

**GAGGENAU**

# **MODELS AND DIMENSIONS**

# THE DEFINITIVE GUIDE TO THE DEFINITIVE KITCHEN

The world of Gaggenau is within your hands.

Our products perform exceptionally, are technologically advanced, built without compromise and designed to be appreciated by both the hand and the eye.

This comprehensive handbook will enable the smooth, we would not say effortless, creation of the kitchen for your client. It is all here, clearly and cleanly presented, easy to find and utterly complete. See for yourself.

The difference is Gaggenau

OVEN EB 333 2

---

GAGGENAU EXPRESSIVE SERIES 8

---

OVENS 400 SERIES 56

---

OVENS 200 SERIES 100

---

VARIO COOKTOPS 138

---

COOKTOPS 206

---

VENTILATION APPLIANCES 276

---

COOLING APPLIANCES 352

---

DISHWASHERS | WASHING  
MACHINE | TUMBLE DRYER 424

---

THE ACCESSORIES | ENERGY LABEL |  
GAGGENAU HOME CONNECT 454

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



# THE OVEN EB 333

EB 333	4
Accessories   special accessories EB 333	5
Technical specifications EB 333	7



### Oven

**EB 333**

### EB 333 111

Stainless steel.  
Width 90 cm.



### Included in the price

- 1 baking tray, enamelled pyrolysis-safe.
- 1 rotisserie spit.
- 1 wire rack.
- 1 grill tray with wire rack.
- 1 plug-in core temperature probe.

### Special accessories

#### BA 018 105

Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.

#### BA 028 115

Baking tray, enamelled.  
30 mm deep.

#### BA 038 105

Wire rack, chromium-plated.  
Without opening, with feet.

#### BA 058 115

Heating element for baking stone and Gastronorm roaster.

#### BA 058 135

Baking stone.  
Incl. baking stone support and pizza paddle.  
Not in combination with pull-out system.

#### BA 090 100

Black rotary knobs for EB 333, set of 2 Stainless steel knobs with black coating.

#### BS 020 003

Pizza paddle.  
Serving and cutting board.

#### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

### Highlights

- One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel.
- Cushioned door opening and closing system.
- Diagonally positioned light sources for optimal interior lighting.
- Pyrolytic system.
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with control module behind glass.
- Electronic temperature control from 30 °C to 300 °C.
- Net volume 83 litres.

### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
1/3 top + bottom heat.  
Bottom heat.  
Hot air + bottom heat.  
Hot air + 1/3 bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.  
Keeping warm.

### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Front-hinged door with 90° door opening angle.

### Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Rotisserie spit.  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
60 W halogen light on the top.  
2 x 10 W halogen light on the side.  
Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.

### Selected digital services (Gaggenau Home Connect)

Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

### Safety

Thermally insulated door with quintuple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

### Cleaning



Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.

### Planning notes

The door panel surface of the appliance extends 40 mm from the furniture cavity.  
The outer edge of the door handle extends 90 mm from the furniture cavity.  
For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.  
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.  
The mains socket needs to be planned outside the built-in niche.  
The LAN port can be found at the back on the upper left side.

### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 5.4 kW.  
Plan a connection cable.  
Plan a LAN cable.

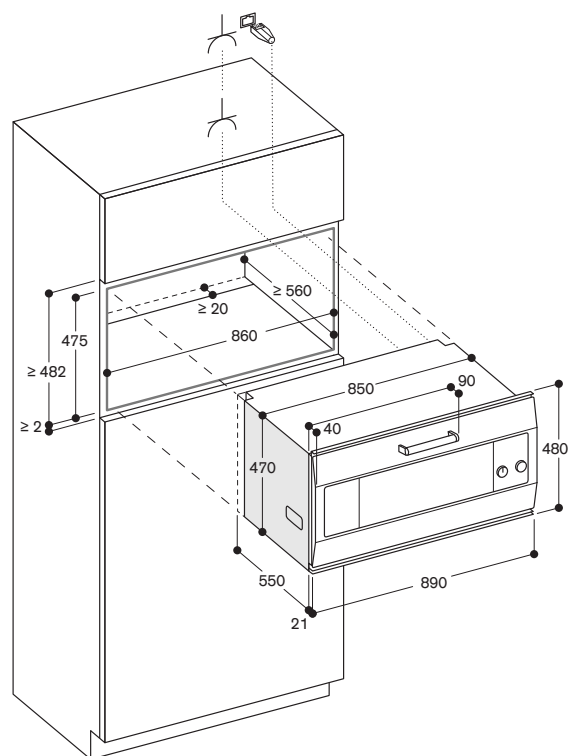

Socket

All measurements in mm.

## Accessories and special accessories EB 333

### BA 090 100

Stainless steel knobs with black coating.




### BA 018 105

Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.



### BA 028 115

Baking tray, enamelled.  
30 mm deep.




### BA 038 105

Wire rack, chromium-plated.  
Without opening, with feet.



### BA 058 115

Heating element for baking stone and  
Gastronorm roaster.



### BA 058 135

Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.



### BS 020 003

Pizza paddle.  
Serving and cutting board.



### GN 340 230

Gastronorm roaster in cast  
aluminium.

GN 2/3, height 165 mm, non-stick.  
For roasting in oven with roasting  
function.

Lower and upper part can also be  
used separately, height 100 and  
65 mm.

For ovens with heating element  
BA 056 115 or BA 058 115 and pull-out  
system BA 016 or BA 018 (both to be  
ordered separately) and Combi-steam  
and steam ovens.



## Accessories and special accessories EB 333



			Oven
			EB 333
<b>Black rotary knobs for oven</b>			
BA 090 100	Stainless steel knobs with black coating		◦
<b>Baking tray, enamelled</b>			
BA 028 115	30 mm deep		•/◦
<b>Pull-out rack</b>			
BA 018 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame		◦
<b>Baking stone</b>			
BA 058 135	Incl. baking stone support and pizza paddle. Not in combination with pull-out system.		◦
<b>Gastronorm roaster, cast aluminium</b>			
GN 340 230	GN 2/3, height 165 mm, non-stick For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456)		◦
<b>Wire rack, chromium-plated</b>			
BA 038 105	no opening, with feet		•/◦
Part No. 706321	for grill tray ET-Nr. 687055, with opening and feet		•/◦
<b>Grill tray, enamelled</b>			
Part No. 687055	with feet and rotisserie spit attachment, 30 mm deep		•/◦
<b>Heating element</b>			
BA 058 115	Necessary accessory for baking stone BA 058 135		◦
<b>Pizza paddle</b>			
BS 020 003	1 paddle. Serving and cutting board.		◦

• Standard. ◦ Special accessory.




## Oven EB 333



<b>Appliance type</b>	<b>Oven</b>
Stainless steel	EB 333
<b>Dimensions</b>	
Width	(cm) 90
Appliance dimensions W × H × D <sup>1</sup>	(mm) 890 × 480 × 550
Door panel extension from furniture cavity	(mm) 21
Niche dimensions W × H × D	(mm) 860 × 475 × 560
Net weight	(kg) 79
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>	
Net volume	(l) 83
Number of cooking compartments	1
Interior dimensions W × H × D	(mm) 624 × 315 × 403
Energy efficiency class with eco hot air	A+++ ↑ D
Energy Efficiency Index (EEI)	95.6
Energy consumption with top / bottom heat	(kWh) 1.32
Energy consumption with eco hot air	(kWh) 0.86
Heat source	electric
<b>Heating methods</b>	
Temperature range	(°C) 30-300
Hot air / Eco hot air / top + bottom heat	•/•/•
Top heat / bottom heat / hot air + bottom heat	•/•/•
Top + 1/3 bottom heat	•
1/2 top + bottom heat	•
Hot air + 1/3 bottom heat	•
Full surface grill + circulated air	•
Full surface grill	•
Compact grill	•
Baking stone function	•
Roaster function	•
Dough proofing / defrosting / keeping warm	•/•/•
<b>Handling</b>	
TFT touch display	•
Controls at the top / centered / at the bottom	•/—/—
Automatic door opening	—
Clear text display	(No. of languages) 44
Individual recipes	50
Door opening angle	(°) 90
<b>Features</b>	
Electronic temperature control	•
Three-Point core temperature probe	•
Automatic programmes	•
Rotisserie spit	•
Baking stone socket	•
Roasting function	•
Actual temperature display	•
Rapid heating	•
Cooking time, cooking time end, timer, stopwatch	•
Long-term timer	•
Halogen light on the top	(W) 60
Halogen light on the side	(W) 2 x 10
Tray levels	(No.) 3
Digital services (Gaggeneau Home Connect) either via LAN or wireless via WiFi. <sup>3</sup>	•
<b>Accessories</b>	
Enamelled baking tray	1
Size of largest baking tray	(cm <sup>2</sup> ) 1.780
Wire rack	1
Enamelled grill tray / wire rack for grill tray	1/1
Glass tray	—
<b>Safety</b>	
Thermally insulated door with multiple glazing	5-fold
Child lock / door lock / safety shut-off	•/•/•
Cooled housing with temperature protection	•
<b>Cleaning</b>	
Pyrolytic system	•
Gaggeneau enamel	•
Heated air cleaning catalyser	•
<b>Connection</b>	
Total connected load	(kW) 5.38

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Special accessory, see pages 5-6. <sup>3</sup> The use of the Gaggeneau Home Connect functionality depends on the Home Connect services, which are not available in every country.

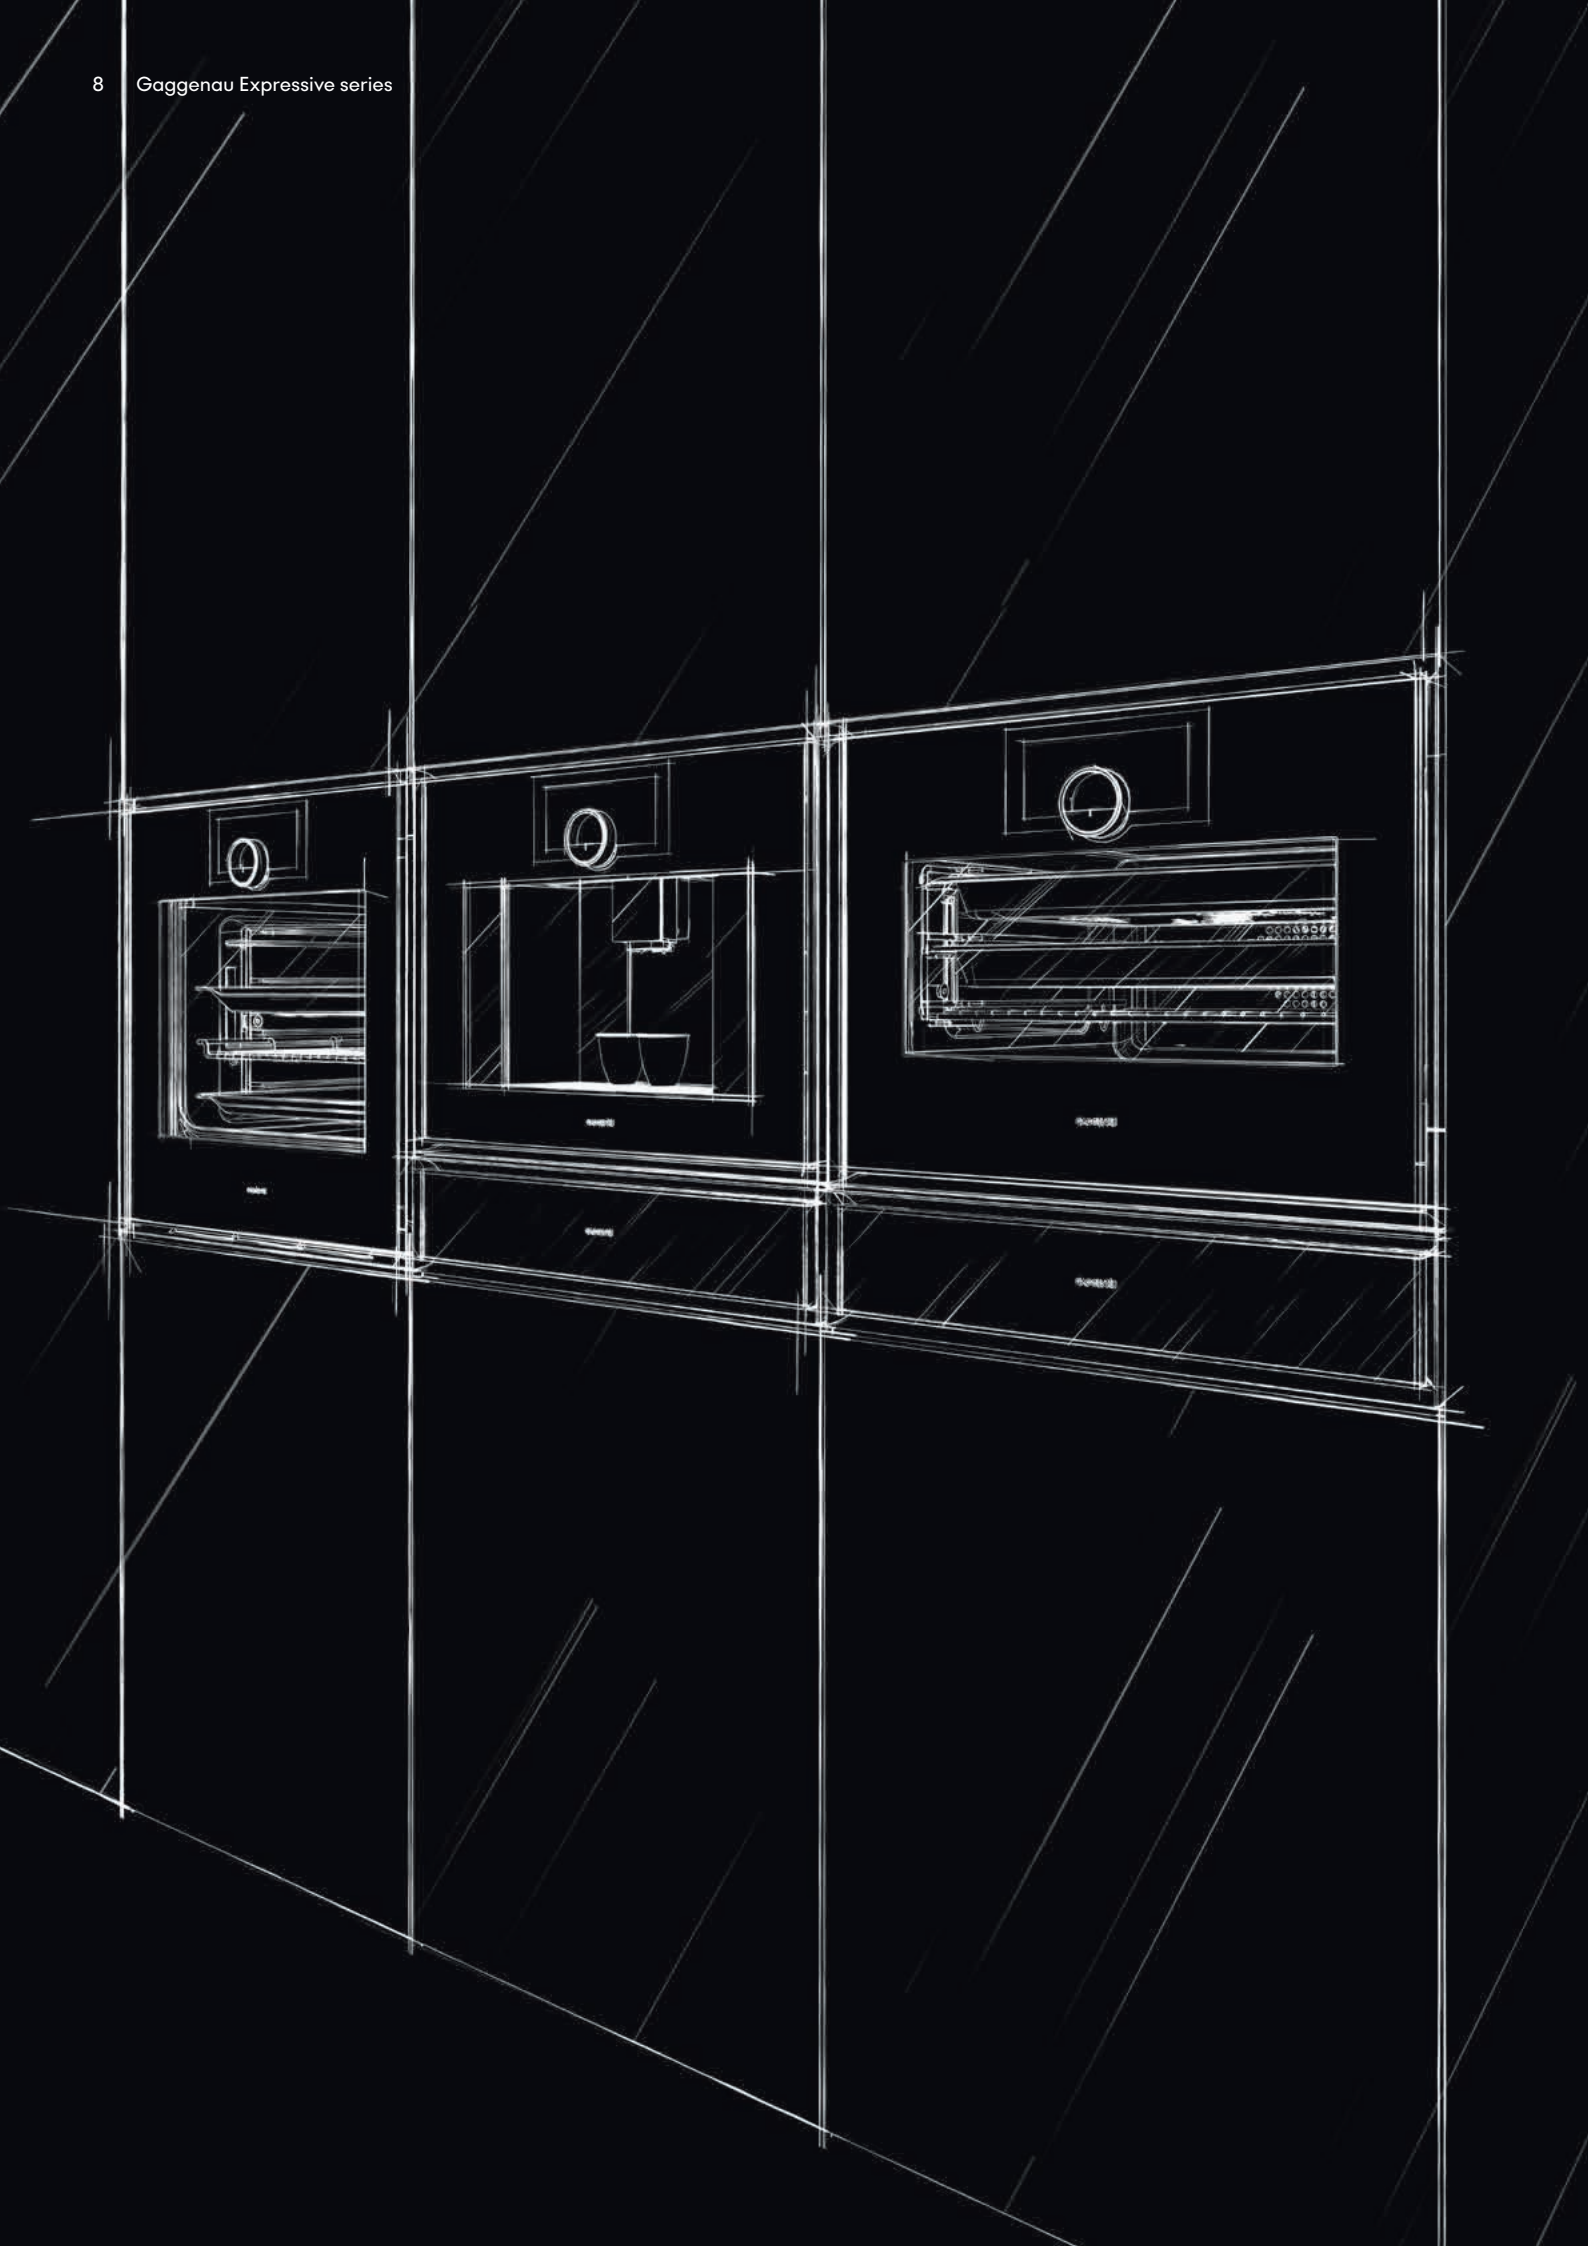

# GAGGENAU EXPRESSIVE SERIES

Checklist for appliance combinations Gaggenau Expressive series	10
Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series	12
Combinations Gaggenau Expressive series	14
Ovens Gaggenau Expressive series	20
Combi-steam ovens Gaggenau Expressive series	24
Combi-microwave ovens Gaggenau Expressive series	30
Fully automatic espresso machines Gaggenau Expressive series	32
Vacuuming drawers Gaggenau Expressive series	36
Culinary warming drawers Gaggenau Expressive series	38
Accessories   special accessories Gaggenau Expressive series	44
Technical specifications Gaggenau Expressive series	50

## Checklist for appliance combinations Gaggenau Expressive series

This checklist provides the most relevant parameters for the perfect combination and ordering of Ovens, Combi-steam ovens, Combi-microwave ovens, Fully automatic espresso machines, Vacuuming drawers, Warming drawers and Dishwashers

### In general

- All appliances shown can be obtained with stainless steel-backed smoked glass front.

### Vertical combinations

When planning and ordering please note that


- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.  
In a corner situation, the distance to the wall of the appliance with the widest opening must be taken into account (e.g. GC).
- The width of the appliances is identical.
- No further appliances must be installed above the GS.
- No GM can be placed under GC in combination with the accessory GA 601 010.
- Appliances installed above a dishwasher need a specific niche.
- With more than one appliance in the bottom cabinet, the use of the intermediate shelf instead of 19 mm wooden shelf is highly recommended.

### Horizontal combinations


When planning and ordering please note that

- The door hinges need to be placed on the outside.
- The door hinge (right-/left-hinged) is not reversible.
- A minimum clearance of 6 mm between the two appliances must be respected.
- Combi-steam ovens, Combi-microwave ovens and Fully automatic espresso machine in combination with a Vacuuming drawer or a Warming drawer (14 cm in height) have the same total front height as a 60 cm wide oven.

### Horizontal 60 cm (24")

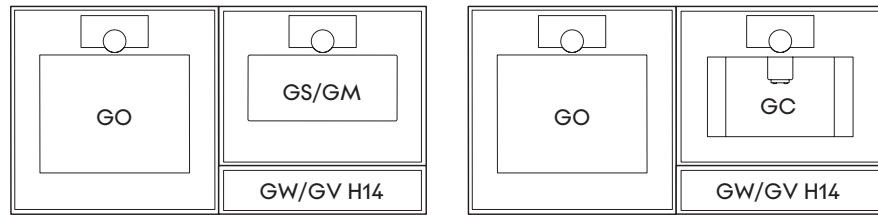


Combination EH66\_14 (For dimensions, see page 14)

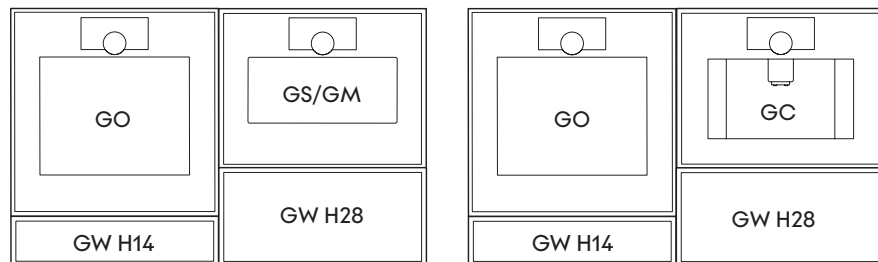


Combination EH66\_1428 (For dimensions, see page 14)

### Horizontal 76 cm (30")

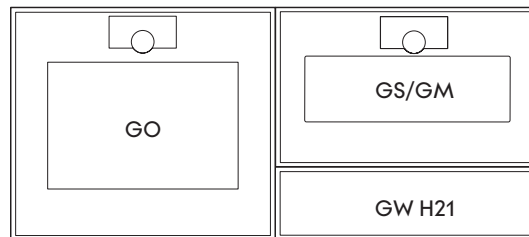


Combination EH33\_21 (For dimensions, see page 14)

### Horizontal Mix 60 cm & 76 cm

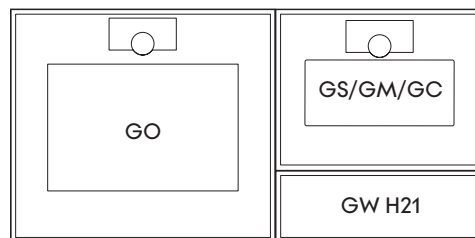


Combination EH36\_21 (For dimensions, see page 15)

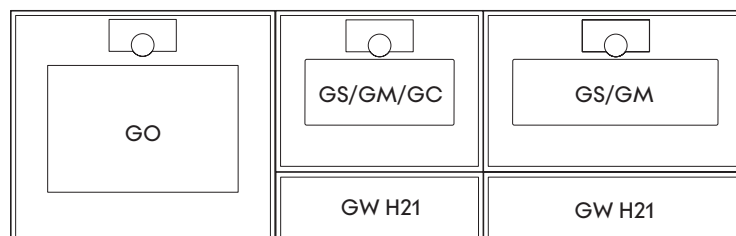


Combination EH363\_21 (For dimensions, see page 15)

- GO Oven
- GS Combi-steam oven
- GM Combi-microwave oven
- GC Fully automatic espresso machine
- GV Vacuuming drawer
- GW Warming drawer


Vertical 60 cm (24")

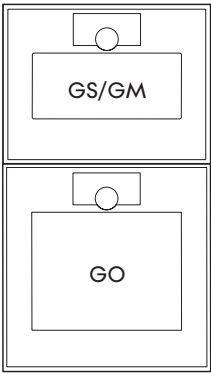


**Combination EV6\_0\_H45**  
(For dimensions, see page 16)

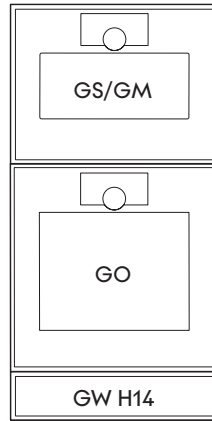

**Combination EV6\_14\_H45**  
(For dimensions, see page 16)

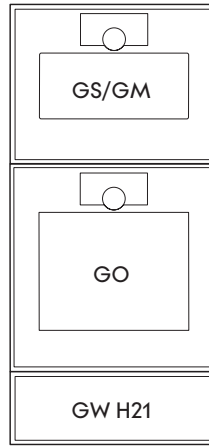


**Combination EV6\_21\_H45**  
(For dimensions, see page 17)

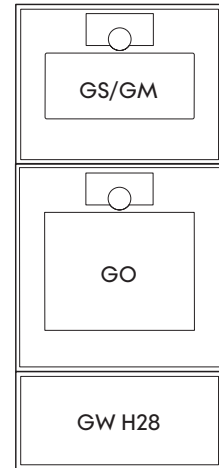


**Combination EV6\_28\_H45**  
(For dimensions, see page 17)

Vertical 76 cm (30")

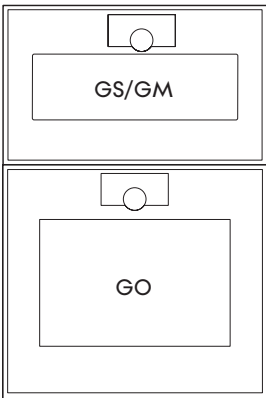


**Combination EV3\_0\_H45**  
(For dimensions, see page 18)

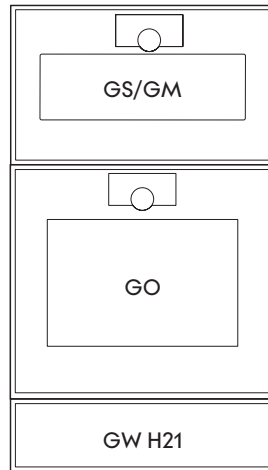


**Combination EV3\_21\_H45**  
(For dimensions, see page 18)

Cube 60 cm (24")

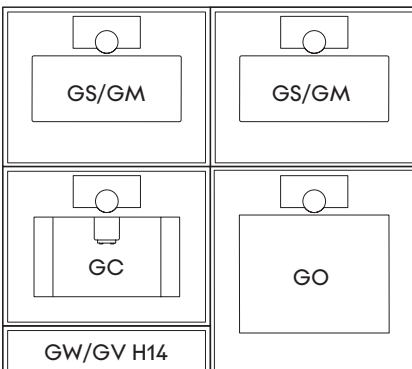

**Combination ECU66\_14\_H45** (For dimensions, see page 19)

Cube Mix 60 cm & 76 cm

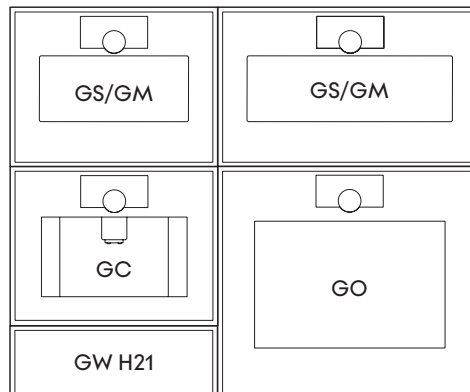

**Combination ECU63\_21\_H45** (For dimensions, see page 19)

## Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series

### General notes

#### Installation behind kitchen furniture doors


Appliance in operation only with open doors. Appropriate measures must be taken to prevent these types of doors from closing when the appliance is heating or while it is cooling down (fan operation).

#### Installation side by side

When appliances are installed side by side, the clearance between the appliances must be at least 6 mm (corresponds to the standard out-side measurement of the furniture cavity of 600 or 762 mm). To optimise ergonomics, the hinges should be placed on the outside.

#### Combination of ovens and Vario cooling 400 series appliances

Please check the planning notes in the information for cooling appliances.

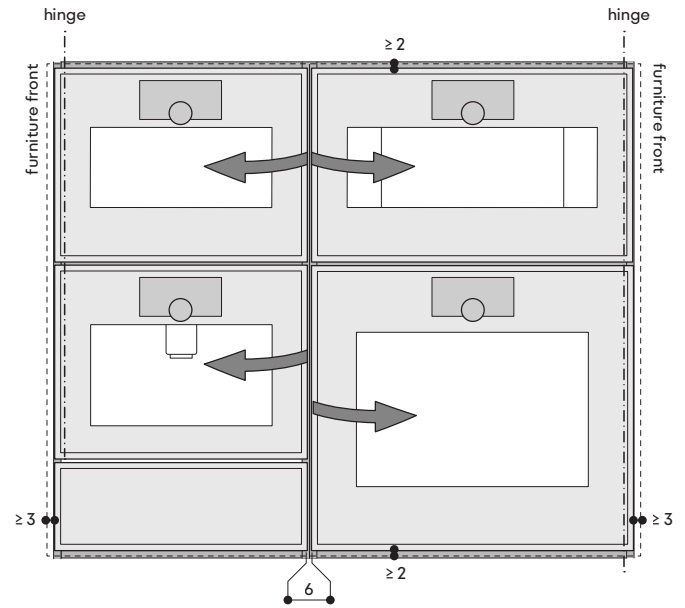

### Reduced gaps between appliances and cabinet fronts

Gaggenau ovens are cooled with fresh air at the top edge of the frame. Hot air is blown out at the frame bottom edge.

Combi-steam ovens and Combi-microwave ovens have the air inlet at the side edges of the frame and the hot air and steam outlets horizontally at the top edge of the frame.

Take into account the minimum needed gaps.

The measurements given in the drawing apply to all appliances.

The following must also be respected:

The area above the appliances

#### GS:

No other electrical appliances should be installed above the GS. Front edges of the furniture panel must be steam resistant as is the case above a dishwasher. Steam may possibly penetrate into the compartment.


#### GC:

No GM can be placed under GC in combination with the intermediate shelf GA 601 010.

**At the sides**

Pay attention to the door opening angles and required distances which may be different depending on the appliances.  
 The default door opening angle is 110°. This angle can be reduced by adjusting it on the appliance.

**Door opening angle and distances**

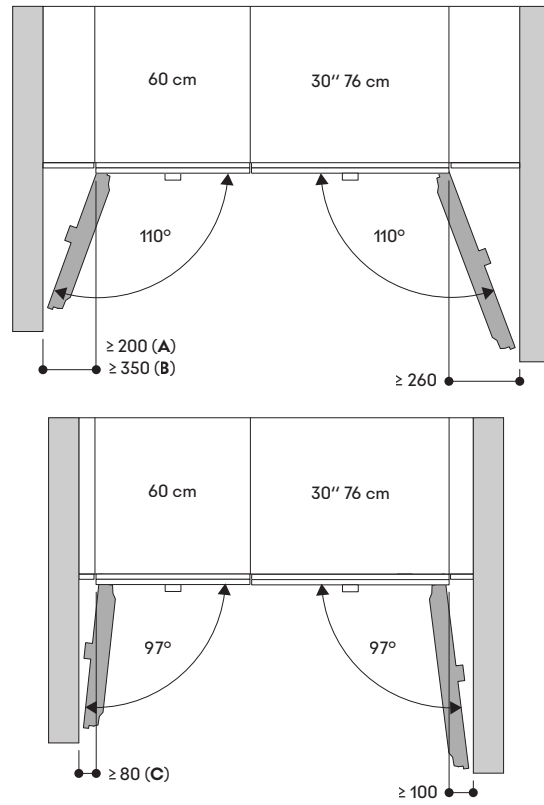


- A:** All 60 cm appliances except GC
- B:** GC appliances (only left hinged)  
 To reduce angle 110° to 92° with a distance ≥ 100, accessory kit 00636455 is required
- C:** All 60 cm appliances except GC

## Combinations Gaggenau Expressive series


### Combination – Horizontal 60 cm – EH66\_14

Front view

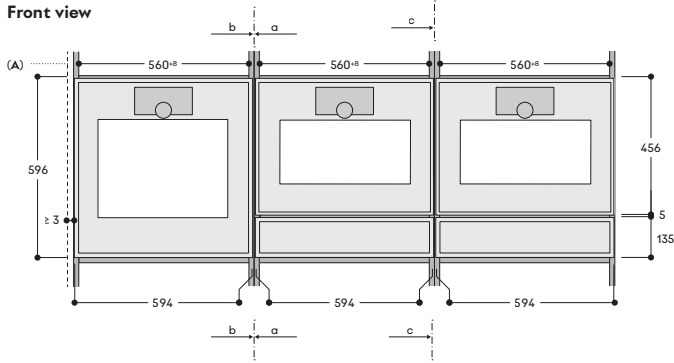


A: Furniture front

Side view

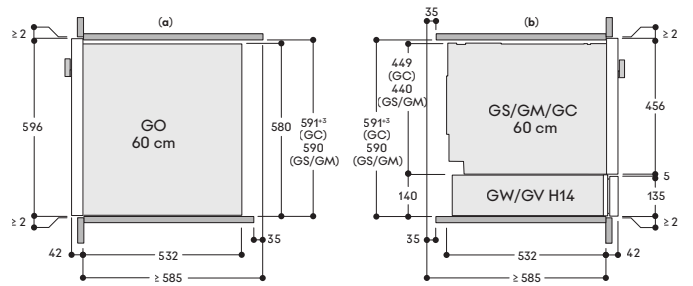


### Combination – Horizontal 60 cm – EH66\_1428

Front view

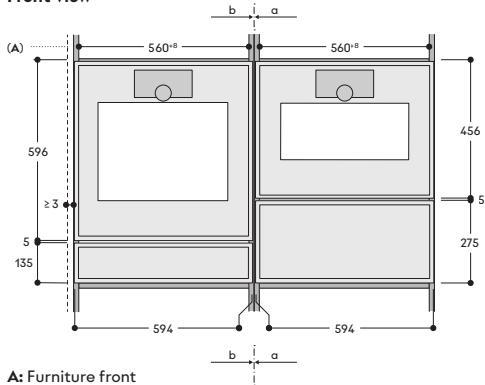


A: Furniture front

Side view

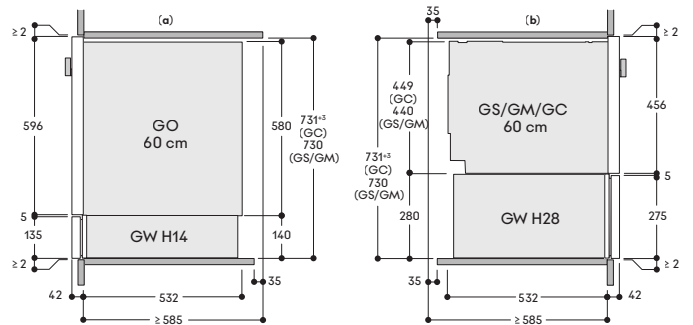


### Combination – Horizontal 76 cm – EH33\_21

Front view

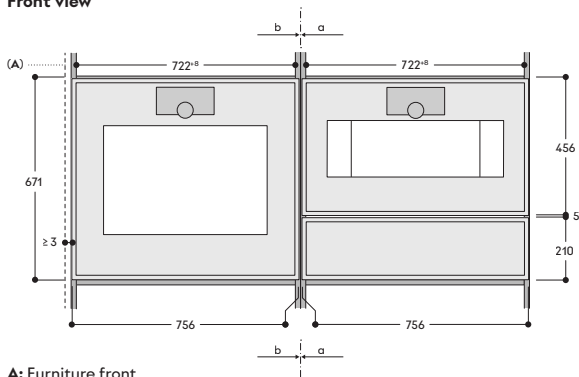

A: Furniture front


Side view

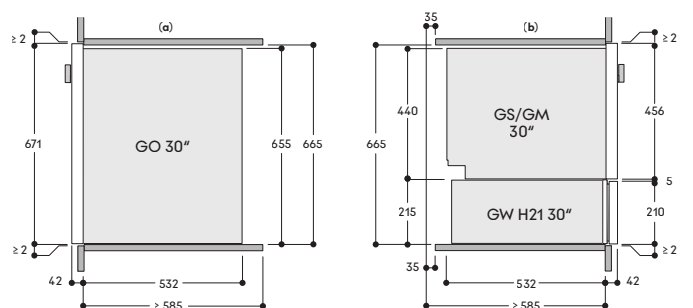




Combination — Horizontal Mix 60 cm & 76 cm — EH36\_21

Front view

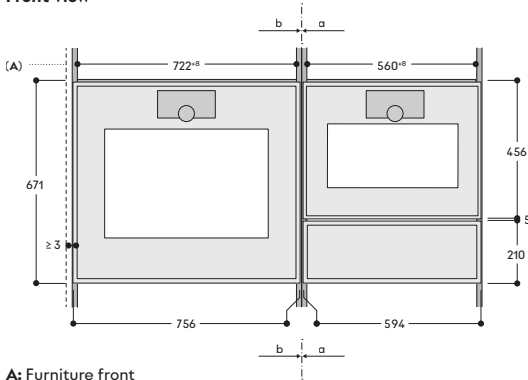


Side view

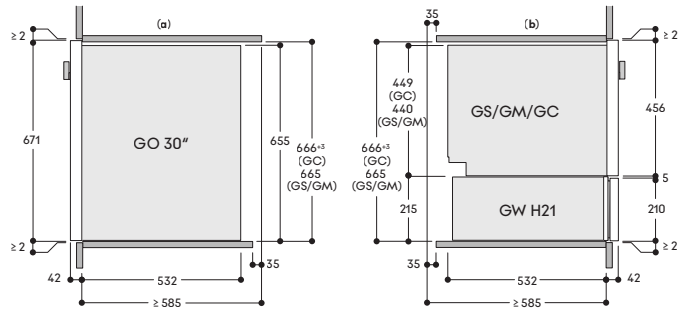


A: Furniture front

Combination — Horizontal Mix 60 cm & 76 cm — EH363\_21

Front view

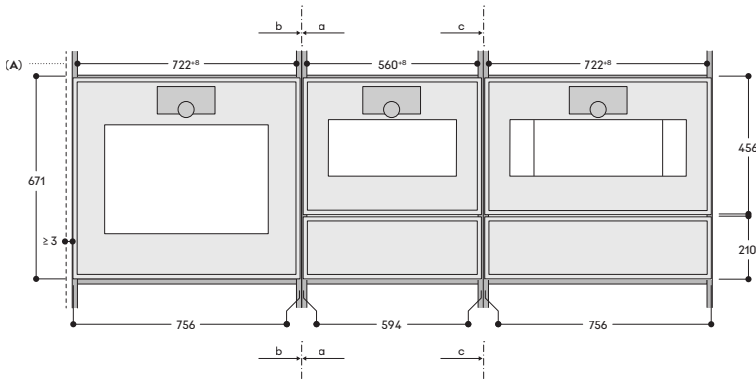

Side view

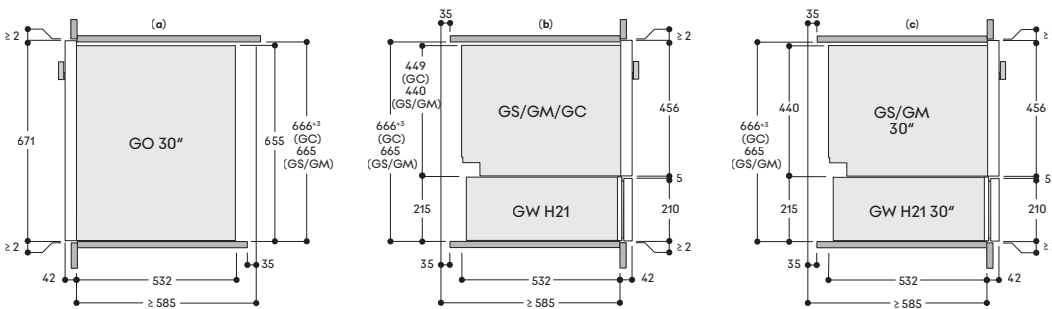

A: Furniture front

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances


Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect


## Combinations Gaggenau Expressive series

### Combination – Vertical 60 cm – EV6\_0\_H45 Wooden shelf

Front view

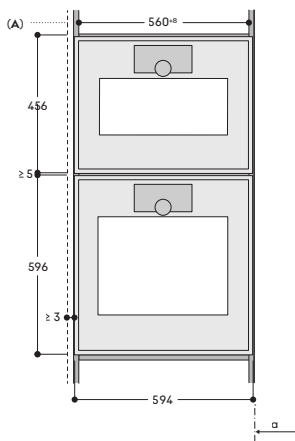


Side view

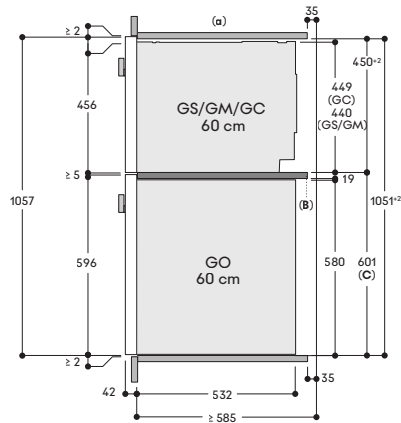


A: Furniture front  
B: Wooden shelf  
C: Reference line

### Combination – Vertical 60 cm – EV6\_0\_H45 Intermediate shelf

Front view

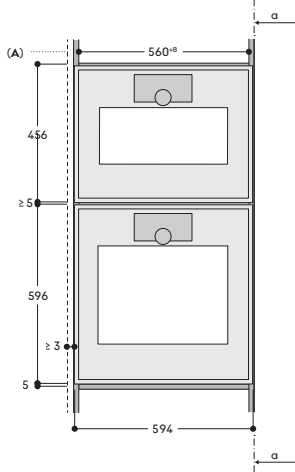


Side view

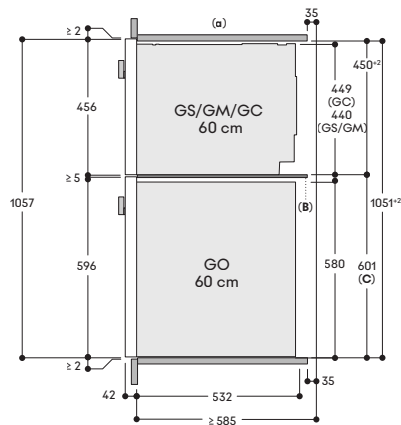


A: Furniture front  
B: Intermediate shelf  
C: Reference line

### Combination – Vertical 60 cm – EV6\_14\_H45

Front view

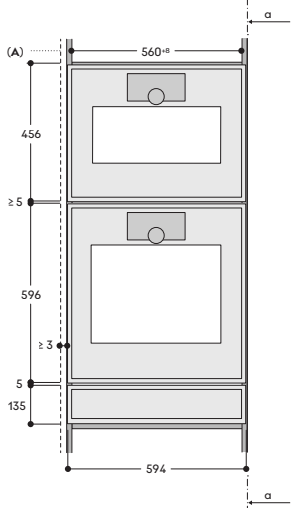


Side view

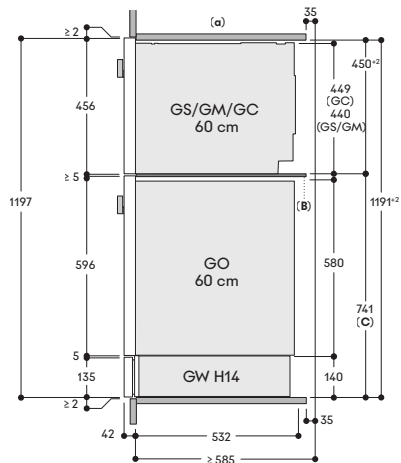


A: Furniture front  
B: Intermediate shelf  
C: Reference line

Combination – Vertical 60 cm – EV6\_21\_H45

Front view

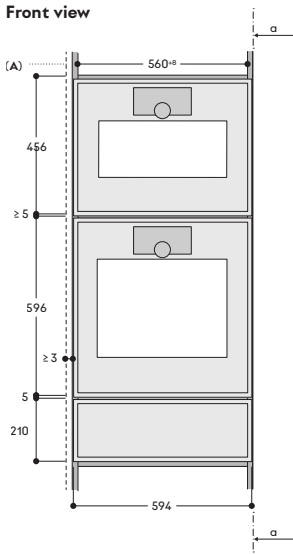


Side view

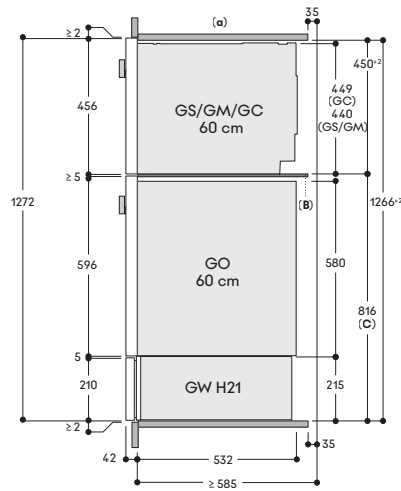


A: Furniture front  
B: Intermediate shelf  
C: Reference line

Combination – Vertical 60 cm – EV6\_28\_H45

Front view

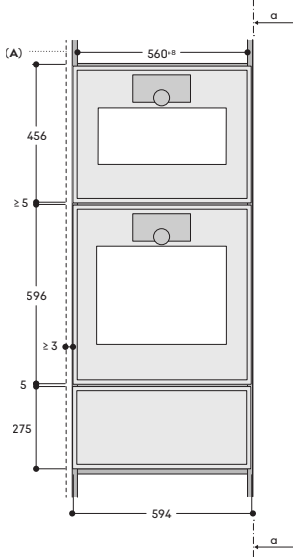

Side view

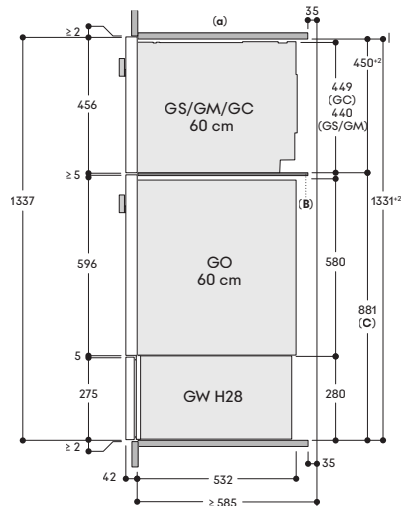

A: Furniture front  
B: Intermediate shelf  
C: Reference line

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances


Cooling appliances

Dishwashers |  
Washing machine


Accessories | Energy Label |  
Gaggenau Home Connect

## Combinations Gaggenau Expressive series


### Combination – Vertical 76 cm – EV3\_0\_H45 Wooden shelf

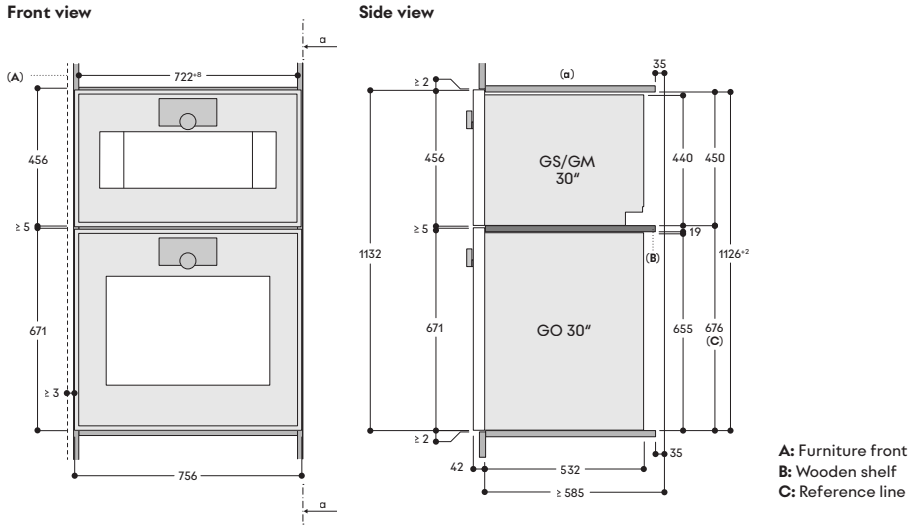

### Combination – Vertical 76 cm – EV3\_0\_H45 Intermediate shelf

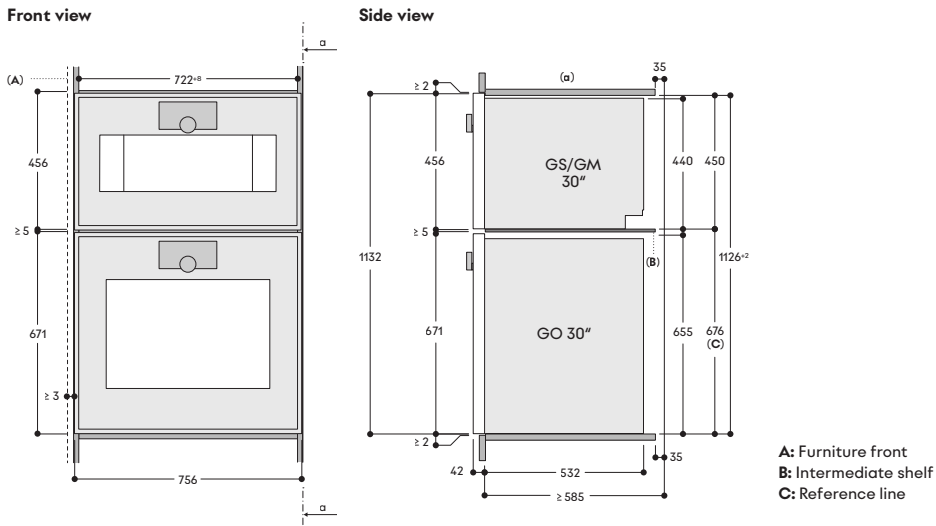


### Combination – Vertical 76 cm – EV3\_21\_H45

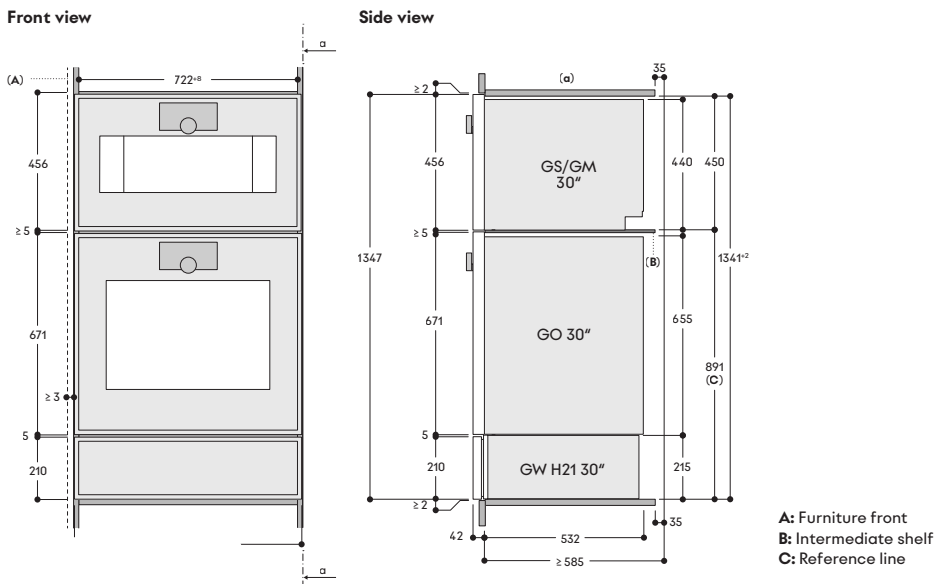


Combination – Cube 60 cm – ECU66\_14\_H45

Front view

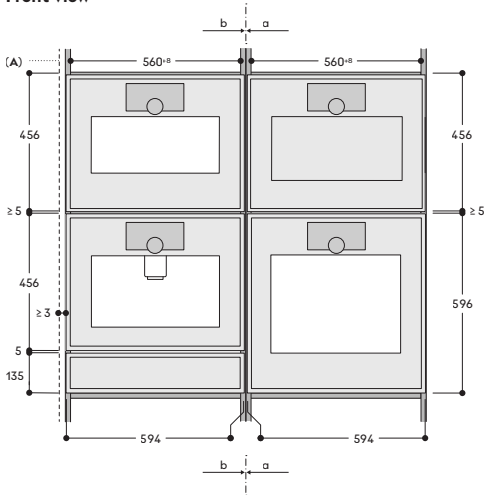


Side view

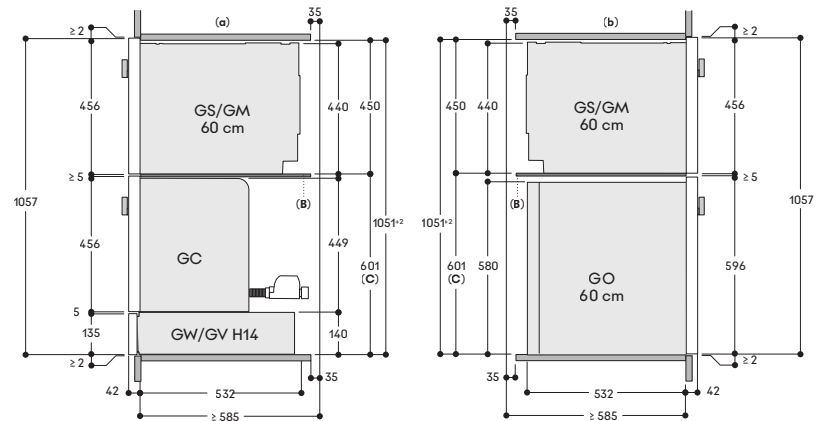


- A: Furniture front
- B: Intermediate shelf
- C: Reference line

Combination – Cube Mix 60 cm & 76 cm – ECU63\_21\_H45

Front view

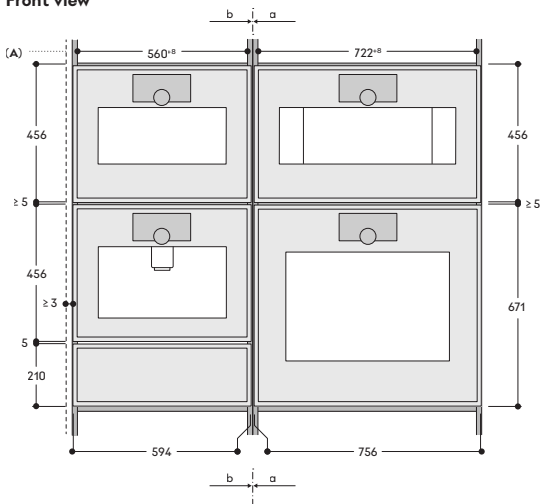

Side view

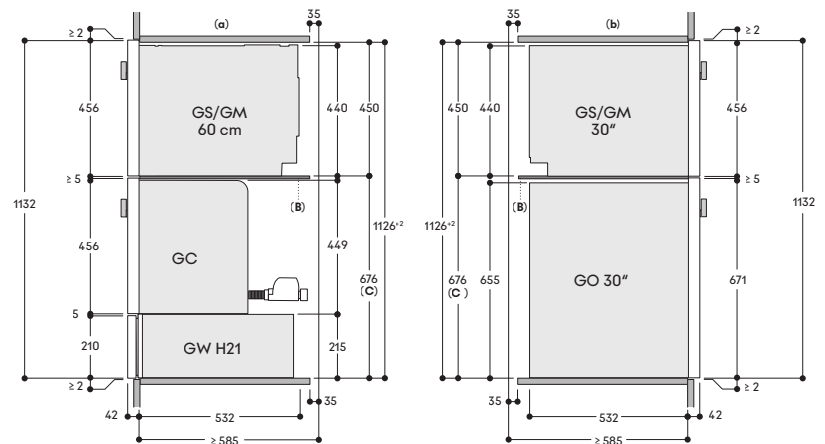

- A: Furniture front
- B: Intermediate shelf
- C: Reference line

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Oven Gaggenau Expressive series**  
GO 480/GO 481

**Right-hinged**

**GO 480 120**

Stainless steel behind smoked glass.  
Width 76 cm.

**Left-hinged**

**GO 481 120**

Stainless steel behind smoked glass.  
Width 76 cm.



**Included in the price**

- 1 wire rack.
- 1 baking tray, enamelled, pyrolysis-safe.
- 1 grill tray, enamelled, pyrolysis- safe with wire rack.
- 1 plug-in core temperature probe.
- 1 rotisserie spit.

**Special accessories**

**BA 020 110**

Air frying tray.  
To be placed on wire rack.

**BA 028 115**

Baking tray, enamelled.  
30 mm deep.

**BA 038 105**

Wire rack, chromium-plated.  
Without opening, with feet.

**BA 058 134**

Baking stone.  
Incl. baking stone support and pizza paddle.  
Not in combination with pull-out system.

**BS 020 003**

Pizza paddle.  
Serving and cutting board.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Pyrolytic self-cleaning.
- Invisible full surface grill behind enamel.
- 19 heating methods from 30 °C to 300 °C, incl. baking stone function, roaster function, air frying, dehydrating.
- Automatic programmes and setting recommendations.
- Core temperature probe.
- Rotisserie function.
- Net volume 125 litres.

**Heating methods / Programmes**

- Hot air plus.
- Hot air eco.
- Top + bottom heat.
- Top + 1/3 bottom heat.
- Top heat.
- Bottom + 1/3 top heat.
- Bottom heat.
- Hot air + bottom heat.
- Hot air + 1/3 bottom heat.
- Moist baking.
- Grill + circulated air.
- Grill.
- Baking stone function.
- Roaster function.
- Air frying.
- Dehydrating.
- Dough proving.
- Keeping warm.
- Defrosting.
- 160 programmes (automatic programmes and setting recommendations).
- Option to save up to 30 favourites.

**Handling**

- Cushioned side-opening door with 110° opening angle.
- Electronic door opening.
- Full touch display with control ring.
- 42 display languages available.
- User detection, adjustable distance.
- Info texts for additional information.
- Animated quick guides to assist appliance operation.

**Features**

- Invisible full surface grill behind enamel 4.5 kW.
- Grill can be added briefly for additional browning.
- Hot air fan rotates in both directions for ideal heat distribution.
- Extra powerful bottom heating for baking stone and roaster function.
- Three-point core temperature probe with cooking time estimation via Home Connect.
- Rotisserie spit for grilling from all sides.
- Precise temperature control with display of the current temperature.
- Rapid heating.
- Heated catalyser to clean the oven air.
- Timer functions: cooking time, cooking time end, count-up timer.
- Long-term timer\*.
- Programmable automatic door opening at cooking time end to avoid overcooking.
- Optimum visibility of the food thanks to side lighting.
- 5 tray levels.

**Selected digital services**

**(Gaggenau Home Connect)**

- Remote control and monitoring.
- Cooking time estimation when using the core temperature probe.
- Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

- Child lock to prevent accidental switch on or operation of the appliance.
- Electronic door lock to prevent unintentional opening of the appliance door.
- Safety shut-off.
- Thermally insulated door with quintuple glazing.
- Cooled housing with temperature protection.

**Cleaning**


- Pyrolysis with minimised odour development thanks to the heated catalyser.
- Side shelf supports enamelled and pyrolysis-safe.
- Seamless cooking compartment without obstructive elements.

**Planning notes**

- Plan the niche without back wall.
- Door hinge not reversible.
- Protrusion from appliance front to furniture cabinet 42 mm.
- Consider the overhang when planning to open drawers next to the appliance.
- When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.
- Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.
- For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.
- The mains socket must be accessible and located outside the built-in niche.

**Connection**

- Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
- Total connected load 6.6 kW.
- Connecting cable 1.75 m without plug.

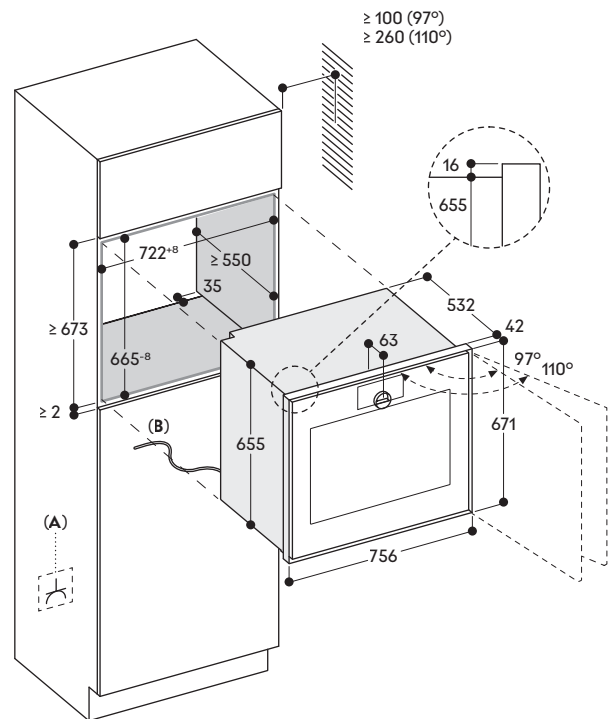

**A:** Accessible electrical connection  
**B:** Fixed cable

\* Available in Q4/2025.

All measurements in mm.



#### Oven Gaggenau Expressive series GO 470/GO 471

##### Right-hinged

#### GO 470 120

Stainless steel behind smoked glass.  
Width 60 cm.

##### Left-hinged

#### GO 471 120

Stainless steel behind smoked glass.  
Width 60 cm.



##### Included in the price

- 1 wire rack.
- 1 baking tray, enamelled, pyrolysis-safe.
- 1 grill tray, enamelled, pyrolysis-safe.
- 1 plug-in core temperature probe.
- 1 rotisserie spit.

##### Special accessories

#### BA 020 110

Air frying tray.  
30 mm deep.

#### BA 026 116

Baking tray, enamelled  
30 mm deep.

#### BA 026 117

Grill tray, enamelled  
38 mm deep.

#### BA 036 106

Wire rack, chromium-plated.  
Without opening, with feet.

#### BA 046 118

Glass tray.  
24 mm deep.

#### BA 056 134

Baking stone.  
Incl. baking stone support and pizza paddle.  
Not in combination with pull-out system.

#### BS 020 003

Pizza paddle.  
Serving and cutting board.

##### Highlights

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Pyrolytic self-cleaning.
- Invisible full surface grill behind enamel.
- 19 heating methods from 30 °C to 300 °C, incl. baking stone function, roaster function, air frying, dehydrating.
- Automatic programmes and setting recommendations.
- Core temperature probe.
- Rotisserie function.
- Net volume 77 litres.

##### Heating methods / Programmes

Hot air plus.  
Hot air eco.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
Bottom + 1/3 top heat.  
Bottom heat.  
Hot air + bottom heat.  
Hot air + 1/3 bottom heat.  
Moist baking.  
Grill + circulated air.  
Grill.  
Baking stone function.  
Roaster function.  
Air frying.  
Dehydrating.  
Dough proving.  
Keeping warm.  
Defrosting.  
160 programmes (automatic programmes and setting recommendations).  
Option to save up to 30 favourites.

##### Handling

Cushioned side-opening door with 110° opening angle.  
Electronic door opening.  
Full touch display with control ring.  
42 display languages available.  
User detection, adjustable distance.  
Info texts for additional information.  
Animated quick guides to assist appliance operation.

##### Features

Invisible full surface grill behind enamel 3.4 kW.  
Grill can be added briefly for additional browning.  
Hot air fan rotates in both directions for ideal heat distribution.  
Extra powerful bottom heating for baking stone and roaster function.  
Three-point core temperature probe with cooking time estimation via Home Connect.  
Rotisserie spit for grilling from all sides.  
Precise temperature control with display of the current temperature.  
Rapid heating.  
Heated catalyser to clean the oven air.  
Timer functions: cooking time, cooking time end, count-up timer.  
Long-term timer\*.  
Programmable automatic door opening at cooking time end to avoid overcooking.  
Optimum visibility of the food thanks to side lighting.  
4 tray levels.

##### Selected digital services

#### (Gaggenau Home Connect)

Remote control and monitoring.  
Cooking time estimation when using the core temperature probe.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

##### Safety

Child lock to prevent accidental switch on or operation of the appliance.  
Electronic door lock to prevent unintentional opening of the appliance door.  
Safety shut-off.  
Thermally insulated door with quintuple glazing.  
Cooled housing with temperature protection.

##### Cleaning


Pyrolysis with minimised odour development thanks to the heated catalyser.  
Side shelf supports enamelled and pyrolysis-safe.  
Seamless cooking compartment without obstructive elements.

##### Planning notes

Plan the niche without back wall.  
Door hinge not reversible.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.  
The mains socket must be accessible and located outside the built-in niche.

##### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.68 kW.  
Connection cable 1.75 m, pluggable.

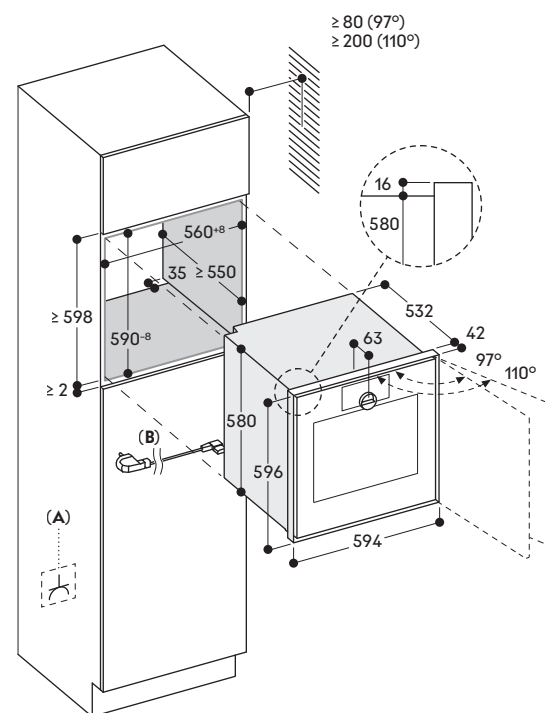

**A:** Accessible electrical connection  
**B:** Cable with or without plug, depending on country



### Oven Gaggenau Expressive series GO 450/GO 451

#### Right-hinged

##### GO 450 120

Stainless steel behind smoked glass.  
Width 60 cm.

#### Left-hinged

##### GO 451 120

Stainless steel behind smoked glass.  
Width 60 cm.



#### Included in the price

- 1 wire rack.
- 1 baking tray, enamelled, pyrolysis-safe.
- 1 grill tray, enamelled, pyrolysis- safe with wire rack.
- 1 plug-in core temperature probe.

#### Special accessories

##### BA 020 110

Air frying tray.  
30 mm deep.

##### BA 026 116

Baking tray, enamelled  
30 mm deep.

##### BA 026 117

Grill tray, enamelled  
38 mm deep.

##### BA 036 106

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 046 118

Glass tray.  
24 mm deep.

##### BA 056 134

Baking stone.  
Incl. baking stone support and pizza paddle.  
Not in combination with pull-out system.

##### BS 020 003

Pizza paddle.  
Serving and cutting board.

#### Highlights

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Pyrolytic self-cleaning.
- Invisible full surface grill behind enamel.
- 15 heating methods from 30 °C to 300 °C, incl. baking stone function, roaster function, air frying, dehydrating.
- Automatic programmes and setting recommendations.
- Core temperature probe.
- Net volume 77 litres.

#### Heating methods / Programmes

Hot air plus.  
Hot air eco.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Moist baking.  
Grill + circulated air.  
Grill.  
Baking stone function.  
Roaster function.  
Air frying.  
Dehydrating.  
Dough proving.  
Defrosting.  
160 programmes (automatic programmes and setting recommendations).  
Option to save up to 30 favourites.

#### Handling

Cushioned side-opening door with 110° opening angle.  
Electronic door opening.  
Full touch display with control ring.  
42 display languages available.  
User detection, adjustable distance.  
Info texts for additional information.  
Animated quick guides to assist appliance operation.

#### Features

Invisible full surface grill behind enamel 3.4 kW.  
Grill can be added briefly for additional browning.  
Hot air fan rotates in both directions for ideal heat distribution.  
Extra powerful bottom heating for baking stone and roaster function.  
Three-point core temperature probe with cooking time estimation via Home Connect.  
Precise temperature control with display of the current temperature.  
Rapid heating.  
Heated catalyser to clean the oven air.  
Timer functions: cooking time, cooking time end, count-up timer.  
Long-term timer\*.  
Programmable automatic door opening at cooking time end to avoid overcooking.  
Optimum visibility of the food thanks to side lighting.  
4 tray levels.

#### Selected digital services

##### (Gaggenau Home Connect)

Remote control and monitoring.  
Cooking time estimation when using the core temperature probe.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Child lock to prevent accidental switch on or operation of the appliance.  
Electronic door lock to prevent unintentional opening of the appliance door.  
Safety shut-off.  
Thermally insulated door with quintuple glazing.  
Cooled housing with temperature protection.

#### Cleaning

Pyrolysis with minimised odour development thanks to the heated catalyser.  
Side shelf supports enamelled and pyrolysis-safe.  
Seamless cooking compartment without obstructive elements.


#### Planning notes

Plan the niche without back wall.  
Door hinge not reversible.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.  
The mains socket must be accessible and located outside the built-in niche.

#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.68 kW.  
Connection cable 1.75 m, pluggable.



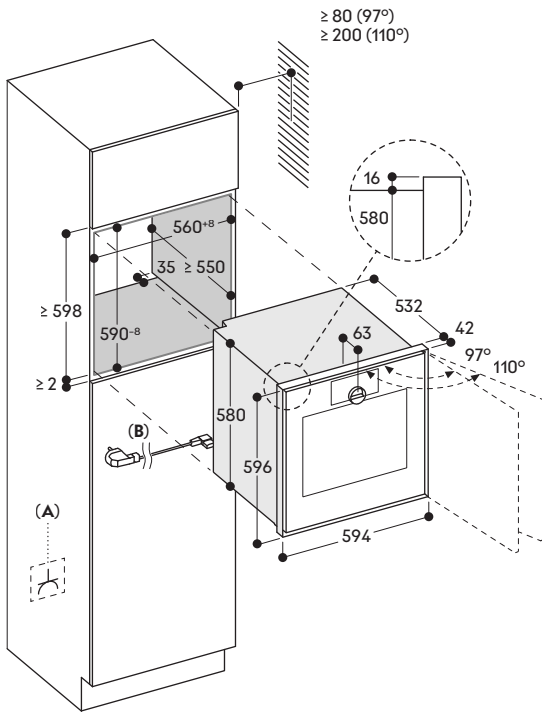

**A:** Accessible electrical connection  
**B:** Cable with or without plug, depending on country

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Combi-steam oven**  
Gaggenau Expressive series  
GS 480/GS 481

**Right-hinged**

**GS 480 120**  
Stainless steel behind smoked glass.  
Width 76 cm.

**Left-hinged**

**GS 481 120**  
Stainless steel behind smoked glass.  
Width 76 cm.



**Included in the price**

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 water inlet hose (3 m).
- 1 water outlet hose (3 m).
- 4 cleaning cartridges.

**Installation accessories**

**GA 301 010**  
Adjustable intermediate shelf.  
For vertical combination.  
Incl. mounting brackets, cover and screws.

**GZ 010 011**  
Extension for water inlet and outlet (2 m long).

**Special accessories**

**BA 010 050**  
Core temperature probe.  
Compatible with GO, GS, GM.

**BA 010 301**  
Triple telescopic pull-out rack for combi-steam ovens.

**BA 020 361**  
Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.

**BA 020 370**  
Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

**BA 020 382**  
Cooking container, unperforated, PFAS free non-stick coating, 46 mm deep, 5.4 l.

**BA 020 391**  
Insert, perforated, PFAS free non-stick coating, 40 mm deep, 5 l.

**BA 046 118**  
Glass tray.  
24 mm deep.

**CLS 100 40**  
Cleaning cartridges, set of 4.  
For combi-steam ovens.

**GN 010 330**  
Adapter for gastronorm insert and roaster.

**GN 114 130**  
Gastronorm insert, stainless steel, GN 1/3.  
Unperforated, 40 mm deep, 1.5 l.

**GN 114 230**  
Gastronorm insert, stainless steel, GN 2/3.  
Unperforated, 40 mm deep, 3 l.

**GN 124 130**  
Gastronorm insert, stainless steel, GN 1/3.  
Perforated, 40 mm deep, 1.5 l.

**GN 124 230**  
Gastronorm insert, stainless steel, GN 2/3.  
Perforated, 40 mm deep, 3 l.

**GN 340 230**  
Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick coating.  
Lower and upper part can also be used as separate ovenproof dishes, 100 and 65 mm deep.

Use in combi-steam ovens in combination with adapter GN 010 330 and pull-out system BA 010 301.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Fixed inlet and outlet water connection for convenient handling.
- External steam generation to avoid limescale in the cooking compartment.
- Automatic cleaning with perfect results, also for heavy soiling.
- Hot air 30 °C to 230 °C, freely combinable with humidity levels 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes and setting recommendations.
- Net volume 50 litres.

**Heating methods / Programmes**

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Grill + circulated air.  
Grill level 1 + humidity.  
Grill level 2 + humidity.  
Sous-vide cooking.  
Low temperature cooking.  
Dough proving.  
Keeping warm.  
Defrosting.  
Regenerating.  
200 programmes (automatic programmes and setting recommendations).  
Option to save up to 30 favourites.

**Handling**

Cushioned side-opening door with 110° opening angle.  
Electronic door opening.  
Full touch display with control ring.  
42 display languages available.  
User detection, adjustable distance.  
Info texts for additional information.  
Animated quick guides to assist appliance operation.

**Features**

Full surface grill 2 kW behind glass ceramic.  
Hot air fan rotates in both directions for ideal heat distribution.  
Connection for core temperature probe (oven temperature probe usable).  
Grill can be added briefly in hot air mode for additional browning.  
Misting for targeted humidity addition.  
Steam removal to avoid humidity on furnitures fronts.  
Automatic boiling point detection.  
Precise temperature control with display of the current temperature.  
Timer functions: cooking time, cooking time end, count-up timer.  
Long-term timer\*.  
Programmable automatic door opening at cooking time end to avoid overcooking.  
Optimum visibility of the food thanks to side lighting.  
3 shelf levels.

**Selected digital services**

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Cooking time estimation when using the core temperature probe.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.  
Electronic door lock to prevent unintentional opening of the appliance door.  
Safety shut-off.  
Thermally insulated door with triple glazing.  
Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel cooking interior.  
Automatic cleaning.  
Automatic descaling for the steam generator.  
Drying programme.  
Automatic drying of the cavity at the end of the cooking process.  
All removable parts and accessories dishwasher-safe, incl. stainer filter.

**Planning notes**


Plan the niche without back wall.  
Door hinge not reversible.  
No other electrical appliances should be installed above the GS.  
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
Inlet and outlet hose can be extended once.  
The outlet hose must not be longer than a maximum of 5 m.  
The water connection for the inlet hose must always be accessible and not located directly behind the appliance.  
The connection of the outlet hose to the siphon must not be directly behind the appliance and should be accessible.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
The mains socket must be accessible and located outside the built-in niche.

Special accessories (order as spare part):  
Part No. 17002490 Descaling tablets.

**Connection**


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.1 kW.  
Only cold water connection.  
To allow water detection, softened water must have a conductivity of > 200µS/cm.  
Inlet hose 3.0 m with connection pipe thread ISO228-G 3/4" (Ø 26.4 mm), extendable.  
Outlet hose (Ø 25 mm) 3.0 m (HT-Hose), extendable.  
Connection cable 1.75 m, pluggable.

\* Available in Q4/2025.

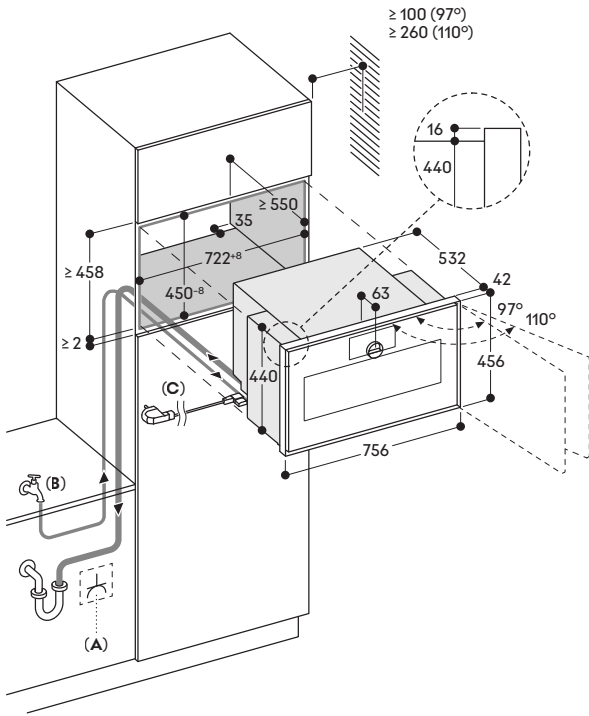

- A: Accessible electrical connection
- B: Accessible water connection
- C: Cable with or without plug, depending on country

View from rear

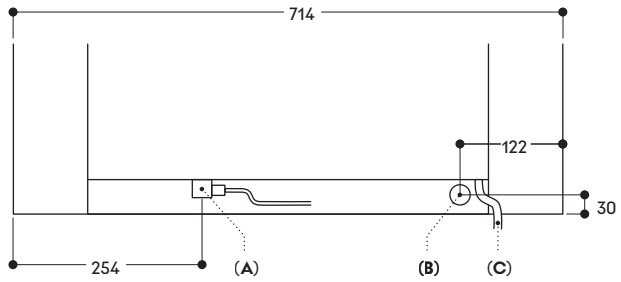

- A: Electric terminal box
- B: Water outlet
- C: Cold water inlet

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Combi-steam oven**  
**Gaggenau Expressive series**  
**GS 470/GS 471**

**Right-hinged**

**GS 470 120**  
 Stainless steel behind smoked glass.  
 Width 60 cm.

**Left-hinged**

**GS 471 120**  
 Stainless steel behind smoked glass.  
 Width 60 cm.



**Included in the price**

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 water inlet hose (3 m).
- 1 water outlet hose (3 m).
- 4 cleaning cartridges.

**Installation accessories**

**GA 601 010**  
 Adjustable intermediate shelf.  
 For vertical combination.  
 Incl. mounting brackets, cover and screws.

**GZ 010 011**  
 Extension for water inlet and outlet (2 m long).

**Special accessories**

**BA 010 050**  
 Core temperature probe.  
 Compatible with GO, GS, GM.

**BA 010 301**  
 Triple telescopic pull-out rack for combi-steam ovens.

**BA 020 361**  
 Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.

**BA 020 370**  
 Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

**BA 020 382**  
 Cooking container, unperforated, PFAS free non-stick coating, 46 mm deep, 5.4 l.

**BA 020 391**  
 Insert, perforated, PFAS free non-stick coating, 40 mm deep, 5 l.

**BA 046 118**  
 Glass tray.  
 24 mm deep.

**CLS 100 40**  
 Cleaning cartridges, set of 4.  
 For combi-steam ovens.

**GN 010 330**  
 Adapter for gastronorm insert and roaster.

**GN 114 130**  
 Gastronorm insert, stainless steel, GN 1/3.  
 Unperforated, 40 mm deep, 1.5 l.

**GN 114 230**  
 Gastronorm insert, stainless steel, GN 2/3.  
 Unperforated, 40 mm deep, 3 l.

**GN 124 130**  
 Gastronorm insert, stainless steel, GN 1/3.  
 Perforated, 40 mm deep, 1.5 l.

**GN 124 230**  
 Gastronorm insert, stainless steel, GN 2/3.  
 Perforated, 40 mm deep, 3 l.

**GN 340 230**  
 Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick coating.  
 Lower and upper part can also be used as separate ovenproof dishes, 100 and 65 mm deep.  
 Use in combi-steam ovens in combination with adapter GN 010 330 and pull-out system BA 010 301.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Fixed inlet and outlet water connection for convenient handling.
- External steam generation to avoid limescale in the cooking compartment.
- Automatic cleaning with perfect results, also for heavy soiling.
- Hot air 30 °C to 230 °C, freely combinable with humidity levels 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes and setting recommendations.
- Net volume 50 litres.

**Heating methods / Programmes**

Hot air + 100 % humidity.  
 Hot air + 80 % humidity.  
 Hot air + 60 % humidity.  
 Hot air + 30 % humidity.  
 Hot air + 0 % humidity.  
 Grill + circulated air.  
 Grill level 1 + humidity.  
 Grill level 2 + humidity.  
 Sous-vide cooking.  
 Low temperature cooking.  
 Dough proving.  
 Keeping warm.  
 Defrosting.  
 Regenerating.  
 200 programmes (automatic programmes and setting recommendations).  
 Option to save up to 30 favourites.

**Handling**

Cushioned side-opening door with 110° opening angle.  
 Electronic door opening.  
 Full touch display with control ring.  
 42 display languages available.  
 User detection, adjustable distance.  
 Info texts for additional information.  
 Animated quick guides to assist appliance operation.

**Features**

Full surface grill 2 kW behind glass ceramic.  
 Hot air fan rotates in both directions for ideal heat distribution.  
 Connection for core temperature probe (oven temperature probe usable).  
 Grill can be added briefly in hot air mode for additional browning.  
 Misting for targeted humidity addition.  
 Steam removal to avoid humidity on furnitures fronts.  
 Automatic boiling point detection.  
 Precise temperature control with display of the current temperature.  
 Timer functions: cooking time, cooking time end, count-up timer.  
 Long-term timer\*.  
 Programmable automatic door opening at cooking time end to avoid overcooking.  
 Optimum visibility of the food thanks to side lighting.  
 3 shelf levels.

**Selected digital services**

**(Gaggenau Home Connect)**  
 Remote control and monitoring.  
 Cooking time estimation when using the core temperature probe.  
 Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.  
 Electronic door lock to prevent unintentional opening of the appliance door.  
 Safety shut-off.  
 Thermally insulated door with triple glazing.  
 Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel cooking interior.  
 Automatic cleaning.  
 Automatic descaling for the steam generator.  
 Drying programme.  
 Automatic drying of the cavity at the end of the cooking process.  
 All removable parts and accessories dishwasher-safe, incl. stainer filter.

**Planning notes**


Plan the niche without back wall.  
 Door hinge not reversible.  
 No other electrical appliances should be installed above the GS.  
 At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
 Inlet and outlet hose can be extended once.  
 The outlet hose must not be longer than a maximum of 5 m.  
 The water connection for the inlet hose must always be accessible and not located directly behind the appliance.  
 The connection of the outlet hose to the siphon must not be directly behind the appliance and should be accessible.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
 The mains socket must be accessible and located outside the built-in niche.

Special accessories (order as spare part):  
 Part No. 17002490 Descaling tablets.

**Connection**


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
 Total connected load 3.1 kW.  
 Only cold water connection.  
 To allow water detection, softened water must have a conductivity of > 200µS/cm.  
 Inlet hose 3.0 m with connection pipe thread ISO228-G 3/4" (Ø 26.4 mm), extendable.  
 Outlet hose (Ø 25 mm) 3.0 m (HT-Hose), extendable.  
 Connection cable 1.75 m, pluggable.

\* Available in Q4/2025.

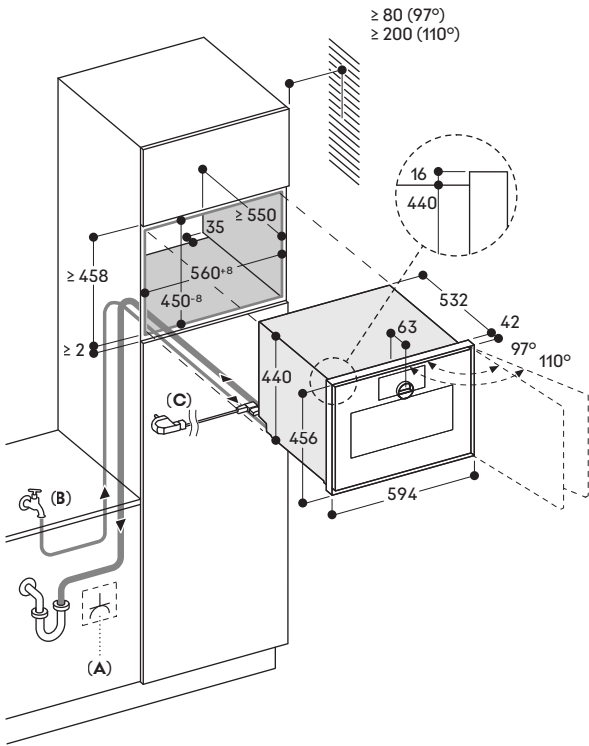

- A: Accessible electrical connection
- B: Accessible water connection
- C: Cable with or without plug, depending on country

View from rear

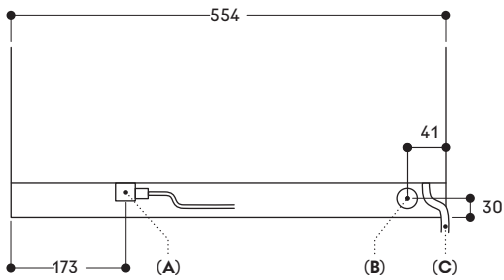

- A: Electric terminal box
- B: Water outlet
- C: Cold water inlet

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Combi-steam oven**  
**Gaggenau Expressive series**  
**GS 450/GS 451**

**Right-hinged**

**GS 450 120**  
 Stainless steel behind smoked glass.  
 Width 60 cm.

**Left-hinged**

**GS 451 120**  
 Stainless steel behind smoked glass.  
 Width 60 cm.



**Included in the price**

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 4 cleaning cartridges.

**Installation accessories**

**GA 601 010**  
 Adjustable intermediate shelf.  
 For vertical combination.  
 Incl. mounting brackets, cover and screws.

**Special accessories**

**BA 010 050**  
 Core temperature probe.  
 Compatible with GO, GS, GM.

**BA 010 301**  
 Triple telescopic pull-out rack for combi-steam ovens.

**BA 020 361**  
 Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.

**BA 020 370**  
 Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

**BA 020 382**  
 Cooking container, unperforated, PFAS free non-stick coating, 46 mm deep, 5.4 l.

**BA 020 391**  
 Insert, perforated, PFAS free non-stick coating, 40 mm deep, 5 l.

**BA 046 118**  
 Glass tray.  
 24 mm deep.

**CLS 100 40**  
 Cleaning cartridges, set of 4.  
 For combi-steam ovens.

**GN 010 330**  
 Adapter for gastronorm insert and roaster.

**GN 114 130**  
 Gastronorm insert, stainless steel, GN 1/3.  
 Unperforated, 40 mm deep, 1.5 l.

**GN 114 230**  
 Gastronorm insert, stainless steel, GN 2/3.  
 Unperforated, 40 mm deep, 3 l.

**GN 124 130**  
 Gastronorm insert, stainless steel, GN 1/3.  
 Perforated, 40 mm deep, 1.5 l.

**GN 124 230**  
 Gastronorm insert, stainless steel, GN 2/3.  
 Perforated, 40 mm deep, 3 l.

**GN 340 230**  
 Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick coating.

Lower and upper part can also be used as separate ovenproof dishes, 100 and 65 mm deep.  
 Use in combi-steam ovens in combination with adapter GN 010 330 and pull-out system BA 010 301.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Water tank for fresh and waste water for flexible installation.
- External steam generation to avoid limescale in the cooking compartment.
- Automatic cleaning with perfect results, also for heavy soiling.
- Hot air 30 °C to 230 °C, freely combinable with humidity levels 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes and setting recommendations.
- Net volume 50 litres.

**Heating methods / Programmes**

Hot air + 100 % humidity.  
 Hot air + 80 % humidity.  
 Hot air + 60 % humidity.  
 Hot air + 30 % humidity.  
 Hot air + 0 % humidity.  
 Grill + circulated air.  
 Grill level 1 + humidity.  
 Grill level 2 + humidity.  
 Sous-vide cooking.  
 Low temperature cooking.  
 Dough proving.  
 Keeping warm.  
 Defrosting.  
 Regenerating.  
 200 programmes (automatic programmes and setting recommendations).  
 Option to save up to 30 favourites.

**Handling**

Cushioned side-opening door with 110° opening angle.  
 Electronic door opening.  
 Full touch display with control ring.  
 42 display languages available.  
 User detection, adjustable distance.  
 Info texts for additional information.  
 Animated quick guides to assist appliance operation.

**Features**

Full surface grill 2 kW behind glass ceramic.  
 Hot air fan rotates in both directions for ideal heat distribution.  
 2 removable 1.7 litre water tanks, dishwasher-safe.  
 Connection for core temperature probe (oven temperature probe usable).  
 Grill can be added briefly in hot air mode for additional browning.  
 Misting for targeted humidity addition.  
 Water level warning.  
 Automatic boiling point detection.  
 Precise temperature control with display of the current temperature.  
 Timer functions: cooking time, cooking time end, count-up timer.  
 Long-term timer\*.  
 Programmable automatic door opening at cooking time end to avoid overcooking.  
 Optimum visibility of the food thanks to side lighting.  
 3 shelf levels.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring.  
 Cooking time estimation when using the core temperature probe.  
 Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.  
 Electronic door lock to prevent unintentional opening of the appliance door.  
 Safety shut-off.  
 Thermally insulated door with triple glazing.  
 Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel cooking interior.  
 Automatic cleaning.  
 Automatic descaling for the steam generator.  
 Drying programme.  
 Automatic drying of the cavity at the end of the cooking process.  
 All removable parts and accessories dishwasher-safe, incl. water tank and stainer filter.

**Planning notes**


Plan the niche without back wall.  
 Door hinge not reversible.  
 No other electrical appliances should be installed above the GS.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
 The mains socket must be accessible and located outside the built-in niche.

Special accessories (order as spare part):  
 Part No. 17002490 Descaling tablets.

**Connection**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
 Total connected load 3.1 kW.  
 Connection cable 1.75 m, pluggable.

\* Available in Q4/2025.

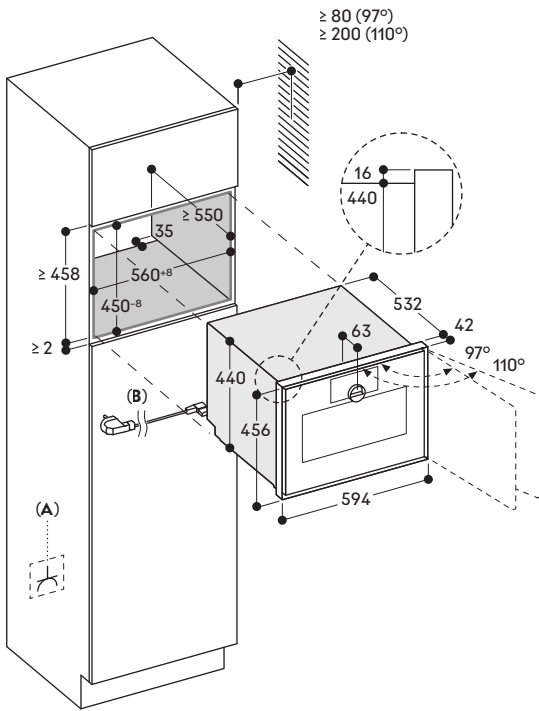

**A:** Accessible electrical connection  
**B:** Cable with or without plug, depending on country

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Combi-microwave oven**  
**Gaggenau Expressive series**  
**GM 480/GM 481**

**Right-hinged**

**GM 480 120**  
 Stainless steel behind smoked glass.  
 Width 76 cm.

**Left-hinged**

**GM 481 120**  
 Stainless steel behind smoked glass.  
 Width 76 cm.

**Included in the price**

- 1 wire rack.
- 1 glass tray.

**Installation accessories**

**GA 301 010**  
 Adjustable intermediate shelf.  
 For vertical combination.  
 Incl. mounting brackets, cover and screws.

**Special accessories**

**BA 010 050**  
 Core temperature probe.  
 Compatible with GO, GS, GM.

**BA 036 106**  
 Wire rack, chromium-plated.  
 Without opening, with feet.

**BA 046 118**  
 Glass tray.  
 24 mm deep.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Single operation and combination of microwave and oven.
- Automatic programmes and setting recommendations.
- Net volume 46 litres.

**Heating methods / Programmes**

Microwave operation with 6 output levels: max. 1000, 600, 450, 360, 180, 90 W.  
 Oven operation with 9 heating methods: Hot air from 30 °C to 230 °C, Grill + circulated air from 30 °C to 230 °C, Warming up beverages, with max. microwave level, Warming up meals from 360 W to 600 W, Dehydrating from 30 °C to 80 °C, Low temperature cooking from 30 °C to 90 °C + microwave, Dough proving from 30 °C to 50 °C, Keeping warm, with special microwave level, Defrosting from 90 W to 360 W.  
 Hot air and grill + circulated air freely combinable with microwave output levels 450, 360, 180 and 90 W.  
 70 programmes (automatic programmes and setting recommendations).  
 Option to save up to 30 favourites.

**Handling**

Cushioned side-opening door with 110° opening angle.  
 Electronic door opening.  
 Full touch display with control ring.  
 42 display languages available.  
 User detection, adjustable distance.  
 Info texts for additional information.  
 Animated quick guides to assist appliance operation.

**Features**

Innowave (inverter technology) for uniform microwave output.  
 Precise temperature control with display of the current temperature.  
 Grill can be added briefly in hot air mode for additional browning.  
 Connection for core temperature probe (oven temperature probe usable).  
 Programmable automatic door opening at cooking time end to avoid overcooking.  
 Timer functions: cooking time, cooking time end, count-up timer.  
 Long-term timer\*.  
 Hot air fan rotates in both directions for ideal heat distribution.  
 Optimum visibility of the food thanks to side lighting.  
 2 shelf levels and option of placing the food in suitable accessories directly on the cooking compartment floor.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring.  
 Cooking time estimation when using the core temperature probe.  
 Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.  
 Electronic door lock to prevent unintentional opening of the appliance door.  
 Safety shut-off.  
 Thermally insulated door with triple glazing.  
 Cooled housing with temperature protection.

**Cleaning**


Hygienic stainless steel interior with heat resistant glass base.  
 Cleaning aid programme.

**Planning notes**

Plan the niche without back wall.  
 Door hinge not reversible.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
 The mains socket must be accessible and located outside the built-in niche.

**Connection**

Total connected load 2.65 kW.  
 Connection cable 1.75 m, pluggable.

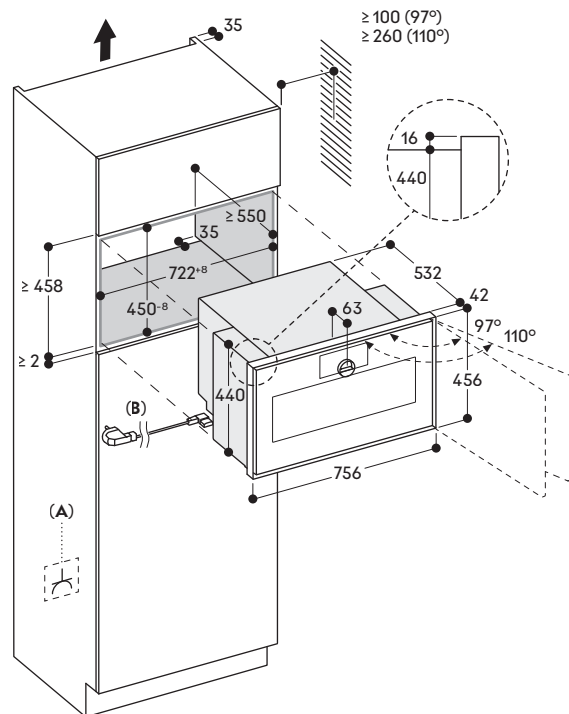

**A:** Accessible electrical connection  
**B:** Cable with or without plug, depending on country

\* Available in Q4/2025.





**Combi-microwave oven**  
Gaggenau Expressive series  
GM 450/GM 451

**Right-hinged**

**GM 450 120**

Stainless steel behind smoked glass.  
Width 60 cm.

**Left-hinged**

**GM 451 120**

Stainless steel behind smoked glass.  
Width 60 cm.

**Included in the price**

- 1 wire rack.
- 1 glass tray.

**Installation accessories**

**GA 601 010**

Adjustable intermediate shelf.  
For vertical combination.  
Incl. mounting brackets, cover and screws.

**Special accessories**

**BA 010 050**

Core temperature probe.  
Compatible with GO, GS, GM.

**BA 036 106**

Wire rack, chromium-plated.  
Without opening, with feet.

**BA 046 118**

Glass tray.  
24 mm deep.

**Highlights**

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Single operation and combination of microwave and oven.
- Automatic programmes and setting recommendations.
- Net volume 46 litres.

**Heating methods / Programmes**

Microwave operation with 6 output levels: max. 1000, 600, 450, 360, 180, 90 W.  
Oven operation with 9 heating methods: Hot air from 30 °C to 230 °C, Grill + circulated air from 30 °C to 230 °C, Warming up beverages, with max. microwave level, Warming up meals from 360 W to 600 W, Dehydrating from 30 °C to 80 °C, Low temperature cooking from 30 °C to 90 °C + microwave, Dough proving from 30 °C to 50 °C, Keeping warm, with special microwave level, Defrosting from 90 W to 360 W. Hot air and grill + circulated air freely combinable with microwave output levels 450, 360, 180 and 90 W. 70 programmes (automatic programmes and setting recommendations). Option to save up to 30 favourites.

**Handling**

Cushioned side-opening door with 110° opening angle.  
Electronic door opening.  
Full touch display with control ring. 42 display languages available.  
User detection, adjustable distance.  
Info texts for additional information.  
Animated quick guides to assist appliance operation.

**Features**

Innowave (inverter technology) for uniform microwave output.  
Precise temperature control with display of the current temperature.  
Grill can be added briefly in hot air mode for additional browning.  
Connection for core temperature probe (oven temperature probe usable).  
Programmable automatic door opening at cooking time end to avoid overcooking.  
Timer functions: cooking time, cooking time end, count-up timer.  
Long-term timer\*.  
Hot air fan rotates in both directions for ideal heat distribution.  
Optimum visibility of the food thanks to side lighting.  
2 shelf levels and option of placing the food in suitable accessories directly on the cooking compartment floor.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring.  
Cooking time estimation when using the core temperature probe.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.  
Electronic door lock to prevent unintentional opening of the appliance door.  
Safety shut-off.  
Thermally insulated door with triple glazing.  
Cooled housing with temperature protection.

**Cleaning**


Hygienic stainless steel interior with heat resistant glass base.  
Cleaning aid programme.

**Planning notes**

Plan the niche without back wall.  
Door hinge not reversible.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.  
The mains socket must be accessible and located outside the built-in niche.

**Connection**

Total connected load 2.65 kW.  
Connection cable 1.75 m, pluggable.

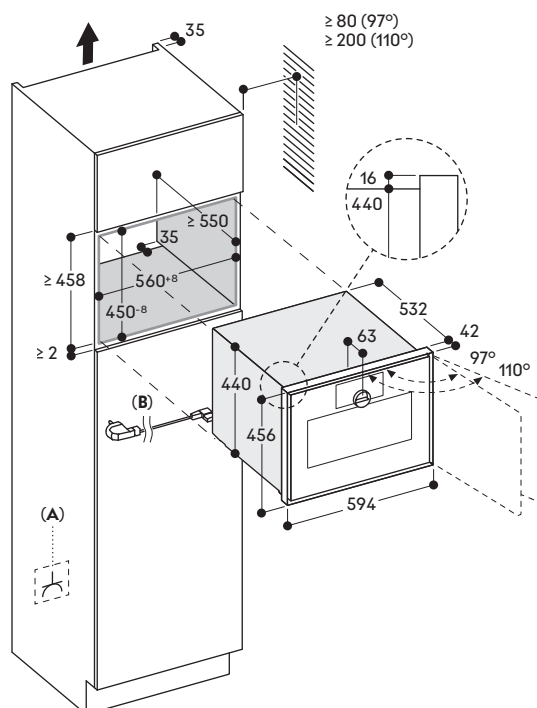

**A:** Accessible electrical connection  
**B:** Cable with or without plug, depending on country



**Fully automatic espresso machine**  
**Gaggenau Expressive series**  
**GC 461**

**Left-hinged**

**GC 461 120**  
 Stainless steel behind smoked glass.  
 Fixed connection for water supply.  
 Width 60 cm.

**Included in the price**

- 1 assembly screws.
- 1 test strip.
- 1 glass milk container.
- 1 connection hose for milk frother.
- 1 milk pipe.
- 1 cleaning cartridge.
- 1 descaling cartridge.

**Installation accessories**

**GA 601 010**  
 Adjustable intermediate shelf.  
 For vertical combination.  
 Incl. mounting brackets, cover and screws.

**Special accessories**

**GA 022 120**  
 Cleaning cartridge.

**GA 022 140**  
 Descaling cartridge.

**Highlights**

- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Dual operation modes: Classic mode and Barista mode.
- Aroma brewing technology including intelligent strength adjustment for full aroma with every selected beverage size.
- Personalisation function with profiles and favourites.
- Fully automatic cleaning and descaling with cartridges.
- Customizable, dynamic lighting scenarios.
- Electronic grinding level adjustment.
- Electronic fill level control for milk, water and coffee for a perfect result.

**Type of beverage**

Ristretto / 2 x Ristretto.  
 Espresso / 2 x Espresso.  
 Doppio.  
 Coffee / 2 x Coffee.  
 Coffee large / 2 x Coffee large.  
 Coffee very large.  
 Americano / 2 x Americano.  
 Cold Brew.  
 Slow Brew.  
 Coffee pot.  
 Hot water / 2 x Hot water.  
 Espresso Macchiato / 2 x Espresso Macchiato.  
 Flat White / 2 x Flat White.  
 Cappuccino / 2 x Cappuccino.  
 Caffè Latte / 2 x Caffè Latte.  
 Cold Brew Macchiato.  
 Latte Macchiato / 2 x Latte Macchiato.  
 Warm milk / 2 x Warm milk.  
 Milk froth / 2 x Milk froth.

**Handling**

Full touch display with control ring. Classic mode for easy beverage preparation with reduced settings for strength, quantity, aroma and milk ratio. The intelligent strength adjustment ensures that each beverage size is always prepared with the desired intensity. Barista mode for detailed and precise beverage preparation. All relevant brewing parameters such as water and coffee quantity, grinding level, contact time, brewing temperature and milk ratio can be customised according to personal preferences. Roast level selection: depending on the roast, the optimum, specific settings for the beans used are displayed in barista mode. Personalisation function for creating up to 10 profiles, each with 10 individualised beverages as favourites. 42 display languages available. User detection, adjustable distance. Info texts for additional information. Animated quick guides to assist appliance operation. One-touch operation. Easy access to water tank, milk and coffee bean container behind the door.

**Features**

Fresh water connection to refill the water tank with fresh water. Continuous flow heater means no waiting time and constant brewing temperature. Maintenance-free grinding unit with ceramic discs. Electronic adjustment of grinding level for easy and precise control of the grinding parameters. Double grinding and brewing cycles for double cup or for extra strong single beverages. Height-adjustable beverage dispenser 7 cm to 15 cm. Beverage dispenser with integrated milk system. Glass milk container for up to 0.7 litres. Removable bean container for 400 g with aroma protecting lid. Removable 2.4 litre water tank. Water pump with 19 bar pressure. Electronic replacement indicator for cleaning and descaling cartridges and water filter for timely reordering. Electronic fill level control for drip tray and container for coffee residue. Integrated, soft lighting for perfect presentation of every single beverage. Hint: for energy-saving, the appliance switches to standby mode automatically after about 30 minutes. This timespan can be changed in the basic settings.

**Selected digital services (Gaggenau Home Connect)**

Coffee World: extended choice of coffee specialties from all over the world. Remote control and monitoring. Playlist function.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance. To protect against water damage throughout the lifetime of the appliance, the tap water connection is equipped with the aqua stop safety system.

**Cleaning**

Fully automatic cleaning and descaling with cartridges. Switching to manual cleaning and descaling with tablets possible. Automatic steam cleaning of the milk system after every milk-based beverage. Holiday mode to prepare the appliance for longer periods of non-use or transportation. Empty-grinding function to remove coffee residues from the system when switching bean types. Removable brewing unit. Dishwasher-safe coffee residue container and drip tray. Dishwasher-safe beverage dispenser. Dishwasher-safe milk container.


**Planning notes**

Plan the niche without back wall. Door hinge not reversible. Ideal installation height 95 cm to 145 cm (top edge of niche bottom). Protrusion from appliance front to furniture cabinet 42 mm. When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall. Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm. Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455). Installation directly above warming drawer possible. Due to the higher appliance housing (449 mm), every combination with GC needs to be planned cautiously. For optimum gap dimensions, the full-surface intermediate shelf GA 601 010 is recommended for a vertical combination with other appliances. Installation above a combi microwave oven is only possible with a standard furniture shelf. The use of the intermediate shelf GA 601 010 is not permitted in this case. The water connection for the inlet hose must always be accessible and not located directly behind the appliance.

Special accessories (order as spare parts):  
 Part No. 17000705 Water filter  
 Part No. 17000706 Water filter, set of 3  
 Part No. region-specific Descaling tablets  
 Part No. region-specific Cleaning tablets  
 Part No. 00636455 Door hinge restrictor (92° opening angle)

**Connection**

Total connected load 1.5 kW.  
 Connection cable 1.7 m, pluggable.  
 Inlet hose 170 cm with 3/4" (26.4 mm) connection, extendable.

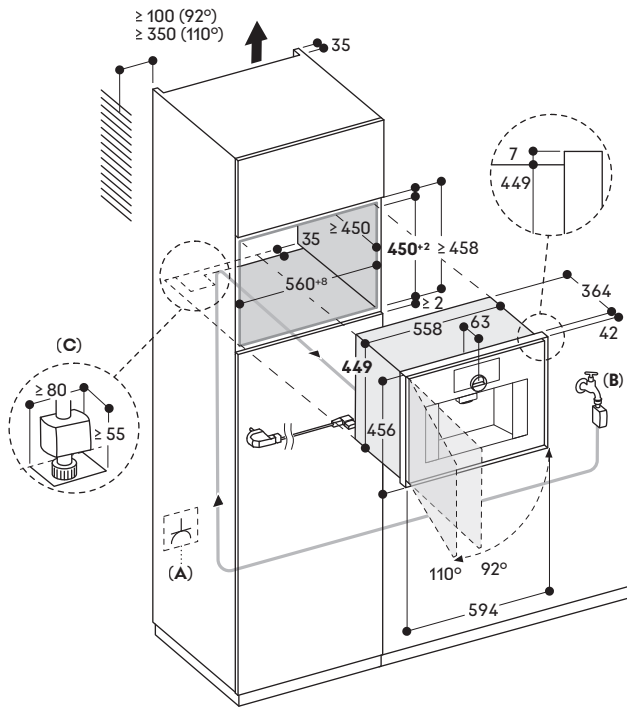

**A:** Accessible electrical connection  
**B:** Accessible water connection  
**C:** Additional cut-out to pass Aquastop

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Fully automatic espresso machine**  
**Gaggenau Expressive series**  
**GC 451**

**Left-hinged**

**GC 451 120**  
 Stainless steel behind smoked glass.  
 Width 60 cm.

**Included in the price**

- 1 assembly screws.
- 1 test strip.
- 1 glass milk container.
- 1 connection hose for milk frother.
- 1 milk pipe.
- 1 cleaning cartridge.
- 1 descaling cartridge.

**Installation accessories**

**GA 601 010**  
 Adjustable intermediate shelf.  
 For vertical combination.  
 Incl. mounting brackets, cover and screws.

**Special accessories**

**GA 022 120**  
 Cleaning cartridge.

**GA 022 140**  
 Descaling cartridge.

**Highlights**

- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Dual operation modes: Classic mode and Barista mode.
- Aroma brewing technology including intelligent strength adjustment for full aroma with every selected beverage size.
- Personalisation function with profiles and favourites.
- Fully automatic cleaning and descaling with cartridges.
- Customizable, dynamic lighting scenarios.
- Electronic grinding level adjustment.
- Electronic fill level control for milk, water and coffee for a perfect result.

**Type of beverage**

Ristretto / 2 x Ristretto.  
 Espresso / 2 x Espresso.  
 Doppio.  
 Coffee / 2 x Coffee.  
 Coffee large / 2 x Coffee large.  
 Coffee very large.  
 Americano / 2 x Americano.  
 Cold Brew.  
 Slow Brew.  
 Coffee pot.  
 Hot water / 2 x Hot water.  
 Espresso Macchiato / 2 x Espresso Macchiato.  
 Flat White / 2 x Flat White.  
 Cappuccino / 2 x Cappuccino.  
 Caffè Latte / 2 x Caffè Latte.  
 Cold Brew Macchiato.  
 Latte Macchiato / 2 x Latte Macchiato.  
 Warm milk / 2 x Warm milk.  
 Milk froth / 2 x Milk froth.

**Handling**

Full touch display with control ring. Classic mode for easy beverage preparation with reduced settings for strength, quantity, aroma and milk ratio. The intelligent strength adjustment ensures that each beverage size is always prepared with the desired intensity. Barista mode for detailed and precise beverage preparation. All relevant brewing parameters such as water and coffee quantity, grinding level, contact time, brewing temperature and milk ratio can be customised according to personal preferences. Roast level selection: depending on the roast, the optimum, specific settings for the beans used are displayed in barista mode. Personalisation function for creating up to 10 profiles, each with 10 individualised beverages as favourites. 42 display languages available. User detection, adjustable distance. Info texts for additional information. Animated quick guides to assist appliance operation. One-touch operation. Easy access to water tank, milk and coffee bean container behind the door.

**Features**

Continuous flow heater means no waiting time and constant brewing temperature. Maintenance-free grinding unit with ceramic discs. Electronic adjustment of grinding level for easy and precise control of the grinding parameters. Double grinding and brewing cycles for double cup or for extra strong single beverages. Height-adjustable beverage dispenser 7 cm to 15 cm. Beverage dispenser with integrated milk system. Glass milk container for up to 0.7 litres. Removable bean container for 400 g with aroma protecting lid. Removable 2.4 litre water tank. Water pump with 19 bar pressure. Electronic replacement indicator for cleaning and descaling cartridges and water filter for timely reordering. Electronic fill level control for drip tray and container for coffee residue. Integrated, soft lighting for perfect presentation of every single beverage. Hint: for energy-saving, the appliance switches to standby mode automatically after about 30 minutes. This timespan can be changed in the basic settings.

**Selected digital services (Gaggenau Home Connect)**

Coffee World: extended choice of coffee specialties from all over the world. Remote control and monitoring. Playlist function.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock to prevent accidental switch on or operation of the appliance.

**Cleaning**

Fully automatic cleaning and descaling with cartridges. Switching to manual cleaning and descaling with tablets possible. Automatic steam cleaning of the milk system after every milk-based beverage. Holiday mode to prepare the appliance for longer periods of non-use or transportation. Empty-grinding function to remove coffee residues from the system when switching bean types. Removable brewing unit. Dishwasher-safe coffee residue container and drip tray. Dishwasher-safe beverage dispenser. Dishwasher-safe milk container.

**Planning notes**


Plan the niche without back wall. Door hinge not reversible. Ideal installation height 95 cm to 145 cm (top edge of niche bottom). Protrusion from appliance front to furniture cabinet 42 mm. When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall. Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm. Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455). Installation directly above warming drawer possible. Due to the higher appliance housing (449 mm), every combination with GC needs to be planned cautiously. For optimum gap dimensions, the full-surface intermediate shelf GA 601 010 is recommended for a vertical combination with other appliances. Installation above a combi microwave oven is only possible with a standard furniture shelf. The use of the intermediate shelf GA 601 010 is not permitted in this case.

**Special accessories**

(order as spare parts):  
 Part No. 17000705 Water filter  
 Part No. 17000706 Water filter, set of 3  
 Part No. region-specific Descaling tablets  
 Part No. region-specific Cleaning tablets  
 Part No. 00636455 Door hinge restrictor (92° opening angle)

**Connection**

Total connected load 1.5 kW.  
 Connection cable 1.7 m, pluggable.

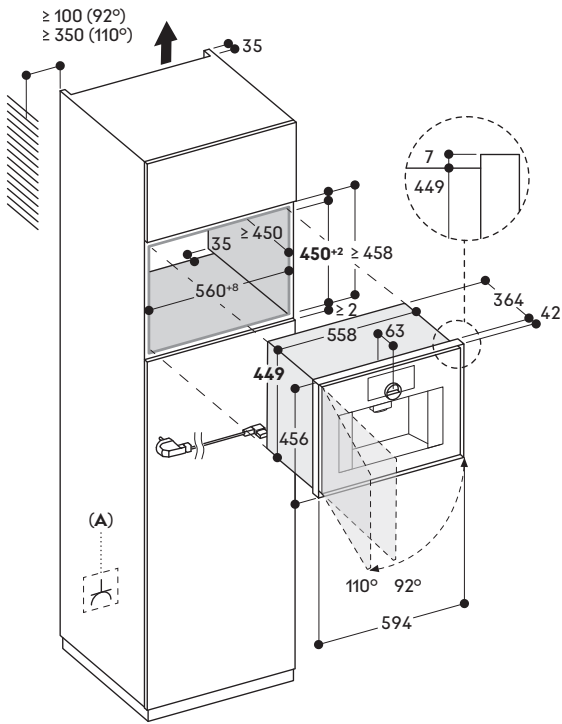

A: Accessible electrical connection

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



#### Vacuumping drawer

Gaggenau Expressive series  
GV 451

#### GV 451 120

Stainless steel behind smoked glass.  
Width 60 cm, Height 14 cm.

#### Included in the price

- 50 Vacuumping bag, small.
- 50 Vacuumping bag, big.
- 1 Raised vacuumping platform.
- 1 Adaptor f. vacuumping outside the chamber.
- 1 Vacuumping hose.
- 1 Adaptor for bottle plugs.
- 3 Plugs for vacuumping of bottles.

#### Highlights

- Integrable in 14 cm high niche.
- Hygienic stainless steel vacuumping chamber, applicable height up to 80 mm.
- 3 vacuumping levels for vacuumping in the chamber, max. 99%.
- 3 vacuumping levels for vacuumping outside the chamber, max. 90%.
- Automatic connection recognition for vacuumping outside the chamber.
- Handleless drawer.
- Push-to-open function.

#### Application

Vacuumping for sous-vide cooking.  
 Vacuumping for fast marinating and flavouring.  
 Vacuumping for extended storage.  
 Vacuumping of vacuumping containers outside the chamber.  
 Vacuumping of liquids in bottles outside the chamber.

#### Handling

Touch key operation.

#### Features

Net volume 7 litres.  
 Capacity load max. 10 kg.  
 Maximum size of vacuumping bags  
 W 240 mm x L 350 mm.  
 3 heat-sealing levels for different strengths of bag material.  
 Sealing bar, non-stick coating, removable.  
 Safety glass cover, opens automatically after vacuumping.  
 Raised vacuumping platform, 44 mm, deployable.  
 Utility space in vacuumping chamber, W 210 mm x L 275 mm.  
 Membrane for avoiding reflow of liquids during vacuumping outside the chamber.  
 Drying programme for vacuumping pump.

#### Planning notes


Plan the niche without back wall.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 Installation of GS/GM/GC directly above GV without intermediate shelf.  
 The mains socket must be accessible and located outside the built-in niche.  
 The socket can be planned behind the appliance.

#### Special accessories

(order as spare parts):  
 Part No. 00578813 vacuumping bags, small  
 Part No. 00578814 vacuumping bags, big.

#### Connection

Total connected load 0.32 kW.  
 Connection cable 1.50 m, pluggable.

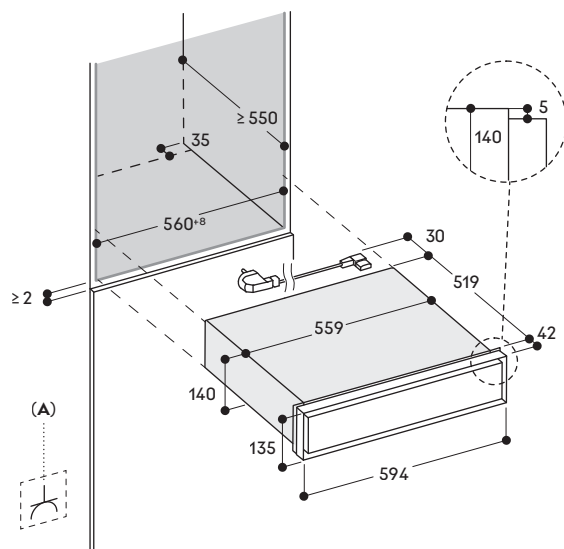

A: Accessible electrical connection



**Vacuumping drawer**  
Gaggenau Expressive series  
**GV 051**

**GV 051 190**

Fully integrated.  
Width 60 cm, Height 14 cm.

**Included in the price**

- 50 Vacuumping bag, small.
- 50 Vacuumping bag, big.
- 1 Raised vacuumping platform.
- 1 Adaptor f. vacuumping outside the chamber.
- 1 Vacuumping hose.
- 1 Adaptor for bottle plugs.
- 3 Plugs for vacuumping of bottles.

**Highlights**

- Integrable in 14 cm high niche.
- Hygienic stainless steel vacuumping chamber, applicable height up to 80 mm.
- 3 vacuumping levels for vacuumping in the chamber, max. 99%.
- 3 vacuumping levels for vacuumping outside the chamber, max. 90%.
- Automatic connection recognition for vacuumping outside the chamber.
- Cushioned closing system.

**Application**

Vacuumping for sous-vide cooking.  
Vacuumping for fast marinating and flavouring.  
Vacuumping for extended storage.  
Vacuumping of vacuumping containers outside the chamber.  
Vacuumping of liquids in bottles outside the chamber.

**Handling**

Touch key operation.

**Features**

Net volume 7 litres.  
Capacity load max. 10 kg.  
Maximum size of vacuumping bags  
W 240 mm x L 350 mm.  
3 heat-sealing levels for different strengths of bag material.  
Sealing bar, non-stick coating, removable.  
Safety glass cover, opens automatically after vacuumping.  
Raised vacuumping platform, 44 mm, deployable.  
Utility space in vacuumping chamber, W 210 mm x L 275 mm.  
Membrane for avoiding reflow of liquids during vacuumping outside the chamber.  
Drying programme for vacuumping pump.

**Planning notes**


Plan the niche without back wall.  
Installation of GS/GM/GC directly above GV without intermediate shelf.  
Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.  
Front weight up to 3 kg.  
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
Built-in under worktop or in single niche.  
The mains socket must be accessible and located outside the built-in niche.  
The socket can be planned behind the appliance.

**Special accessories**

(order as spare parts):  
Part No. 00578813 vacuumping bags, small  
Part No. 00578814 vacuumping bags, big.

**Connection**

Total connected load 0.32 kW.  
Connection cable 1.50 m, pluggable.

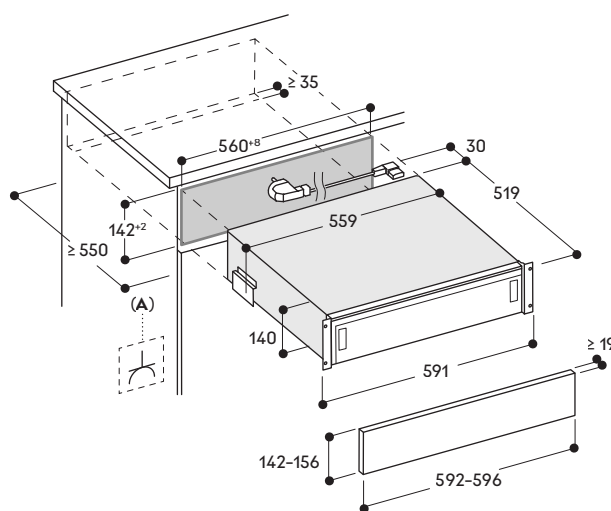

**A:** Accessible electrical connection



**Culinary warming drawer**  
**Gaggenau Expressive series**  
**GW 483**

**GW 483 120**

Stainless steel behind smoked glass.  
 Width 76 cm, Height 21.5 cm.

**Highlights**

- Handleless drawer.
- Bright interior lighting.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Preheating of small beverage containers/cups.  
 Warming cookware/plates.  
 Keeping meals warm.  
 Low-temperature cooking.  
 Direct temperature control.  
 16 additional programmes via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 47 litres.  
 Volume capacity: Dinner service for 10 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
 Capacity load max. 25 kg.  
 Usable interior dimensions W 701 mm × H 166 mm × D 405 mm.  
 Heating system for even heat distribution and stable cavity temperature.  
 Status indicator, visible on the frame.  
 Glass bottom made of safety glass.

**Selected digital services**

**(Gaggenau Home Connect)**  
 Additional programmes and recipes.  
 Remote control and monitoring.  
 Timing function.


Please read additional information on Gaggenau Home Connect on page 459.

**Planning notes**

Plan the niche without back wall.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 Installation directly above the drawer without intermediate floor.  
 The mains socket must be accessible and located outside the built-in niche.  
 The socket can be planned behind the appliance.

**Connection**

Total connected load 0.82 kW.  
 Connection cable 1.75 m, pluggable.

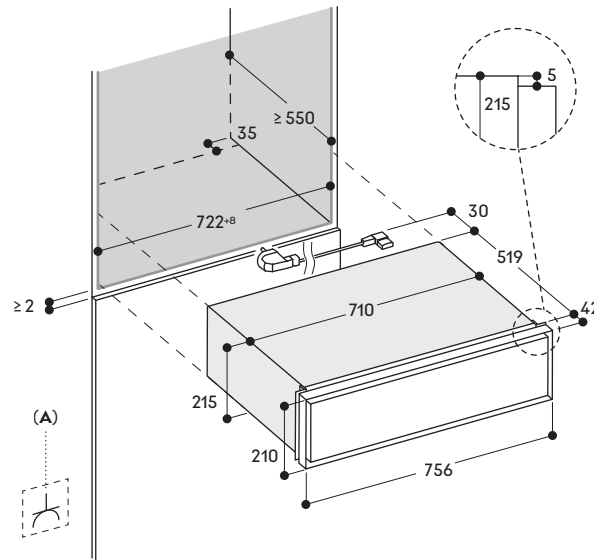

**A:** Accessible electrical connection





**Culinary warming drawer**  
Gaggenau Expressive series  
**GW 452**

**GW 452 120**  
Stainless steel behind smoked glass.  
Width 60 cm, Height 28 cm.

**Included in the price**

1 wire rack.

**Highlights**

- Handleless drawer.
- Bright interior lighting.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Preheating of small beverage containers/cups.  
Warming cookware/plates.  
Keeping meals warm.  
Low-temperature cooking.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programmes via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 52 litres.  
Additional grid creates a second level and extends storage space.  
Volume capacity: Dinner service for 12 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W 548 mm x H 232 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status indicator, visible on the frame.  
Glass bottom made of safety glass.

**Selected digital services  
(Gaggenau Home Connect)**

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.


Please read additional information on Gaggenau Home Connect on page 459.

**Planning notes**

Plan the niche without back wall.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
Installation directly above the drawer without intermediate floor.  
The mains socket must be accessible and located outside the built-in niche.  
The socket can be planned behind the appliance.

**Connection**

Total connected load 0.82 kW.  
Connection cable 1.75 m, pluggable.

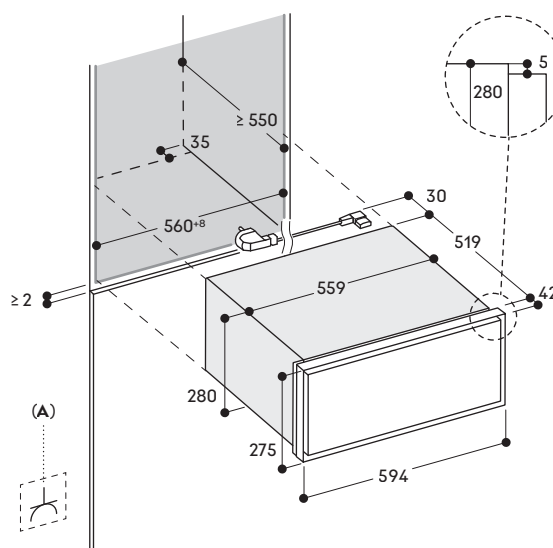

**A:** Accessible electrical connection



**Culinary warming drawer**  
**Gaggenau Expressive series**  
**GW 453**

**GW 453 120**

Stainless steel behind smoked glass.  
 Width 60 cm, Height 21.5 cm.

**Highlights**

- Handleless drawer.
- Bright interior lighting.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Preheating of small beverage containers/cups.  
 Warming cookware/plates.  
 Keeping meals warm.  
 Low-temperature cooking.  
 Direct temperature control.  
 Personalisation function via Home Connect.  
 16 additional programmes via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 37 litres.  
 Volume capacity: Dinner service for 8 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
 Capacity load max. 25 kg.  
 Usable interior dimensions  
 W 548 mm × H 166 mm × D 410 mm.  
 Heating system for even heat distribution and stable cavity temperature.  
 Status indicator, visible on the frame.  
 Glass bottom made of safety glass.

**Selected digital services**

**(Gaggenau Home Connect)**

Additional programmes and recipes.  
 Remote control and monitoring.  
 Timing function.


Please read additional information on Gaggenau Home Connect on page 459.

**Planning notes**

Plan the niche without back wall.  
 Protrusion from appliance front to furniture cabinet 42 mm.  
 Consider the overhang when planning to open drawers next to the appliance.  
 Installation directly above the drawer without intermediate floor.  
 The mains socket must be accessible and located outside the built-in niche.  
 The socket can be planned behind the appliance.

**Connection**

Total connected load 0.82 kW.  
 Connection cable 1.75 m, pluggable.

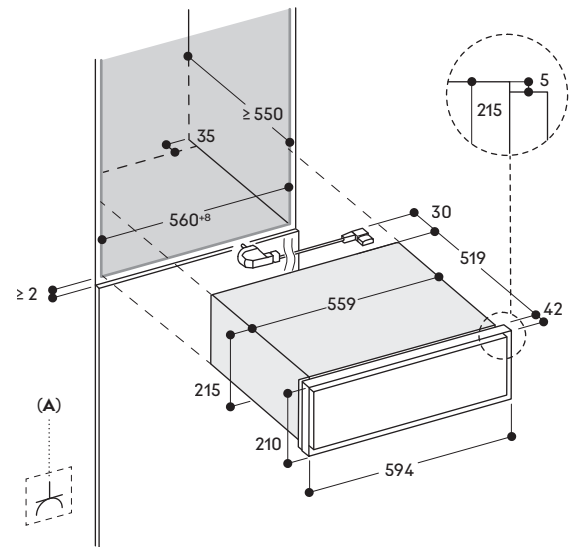

**A:** Accessible electrical connection



**Culinary warming drawer**  
Gaggenau Expressive series  
**GW 451**

**GW 451 120**

Stainless steel behind smoked glass.  
Width 60 cm, Height 14 cm.

**Highlights**

- Handleless drawer.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Preheating of small beverage containers/cups.  
Warming cookware/plates.  
Keeping meals warm.  
Low-temperature cooking.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programmes via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W 548 mm × H 92 mm × D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status indicator, visible on the frame.  
Glass bottom made of safety glass.

**Selected digital services**

**(Gaggenau Home Connect)**  
Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.


Please read additional information on Gaggenau Home Connect on page 459.

**Planning notes**

Plan the niche without back wall.  
Protrusion from appliance front to furniture cabinet 42 mm.  
Consider the overhang when planning to open drawers next to the appliance.  
Installation directly above the drawer without intermediate floor.  
The mains socket must be accessible and located outside the built-in niche.  
The socket can be planned behind the appliance.

**Connection**

Total connected load 0.82 kW.  
Connection cable 1.75 m, pluggable.

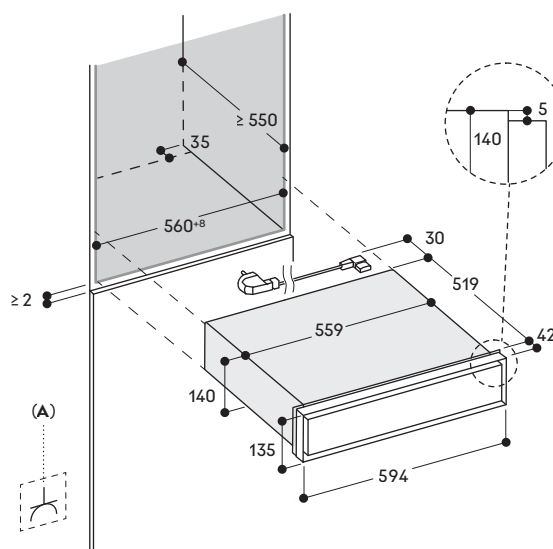

**A:** Accessible electrical connection



Culinary warming drawer  
Gaggenau Expressive series  
GW 051

#### GW 051 190

Fully integrated.  
Width 60 cm, Height 14. cm.

#### Highlights

- Integrable in 14 cm high niche.
- Bright interior lighting.
- Cushioned closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Preheating of small beverage containers/cups.  
Warming cookware/plates.  
Keeping meals warm.  
Low-temperature cooking.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programmes via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W 548 mm × H 92 mm × D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.


Please read additional information on Gaggenau Home Connect on page 459.

#### Planning notes

Plan the niche without back wall.  
Installation directly above the drawer without intermediate floor.  
Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.  
Front weight up to 3 kg.  
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
Built-in under worktop or in single niche.  
The mains socket must be accessible and located outside the built-in niche.  
The socket can be planned behind the appliance.

#### Connection

Total connected load 0.82 kW.  
Connection cable 1.75 m, pluggable.

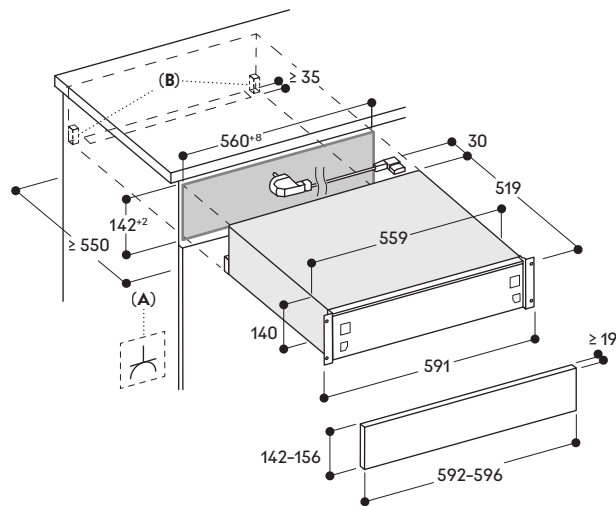


A: Accessible electrical connection  
B: Anti tilting

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------

## Accessories and special accessories Gaggenau Expressive series

**BA 010 301**

Triple telescopic pull-out rack for combi-steam oven.



**BA 020 361**

Cooking container, stainless steel, unperforated, 46 mm deep, 5.4l.



**BA 020 370**

Cooking container, stainless steel, perforated, 40 mm deep, 5l.



**BA 020 382**

Cooking container, unperforated, PFAS free non-stick coating, 46 mm deep, 5.4l.




**BA 020 391**

Insert, perforated, PFAS free non-stick coating, 40 mm deep, 5l.



**BA 026 116**

Baking tray, enamelled. 30 mm deep.



**BA 026 117**

Grill tray, enamelled. 38 mm deep.




**BA 028 115**

Baking tray, enamelled. 30 mm deep.




**BA 020 110**

Air frying tray. 30 mm deep.



**BA 036 106**

Wire rack, chromium-plated. Without opening, with feet.



**BA 038 105**

Wire rack, chromium-plated. Without opening, with feet.



**BA 056 134**

Baking stone. Incl. baking stone support and pizza paddle. Not in combination with pull-out system.



**BA 058 134**

Baking stone. Incl. baking stone support and pizza paddle. Not in combination with pull-out system.




**BS 020 003**

Pizza paddle. Serving and cutting board.



**GN 010 330**

Adapter for gastronorm insert and roaster.



**GN 114 130**

Gastronorm insert, stainless steel, GN1/3. Unperforated, 40 mm deep, 1.5l.



**GN 114 230**

Gastronorm insert, stainless steel, GN2/3. Unperforated, 40 mm deep, 3l.



**GN 124 130**

Gastronorm insert, stainless steel, GN1/3. Perforated, 40 mm deep, 1.5l.



**GN 124 230**

Gastronorm insert, stainless steel, GN2/3. Perforated, 40 mm deep, 3l.



**CL S10 040**

Cleaning cartridges, set of 4.  
For Combi-steam oven.



**GZ 010 011**

Extension for water inlet and outlet  
(2m long).



**BA 010 050**

Core temperature probe.  
Compatible with GO, GS, GM.




**GA601010**

Adjustable intermediate shelf.  
For vertical combination.  
Incl. mounting brackets, cover and screws.

**GA301010**

Adjustable intermediate shelf.  
For vertical combination.  
Incl. mounting brackets, cover and screws.

**GA601010 / GA301010**

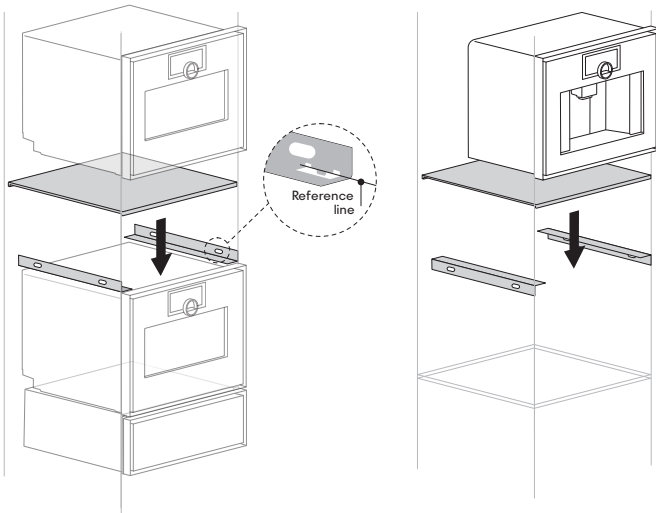

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Accessories and special accessories Gaggenau Expressive series



Oven  
GO 480/GO 481

Baking tray, enamelled		
BA 026 116	30 mm deep.	
BA 026 117	38 mm deep.	
BA 028 115	30 mm deep.	•/o
Pull-out rack		
BA 016 106*	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe.	
BA 018 106*	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe.	o
BA 010 301	Triple telescopic pull-out rack for combi-steam oven.	
Baking stone		
BA 056 134	Incl. baking stone support and pizza paddle.	
BA 058 134	Incl. baking stone support and pizza paddle.	o
Pizza paddle		
BS 020 003	Serving and cutting board	o
Cooking container, steam oven		
BA 020 361	Cooking container, stainless steel, unperforated, 46 mm deep, 5,4 l.	
BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5l.	
BA 020 382	Cooking container, non-stick, unperforated, 46 mm deep, 5,4 l.	
BA 020 391	Cooking container, non-stick, Perforated, 40 mm deep, 5l.	
GN 114 130	GN 1/3, unperforated, 40 mm deep, 1,5l.	
GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l.	
GN 124 130	GN 1/3, perforated, 40 mm deep, 1,5l.	
GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l.	
Gastronorm roaster, cast aluminium		
GN 340 230	GN 2/3, height 165 mm, non-stick coating.	
GN 340 231**	GN 2/3, height 165 mm, non-stick coating. For ovens and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456).	o
GN 010 330	Adapter for gastronorm insert.	
Glass tray		
BA 046 118	24 mm deep.	
Wire rack		
BA 036 106	No opening, with feet.	
BA 038 105	No opening, with feet.	•/o
Air frying tray		
BA 020 110	In combination with air frying mode.	o
Core temperature probe		
BA 010 050	Three-Point core temperature probe.	•
Cleaning and care		
CL S10 040	Cleaning cartridges, set of 4.	
Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.	
GA 022 120	Cleaning cartridge.	
GA 022 140	Descaling cartridge.	
Part No. 17000705	Water-filter cartridge.	
Part No. 17000706	Water-filter cartridge, set of 3.	
Part No. is region-specific	Descaling tablets available via customer service.	
Part No. is region-specific	Cleaning tablets available via customer service.	
Vacuuming bags		
Part No. 00578813	Vacuuming bags, small, 180 mm x 280 mm.	
Part No. 00578814	Vacuuming bags, large, 240 mm x 350 mm.	
Water connection		
GZ 010 011	Extension for water inlet and outlet hose.	
Adjustable intermediate shelf		
GA 301 010	For 76 cm vertical combination.	
GA 601 010	For 60 cm vertical combination.	

• Standard. o Special accessory. \* Available from 03/2026. \*\* Available from 10/2025.





Oven	Oven	Combi-steam oven	Combi-steam oven	Combi-steam oven
GO 470/GO 471	GO 450/GO 451	GS 480/GS 481	GS 470/GS 471	GS 450/GS 451
•/o	•/o			
•/o	•/o			
o	o			
		o	o	o
o	o			
o	o			
		•/o	•/o	•/o
		•/o	•/o	•/o
		o	o	o
		o	o	o
		o	o	o
		•/o	•/o	•/o
		o	o	o
		•/o	•/o	•/o
o	o	o	o	o
		o	o	o
•/o	•/o	o	o	o
•/o	•/o			
o	o			
•	•	o	o	o
		•/o	•/o	•/o
		o	o	o
		o	o	
		o		o

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Accessories and special accessories Gaggenau Expressive series



**Combi-microwave oven**  
GM 480/GM 481

Baking tray, enamelled		
BA 026 116	30 mm deep.	
BA 026 117	38 mm deep.	
BA 028 115	30 mm deep.	
Pull-out rack		
BA 016 106*	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe.	
BA 018 106*	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe.	
BA 010 301	Triple telescopic pull-out rack for combi-steam oven.	
Baking stone		
BA 056 134	Incl. baking stone support and pizza paddle.	
BA 058 134	Incl. baking stone support and pizza paddle.	
Pizza paddle		
BS 020 003	Serving and cutting board	
Cooking container, steam oven		
BA 020 361	Cooking container, stainless steel, unperforated, 46 mm deep, 5,4 l.	
BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5l.	
BA 020 382	Cooking container, non-stick, unperforated, 46 mm deep, 5,4 l.	
BA 020 391	Cooking container, non-stick, Perforated, 40 mm deep, 5l.	
GN 114 130	GN 1/3, unperforated, 40 mm deep, 1,5l.	
GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l.	
GN 124 130	GN 1/3, perforated, 40 mm deep, 1,5l.	
GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l.	
Gastronorm roaster, cast aluminium		
GN 340 230	GN 2/3, height 165 mm, non-stick coating.	
GN 340 231**	GN 2/3, height 165 mm, non-stick coating. For ovens and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456).	
GN 010 330	Adapter for gastronorm insert.	
Glass tray		
BA 046 118	24 mm deep.	•/°
Wire rack		
BA 036 106	No opening, with feet.	•/°
BA 038 105	No opening, with feet.	•/°
Air frying tray		
BA 020 110	In combination with air frying mode.	
Core temperature probe		
BA 010 050	Three-Point core temperature probe.	°
Cleaning and care		
CL S10 040	Cleaning cartridges, set of 4.	
Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.	
GA 022 120	Cleaning cartridge.	
GA 022 140	Descaling cartridge.	
Part No. 17000705	Water-filter cartridge.	
Part No. 17000706	Water-filter cartridge, set of 3.	
Part No. is region-specific	Descaling tablets available via customer service.	
Part No. is region-specific	Cleaning tablets available via customer service.	
Vacuuming bags		
Part No. 00578813	Vacuuming bags, small, 180 mm x 280 mm.	
Part No. 00578814	Vacuuming bags, large, 240 mm x 350 mm.	
Water connection		
GZ 010 011	Extension for water inlet and outlet hose.	
Adjustable intermediate shelf		
GA 301 010	For 76 cm vertical combination.	°
GA 601 010	For 60 cm vertical combination.	

• Standard. ° Special accessory. \* Available from 03/2026. \*\* Available from 10/2025.



**Combi-microwave oven**  
GM 450/GM 451



**Fully automatic espresso machine**  
GC 461



**Fully automatic espresso machine**  
GC 451



**Vacuuming drawer**  
GV 451/GV051



**Culinary warming drawer**  
GW 483/GW 083



**Culinary warming drawer**  
GW452



**Culinary warming drawer**  
GW451/GW 051



**Culinary warming drawer**  
GW453

•/o

•/o

o

•/o

•/o

o

o

o

o

•/o

•/o

o

o

o

o

•/o

•/o

o

o

o

## Ovens Gaggenau Expressive series



Appliance type	Oven	Oven	Oven
Side-opening door right-hinged / left-hinged	GO 480/GO 481	GO 470/GO 471	GO 450/GO 451
Stainless steel behind smoked glass	GO 480/481 120	GO 470/471 120	GO 450/451 120
<b>Dimensions</b>			
Width	(cm) 76	60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 756 x 671 x 532	594 x 596 x 532	594 x 596 x 532
Door panel extension from furniture cavity	(mm) 42	42	42
Niche dimensions W x H x D	(mm) 722 x 657 x 550	560 x 590 x 550	560 x 590 x 550
Net weight	(kg) 73	56	54
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>			
Net volume	(l) 125	77	77
Number of cooking compartments	1	1	1
Interior dimensions W x H x D	(mm) 654 x 469 x 408	492 x 386 x 408	492 x 386 x 408
Energy efficiency class with hot air eco			
Energy Efficiency Index (EEI)	88	83.9	83.9
Energy consumption with top + bottom heat	(kWh) 1.79	1.4	1.4
Energy consumption with hot air eco	(kWh) 0.95	0.73	0.73
Heat source	electric	electric	electric
<b>Heating methods / programmes</b>			
Temperature range	(°C) 30-300	30-300	30-300
Hot air plus / hot air eco / top + bottom heat	•/•/•	•/•/•	•/•/•
Top heat / bottom heat / hot air + bottom heat	•/•/•	•/•/•	•/•/•
Top + 1/3 bottom heat	•	•	—
Bottom heat + 1/3 top heat	•	•	—
Hot air + 1/3 bottom heat	•	•	—
Grill / grill + circulated air	•	•	•
Air frying	•	•	•
Baking stone function	•	•	•
Roaster function	•	•	•
Moist baking	•	•	•
Dough proving / defrosting / dehydration	•/•/•	•/•/•	•/•/•
Keeping warm	•	•	—
Option to save favourites	•	•	•
Automatic programmes / setting recommendations	•/•	•/•	•/•
<b>Handling</b>			
Electronic door opening	•	•	•
Door opening angle	110°	110°	110°
Full touch display / control ring	•/•	•/•	•/•
Display languages	(no.) 42	42	42
Info texts	•	•	•
Animated quick guides	•	•	•
User detection	•	•	•
<b>Features</b>			
Cooking time / cooking time end / count-up timer	•/•/•	•/•/•	•/•/•
Long-term timer <sup>3</sup>	•	•	•
Actual temperature display	•	•	•
Rapid heating	•	•	•
Full surface grill behind enamel	•	•	•
Side interior lighting	•	•	•
Shelf levels	(no.) 5	4	4
Heated catalyser	•	•	•
Digital services (Gaggenau Home Connect) via WiFi <sup>2</sup>	•	•	•
<b>Accessories</b>			
Enamelled baking tray	1	1	1
Enamelled grill tray	1	1	1
Size of largest baking tray	(cm <sup>2</sup> ) 1.780	1.290	1.290
Wire rack	1	1	1
Three-point core temperature probe	•	•	•
Rotisserie spit	•	•	—
<b>Safety</b>			
Child lock / electronic door lock	•/•	•/•	•/•
Safety shut-off	•	•	•
Thermally insulated door with multiple glazing	5-fold	5-fold	5-fold
Cooled housing with temperature protection	•	•	•
<b>Cleaning</b>			
Pyrolysis	•	•	•
<b>Connection</b>			
Total connected load	(kW) 6.6	3.68	3.68

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Available in Q4/2025.

## Combi-steam ovens Gaggenau Expressive series



Appliance type	Combi-steam oven	Combi-steam oven	Combi-steam oven
Side-opening door right-hinged / left-hinged	GS 480/GS 481	GS 470/GS 471	GS 450/GS 451
Stainless steel behind smoked glass	GS 480/481 120	GS 470/471 120	GS 450/451 120
<b>Dimensions</b>			
Width	(cm) 76	60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 756 x 456 x 532	594 x 456 x 532	594 x 456 x 532
Door panel extension from furniture cavity	(mm) 42	42	42
Niche dimensions W x H x D	(mm) 722 x 450 x 550	560 x 450 x 550	560 x 450 x 550
Net weight	(kg) 49	44	44
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>			
Net volume	(l) 50	50	50
Number of cooking compartments	1	1	1
Interior dimensions W x H x D	(mm) 504 x 246 x 406	504 x 246 x 406	504 x 246 x 406
Energy efficiency class with hot air			
Energy Efficiency Index (EEI)	94.7	94.7	94.7
Energy consumption with hot air	(kWh) 0.72	0.72	0.72
Heat source	electric	electric	electric
<b>Heating methods / programmes</b>			
Temperature range	(°C) 30–230	30–230	30–230
Hot air + 100 % humidity	•	•	•
Hot air + 80 % humidity	•	•	•
Hot air + 60 % humidity	•	•	•
Hot air + 30 % humidity	•	•	•
Hot air + 0 % humidity	•	•	•
Low temperature cooking	•	•	•
Sous-vide cooking	•	•	•
Grill level 1 + humidity	•	•	•
Grill level 2 + humidity	•	•	•
Grill + circulated air	•	•	•
Dough proving	•	•	•
Defrosting	•	•	•
Regenerating	•	•	•
Keeping warm	•	•	•
Option to save favourites	•	•	•
Automatic programmes / setting recommendations	•/•	•/•	•/•
<b>Handling</b>			
Electronic door opening	•	•	•
Door opening angle	110°	110°	110°
Full touch display /control ring	•/•	•/•	•/•
Display languages	(no.) 42	42	42
Info texts	•	•	•
Animated quick guides	•	•	•
User detection	•	•	•
<b>Features</b>			
Fixed inlet and outlet water connection	•	•	—
Water tank for fresh and waste water	—	—	—
Cooking time / cooking time end / count-up timer	•/•/•	•/•/•	•/•/•
Long-term timer <sup>3</sup>	•	•	•
Actual temperature display	•	•	•
Steam removal / misting	•/•	•/•	—/•
Automatic boiling point detection	•	•	•
Connection for core temperature probe	•	•	•
Full surface grill behind glass ceramic	•	•	•
Side interior lighting	•	•	•
Shelf levels	(no.) 3	3	3
Digital services (Gaggenau Home Connect) via WiFi <sup>2</sup>	•	•	•
<b>Accessories</b>			
Size of largest baking tray	(cm <sup>2</sup> ) 1.300	1.300	1.300
Cooking container, stainless steel, 40 mm, perforated	1	1	1
Cooking container, stainless steel, 46 mm, unperforated	1	1	1
Wire rack	1	1	1
Cleaning cartridge	(no.) 4	4	4
Descaling tablets	Part No. 17002490	Part No. 17002490	Part No. 17002490
<b>Safety</b>			
Child lock / electronic door lock	•/•	•/•	•/•
Safety shut-off	•	•	•
Thermally insulated door with multiple glazing	3-fold	3-fold	3-fold
Cooled housing with temperature protection	•	•	•
<b>Cleaning</b>			
Automatic cleaning / Cleaning aid	•/•	•/•	•/•
Automatic descaling / Drying programme	•/•	•/•	•/•
<b>Connection</b>			
Total connected load	(kW) 3.15	3.15	3.15

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Available in Q4/2025.

## Combi-microwave ovens Gaggenau Expressive series



Appliance type	Combi-microwave oven	Combi-microwave oven
Side-opening door right-hinged / left-hinged	GM 480 / GM 481	GM 450 / GM 451
Stainless steel behind smoked glass	•	•
<b>Dimensions</b>		
Width	(cm) 76	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 756 x 456 x 532	594 x 456 x 532
Door panel extension from furniture cavity	(mm) 42	42
Niche dimensions W x H x D	(mm) 722 x 450 x 550	560 x 450 x 550
Net weight	(kg) 45	40
<b>Volume</b>		
Capacity	(l) 46	46
Interior dimensions W x H x D	(mm) 493 x 231 x 402	493 x 231 x 402
<b>Heating methods / Programmes</b>		
Maximum microwave output	(W) 1,000	1,000
Microwave output levels	(no.) 6	6
Hot air with temperature range	(°C) 30-230	30-230
Grill + circulated air with temperature range	(°C) 30-230	30-230
Warming up beverages	(W) Max. (1000)	Max. (1000)
Warming up meals with microwave range	(W) 360-600	360-600
Dehydrating with temperature range	(°C) 30-80	30-80
Low temperature cooking with temperature range	(°C) 30-90	30-90
Dough proving with temperature range	(°C) 30-50	30-50
Keeping warm	(W) 50	50
Defrosting with microwave range	(W) 90-360	90-360
Maximum microwave output for combination with oven	(W) 450	450
Option to save favourites	(no.) 30	30
Automatic programmes / setting recommendations	(no.) 19 / 51	19 / 51
<b>Handling</b>		
Electronic door opening	•	•
Door opening angle	110°	110°
Full touch display / control ring	•/•	•/•
Display languages	(no.) 42	42
Info texts	•	•
Animated quick guides	•	•
User detection	•	•
<b>Features</b>		
Innowave	•	•
Cooking time, cooking time end, count-up timer	•/•/•	•/•/•
Long-term timer <sup>3</sup>	•	•
Actual temperature display	•	•
Connection for core temperature probe	•	•
Side interior lighting	•	•
Shelf levels	(no.) 2	2
Digital services (Gaggenau Home Connect) via WiFi <sup>2</sup>	•	•
<b>Accessories</b>		
Glass tray	•	•
Wire rack	•	•
<b>Safety</b>		
Child lock	•	•
Electronic door lock	•	•
Safety shut-off	•	•
Thermally insulated door with multiple glazing	3-fold	3-fold
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Cleaning aid programme	•	•
Stainless steel interior with heat resistant glass base	•	•
<b>Connection</b>		
Total connected load	(kW) 2.65	2.65

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Available in Q4/2025.

## Fully automatic espresso machines Gaggenau Expressive series



Appliance type	Fully automatic espresso machine GC 461	Fully automatic espresso machine GC 451
Stainless steel behind smoked glass		
<b>Dimensions</b>		
Width	(cm) 60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 594 x 456 x 364	594 x 456 x 364
Door panel extension from furniture cavity	(mm) 42	42
Niche dimensions W x H x D	(mm) 560 x 450 x 450	560 x 450 x 450
Net weight	(kg) 22	22
<b>Typ of beverage</b>		
Ristretto / 2 x Ristretto	•	•
Espresso / 2 x Espresso	•	•
Doppio	•	•
Coffee / 2 x coffee	•	•
Coffee large / 2 x Coffee large	•	•
Coffee very large	•	•
Americano / 2 x Americano	•	•
Cold Brew	•	•
Slow Brew	•	•
Coffee pot	•	•
Hot water / 2 x Hot water	•	•
Espresso Macchiato / 2 x Espresso Macchiato	•	•
Flat White / 2 x Flat White	•	•
Cappuccino / 2 x Cappuccino	•	•
Caffe Latte / 2 x Caffe Latte	•	•
Cold Brew Macchiato	•	•
Latte Macchiato / 2 x Latte Macchiato	•	•
Warm milk / 2 x Warm milk	•	•
Milk froth / 2 x Milk froth	•	•
<b>Handling</b>		
Electronic door opening	—	—
Door opening angle	110°	110°
Full touch display /control ring	•/•	•/•
Display languages	(no.) 42	42
Info texts	•	•
Animated quick guides	•	•
User detection	•	•
Personalisation function with profiles and favourites	(No. Profiles /No. Favourites) 10 / 10 per each profile	10 / 10 per each profile
Operation modes	Classic / Barista	Classic / Barista
Height adjustable beverage dispenser up to	(cm) 15	15
<b>Programmable basic settings</b>		
— Start screen	Classic mode, Favourites or Barista mode	Classic mode, Favourites or Barista mode
— Lighting scenarios	•	•
— Capacity unit	(ml/fl.oz.) •	•
— Water tank filling	Automatic or Manual	—
— Cleaning & Descaling	Automatic or Manual	Automatic or Manual
— Descaling start time	•	•
— Standby after	(min, h) 5 min to 180 min	5 min to 180 min
— Water hardness	(No. of levels) 4	4
<b>Features</b>		
Fresh water connection to refill the water tank	•	—
Aroma brewing technology with intelligent strength adjustment	•	•
Grinding unit with ceramic discs	•	•
Continuous flow heater	•	•
Pump pressure	(bar) 19	19
Integrated milk system	•	•
Glass milk container	(l) 0.7	0.7
Milk scale	•	•
Bean container	(g) 400	400
Grinding level control	Electronic	Electronic
Volume of adjustable brewing chamber	(g) 5 to 14	5 to 14
Double grinding and brewing cycles for extra intensity for one beverage	•	•
Double grinding and brewing cycles for two beverages	•	•
Removable water tank	(l) 2.4	2.4
Electronic replacement indicator for cleaning and descaling cartridge	•/•	•/•
Electronic replacement indicator for water filter	•	•
Electronic fill level control for milk, water and coffee beans	•	•
Electronic fill level control for drip tray and coffee residue container	•	•
Integrated LED lighting	•	•
Digital services (Gaggenau Home Connect) via WiFi. <sup>2</sup>	•	•
<b>Safety</b>		
Child lock	•	•
Aqua stop with guarantee	•	—
<b>Cleaning</b>		
Fully automatic cleaning with cartridge	•	•
Fully automatic descaling with cartridge	•	•
Switching to cleaning and descaling with tablets possible	•	•
Fully automatic rinse programme when switching on/off	•/•	•/•
Automatic quick rinsing of milk system	•	•
Emptying programme to prepare the appliance for holiday or transportation	•	•
Empty-grinding function, if using a new type of beans	•	•
Removable brewing unit	•	•
Coffee residue container and drip tray removable and dishwasher-safe	•	•
Beverage dispenser removable and dishwasher-safe	•	•
Milk container dishwasher-safe	•	•
Option to install a water filter in the water tank	•	•
<b>Connection</b>		
Total connected load	(kW) 1.5	1.5
Fixed inlet water connection	•	—

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

## Vacuuming drawers Gaggenau Expressive series







<b>Appliance type</b>		<b>Vacuuming drawer</b>
Stainless steel-backed smoked glass front		GV 451 120
Fully integrated		GV 051 190
<b>Dimensions</b>		
Width	(cm)	60
Height	(cm)	14
Appliance dimensions W x H x D <sup>1</sup>	(mm)	559 x 140 x 519
Door panel extension from furniture cavity	(mm)	42
Niche dimensions W x H x D	(mm)	560 x 140 x 550
Net weight	(kg)	31
<b>Volume</b>		
Net volume	(l)	7
Interior dimensions W x H x D	(mm)	210 x 95 x 275
Maximum size of vacuuming bags W x L	(mm)	240 x 350
<b>Usage</b>		
Vacuuming levels		3, max. 99%
Heat-sealing levels		3
Vacuuming of bags and containers		•
Vacuuming of vacuuming containers and bottles		•
Vacuuming of liquids		•
Drying program for vacuuming pump		•
<b>Handling</b>		
Sensor Control		•
Handleless drawer		• <sup>2</sup>
Push-to-open-function		• <sup>3</sup>
<b>Features</b>		
Stainless steel vacuuming chamber		•
Maximum load	(kg)	10
Applicable height	(mm)	80
Safety glass cover		•
Sealing bar, non-stick, removable		•
Raised vacuuming platform		•
Connection with tube for vacuuming outside the chamber		•
Utility space in vacuuming chamber, W x L	(mm)	210 x 275
Membrane avoiding reflow of liquids during external vacuuming		•
Vacuuming bags, small, 180 mm x 280 mm	(pcs.)	50
Vacuuming bags, large, 240 mm x 350 mm	(pcs.)	50
Plug for vacuuming bottles	(pcs.)	3
Adaptor for bottle plugs		•
<b>Connection</b>		
Total connected load	(kW)	0.32

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Attention: To open the fully integrated variant, a handle or a recessed grip is necessary. <sup>3</sup> Fully integrated drawer only with cushioned closing system.



## Culinary warming drawers Gaggenau Expressive series

				
<b>Appliance type</b>	<b>Culinary warming drawer</b>	<b>Culinary warming drawer</b>	<b>Culinary warming drawer</b>	<b>Culinary warming drawer</b>
Stainless steel-backed smoked glass front	GW 483 120	GW 452 120	GW 453 120	GW 451 120
Fully integrated				GW 051 190
<b>Dimensions</b>				
Width	(cm) 76	60	60	60
Height	(cm) 21,5	28	21,5	14
Appliance dimensions W x H x D <sup>1</sup>	(mm) 710 x 215 x 519	559 x 280 x 519	559 x 215 x 519	559 x 140 x 519
Door panel extension from furniture cavity	(mm) 42	42	42	42
Niche dimensions W x H x D	(mm) 722 x 215 x 550	560 x 280 x 550	560 x 215 x 550	560 x 140 x 550
Net weight	(kg) 31	23	18	16
<b>Volume</b>				
Net volume	(l) 47	52	37	20
Interior dimensions W x H x D	(mm) 701 x 166 x 405	548 x 232 x 410	548 x 166 x 410	548 x 92 x 410
Number of table settings	(no.) 10	12	8	6
<b>Heating methods</b>				
Preheating of small beverage containers/cups.	•	•	•	•
Warming cookware/plates	•	•	•	•
Keeping meals warm	•	•	•	•
Low-temperature cooking	•	•	•	•
Direct temperature control	•	•	•	•
Temperature range 30 °C to 80 °C (temperature levels)	6	6	6	6
Further heating methods via App	•	•	•	•
<b>Handling</b>				
Touch key operation	•	•	•	•
Status indicator, visible in the glass front	•	•	•	•
Time setting via App	•	•	•	•
Handleless drawer	•	•	•	• <sup>2</sup>
Push-to-open function	•	•	•	• <sup>3</sup>
Gaggenau Home Connect	•	•	•	•
<b>Features</b>				
Interior light	•	•	•	•
Maximum load	(kg) 25	25	25	25
Stainless steel interior with glass bottom	•	•	•	•
Fan for even heat distribution	•	•	•	•
<b>Connection</b>				
Total connected load	(kW) 0.82	0.82	0.82	0.82

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Attention: To open the fully integrated variant, a handle or a recessed grip is necessary. <sup>3</sup> Fully integrated drawer only with cushioned closing system.



# OVENS 400 SERIES

Checklist for appliance combinations 400 series	58
Planning notes for ovens and oven combinations	62
Ovens 400 series	64
Combi-steam ovens 400 series	70
Combi-microwave ovens 400 series	76
Fully automatic espresso machine 400 series	78
Vacuuming drawers 400 series	80
Warming drawers 400 series	82
Accessories   special accessories 400 series	86
Technical specifications 400 series	92

## Checklist for appliance combinations 400 series

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, Combi-microwave ovens, fully automatic espresso machine, vacuuming drawers, warming drawers and dishwashers.

### In general

- All appliances shown can be obtained with stainless-steel-backed full glass doors.
- When several appliances are listed (BS/BM and DV/WS), the first appliance is shown.

### Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- The width of the appliances is identical.
- The control modules of the two appliances should meet each other in the middle of the combination.
- No further appliances may be fitted above the BS.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide. A stainless-steel-backed full glass door can be obtained as a special accessory.

### Horizontal combinations

When planning and ordering please note that

- The door hinges need to be placed on the outside in order to use the full available door opening angle.
- The door hinge (right-/left-hinged) is not reversible.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, Combi-microwave ovens and fully automatic espresso machine in combination with a vacuuming drawer or a warming drawer (14 cm in height) have the same total height as a 60 cm wide oven.
- The control modules are either all at the top or all at the bottom.

### Vertical combination, 76 cm / 30" wide appliances



BS 484/BM 484  
BO 480  
WS 482



BX 480  
WS 482

### Combination of 4, 76 cm / 30" wide appliances



BS 485/BM 485  
BO 48

BS 484/BM 484  
BO 480

### Horizontal combination, 76 cm / 30" wide appliances



BO 481



BO 480

### Vertical combination, 60 cm wide appliances



BS 474/BM 454/BM 454  
BO 470/BO 450/BO 420  
WS 462



BS 454/BM 454/BM 454  
BO 470/BO 450/BO 420  
WS 462



BS 454/BM 454/BM 454  
BM 450  
DV 461/WS 461



BM 454/BS 474/BS 454  
CM 450  
WS 461/DV 461



BO 470/BO 450/BO 420  
DF



BS 470/BS 450/BM 450  
DF



CM 450  
DF

- BO Ovens
- BS Combi-steam ovens
- BM Combi-microwave ovens
- CM Fully automatic espresso machine
- DV Vacuuming drawers
- WS Warming drawers
- DF Dishwashers

Horizontal combination, 60 cm wide appliances



BO 471/BO 451/BO 421 BO 470/BO 450/BO 420



BO 471/BO 451/BO 421 BS 470/BS 450/BM 450  
DV 461/WS 461



BO 471/BO 451/BO 421 CM 450  
WS 461/DV 461



BS 451/BS 471/BM 451 BM 450/BS 470/BS 450  
WS 461/DV 461 DV 461/WS 461



BS 471/BS 451/BM 451 CM 450  
DV 461/WS 461



BO 471/BO 451/BO 421 CM 450  
WS 461/DV 461 BS 470/BS 450/BM 450  
DV 461/WS 461



BM 451/BS 471/BS 451 CM 450  
WS 461/DV 461 DV 461/WS 461 BS 450/BS 470/BM 450  
WS 461/DV 461

Combination of 4 with warming drawer, 60 cm wide appliances



BS 455/BS 475/BM 455 BM 454/BS 474/BS 454  
BO 471/BO 451/BO 421 CM 450  
DV 461/WS 461

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Checklist for appliance combinations 400 series

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, Combi-microwave ovens, fully automatic espresso machine, vacuuming drawers, warming drawers and dishwashers.

### In general

- All appliances shown can be obtained with full glass doors in Gaggenau Anthracite.
- When several appliances are listed (BS/BM), the first appliance is shown.

### Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- The width of the appliances is identical.
- The control modules of the two appliances should meet each other in the middle of the combination.
- No further appliances may be fitted above the BS.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide.

### Horizontal combinations

When planning and ordering please note that

- The door hinges need to be placed on the outside in order to use the full available door opening angle.
- The door hinge (right-/left-hinged) is not reversible.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, Combi-microwave ovens and fully automatic espresso machine in combination with a vacuuming drawer or a warming drawer (14 cm in height) have the same total height as a 60 cm wide oven.
- The control modules are either all at the top or all at the bottom.

### Vertical combination, 60 cm / 30" wide appliances



BS 474/BS 454/BM 454  
BO 470/BO 420  
WS 462



BM 454/BS 474  
BO 470/BO 420  
WS 462



BS 474/BS 454/BM 454  
BM 450  
DV 461/WS 461



BM 454/BS 474  
CM 450  
WS 461/DV 461



BO 470/BO 420  
DF



BS 470/BM 450  
DF



CM 450  
DF

- BO Ovens
- BS Combi-steam ovens
- BM Combi-microwave ovens
- CM Fully automatic espresso machine
- DV Vacuuming drawers
- WS Warming drawers
- DF Dishwashers

Horizontal combination, 60 cm wide appliances



BO 471/BO 421



BO 470/BO 420



BO 471/BO 421



BS 470/BM 450  
DV 461/WS 461



BO 471/BO 421



CM 450  
WS 461/DV 461



BS 471/BM 451  
DV 461/WS 461



BM 450/BS 470  
WS 461/DV 461



BS 471/BM 451  
DV 461/WS 461



CM 450  
WS 461/DV 461



BO 471/BO 421



CM 450  
WS 461/DV 461



BS 470/BM 450  
DV 461/WS 461



BM 451/BS 471  
WS 461/DV 461



CM 450  
WS 461/DV 461



BS 470/BM 450  
DV 461/WS 461

Combination of 4 with warming drawer, 60 cm wide appliances



BS 475/BM 455  
BO 471/BO 421



BM 454/BS 474  
CM 450  
DV 461/WS 461

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Planning notes for the installation of ovens and oven combinations 400 and 200 series

### General notes

#### Installation behind kitchen furniture doors

Appliance in operation only with open doors. Appropriate measures must be taken to prevent these types of doors from closing when the appliance is heating or while it is cooling down (fan operation).

#### Installation side by side


When appliances are installed side by side, the clearance between the appliances must be at least 10 mm (corresponds to the standard outside measurement of the furniture cavity of 600 or 762 mm).

The door hinges need to be placed outside in order to use the full available door opening angle.

#### Combination of ovens and Vario cooling 400 series appliances

Please check the planning notes in the information for Vario cooling 400 series appliances in order to prevent the refrigerator door from colliding with the oven.

### When installed next to each other

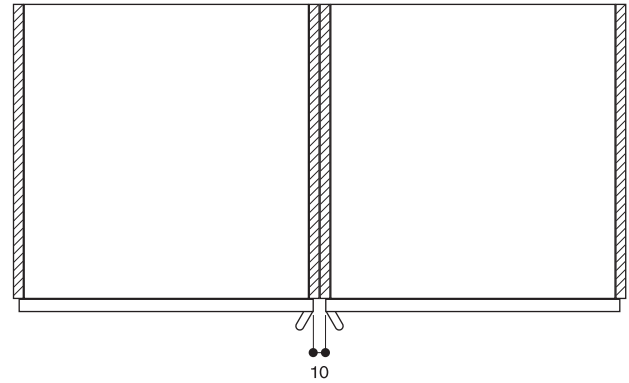

### Necessary air cross section at the door edges

Gaggenau ovens are cooled with fresh air at the top edge and side edges of the door. Hot air is blown out at the door bottom edge. Combi-steam ovens and Combi-microwave ovens have the air inlet at the side edges of the door and the hot air and steam outlets at the top edge of the door. In order to prevent appliances from overheating and to ensure that they cool down as required after operation, appropriate minimum cross sections of free space must be maintained from kitchen furniture edges.

The measurements given in the drawing apply to all appliances. The following must also be observed:

The area above the appliances

#### BS:

No other electrical appliances should be installed above the BS.

It is recommended that a horizontal handle is not fitted on furniture above the BS.


Where the edge of a kitchen unit protrudes more than 20 mm from the front edge of the furniture cavity, the edge of the kitchen furniture panel must be steam resistant as is the case above a dishwasher. Steam may possibly penetrate into the compartment.

The area below the appliances

#### DV / WS:

It must be ensured that there is sufficient access to the lower edge of the vacuuming drawer and warming drawer, if the thickness of the kitchen furniture door is greater than 20 mm in front of the furniture cavity.

### Cross section of the top/bottom door edge gaps

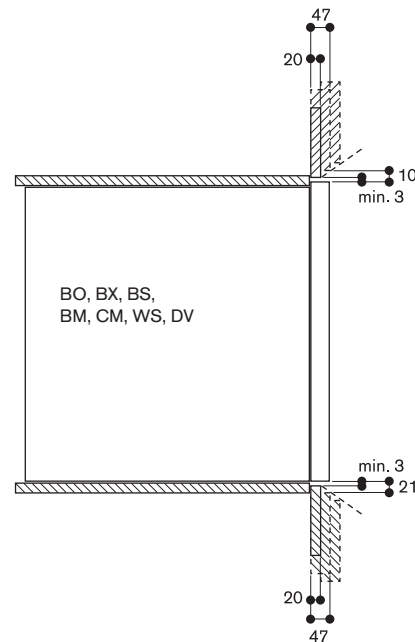




**At the sides**

In cases where kitchen furniture door thicknesses are greater or where sidewalls protrude up to 34 mm from front of the edge of the furniture cavity, the minimum distance on the hinge side is sufficient for the air supply and a door opening angle of 120°. Above that, a distance of 10 mm or even more is required. The handle side may, if required, be covered by a side panel provided that the minimum distance is maintained.

**Air inlet cross section at the door edges**

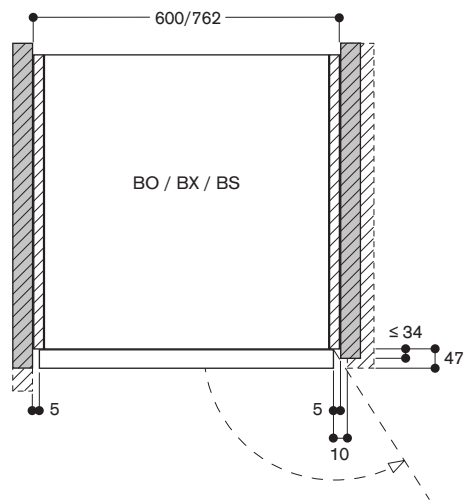

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Double oven 400 series**  
**BX 480/BX 481**

**Controls centered**  
**Right-hinged**

**BX 480 112**  
Stainless steel-backed full glass door.  
Width 76 cm.

**Left-hinged**

**BX 481 112**  
Stainless steel-backed full glass door.  
Width 76 cm.



**Included in the price**

- 2 baking trays, enamelled pyrolysis-safe.
- 1 rotisserie spit.
- 2 wire racks.
- 2 grill trays with wire rack.
- 1 plug-in core temperature probe.

**Special accessories**

**BA 018 105**  
Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.

**BA 028 115**  
Baking tray, enamelled.  
30 mm deep.

**BA 038 105**  
Wire rack, chromium-plated.  
Without opening, with feet.

**BA 058 115**  
Heating element for baking stone and Gastronorm roaster.

**BA 058 133**  
Baking stone.  
Incl. baking stone support and pizza paddle (heating element must be ordered separately).  
Not in combination with pull-out system.

**BS 020 002**  
Pizza paddle, set of 2.

**GN 340 230**  
Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

**Highlights**

- Pyrolytic system.
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function.
- Core temperature probe with estimation of cooking time.
- TFT touch display.
- Electronic temperature control from 30 °C to 300 °C.
- 2 x 110 litres net volume.

**Heating methods**

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
1/3 top + bottom heat.  
Bottom heat.  
Hot air + bottom heat.  
Hot air + 1/3 bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.  
Keeping warm.

**Handling**

Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

**Features**

Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Rotisserie spit (lower oven).  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
60 W halogen light on the top.  
10 W halogen light on the side.  
Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

**Safety**

Thermally insulated door with quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

**Cleaning**

Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.



**Planning notes**

Door hinge not reversible.  
The facade of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.  
The mains socket needs to be planned outside the built-in niche.

Please read the installation details regarding oven combination on page 62-63.

**Connection**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 9.2 kW.  
Plan a connection cable.

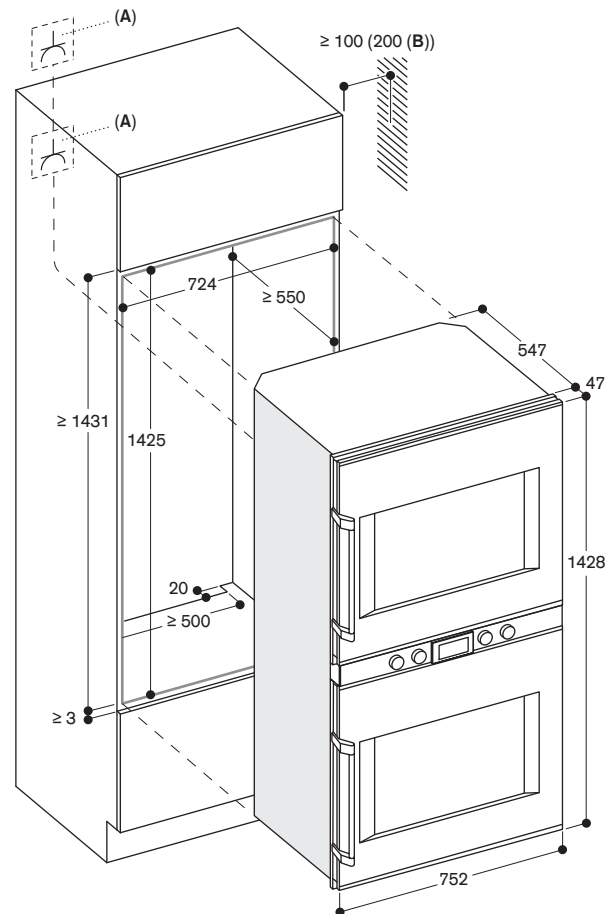

**A:** Electrical connection  
**B:** 200 mm in conjunction with BA 018



#### Oven 400 series BO 480/BO 481

#### Controls at the top Right-hinged

##### BO 480 112

Stainless steel-backed full glass door.  
Width 76 cm.

##### Left-hinged

##### BO 481 112

Stainless steel-backed full glass door.  
Width 76 cm.



#### Included in the price

- 1 baking tray, enamelled pyrolysis-safe.
- 1 rotisserie spit.
- 1 wire rack.
- 1 grill tray with wire rack.
- 1 plug-in core temperature probe.

#### Special accessories

##### BA 018 105

Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.

##### BA 028 115

Baking tray, enamelled.  
30 mm deep.

##### BA 038 105

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 058 115

Heating element for baking stone and Gastronorm roaster.

##### BA 058 133

Baking stone.  
Incl. baking stone support and pizza paddle (heating element must be ordered separately).  
Not in combination with pull-out system.

##### BS 020 002

Pizza paddle, set of 2.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Handleless door / automatic door opening / door opening via voice assistant possible.
- Pyrolytic system.
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30°C to 300°C.
- Net volume 110 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
1/3 top + bottom heat.  
Bottom heat.  
Hot air + bottom heat.  
Hot air + 1/3 bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.  
Keeping warm.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

#### Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Rotisserie spit.  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
60 W halogen light on the top.  
2 x 10 W halogen light on the side.  
Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

#### Selected digital services (Gaggenau Home Connect)

Door opening via voice assistant.  
Automatic programmes.  
Remote monitoring and control.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Thermally insulated door with quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.  
Cleaning  
Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.



#### Planning notes

Door hinge not reversible.  
The facade of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.  
The mains socket needs to be planned outside the built-in niche.  
The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 62–63.

#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 5.5 kW.  
Plan a connection cable.  
Plan a LAN cable.

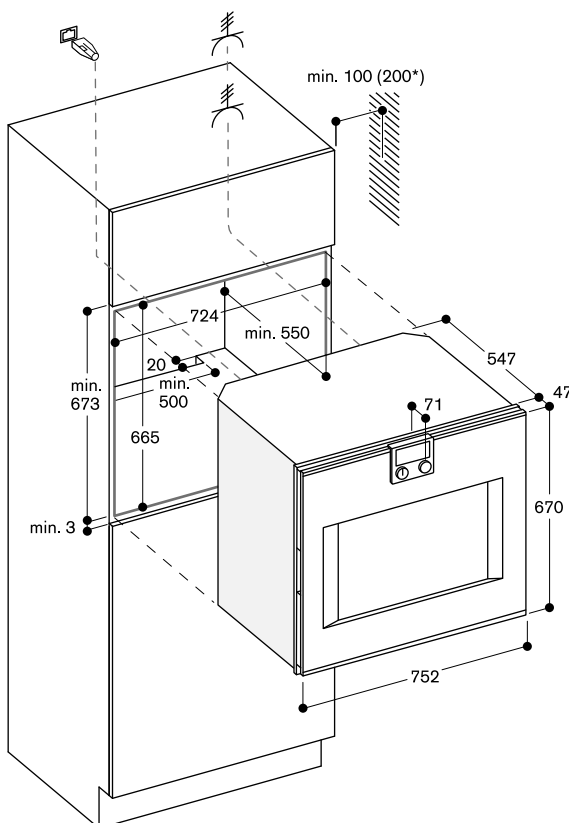

\* 200 mm in conjunction with BA 018

All measurements in mm.



### Oven 400 series BO 470/BO 471

#### Controls at the top Right-hinged

**BO 470 112**  
Stainless steel-backed full glass door.  
Width 60 cm.

**BO 470 102**  
Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

#### Left-hinged

**BO 471 112**  
Stainless steel-backed full glass door.  
Width 60 cm.

**BO 471 102**  
Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.



#### Included in the price

- 2 baking trays, enamelled  
pyrolysis-safe.
- 1 rotisserie spit.
- 1 glass tray.
- 1 wire rack.
- 1 grill tray with wire rack.
- 1 plug-in core temperature probe.

#### Special accessories

**BA 016 105**  
Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.

**BA 026 105**  
Grill tray, enamelled.  
30 mm deep.

**BA 026 115**  
Baking tray, enamelled.  
15 mm deep.

**BA 036 105**  
Wire rack, chromium-plated.  
Without opening, with feet.

**BA 046 117**  
Glass tray.  
24 mm deep.

**BA 056 115**  
Heating element for baking stone and  
Gastronorm roaster.

**BA 056 133**  
Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.

**BS 020 002**  
Pizza paddle, set of 2.

**GN 340 230**  
Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Handleless door / automatic door  
opening / door opening via voice  
assistant possible.
- Pyrolytic system.
- 17 heating methods with core  
temperature probe, rotisserie spit  
and baking stone function.
- Automatic programmes.
- Core temperature probe with  
estimation of cooking time.
- TFT touch display.
- Panel-free appliance with surface  
control module.
- Electronic temperature control  
from 30 °C to 300 °C.
- Net volume 76 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top + 1/3 bottom heat.  
Top heat.  
1/3 top + bottom heat.  
Bottom heat.  
Hot air + bottom heat.  
Hot air + 1/3 bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.  
Keeping warm.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display  
operation.  
Clear text display.  
Option to save individual recipes  
(incl. core temperature probe).  
Personalisation of automatic  
programmes.  
Information key with use indicators.  
Side-opening door opens up to  
180° angle.

#### Features

Three-point core temperature probe  
with automatic shut-off and  
estimation of cooking time.  
Automatic programmes.  
Rotisserie spit.  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking  
time end, timer, stopwatch, long-term  
timer (certified by Star-K).  
60 W halogen light on the top.  
2 x 10 W halogen light on the side.  
Enamelled side shelf supports with  
4 tray levels, pyrolysis-safe.

#### Selected digital services (Gaggenau Home Connect)

Door opening via voice assistant.  
Automatic programmes.  
Remote monitoring and control.  
Recipes.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Safety

Thermally insulated door with  
quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature  
protection.  
Cleaning  
Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.


#### Planning notes

Door hinge not reversible.  
The facade of the appliance extends  
47 mm from the furniture cavity.  
Consider the overhang when planning  
to open drawers next to the appliance.  
When planning a corner solution, pay  
attention to the side-opening door  
and the minimum required distance  
to the wall.  
To achieve the 550 mm installation  
depth, the connection cable needs to  
follow the slanted edge on the lower  
right hand corner of the housing.  
The mains socket needs to be planned  
outside the built-in niche.  
The LAN port can be found at the  
back on the upper right side.

Please read the installation details  
regarding oven combination on  
page 62–63.

#### Connection

Energy efficiency class A at a range  
of energy efficiency classes from  
A+++ to D.  
Total connected load 3.7 kW.  
Plan a connection cable.  
Plan a LAN cable.

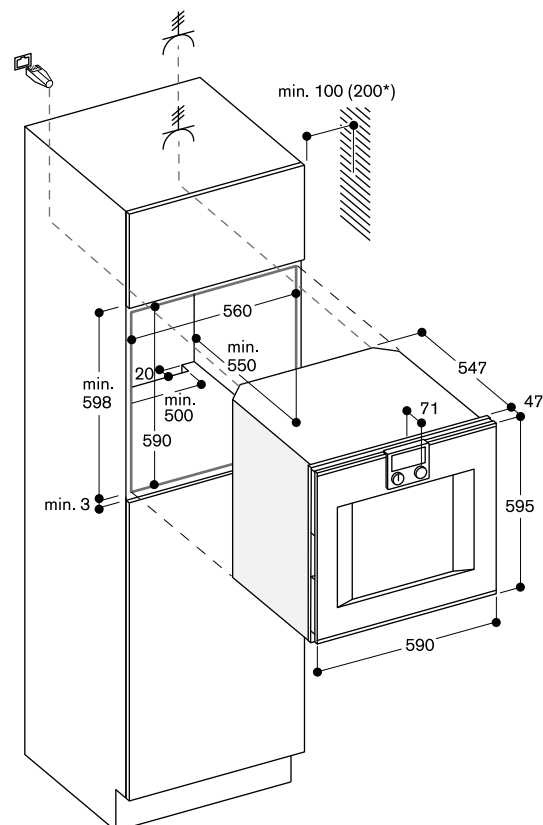

\* 200 mm in conjunction with BA 016



#### Oven 400 series BO 450/BO 451

#### Controls at the top

##### Right-hinged

##### BO 450 112

Stainless steel-backed full glass door.  
Width 60 cm.

##### Left-hinged

##### BO 451 112

Stainless steel-backed full glass door.  
Width 60 cm.



#### Included in the price

- 1 baking tray, enamelled pyrolysis-safe.
- 1 glass tray.
- 1 wire rack.
- 1 plug-in core temperature probe.

#### Special accessories

##### BA 016 105

Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.

##### BA 026 115

Baking tray, enamelled.  
15 mm deep.

##### BA 036 105

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 046 117

Glass tray.  
24 mm deep.

##### BA 056 115

Heating element for baking stone and Gastronorm roaster.

##### BA 056 133

Baking stone.  
Incl. baking stone support and pizza paddle (heating element must be ordered separately).  
Not in combination with pull-out system.

##### BA 226 105

Grill tray, enamelled.  
30 mm deep.

##### BS 020 002

Pizza paddle, set of 2.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Handleless door / automatic door opening / door opening via voice assistant possible.
- Pyrolytic system.
- 13 heating methods with core temperature probe and baking stone function.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30°C to 300°C.
- Net volume 76 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

#### Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
60 W halogen light on the top.  
10 W halogen light on the side.  
Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

#### Selected digital services

**(Gaggenau Home Connect)**  
Door opening via voice assistant.  
Automatic programmes.  
Remote monitoring and control.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Thermally insulated door with quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.


#### Planning notes

Door hinge not reversible.  
The facade of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.  
The mains socket needs to be planned outside the built-in niche.  
The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 62–63.

#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.7 kW.  
Plan a connection cable.  
Plan a LAN cable.

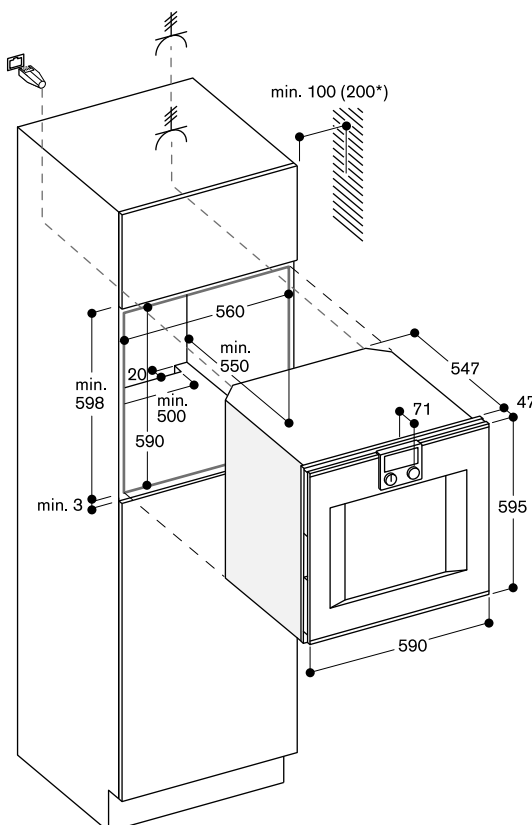

\* 200 mm in conjunction with BA 016



#### Oven 400 series BO 420/BO 421

#### Controls at the top Right-hinged

**BO 420 112**  
Stainless steel-backed full glass door.  
Width 60 cm.

**BO 420 102**  
Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

#### Left-hinged

**BO 421 112**  
Stainless steel-backed full glass door.  
Width 60 cm.

**BO 421 102**  
Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.



#### Included in the price

- 1 baking tray, enamelled  
pyrolysis-safe.
- 1 glass tray.
- 1 wire rack.

#### Special accessories

**BA 016 105**  
Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.

**BA 026 115**  
Baking tray, enamelled.  
15 mm deep.

**BA 036 105**  
Wire rack, chromium-plated.  
Without opening, with feet.

**BA 046 117**  
Glass tray.  
24 mm deep.

**BA 056 115**  
Heating element for baking stone and  
Gastronorm roaster.

**BA 056 133**  
Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.

**BA 226 105**  
Grill tray, enamelled.  
30 mm deep.

**BS 020 002**  
Pizza paddle, set of 2.

**GN 340 230**  
Gastronorm roaster in cast aluminium.  
GN2/3, height 165 mm, non-stick.

#### Highlights

- Handleless door / automatic door  
opening.
- Pyrolytic system.
- 9 heating methods, with baking  
stone function.
- TFT touch display.
- Panel-free appliance with surface  
control module.
- Electronic temperature control  
from 50 °C to 300 °C.
- Net volume 76 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Baking stone function.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display  
operation.  
Clear text display.  
Option to save individual recipes.  
Information key with use indicators.  
Side-opening door opens up to  
180° angle.

#### Features

Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking  
time end, timer, stopwatch, long-term  
timer (certified by Star-K).  
60 W halogen light on the top.  
Enamelled side shelf supports with  
4 tray levels, pyrolysis-safe.

#### Selected digital services (Gaggenau Home Connect)

Remote monitoring and control.  
Recipes.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Safety

Thermally insulated door with  
quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature  
protection.

#### Cleaning

Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.

#### Planning notes


Door hinge not reversible.  
The façade of the appliance extends  
47 mm from the furniture cavity.  
Consider the overhang, incl. the door  
handle where applicable, when  
planning to open drawers next to the  
appliance.  
When planning a corner solution, pay  
attention to the side-opening door  
and the minimum required distance to  
the wall.  
To achieve the 550 mm installation  
depth, the connection cable needs to  
follow the slanted edge on the lower  
right hand corner of the housing.  
The mains socket needs to be planned  
outside the built-in niche.  
The LAN port can be found at the  
back on the upper right side.

Please read the installation details  
regarding oven combination on  
page 62-63.

#### Connection

Energy efficiency class A at a range  
of energy efficiency classes from  
A+++ to D.  
Total connected load 3.7 kW.  
Plan a connection cable.  
Plan a LAN cable.



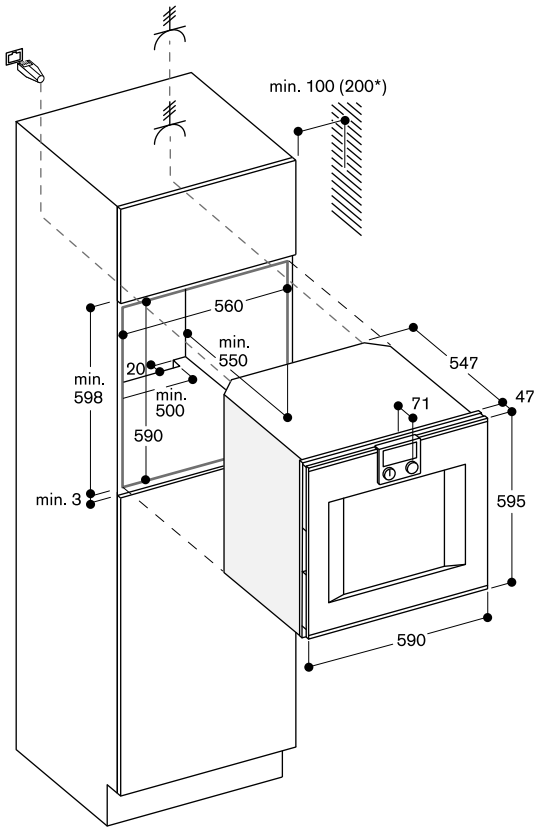

\* 200 mm in conjunction with BA 016

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Combi-steam oven 400 series BS 484/BS 485

#### Controls at the bottom Right-hinged

**BS 484 112**  
Stainless steel-backed full glass door.  
Width 76 cm.

#### Left-hinged

**BS 485 112**  
Stainless steel-backed full glass door.  
Width 76 cm.



#### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.
- 1 outlet hose (3 m long).
- 1 water inlet hose (3 m long).
- 4 cleaning cartridges.

#### Installation accessories

**GF 111 100**  
Water descaling system.

**GF 121 110**  
Filter cartridge.

**GZ 010 011**  
Extension for water inlet and outlet  
(2 m long).

#### Special accessories

**BA 010 301**  
Triple telescopic pull-out rack.  
For combi-steam oven.

**BA 020 361**  
Cooking container, stainless steel,  
unperforated, 46 mm deep, 5.4 l.

**BA 020 370**  
Cooking container, stainless steel,  
perforated, 40 mm deep, 5 l.

**BA 020 381**  
Cooking container, non-stick,  
unperforated, 46 mm deep, 5.4 l.

**BA 020 390**  
Cooking container, non-stick,  
perforated, 40 mm deep, 5 l.

**BA 046 117**  
Glass tray.  
24 mm deep.

**CL S10 040**  
Cleaning cartridges, set of 4.  
For combi-steam ovens.

**GN 010 330**  
Adapter for gastronorm insert and  
roaster.

**GN 114 130**  
Gastronorm insert, stainless steel,  
GN 1/3.  
Unperforated, 40 mm deep, 1.5 l.

**GN 114 230**  
Gastronorm insert, stainless steel,  
GN 2/3.  
Unperforated, 40 mm deep, 3 l.

#### GN 124 130

Gastronorm insert, stainless steel,  
GN 1/3.

Perforated, 40 mm deep, 1.5 l.

#### GN 124 230

Gastronorm insert, stainless steel,  
GN 2/3.

Perforated, 40 mm deep, 3 l.

#### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Handleless door / automatic door opening / door opening via voice assistant possible.
- Fixed inlet and outlet water connection.
- Cleaning system, fully automatic.
- Large cavity.
- 2 LED light sources.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres.

#### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Low temperature cooking.  
Sous-vide cooking.  
Full surface grill level 1 + humidity.  
Full surface grill level 2 + humidity.  
Full surface grill + circulated air.  
Dough proofing.  
Defrosting.  
Regenerating.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

#### Features

Full surface grill 2 kW behind glass ceramic.  
Steam removal.  
Misting.  
Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
2 x LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

#### Selected digital services

##### (Gaggenau Home Connect)

Door opening via voice assistant.  
Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning programme, fully automatic.  
Descaling programme for the steam generator.  
Drying programme.  
Automatic drying of the cavity at the end of the cooking process.  
Strainer filter, removable.  
Demo cleaning programme.

#### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
Inlet hose can be extended once.  
The outlet hose must not be longer than a maximum of 5 m.  
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.  
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.  
The descaling system GF 111100 (3) may be installed when connecting the appliance if the water hardness exceeds 7° dH.  
The facade of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside the built-in niche.

#### Special accessories

(order as spare parts):  
Part No. 17002490 Descaling tablets




Please read the installation details regarding oven combination on page 62-63.

#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.15 kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.  
Inlet hose 3,0 m with connection pipe thread ISO228-G 3/4" (Ø 26,4 mm) extendable.  
Outlet hose (Ø 25 mm) 3,0 m (HT-Hose).






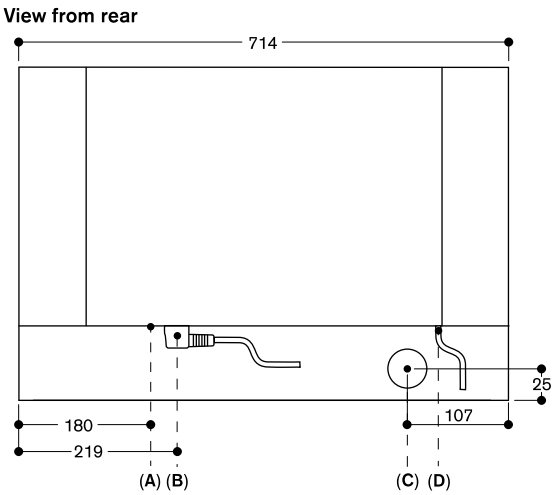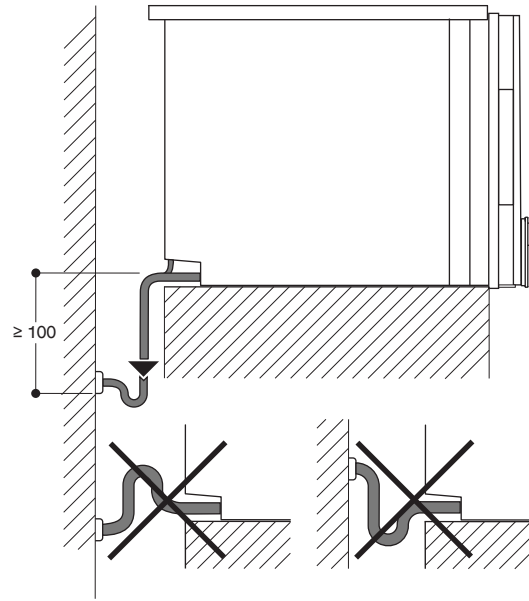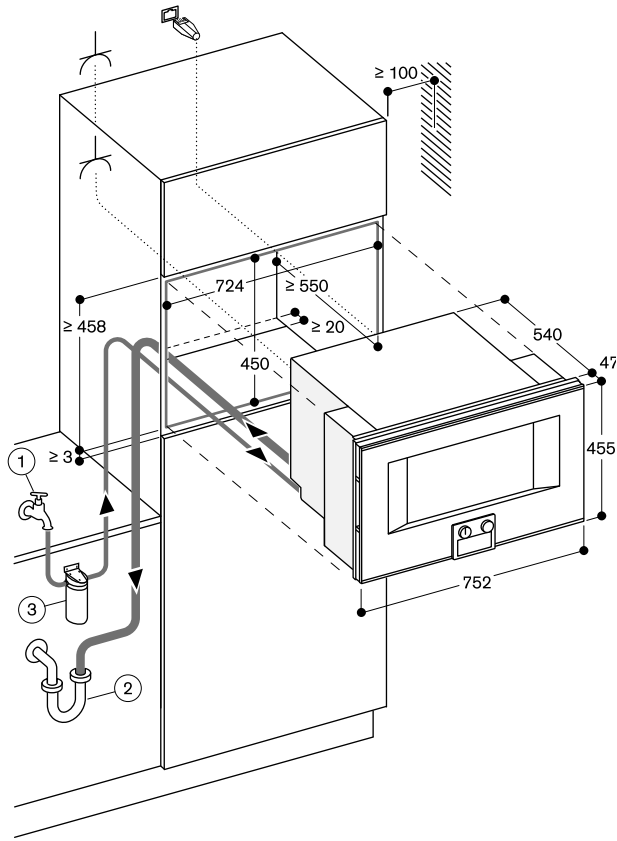

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

Side view of BS 484/485 above BO

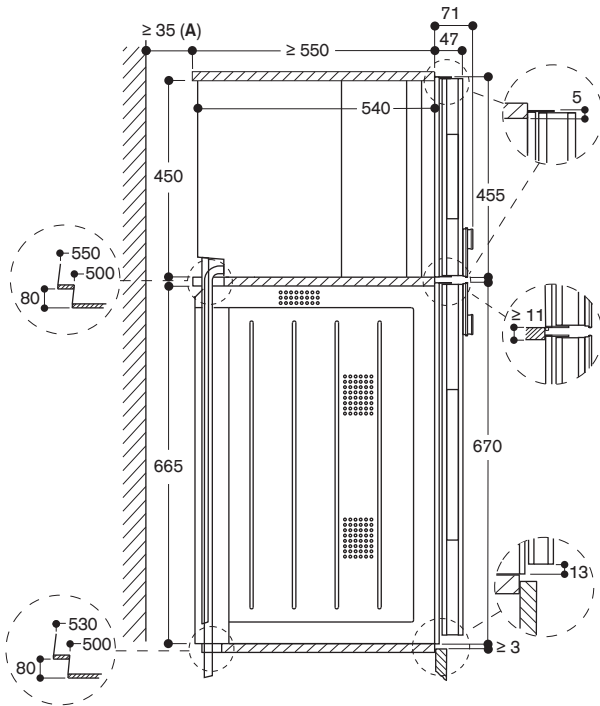

A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



#### Combi-steam oven 400 series BS 470/BS 471/BS 474/BS 475

##### Controls at the top Right-hinged

###### BS 470 112

Stainless steel-backed full glass door.  
Width 60 cm.

###### BS 470 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

##### Left-hinged

###### BS 471 112

Stainless steel-backed full glass door.  
Width 60 cm.

###### BS 471 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

##### Controls at the bottom

##### Right-hinged

###### BS 474 112

Stainless steel-backed full glass door.  
Width 60 cm.

###### BS 474 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

##### Left-hinged

###### BS 475 112

Stainless steel-backed full glass door.  
Width 60 cm.

###### BS 475 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.



##### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.
- 1 outlet hose (3 m long).
- 1 water inlet hose (3 m long).
- 4 cleaning cartridges.

##### Installation accessories

###### GF 111 100

Water descaling system.

###### GF 121 110

Filter cartridge.

###### GZ 010 011

Extension for water inlet and outlet  
(2 m long).

##### Special accessories

###### BA 010 301

Triple telescopic pull-out rack.  
For combi-steam oven.

###### BA 020 361

Cooking container, stainless steel,  
unperforated, 46 mm deep, 5.4 l.

###### BA 020 370

Cooking container, stainless steel,  
perforated, 40 mm deep, 5 l.

###### BA 020 381

Cooking container, non-stick,  
unperforated, 46 mm deep, 5.4 l.

###### BA 020 390

Cooking container, non-stick,  
perforated, 40 mm deep, 5 l.

###### BA 046 117

Glass tray.  
24 mm deep.

###### CL S10 040

Cleaning cartridges, set of 4.  
For combi-steam ovens.

###### GN 010 330

Adapter for gastronorm insert and  
roaster.

###### GN 114 130

Gastronorm insert, stainless steel,  
GN 1/3.  
Unperforated, 40 mm deep, 1.5 l.

###### GN 114 230

Gastronorm insert, stainless steel,  
GN 2/3.  
Unperforated, 40 mm deep, 3 l.

###### GN 124 130

Gastronorm insert, stainless steel,  
GN 1/3.  
Perforated, 40 mm deep, 1.5 l.

###### GN 124 230

Gastronorm insert, stainless steel,  
GN 2/3.  
Perforated, 40 mm deep, 3 l.

###### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

##### Highlights

- Handleless door / automatic door opening / door opening via voice assistant possible.
- Fixed inlet and outlet water connection.
- Cleaning system, fully automatic.
- Large cavity.
- 2 LED light sources.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres.

##### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Low temperature cooking.  
Sous-vide cooking.  
Full surface grill level 1 + humidity.  
Full surface grill level 2 + humidity.  
Full surface grill + circulated air.  
Dough proofing.  
Defrosting.  
Regenerating.

##### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

##### Features

Full surface grill 2 kW behind glass ceramic.  
Steam removal.  
Misting.  
Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
2 x LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

##### Selected digital services

##### (Gaggenau Home Connect)

Door opening via voice assistant.  
Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

##### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

##### Cleaning

Cleaning programme, fully automatic.  
Descaling programme for the steam generator.  
Drying programme.  
Automatic drying of the cavity at the end of the cooking process.  
Strainer filter, removable.  
Demo cleaning programme.

##### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
Inlet hose can be extended once.  
The outlet hose must not be longer than a maximum of 5 m.  
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.  
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.  
The descaling system GF 111100 (3) may be installed when connecting the appliance if the water hardness exceeds 7° dH.  
The facade of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside the built-in niche.

##### Special accessories


(order as spare parts):  
Part No. 17002490 Descaling tablets

Please read the installation details regarding oven combination on page 62–63.



##### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.15 kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.  
Inlet hose 3,0 m with connection pipe thread ISO228-G 3/4" (Ø 26,4 mm) extendable.  
Outlet hose (Ø 25 mm) 3,0 m (HT-Hose).



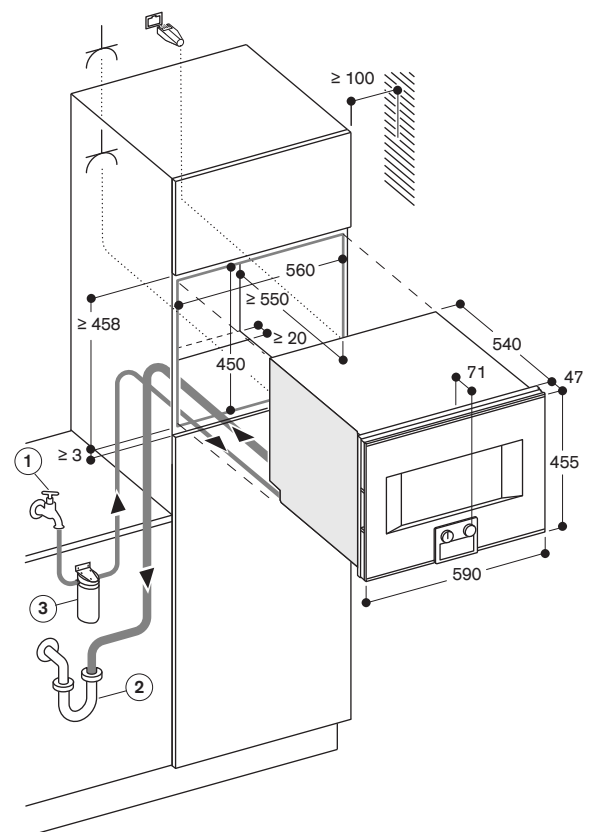


Socket

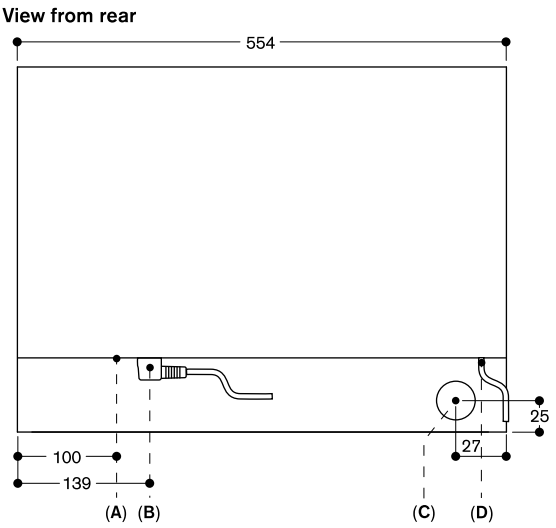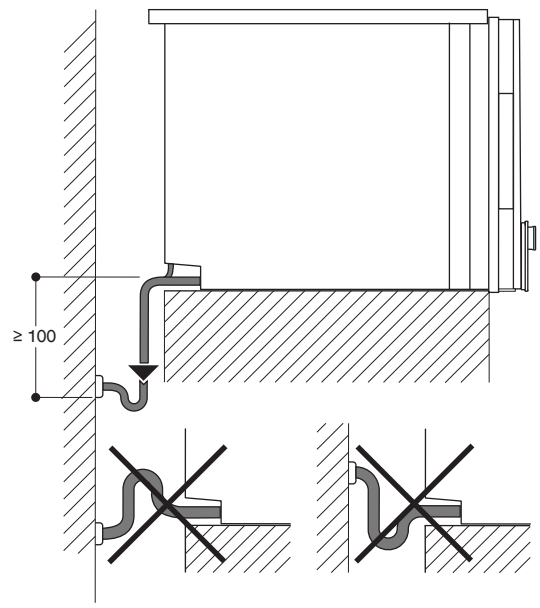

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

Side view of BS 474/475 above BO

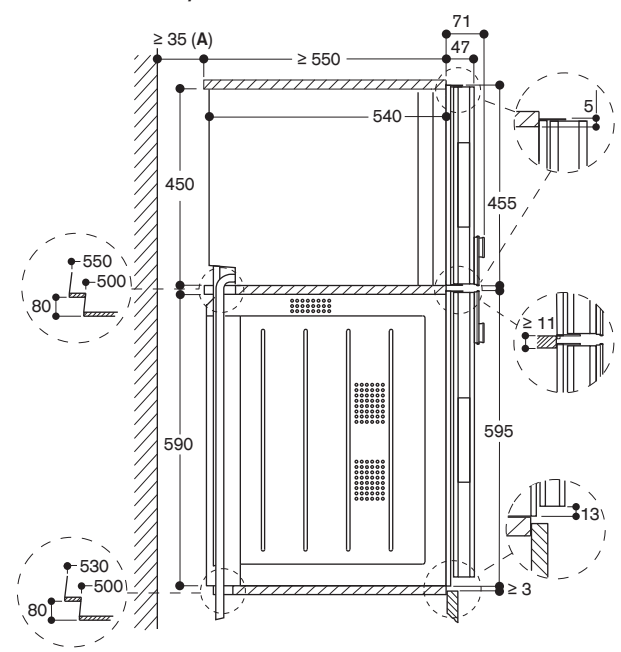

A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
--	-------------------------------	--------------------	------------------------	----------	----------------	------------------	------------------	----------------------------	--------



**Combi-steam oven 400 series**  
**BS 450/BS 451/BS 454/BS 455**

**Controls at the top**  
**Right-hinged**

**BS 450 111**  
 Stainless steel-backed full glass door.  
 Width 60 cm.

**BS 450 101**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Left-hinged**

**BS 451 111**  
 Stainless steel-backed full glass door.  
 Width 60 cm.

**BS 451 101**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Controls at the bottom**  
**Right-hinged**

**BS 454 111**  
 Stainless steel-backed full glass door.  
 Width 60 cm.

**BS 454 101**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Left-hinged**

**BS 455 111**  
 Stainless steel-backed full glass door.  
 Width 60 cm.

**BS 455 101**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.



**Included in the price**

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.
- 4 cleaning cartridges.

**Special accessories**

**BA 010 301**  
 Triple telescopic pull-out rack.  
 For combi-steam oven.

**BA 020 361**  
 Cooking container, stainless steel,  
 unperforated, 46 mm deep, 5.4l.

**BA 020 370**  
 Cooking container, stainless steel,  
 perforated, 40 mm deep, 5l.

**BA 020 381**  
 Cooking container, non-stick,  
 unperforated, 46 mm deep, 5.4l.

**BA 020 390**  
 Cooking container, non-stick,  
 perforated, 40 mm deep, 5l.

**BA 046 117**

Glass tray.  
 24 mm deep.

**CL S10 040**

Cleaning cartridges, set of 4.  
 For combi-steam ovens.

**GN 010 330**

Adapter for gastronorm insert and  
 roaster.

**GN 114 130**

Gastronorm insert, stainless steel,  
 GN 1/3.  
 Unperforated, 40 mm deep, 1.5l.

**GN 114 230**

Gastronorm insert, stainless steel,  
 GN 2/3.  
 Unperforated, 40 mm deep, 3l.

**GN 124 130**

Gastronorm insert, stainless steel,  
 GN 1/3.  
 Perforated, 40 mm deep, 1.5l.

**GN 124 230**

Gastronorm insert, stainless steel,  
 GN 2/3.  
 Perforated, 40 mm deep, 3l.

**GN 340 230**

Gastronorm roaster in cast aluminium.  
 GN 2/3, height 165 mm, non-stick.

**Highlights**

- Handleless door / automatic door opening / door opening via voice assistant possible.
- Water tank for fresh and waste water.
- Cleaning system, fully automatic.
- Large cavity.
- 2 LED light sources.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres.

**Heating methods**

Hot air + 100 % humidity.  
 Hot air + 80 % humidity.  
 Hot air + 60 % humidity.  
 Hot air + 30 % humidity.  
 Hot air + 0 % humidity.  
 Low temperature cooking.  
 Sous-vide cooking.  
 Full surface grill level 1 + humidity.  
 Full surface grill level 2 + humidity.  
 Full surface grill + circulated air.  
 Dough proofing.  
 Defrosting.  
 Regenerating.

**Handling**

Automatic door opening.  
 Rotary knob and TFT touch display operation.  
 Clear text display.  
 Option to save individual recipes (incl. core temperature probe).  
 Personalisation of automatic programmes.  
 Information key with use indicators.  
 Side-opening door opens up to 180° angle.

**Features**

Full surface grill 2 kW behind glass ceramic.  
 2 removable 1.7 litre water tanks.  
 Misting.  
 Water level warning.  
 Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
 Automatic programmes.  
 Actual temperature display.  
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
 Automatic boiling point detection.  
 2 x LED light on the side.  
 Hygienic stainless steel cooking interior.  
 3 tray levels.

**Selected digital services**  
**(Gaggenau Home Connect)**

Door opening via voice assistant.  
 Automatic programmes.  
 Remote control and monitoring.  
 Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

**Cleaning**

Cleaning programme, fully automatic.  
 Descaling programme for the steam generator.  
 Drying programme.  
 Automatic drying of the cavity at the end of the cooking process.  
 Strainer filter, removable.  
 Water tank, dishwasher-safe.  
 Demo cleaning programme.

**Planning notes**


Door hinge not reversible.  
 No other electrical appliances should be installed above the BS.  
 The facade of the appliance extends 47 mm from the furniture cavity.  
 Consider the overhang when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 The mains socket needs to be planned outside the built-in niche.  
 The LAN port can be found at the back on the lower left side.


Special accessories  
 (order as spare parts):  
 Part No. 17002490 Descaling tablets

Please read the installation details regarding oven combination on page 62-63.

**Connection**


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
 Total connected load 3.15 kW.  
 Connecting cable 1.8 m with plug.  
 Plan a LAN cable.



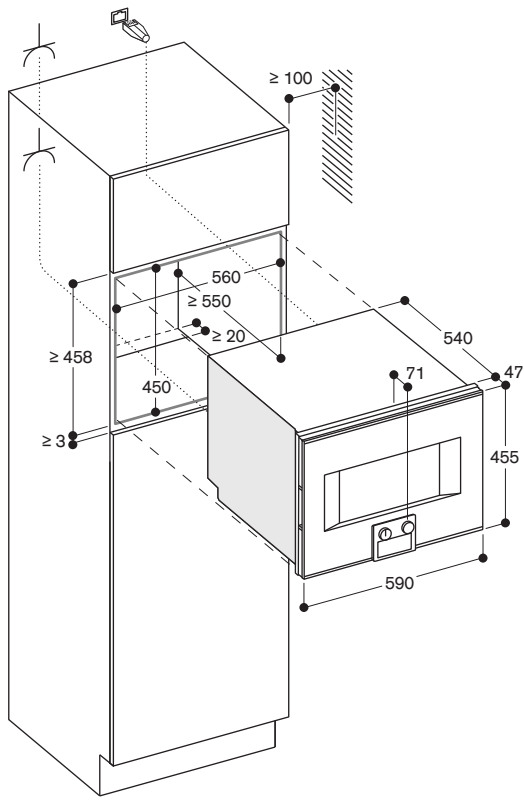

Socket

Side view of BS 454/455 above BO

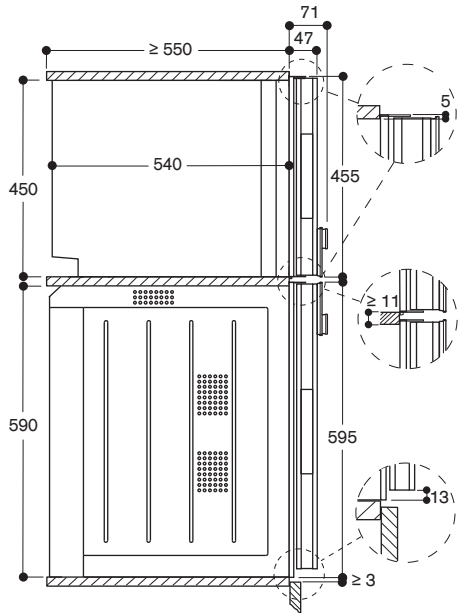

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Combi-microwave oven 400 series**  
**BM 484/BM 485**

**Controls at the bottom**  
**Right-hinged**

**BM 484 110**  
Stainless steel-backed full glass door.  
Width 76 cm.

**Left-hinged**

**BM 485 110**  
Stainless steel-backed full glass door.  
Width 76 cm.

**Included in the price**

- 1 combination wire rack.
- 1 glass tray.

**Highlights**

- Handleless door / automatic door opening.
- Single operation and combination of microwave, grill and oven.
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control.
- Interior volume 36 litres.

**Programmes**

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.  
Oven operation with 4 heating methods:  
Hot air 40°C and from 100°C to 250°C,  
Full surface grill + hot air from 100°C to 250°C,  
Full surface grill + circulated air from 100°C to 250°C,  
Full surface grill with 3 levels of intensity, maximum output 2000 W.  
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.  
15 automatic programmes with weight indication, customisable:  
4 defrosting programmes  
4 cooking programmes  
7 combination programmes  
Option to save individual recipes.

**Handling**

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

**Features**

Innowave.  
Rapid heating.  
4 tray levels.  
Actual temperature display.  
60W halogen light on the side.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

**Safety**

Thermally insulated door with triple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel interior with glass ceramic base.  
Interior back wall with catalytic coating.


**Planning notes**

Door hinge not reversible.  
The door panel surface of the appliance extends 47 mm from the furniture cavity.  
Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside of the built-in niche.

Please read the installation details regarding oven combination on page 62–63.


**Connection**

Total connected load 3.1kW.  
Connection cable 1.5 m without plug.

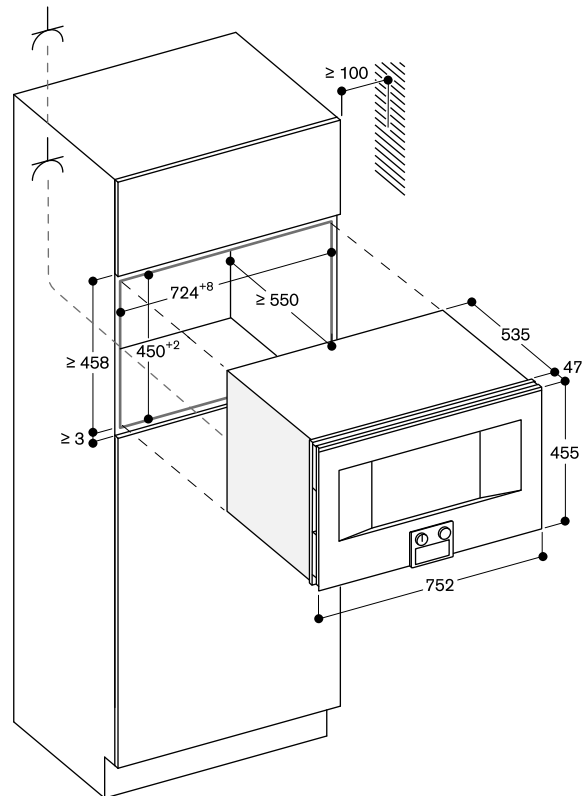

Socket

**Side view of BM 484/485 above BO**

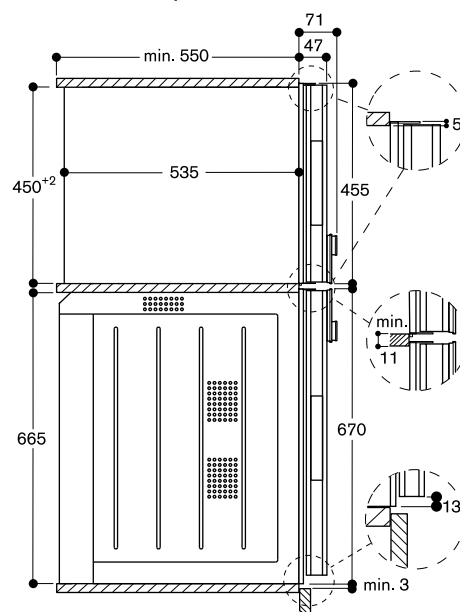



**Combi-microwave oven 400 series**  
**BM 450/BM 451/BM 454/BM 455**

**Controls at the top**

**Right-hinged**

**BM 450 110**

Stainless steel-backed full glass door.  
 Width 60 cm.

**BM 450 100**

Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Left-hinged**

**BM 451 110**

Stainless steel-backed full glass door.  
 Width 60 cm.

**BM 451 100**

Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Controls at the bottom**

**Right-hinged**

**BM 454 110**

Stainless steel-backed full glass door.  
 Width 60 cm.

**BM 454 100**

Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Left-hinged**

**BM 455 110**

Stainless steel-backed full glass door.  
 Width 60 cm.

**BM 455 100**

Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**Included in the price**

- 1 combination wire rack.
- 1 glass tray.

**Highlights**

- Handleless door / automatic door opening.
- Single operation and combination of microwave, grill and oven.
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control.
- Interior volume 36 litres.

**Programmes**

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.  
 Oven operation with 4 heating methods:  
 Hot air 40°C and from 100°C to 250°C,  
 Full surface grill + hot air from 100°C to 250°C,  
 Full surface grill + circulated air from 100°C to 250°C,  
 Full surface grill with 3 levels of intensity, maximum output 2000 W.  
 Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.  
 15 automatic programmes with weight indication, customisable:  
 4 defrosting programmes  
 4 cooking programmes  
 7 combination programmes  
 Option to save individual recipes.

**Handling**

Automatic door opening.  
 Rotary knob and TFT touch display operation.  
 Clear text display.  
 Information key with use indicators.  
 Side-opening door opens up to 180° angle.

**Features**

Innowave.  
 Rapid heating.  
 4 tray levels.  
 Actual temperature display.  
 60 W halogen light on the side.  
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

**Safety**

Thermally insulated door with triple glazing.  
 Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel interior with glass ceramic base.  
 Interior back wall with catalytic coating.


**Planning notes**

Door hinge not reversible.  
 Plan the niche without back wall.  
 The door panel surface of the appliance extends 47 mm from the furniture cavity.  
 Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 The mains socket needs to be planned outside of the built-in niche.

Please read the installation details regarding oven combination on page 62-63.


**Connection**

Total connected load 3.1 kW.  
 Connection cable 1.5 m without plug.

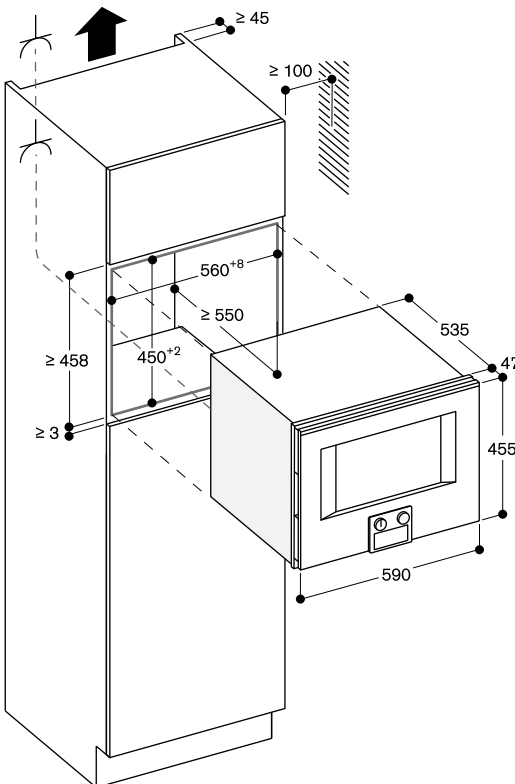

Socket

**Side view of BM 454/455 above BO**

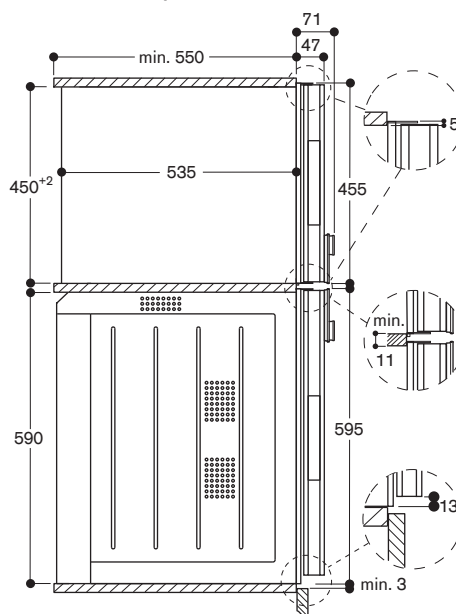



**Fully automatic espresso machine**  
**400 series**  
**CM 450**

**Controls at the top**  
**Left-hinged**

**CM 450 112**  
 Stainless steel-backed full glass door.  
 Width 60 cm.

**CM 450 102**  
 Full glass door in Gaggeneau  
 Anthracite.  
 Width 60 cm.

**Included in the price**

- 1 assembly screws.
- 1 scoop.
- 1 test strip.
- 1 milk container (insulated).
- 1 connection hose for milk frother.
- 1 milk pipe.

**Highlights**

- Handleless door / automatic door opening.
- Continuous flow heater means no waiting time and constant brewing temperature.
- Aroma brewing technology for a full aroma.
- Single portion cleaning.
- TFT touch display.
- Panel-free appliance with surface control module.
- One-touch operation.
- Personalisation function.
- 7 light settings.
- Electronic fill level control for milk, water and coffee to ensure a perfect result.

**Type of beverage**

Ristretto / 2 x Ristretto.  
 Espresso / 2 x Espresso.  
 Espresso Macchiato / 2 x Espresso Macchiato.  
 Coffee / 2 x Coffee.  
 Americano / 2 x Americano.  
 Caffè Latte / 2 x Caffè Latte.  
 Latte Macchiato / 2 x Latte Macchiato.  
 Cappuccino / 2 x Cappuccino.  
 Flat White / 2 x Flat White.  
 Milk froth / 2 x Milk froth.  
 Warm milk / 2 x Warm milk.  
 Hot water / 2 x Hot water.

**Handling**

Automatic door opening.  
 Rotary knob and TFT touch display operation.  
 Clear text display.  
 Personalisation function, option to save 8 individualised beverages.  
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
 8 coffee strength levels from very mild to extra strong.  
 3 coffee temperature levels.  
 10 hot water temperature levels.  
 4 coffee-milk ratio levels.  
 Adjustable grinding level.  
 Height-adjustable coffee dispenser 7 cm to 15 cm.  
 Easy access to water tank, milk and coffee bean container behind the door.

**Features**

Maintenance-free grinding unit with ceramic discs.  
 Separate drawer for second ground coffee type.  
 Water pump with 19 bar pressure.  
 Double grinding and brewing cycles for extra intensity for single beverage order.  
 For double beverage order, two grinding and brewing cycles.  
 Beverage dispenser with integrated milk system.  
 Insulated stainless steel milk container for up to 0.5 litres.  
 Integrated lightning with LEDs.  
 Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
 Automatic adjustment of ground coffee quantity.  
 Removable 2.4 litre water tank.  
 Electronic water filter exchange indicator.

Electronic fill level control for drip tray and container for coffee residue.  
 Hint: for energy-saving, the appliance switches to standby mode automatically after about 30 minutes. This timespan can be changed in the basic settings.

**Selected digital services**  
**(Gaggeneau Home Connect)**

Coffee world: extended choice of coffee specialities from all over the world.  
 Remote control and monitoring.

Please read additional information on Gaggeneau Home Connect on page 459.

**Safety**

Child lock.

**Cleaning**

Fully automatic rinse programme when machine is turned on/off.  
 Automatic steam cleaning of the milk system after every beverage.  
 Automatic cleaning and descaling programme.  
 Emptying programme to prepare the appliance for holiday or transportation.  
 Empty-grinding function to remove coffee residues from the system when switching bean types.  
 Removable brewing unit.  
 Dishwasher-safe coffee residue container and drip tray.  
 Dishwasher-safe beverage dispenser.

**Planning notes**

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).  
 The door panel surface of the appliance extends 47 mm from the furniture cavity.  
 When installing in a corner a side clearance is required.  
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.  
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.  
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).  
 Installation directly above 14 cm high warming drawer in 59 cm standard-sized niche.  
 The LAN port can be found at the back on the lower right side.


Special accessories (order as spare parts - see also page 90-91):  
 Part No. 17000705 Water filter  
 Part No. region-specific Descaling tablets  
 Part No. region-specific Cleaning tablets  
 Part No. 00636455 Door hinge restrictor (92° opening angle)  
 Part No. 11015223 Bean container with lid

Please read the installation details regarding oven combination on page 62-63.

**Connection**

Total connected load 1.6 kW.  
 Connection cable 1.7 m with plug.  
 Plan a LAN cable.



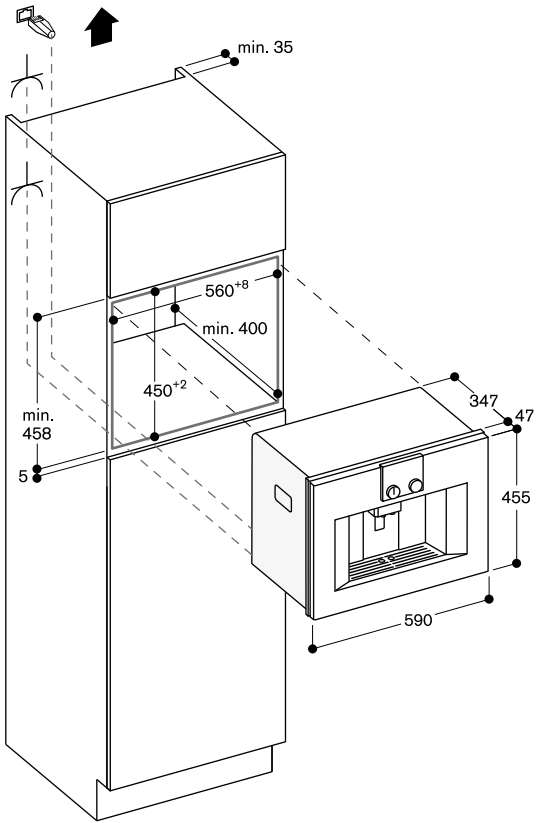

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Vacuumping drawer 400 series DV 461

#### DV 461 110

Stainless steel-backed glass front.  
Width 60 cm, Height 14 cm.

#### DV 461 100

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 14 cm.

#### Included in the price

- 50 vacuumping bags, small.
- 50 vacuumping bags, big.
- 1 raised vacuumping platform.
- 1 adaptor f. vacuumping outside the chamber.
- 1 vacuumping hose.
- 1 adaptor for bottle plugs.
- 3 plugs for vacuumping of bottles.

#### Highlights

- Integrable in 14 cm high niche.
- Hygienic stainless steel vacuumping chamber, applicable height up to 80 mm.
- 3 vacuumping levels for vacuumping in the chamber, max. 99%.
- 3 vacuumping levels for vacuumping outside the chamber, max. 90%.
- Automatic connection recognition for vacuumping outside the chamber.
- Handleless drawer.
- Cushioned closing system.

#### Application

Vacuumping for sous-vide cooking.  
 Vacuumping for fast marinating and flavouring.  
 Vacuumping for extended storage.  
 Vacuumping of vacuumping containers outside the chamber.  
 Vacuumping of liquids in bottles outside the chamber.

#### Handling

Touch key operation.  
 Recessed grip at the front bottom of the drawer.

#### Features

Net volume 7 litres.  
 Capacity load max. 10 kg.  
 Maximum size of vacuumping bags  
 W 240 mm × L 350 mm.  
 3 heat-sealing levels for different strengths of bag material.  
 Sealing bar, non-stick coating, removable.  
 Safety glass cover, opens automatically after vacuumping.  
 Raised vacuumping platform, 44 mm, deployable.  
 Utility space in vacuumping chamber, W 210 mm × L 275 mm.  
 Membrane for avoiding reflow of liquids during vacuumping outside the chamber.  
 Drying programme for vacuumping pump.  
 Warning function.

#### Planning notes


The panel surface of the appliance extends 47 mm from the furniture cavity.  
 Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.  
 Built-in under worktop or in single niche.  
 The socket can be planned behind the appliance.

Special accessories  
 (order as spare parts):  
 Part No. 00578813  
 vacuumping bags, small  
 Part No. 00578814  
 vacuumping bags, big


Please read the installation details regarding oven combination on page 62-63.

#### Connection

Total connected load 0.32 kW.  
 Connection cable 1.5 m, pluggable.

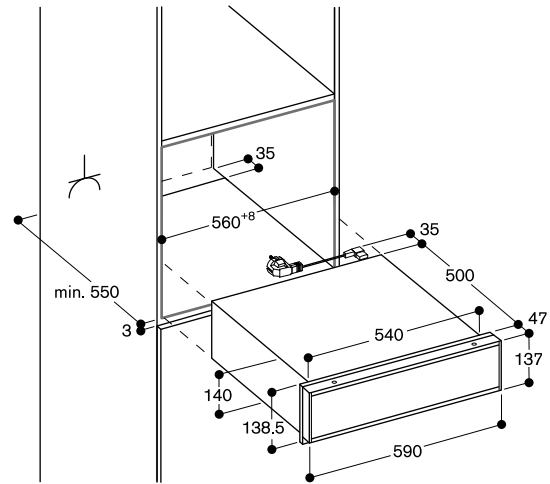

Side view of DV 461 below BS, BM, CM

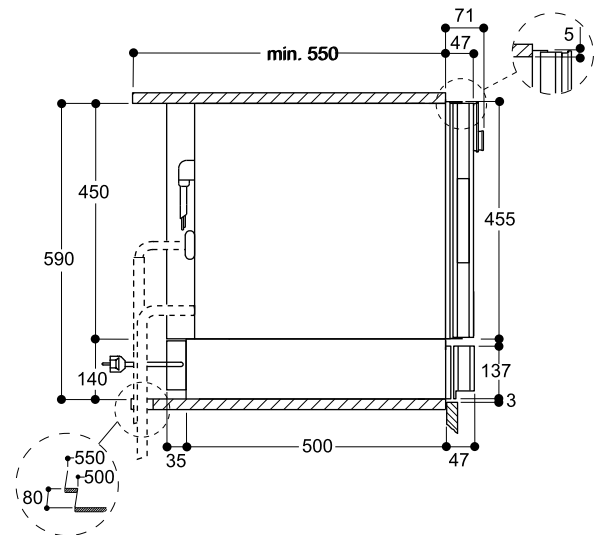



#### Vacuuming drawer 400 series DV 061

**DV 061 100\***  
Fully integrated.  
Width 60 cm, Height 14 cm.

\* Suitable for 400 and 200 series

#### Included in the price

- 50 vacuuming bags, small.
- 50 vacuuming bags, big.
- 1 raised vacuuming platform.
- 1 adaptor f. vacuuming outside the chamber.
- 1 vacuuming hose.
- 1 adaptor for bottle plugs.
- 3 plugs for vacuuming of bottles.

#### Highlights

- Integrable in 14 cm high niche.
- Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm.
- 3 vacuuming levels for vacuuming in the chamber, max. 99%.
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%.
- Automatic connection recognition for vacuuming outside the chamber.
- Cushioned closing system.

#### Application

- Vacuuming for sous-vide cooking.
- Vacuuming for fast marinating and flavouring.
- Vacuuming for extended storage.
- Vacuuming of vacuuming containers outside the chamber.
- Vacuuming of liquids in bottles outside the chamber.

#### Handling

Touch key operation.

#### Features

- Net volume 7 litres.
- Capacity load max. 10 kg.
- Maximum size of vacuuming bags W 240 mm x L 350 mm.
- 3 heat-sealing levels for different strengths of bag material.
- Sealing bar, non-stick coating, removable.
- Safety glass cover, opens automatically after vacuuming.
- Raised vacuuming platform, 44 mm, deployable.
- Utility space in vacuuming chamber, W 210 mm x L 275 mm.
- Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
- Drying programme for vacuuming pump.
- Warning function.

#### Planning notes


- Attention: To open the fully integrated variant, a handle or a recessed grip is required.
- The thickness of the furniture panel is at least 19 mm.
- The width of the furniture panel is 590-596 mm.
- The recommended height of the furniture panel is 142-156 mm.
- Front weight up to 3 kg.
- Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.
- Built-in under worktop or in single niche.
- The socket can be planned behind the appliance.

Special accessories  
(order as spare parts):  
Part No. 00578813  
vacuuming bags, small  
Part No. 00578814  
vacuuming bags, big

Please read the installation details regarding oven combination on page 62-63.

#### Connection

Total connected load 0.32 kW.  
Connection cable 1.5 m, pluggable.

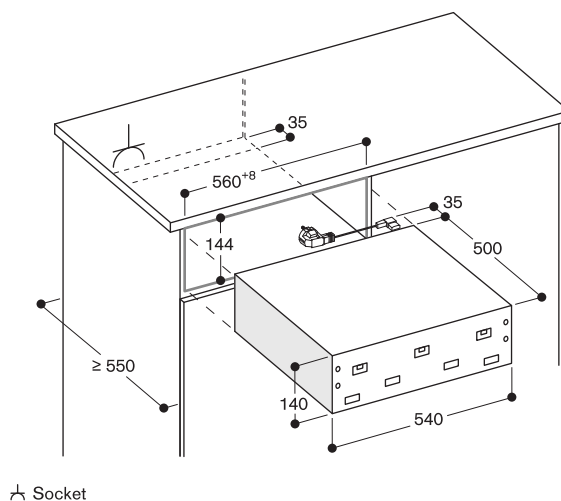

⚡ Socket



**Warming drawer 400 series**  
**WS 482**

**WS 482 110**  
Stainless steel-backed glass front.  
Width 76 cm, Height 21 cm.

**Highlights**

- Handleless drawer.
- Bright interior light.
- Cushioned closing system.
- Hygienic stainless steel interior with glass bottom.
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface).
- Also for preparing and cooking meals, and for keeping meals warm.

**Heating methods**

Defrosting of meals/proving of yeast dough.  
Preheating of small beverage containers.  
Keeping meals warm/slow cooking meals.  
Warming ovenware.

**Handling**

Rotary knob operation.  
Recessed grip at the front bottom of the drawer.

**Features**

Net volume 38 litres.  
Volume capacity: Dinner service for 10 people including ø 24 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Max. load 25 kg.  
Usable interior dimensions W 606 × H 132 × D 480 mm.  
Heating under glass bottom for easy cleaning.  
Fan for even heat distribution for fast warming ovenware.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.


**Planning notes**

The panel surface of the appliance extends 47 mm from the furniture cavity.  
Installation of BO/BS above WS with dimensionally stable intermediate shelf.  
Installation of BS above WS in 66.5 cm niche with intermediate floor (gap of 7 mm between WS and BS).  
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 62-63.

**Connection**


Total connected load 0.81kW.  
Connection cable 1.5 m, pluggable.

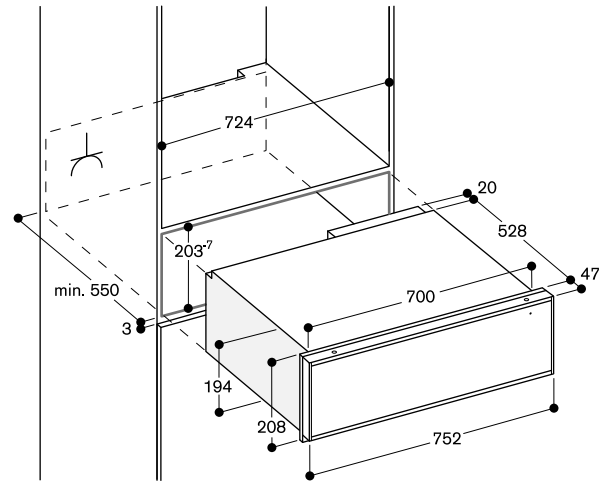

Side view of WS 482 below BO 480

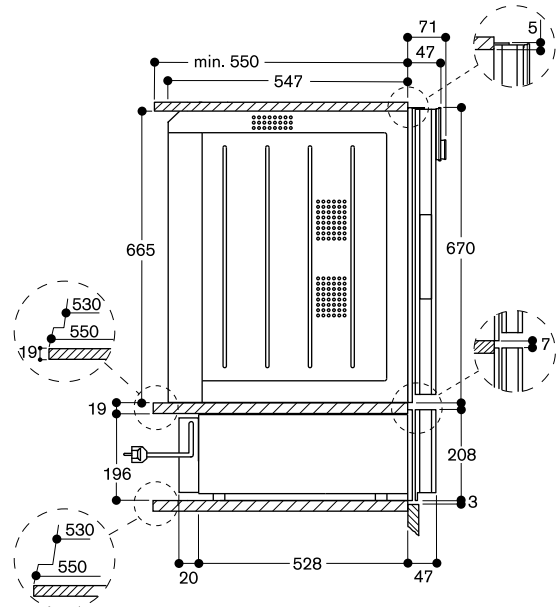

Side view of WS 482 below BS 484/485

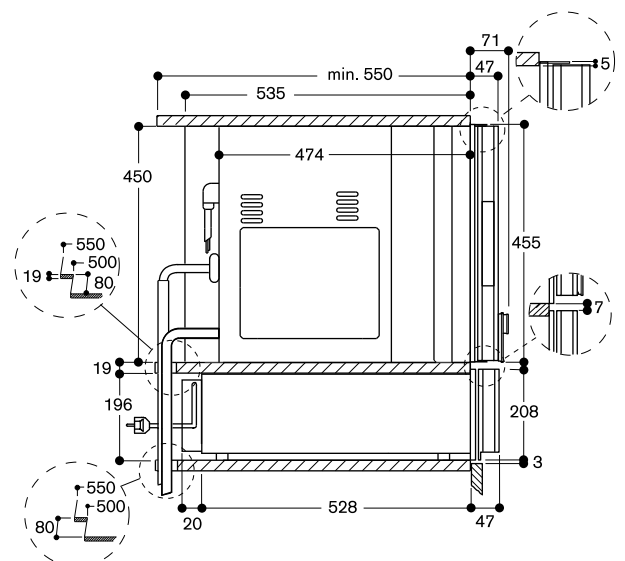



### Culinary warming drawer 400 series WS 461

#### WS 461 112

Stainless steel-backed glass front.  
Width 60 cm, Height 14 cm.

#### WS 461 102

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 14 cm.

#### Highlights

- Handleless drawer.
- Cushioned closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30°C to 80°C.
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programs via Home Connect.

#### Handling

Touch key operation.  
Recessed grip at the front bottom of the drawer.

#### Features

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions W 547 mm × H 91 mm × D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

Please read additional information on Gaggenau Home Connect on page 459.


#### Planning notes

The panel surface of the appliance extends 47 mm from the furniture cavity.  
Installation of BS/BM/CM directly above WS in 59 cm niche without intermediate floor.  
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 62-63.

#### Connection

Total connected load 0.82 kW.  
Connection cable 1.8 m, pluggable.

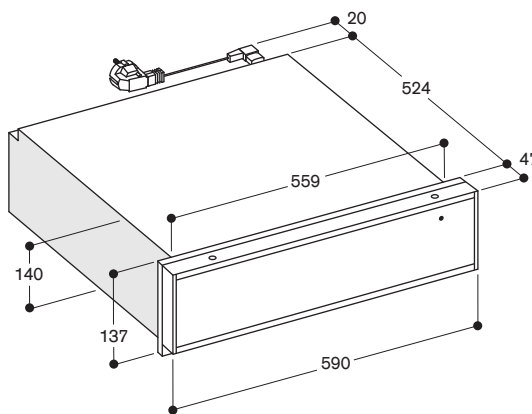

Side view of WS 461 below BS, BM, CM

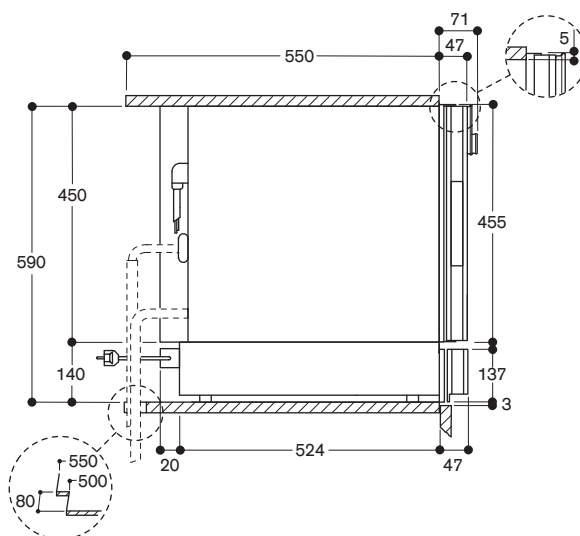



**Culinary warming drawer 400 series**  
**WS 462**

**WS 462 112**

Stainless steel-backed glass front.  
Width 60 cm, Height 29 cm.

**WS 462 102**

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 29 cm.

**Highlights**

- Handleless drawer.
- Cushioned closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programs via Home Connect.

**Handling**

Touch key operation.  
Recessed grip at the front bottom of the drawer.

**Features**

Net volume 54 litres.  
Volume capacity: Dinner service for 12 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions W 547 mm x H 241 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

**Selected digital services**

**(Gaggenau Home Connect)**

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

Please read additional information on Gaggenau Home Connect on page 459.


**Planning notes**

The panel surface of the appliance extends 47 mm from the furniture cavity.  
Installation of BS/BM/CM directly above WS in 59 cm niche without intermediate floor.  
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 62-63.

**Connection**

Total connected load 0.82 kW.  
Connection cable 1.8 m, pluggable.

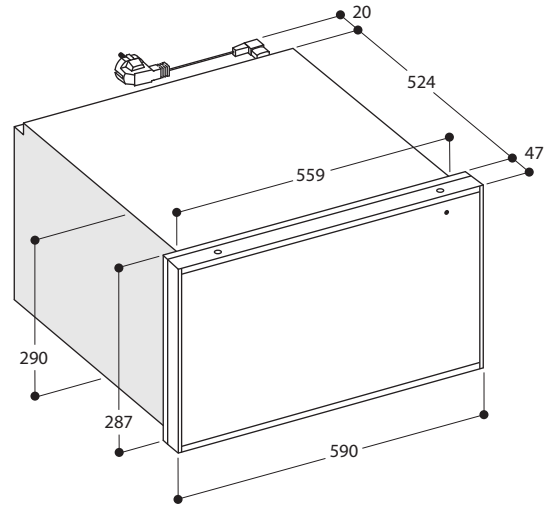

Side view of WS 462 below BO

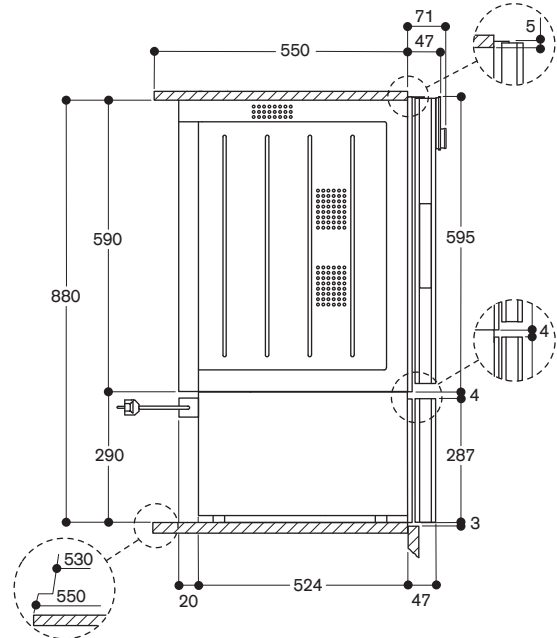



### Culinary warming drawer 400 series WS 061

#### WS 061 102\*

Fully integrated.  
Hygienic stainless steel interior with glass bottom.  
Width 60 cm, Height 14 cm.

\* Suitable for 400 and 200 series

#### Highlights

- Direct temperature selection in the range 30 °C to 80 °C.
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programs via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W 547 mm x H 91 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

Please read additional information on Gaggenau Home Connect on page 459.


#### Planning notes

Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.  
The thickness of the furniture panel is at least 19 mm.  
The width of the furniture panel is 590-596 mm.  
The recommended height of the furniture panel is 142-156 mm.  
Front weight up to 3 kg.  
The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 62-63.

#### Connection

Total connected load 0.82 KW.  
Connection cable 1.8 m, pluggable.

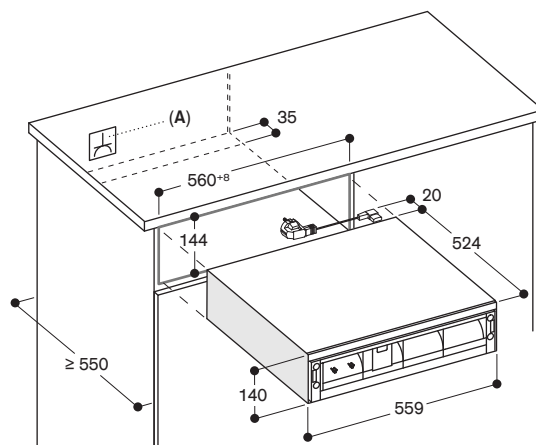


A: Socket

## Accessories and special accessories 400 series

**BA 010 301**

Triple telescopic pull-out rack.  
For combi-steam oven.



**BA 016 105**

Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.



**BA 018 105**

Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.

**BA 020 361**

Cooking container, stainless steel,  
unperforated, 46 mm deep, 5.4l.



**BA 020 370**

Cooking container, stainless steel,  
perforated, 40 mm deep, 5l.




**BA 020 381**

Cooking container, non-stick,  
unperforated, 46 mm deep, 5.4l.



**BA 020 390**

Cooking container, non-stick,  
perforated, 40 mm deep, 5l.




**BA 026 115**

Baking tray, enamelled.  
15 mm deep.



**BA 028 115**

Baking tray, enamelled.  
30 mm deep.



**BA 036 105**

Wire rack, chromium-plated.  
Without opening, with feet.

**BA 038 105**

Wire rack, chromium-plated.  
Without opening, with feet.



**BA 046 117**

Glass tray.  
24 mm deep.

**BA 226 105**

Grill tray, enamelled  
30 mm deep.




**BA 056 115**

Heating element for baking stone and  
Gastronorm roaster.

**BA 058 115**

Heating element for baking stone and  
Gastronorm roaster.



**BA 056 133**

Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.



**BA 058 133**

Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.


**BS 020 002**

Pizza paddle, set of 2.



**GN 010 330**

Adapter for gastronorm insert and  
roaster.





**GN 114 130**

Gastronorm insert, stainless steel, GN1/3.  
Unperforated, 40 mm deep, 1.5l.

**GN 114 230**

Gastronorm insert, stainless steel, GN2/3.  
Unperforated, 40 mm deep, 3l.

**GN 124 130**

Gastronorm insert, stainless steel, GN1/3.  
Perforated, 40 mm deep, 1.5l.

**GN 124 230**

Gastronorm insert, stainless steel, GN2/3.  
Perforated, 40 mm deep, 3l.

**GN 340 230**

Gastronorm roaster in cast aluminium. GN 2/3, height 165 mm, non-stick.  
For roasting in oven with roasting function.  
Lower and upper part can also be used as separate ovenproof dishes, height 100 and 65 mm.  
For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (both to be ordered separately).

**CL S10 040**

Cleaning cartridges, set of 4.  
For Combi-steam oven.

**GF 111 100**

Descaling and neutralising filter, for first installation.  
Descaling system, recommended to be installed if water hardness exceeds 7°dH or carbon hardness 5°dH.  
Filter head with integrated non-return valve and filter.  
Width 130 mm, Height 265 mm, Depth 121 mm.  
Water inlet 1.5 m with 3/4" connection.

**GF 121 110**

Filter cartridge.

**GZ 010 011**

Extension for water inlet and outlet (2 m long).



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect

## Accessories and special accessories 400 series



**Double oven**  
BX 480/BX 481

<b>Baking tray, enamelled</b>			
	BA 026 115	15 mm deep.	
	BA 028 115	30 mm deep.	• (2x)/°
<b>Pull-out rack</b>			
	BA 016 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame.	
	BA 018 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame.	°
	BA 010 301	Triple telescopic pull-out rack for combi-steam oven.	
<b>Baking stone</b>			
	BA 056 133	incl. baking stone support and pizza paddle (heating element must be ordered separately).	
	BA 058 133	incl. baking stone support and pizza paddle (heating element must be ordered separately).	°
<b>Cooking container, steam oven</b>			
	BA 020 361	Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.	
	BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5 l.	
	BA 020 381	Cooking container, non-stick, unperforated, 46 mm deep, 5.4 l.	
	BA 020 390	Cooking container, non-stick, perforated, 40 mm deep, 5 l.	
	GN 114 130	GN 1/3, unperforated, 40 mm deep, 1.5 l.	
	GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l.	
	GN 124 130	GN 1/3, perforated, 40 mm deep, 1.5 l.	
	GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l.	
<b>Gastronorm roaster, cast aluminium</b>			
	GN 340 230	GN 2/3, height 165 mm, non-stick. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456).	°
<b>GN-Adapter</b>			
	GN 010 330	Adapter for gastronorm insert.	
<b>Glass tray</b>			
	BA 046 117	24 mm deep.	
<b>Wire rack</b>			
	BA 036 105	No opening, with feet.	
	BA 038 105	No opening, with feet.	• (2x)/°
	Part No. 672921	For grill tray BA 226 105, with opening and feet.	
	Part No. 706321	For grill tray ET-Nr. 687055, with opening and feet.	• (2x)/°
<b>Grill tray, enamelled</b>			
	BA 226 105	30 mm deep.	
	Part No. 687055	with feet and rotisserie spit attachment, 30 mm deep.	• (2x)/°
<b>Heating element</b>			
	BA 056 115	Necessary accessory for baking stone BA 056 133.	
	BA 058 115	Necessary accessory for baking stone BA 058 133.	°
<b>Pizza paddle</b>			
	BS 020 002	Set of 2.	°
<b>Bean container</b>			
	Part No. 11015223	Bean container with lid.	
<b>Cleaning and care</b>			
	CL S10 040	Cleaning cartridges, set of 4.	
	Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.	
	Part No. 17000705	Water filter cartridge.	
	Part No. 17000706	Water filter cartridge, set of 3.	
	Part No. is region-specific	Descaling tablets available via customer service.	
	Part No. is region-specific	Cleaning tablets available via customer service.	
<b>Water connection</b>			
	GF 111 100	Descaling and neutralising filter, for first installation.	
	GF 121 110	Filter cartridge for GF 111 100.	
	GZ 010 011	Extension for water inlet and outlet hose.	
<b>Vacuuming bags</b>			
	Part No. 00578813	Vacuuming bags, small.	
	Part No. 00578814	Vacuuming bags, big.	

• Standard. ° Special accessory.



Oven	Oven	Oven	Oven	Combi-steam oven	Combi-steam oven	Combi-steam oven
BO 480/BO 481	BO 470/BO 471	BO 450/BO 451	BO 420/BO 421	BS 484/BS 485	BS 470/BS 471	BS 450/BS 451
•/o	• (2x)/o	•/o	•/o			
	o	o	o			
o				o	o	o
	o	o	o			
				o	o	o
				•/o	•/o	•/o
				o	o	o
				o	o	o
				o	o	o
				o	o	o
o	o	o	o (without roaster function)	o	o	o
				o	o	o
	•/o	•/o	•/o	o	o	o
•/o	•/o	•/o	•/o			
•/o	•/o	o	o			
•/o		o	o			
•/o						
	o	o	o			
o						
				•/o	•/o	•/o
				o	o	o
				o	o	
				o	o	
				o	o	

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Accessories and special accessories 400 series



Combi-microwave oven

BM 484/BM 485

<b>Baking tray, enamelled</b>		
BA 026 115		15 mm deep.
BA 028 115		30 mm deep.
<b>Pull-out rack</b>		
BA 016 105		Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame.
BA 018 105		Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame.
BA 010 301		Triple telescopic pull-out rack for combi-steam oven.
<b>Baking stone</b>		
BA 056 133		incl. baking stone support and pizza paddle (heating element must be ordered separately).
BA 058 133		incl. baking stone support and pizza paddle (heating element must be ordered separately).
<b>Cooking container, steam oven</b>		
BA 020 361		Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.
BA 020 370		Cooking container, stainless steel, perforated, 40 mm deep, 5 l.
BA 020 381		Cooking container, non-stick, unperforated, 46 mm deep, 5.4 l.
BA 020 390		Cooking container, non-stick, perforated, 40 mm deep, 5 l.
GN 114 130		GN 1/3, unperforated, 40 mm deep, 1.5 l.
GN 114 230		GN 2/3, unperforated, 40 mm deep, 3 l.
GN 124 130		GN 1/3, perforated, 40 mm deep, 1.5 l.
GN 124 230		GN 2/3, perforated, 40 mm deep, 3 l.
<b>Gastronorm roaster, cast aluminium</b>		
GN 340 230		GN 2/3, height 165 mm, non-stick. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456)
<b>GN-Adapter</b>		
GN 010 330		Adapter for gastronorm insert.
<b>Glass tray</b>		
BA 046 117		24 mm deep.
<b>Wire rack</b>		
BA 036 105		No opening, with feet.
BA 038 105		No opening, with feet.
Part No. 672921		For grill tray BA 226 105, with opening and feet.
Part No. 706321		For grill tray ET-Nr. 687055, with opening and feet.
<b>Grill tray, enamelled</b>		
BA 226 105		30 mm deep.
Part No. 687055		with feet and rotisserie spit attachment, 30 mm deep.
<b>Heating element</b>		
BA 056 115		Necessary accessory for baking stone BA 056 133.
BA 058 115		Necessary accessory for baking stone BA 058 133.
<b>Pizza paddle</b>		
BS 020 002		Set of 2.
<b>Bean container</b>		
Part No. 11015223		Bean container with lid.
<b>Cleaning and care</b>		
CL S10 040		Cleaning cartridges, set of 4.
Part No. 17002490		Descaling tablets, for combi steam ovens, set of 4.
Part No. 17000705		Water filter cartridge.
Part No. 17000706		Water filter cartridge, set of 3.
Part No. is region-specific		Descaling tablets available via customer service.
Part No. is region-specific		Cleaning tablets available via customer service.
<b>Water connection</b>		
GF 111 100		Descaling and neutralising filter, for first installation.
GF 121 110		Filter cartridge for GF 111 100.
GZ 010 011		Extension for water inlet and outlet hose.
<b>Vacuuming bags</b>		
Part No. 00578813		Vacuuming bags, small.
Part No. 00578814		Vacuuming bags, big.

• Standard. ◦ Special accessory.



Combi-microwave oven

BM 450/BM 451  
BM 454/BM 455



Fully automatic espresso machine

CM450



Vacuuming drawer

DV 461  
DV 061



Warming drawer

WS 482



Culinary warming drawer

WS 461



Culinary warming drawer

WS 462

•/°

- °
- °
- °
- °

•/°  
•/°

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances



Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Ovens 400 series



Appliance type	Double oven	Oven
Side-opening door right-hinged / left-hinged	BX 480/BX 481	BO 480/BO 481
Stainless steel-backed full glass door	BX 480/481 112	BO 480/481 112
Full glass door in Gaggenau Anthracite		
<b>Dimensions</b>		
Width (cm)	76	76
Appliance dimensions W x H x D <sup>1</sup> (mm)	752 x 1.428 x 547	752 x 670 x 547
Door panel extension from furniture cavity (mm)	47	47
Niche dimensions W x H x D (mm)	724 x 1.425 x 550	724 x 665 x 550
Net weight (kg)	152	77
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>		
Net volume (l)	110 per cooking compartment	110
Number of cooking compartments	2	1
Interior dimensions W x H x D (mm)	624 x 435 x 403	624 x 435 x 403
Energy efficiency class with eco hot air	 per cooking compartment	
Energy Efficiency Index (EEI)	96 above, 121 below	96
Energy consumption with top / bottom heat (kWh)	1.53 per cooking compartment	1.53
Energy consumption with eco hot air (kWh)	0.97 above, 1.22 below	0.97
Heat source	electric	electric
<b>Heating methods</b>		
Temperature range (°C)	30-300	30-300
Hot air / Eco hot air / top + bottom heat	•/•/•	•/•/•
Top heat / bottom heat / hot air + bottom heat	•/•/•	•/•/•
Top + 1/3 bottom heat	•	•
1/3 top + bottom heat	•	•
Hot air + 1/3 bottom heat	•	•
Full surface grill + circulated air	•	•
Full surface grill	•	•
Compact grill	•	•
Baking stone function	•	•
Roaster function	•	•
Dough proofing / defrosting / keeping warm	•/•/•	•/•/•
<b>Handling</b>		
TFT touch display	•	•
Controls at the top / centered / at the bottom	-/•/-	•/-/-
Automatic door opening	-	•
Clear text display (No. of languages)	25	44
Individual recipes	-	50
Door opening angle (°)	180	180
<b>Features</b>		
Electronic temperature control	•	•
Three-Point core temperature probe	• (bottom only)	•
Automatic programmes	-	•
Rotisserie spit	• (bottom only)	•
Baking stone socket	•	•
Roasting function	•	•
Actual temperature display	•	•
Rapid heating	•	•
Cooking time, cooking time end, timer, stopwatch	•	•
Long-term timer	•	•
Halogen light on the top (W)	60 per cooking compartment	60
Halogen light on the side (W)	10 per cooking compartment	2 x 10
Tray levels (No.)	5	5
Digital services (Gaggenau Home Connect) either via LAN or wireless via WiFi. <sup>3</sup>	-	•
<b>Accessories</b>		
Enamelled baking tray	1 per cooking compartment	1
Size of largest baking tray (cm <sup>2</sup> )	1.780	1.780
Wire rack	1 per cooking compartment	1
Enamelled grill tray / wire rack for grill tray	1/1 per cooking compartment	1/1
Glass tray	-	-
<b>Safety</b>		
Thermally insulated door with multiple glazing	4-fold	4-fold
Child lock / door lock / safety shut-off	•/•/•	•/•/•
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Pyrolytic system	•	•
Gaggenau enamel	•	•
Heated air cleaning catalyser	•	•
<b>Connection</b>		
Total connected load (kW)	9.2	5.52

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Special accessory, see pages 86-91. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.



Oven	Oven	Oven
BO 470/BO 471	BO 450/BO 451	BO 420/BO 421
BO 470/471 112	BO 450/451 112	BO 420/421 112
BO 470/471 102		BO 420/421 102
60	60	60
590 x 595 x 547	590 x 595 x 547	590 x 595 x 547
47	47	47
560 x 590 x 550	560 x 590 x 550	560 x 590 x 550
64	56	56
76	76	76
1	1	1
475 x 383 x 414	475 x 383 x 414	475 x 383 x 414
96	96	96
1.25	1.25	1.25
0.83	0.83	0.83
electric	electric	electric
30-300	30-300	50-300
•/•/•	•/•/•	•/•/•
•/•/•	•/•/•	•/•/•
•	—	—
•	—	—
•	—	—
•	•	•
•	•	•
•	•	—
•	•	•
•	•	—
•/•/•	•/•/—	—/—/—
•	•	•
•/—/—	•/—/—	•/—/—
•	•	•
44	44	44
50	50	50
180	180	180
•	•	•
•	•	—
•	•	—
•	—	—
•	•	•
•	•	—
•	•	•
•	•	•
•	•	•
•	•	•
60	60	60
2 x 10	10	—
4	4	4
•	•	•
2	1	1
1.200	1.200	1.200
1	1	1
1/1	BA 226 105 <sup>2</sup> / 672 921 <sup>2</sup>	BA 226 105 <sup>2</sup> / 672 921 <sup>2</sup>
1	1	1
4-fold	4-fold	4-fold
•/•/•	•/•/•	•/•/•
•	•	•
•	•	•
•	•	•
•	•	•
3.7	3.7	3.7

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Combi-steam ovens 400 series



Appliance type	Combi-steam oven	Combi-steam oven
Side-opening door right-hinged / left-hinged	BS 484/BS 485	BS 470/BS 471
Stainless steel-backed full glass door	BS 484/BS 485 112	BS 470/BS 471 112
Full glass door in Gaggenau Anthracite		BS 470/BS 471 102
<b>Dimensions</b>		
Width (cm)	76	60
Appliance dimensions W x H x D <sup>1</sup> (mm)	752 x 455 x 540	590 x 455 x 540
Door panel extension from furniture cavity (mm)	47	47
Niche dimensions W x H x D (mm)	724 x 450 x 550	560 x 450 x 550
Net weight (kg)	53	47
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>		
Net volume (l)	50	50
Number of cooking compartments	1	1
Interior dimensions W x H x D (mm)	501 x 246 x 406	501 x 246 x 406
Energy efficiency class with hot air + 30 % humidity		
Energy Efficiency Index (EEI)	94.7	94.7
Energy consumption with hot air + 30 % humidity (kWh)	0.72	0.72
Heat source (min)	electric	electric
<b>Heating methods</b>		
Temperature range (°C)	30-230	30-230
Hot air + 100 % humidity	•	•
Hot air + 80 % humidity	•	•
Hot air + 60 % humidity	•	•
Hot air + 30 % humidity	•	•
Hot air + 0 % humidity	•	•
Low temperature cooking	•	•
Sous-vide cooking	•	•
Full surface grill level 1 + humidity	•	•
Full surface grill level 2 + humidity	•	•
Full surface grill + circulated air	•	•
Dough proofing	•	•
Defrosting	•	•
Regenerating	•	•
<b>Handling</b>		
TFT touch display	•	•
Controls at the top / at the bottom	—/•	•/—
Automatic door opening	•	•
Clear text display (No. of languages)	44	44
Individual recipes	50	50
Door opening angle (°)	180°	180°
<b>Features</b>		
Steaming without pressure	•	•
Electronic temperature control	•	•
Full surface grill behind glass ceramic (W)	2.000	2.000
Steam removal / misting	•/•	•/•
Three-Point core temperature probe	•	•
Automatic programmes	•	•
Actual temperature display	•	•
Cooking time, cooking time end, timer, stopwatch	•	•
Long-term timer	•	•
Automatic boiling point detection	•	•
Capacity display for filter cartridge	•	•
Water tank capacity / water level warning (l)	—/—	—/—
LED light on the side (W)	2 x 10	2 x 10
Tray levels / stainless steel cooking interior (No.)	3/•	3/•
Digital services (Gaggenau Home Connect) either via LAN or wireless via WiFi. <sup>3</sup>	•	•
<b>Accessories</b>		
Size of largest baking tray (cm <sup>2</sup> )	810	810
Wire rack	1	1
Cooking container, stainless steel, 40 mm, perforated / unperforated	1/1	1/1
Cleaning cartridge	4	4
Descaling tablets	Part No. 17002490	Part No. 17002490
<b>Safety</b>		
Thermally insulated door with multiple glazing	3-fold	3-fold
Child lock / door lock / safety shut-off	•/•/•	•/•/•
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Cleaning programme	•	•
Descaling programme / drying programme	•/•	•/•
Automatic drying of the cavity at the end of the cooking process.	•	•
<b>Connection</b>		
Total connected load (kW)	3.15	3.15
Fixed inlet and outlet water connection	•	•

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Special accessory, see pages 86–91. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.





## Combi-microwave ovens 400 series



Appliance type	Combi-microwave oven	Combi-microwave oven	Combi-microwave oven
Side-opening door right-hinged / left-hinged	BM 484/BM 485	BM 450/BM 451	BM 454/BM 455
Stainless steel-backed full glass door	BM 484/485 110	BM 450/451 110	BM 454/455 110
Full glass door in Gaggenau Anthracite		BM 450/451 100	BM 454/455 100
<b>Dimensions</b>			
Width	(cm) 76	60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 752 x 455 x 535	590 x 455 x 535	590 x 455 x 535
Door panel extension from furniture cavity	(mm) 47	47	47
Niche dimensions W x H x D	(mm) 724 x 450 x 550	560 x 450 x 550	560 x 450 x 550
Net weight	(kg) 50	46	46
<b>Volumen</b>			
Capacity	(l) 36	36	36
Interior dimensions W x H x D	(mm) 445 x 236 x 348	445 x 236 x 348	445 x 236 x 348
<b>Heating methods / Programmes</b>			
Maximum microwave output	(W) 1,000	1,000	1,000
Microwave output levels	(No.) 5	5	5
Hot air with temperature range	(°C) 40, 100-250	40, 100-250	40, 100-250
Full surface grill + hot air with temperature range	(°C) 100-250	100-250	100-250
Full surface grill + circulated air with temperature range	(°C) 100-250	100-250	100-250
Full surface grill as quartz grill with levels of intensity	(No.) 3	3	3
Maximum grill output	(W) 2,000	2,000	2,000
Maximum Hot air output	(W) 1,950	1,950	1,950
Maximum microwave output for combination with grill and oven	(W) 600	600	600
Sequential operation of up to 5 modes incl. programming of combined operation and rest time	•	•	•
Automatic weight feature	(No.) 15	15	15
<b>Handling</b>			
TFT touch display	•	•	•
Controls at the top / at the bottom	•/—	•/—	—/•
Automatic door opening	•	•	•
Clear text display	(No. of languages) 25	25	25
Individual recipes	50	50	50
Door opening angle	180°	180°	180°
<b>Features</b>			
Electronic temperature control	•	•	•
Actual temperature display	•	•	•
Rapid heating	•	•	•
Innowave	•	•	•
Cooking time, switch-off time, short-term timer, stop watch	•/•/•/•	•/•/•/•	•/•/•/•
Long-term timer	•	•	•
Interior lighting, side	(W) 60	60	60
Rack levels	(No.) 4	4	4
<b>Accessories</b>			
Glass tray	•	•	•
Wire rack	•	•	•
Glass rod	•	•	•
<b>Safety</b>			
Thermally insulated door with multiple glazing	•	•	•
Child lock / safety shut-off	•/•	•/•	•/•
Cooled housing with temperature protection	•	•	•
<b>Cleaning</b>			
Catalytic special enamelling at interior back wall	•	•	•
Stainless steel interior with ceramic base.	•	•	•
<b>Connection</b>			
Total connected load	(kW) 3.1	3.1	3.1

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.

## Fully automatic espresso machine 400 series



<b>Appliance type</b>	<b>Fully automatic espresso machine</b>
Stainless steel-backed glass front	CM 450 112
Full glass door in Gaggenau Anthracite	CM 450 102
<b>Dimensions</b>	
Width	(cm) 60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 455 x 444
Door panel extension from furniture cavity	(mm) 47
Niche dimensions W x H x D	(mm) 560 x 450 x 550
Net weight	(kg) 22
<b>Typ of beverage</b>	
	Ristretto / 2 x Ristretto
	Espresso / 2 x Espresso
	Espresso Macchiato / 2 x Espresso Macchiato
	Coffee / 2 x coffee
	Americano / 2 xAmericano
	Caffe Latte / 2 x Caffe Latte
	Latte Macchiato / 2 x Latte Macchiato
	Cappuccino / 2 x Cappuccino
	Flat White / 2 x Flat White
	Milk froth / 2 x Milk froth
	Warm milk / 2 x Warm milk
	Hot water / 2 x Hot water
<b>Handling</b>	
TFT touch display	•
Controls at the top	•
Automatic door opening	•
Clear text display	(No.of languages) 25
Beverages can be personalised and memorised	(No.) 8
Beverage size settings	(No.) 3
Coffee strength levels	(No.) 8
Coffee temperature levels	(No.) 3
Hot water temperature levels	(°C) 10
Coffee-milk ratio levels	•
Height adjustable coffee dispenser up to	(cm) 15
<b>Programmable basic settings</b>	
— Lighting scenarios	(No.) 7
— Capacity unit	(ml/fl.oz.) •
— Adjustability of dispensing per type and size of beverage to match the cup size	•
— Standby after	(min, h) 5 min to 12 h
— Water hardness	(No. of levels) 4, water-softening system
— Water filter	•
<b>Features</b>	
Aroma brewing technology	•
Grinding unit with ceramic discs	•
Automatic adjustment of ground coffee quantity	•
Continuous flow heater	•
Pump pressure	(bar) 19
Integrated milk system	•
Insulated milk container	(l) 0.5
Bean container	(g) 500
Separate container for second ground coffee type	•
Grinding level control	•
Volume of adjustable brewing chamber	(g) 8 to 12
Double grinding and brewing cycles for extra intensity for one beverage	•
Double grinding and brewing cycles for two beverages	•
Removable water tank	(l) 2.4
Water filter cartridge for water tank	installable
Single portion cleaning	•
Electronic water filter exchange indicator	•
Electronic fill level control for milk, water and coffee beans	•
Electronic fill level control for drip tray and coffee residues container	•
Integrated LED lighting	•
<b>Safety</b>	
Child lock	•
<b>Cleaning</b>	
Fully automatic rinse programme when switching on/off	•/•
Automatic quick rinsing of milk system	•
Automatic cleaning and descaling programme	•
Automatic cleaning programme	•
Automatic descaling programme	•
Removable brewing unit	•
Coffee residue container and drip tray removable and dishwasher-safe	•
Beverage dispenser removable and dishwasher-safe	•
Emptying programme to prepare the appliance for holiday or transportation	•
Empty-grinding function, if using a new type of beans	•
<b>Connection</b>	
Total connected load	(kW) 1.6

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.


## Vacuuming drawer 400 series



<b>Appliance type</b>	<b>Vacuuming drawer</b>
Stainless steel-backed glass front	DV 461 110
Glass front in Gaggenau Anthracite	DV 461 100
Fully integrated	DV 061 100
<b>Dimensions</b>	
Width	(cm) 60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 140 x 532
Door panel extension from furniture cavity	(mm) 47
Niche dimensions W x H x D	(mm) 560 x 140 x 550
Net weight	(kg) 31
<b>Volume</b>	
Net volume	(l) 7
Interior dimensions W x H x D	(mm) 210 x 95 x 275
Maximum size of vacuuming bags W x L	(mm) 240 x 350
<b>Usage</b>	
Vacuuming levels	3, max. 99%
Heat-sealing levels	3
Vacuuming of bags and containers	•
Vacuuming of vacuuming containers and bottles	•
Vacuuming of liquids	•
Drying program for vacuuming pump	•
Warming function	•
<b>Handling</b>	
Sensor Control	•
Handleless drawer	•
Recessed grip	•
Push-to-open system	—
Cushioned closing system	•
<b>Features</b>	
Stainless steel vacuuming chamber	•
Maximum load	(kg) 10
Applicable height	(mm) 80
Safety glass cover	•
Sealing bar, non-stick, removable	•
Raised vacuuming platform	•
Connection with tube for vacuuming outside the chamber	•
Utility space in vacuuming chamber, W x L	(mm) 210 x 275
Membrane avoiding reflow of liquids during external vacuuming	•
Vacuuming bags, small, 180 mm x 280 mm	(pcs.) 50
Vacuuming bags, large, 240 mm x 350 mm	(pcs.) 50
Plug for vacuuming bottles	(pcs.) 3
Adaptor for bottle plugs	•
<b>Connection</b>	
Total connected load	(kW) 0.32

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.

## Warming drawers 400 series



Appliance type	Warming drawer	Culinary warming drawer	Culinary warming drawer	Culinary warming drawer
Stainless steel-backed glass front	WS 482 110	WS 461 112	WS 462 112	
Glass front in Gaggenau Anthracite		WS 461 102	WS 462 102	
Fully integrated				WS 061 102
<b>Dimensions</b>				
Width	(cm) 76	60	60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 752 x 208 x 548	590 x 140 x 524	590 x 290 x 524	590 x 140 x 524
Door panel extension from furniture cavity	(mm) 47	47	47	47
Niche dimensions W x H x D	(mm) 724 x 203 x 550	560 x 140 x 550	560 x 290 x 550	560 x 140 x 550
Net weight	(kg) 29	18	23	17
<b>Volume</b>				
Net volume	(l) 38	20	54	20
Interior dimensions W x H x D	(mm) 606 x 132 x 480	547 x 91 x 410	547 x 241 x 410	547 x 91 x 410
Number of table settings	(No.) 10	6	12	6
<b>Heating methods</b>				
Defrosting of meals / proving of yeast dough	•	•	•	•
Preheating of small beverage containers	•	•	•	•
Keeping meals warm / slow cooking meals	•	•	•	•
Warming ovenware	•	•	•	•
Low temperature cooking	•	•	•	•
Temperature range 30 °C to 80 °C (temperature levels)	40-80 °C	6	6	6
Further heating methods via App	—	•	•	•
<b>Handling</b>				
Touch key operation	—	•	•	•
Status display, visible in the glass front	•	•	•	•
Time setting via App	—	•	•	•
Handleless drawer	•	•	•	•
Recessed grip	•	•	•	•
Cushioned closing system	•	•	•	•
<b>Features</b>				
Interior light	•	—	—	—
Maximum load	(kg) 25	25	25	25
Stainless steel interior with glass bottom	•	•	•	•
Fan for even heat distribution	•	•	•	•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	—	•	•	•
<b>Connection</b>				
Total connected load	(kW) 0.81	0.82	0.82	0.82

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.



# OVENS 200 SERIES

Checklist for appliance combinations 200 series	102
Ovens 200 series	104
Combi-steam ovens 200 series	108
Steam ovens 200 series	114
Combi-microwave ovens 200 series	116
Microwave ovens 200 series	118
Fully automatic espresso machines 200 series	120
Vacuuming drawers 200 series	122
Warming drawers 200 series	123
Accessories   special accessories 200 series	126
Technical specifications 200 series	130

## Checklist for appliance combinations 200 series

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, steam ovens, Combi-microwave ovens, microwaves, fully automatic espresso machines, warming drawers and dishwashers.

When several appliances are listed (BSP/BMP), the first appliance is shown.

### Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- No further appliances may be fitted above the BSP.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide.

### Horizontal combinations

When planning and ordering please note that

- The door hinges can be located on either the inside or outside, without the full door opening angle being restricted.
- The door hinge (right-/left-hinged) cannot be reversed retrospectively.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, steam ovens, Combi-microwave ovens, microwaves and fully automatic espresso machines in combination with a warming drawer (14 cm in height) have the same total height as a 60 cm wide ovens.

All appliances shown can be obtained in these appliance colors



Gaggenau Anthracite



Gaggenau Metallic



Gaggenau Silver

### Vertical combination, 60 cm wide appliances



BSP 2.0/BMP 250  
BOP 2.0  
WSP 222




BMP 224  
BOP 2.0  
WSP 222



BSP 2.0/BMP 250  
BMP 250  
WSP 221



BMP 250/BSP 2.0  
CMP 250  
WSP 221



BMP 224  
CMP 250  
WSP 221



BOP 2.0  
DF



BSP 2.0/BMP 250  
DF



CMP 250  
DF

- BOP Ovens
- BSP Combi-steam ovens/steam ovens
- BMP Combi-microwave ovens/microwaves
- CMP Fully automatic espresso machine
- WSP Warming drawers
- DF Dishwashers

Please read additional planning notes on page 62–63.



Horizontal combination, 60 cm wide appliances



BOP 2.1 BOP 2.0



BOP 2.1 BSP 2.0/BMP 250  
DVP 221/WSP 221



BOP 251 CMP 250  
WSP 221/DVP 221



BMP 251/BSP 2.1 BMP 250/BSP 2.0  
WSP 221/DVP 221 DVP 221/WSP 221



BMP 251/BSP 2.1 CMP 250  
DVP 221/WSP 221 WSP 221/DVP 221



BOP 251 CMP 250 BMP 250/BSP 2.0  
WSP 221/DVP 221 DVP 221/WSP 221




BMP 251/BSP 2.1 CMP 250 BMP 250/BSP 2.0  
WSP 221/DVP 221 DVP 221/WSP 221 WSP 221/DVP 221



BOP 2.1 BMP 250/BSP 2.0 BMP 250/BSP 2.0  
DVP 221/WSP 221 WSP 221/DVP 221

Combination of 4 with warming drawer, 60 cm wide appliances

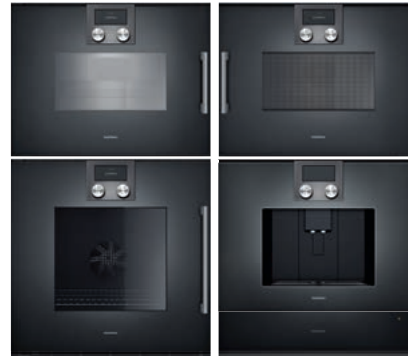

BMP 251/BSP 2.1 BMP 250/BSP 2.0  
BOP 2.1 CMP 250  
WSP 221/DVP 221

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Oven 200 series BOP 250/BOP 251

##### Controls at the top

##### Right-hinged

##### BOP 250 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

##### BOP 250 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BOP 250 132

Full glass door in Gaggenau Silver.  
Width 60 cm.

##### Left-hinged

##### BOP 251 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

##### BOP 251 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BOP 251 132

Full glass door in Gaggenau Silver.  
Width 60 cm.



##### Included in the price

- 1 baking tray, enamelled  
pyrolysis-safe.
- 1 glass tray.
- 1 wire rack.
- 1 plug-in core temperature probe.

##### Special accessories

##### BA 016 105

Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.

##### BA 026 115

Baking tray, enamelled.  
15 mm deep.

##### BA 036 105

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 046 118

Glass tray. 24 mm deep.

##### BA 056 115

Heating element for baking stone and  
Gastronorm roaster.

##### BA 056 133

Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out system.

##### BA 226 105

Grill tray, enamelled. 30 mm deep.

##### BS 020 003

Pizza paddle. Serving and cutting board.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

##### Highlights

- Flush installation.
- Pyrolytic system.
- 13 heating methods with core  
temperature probe and baking  
stone function.
- Automatic programmes.
- Core temperature probe with  
estimation of cooking time.
- TFT touch display.
- Panel-free appliance with surface  
control module.
- Electronic temperature control  
from 30 °C to 300 °C.
- Net volume 76 litres.

##### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Compact grill.  
Baking stone function.  
Roaster function.  
Dough proofing.  
Defrosting.

##### Handling

Rotary knob and TFT touch display  
operation.  
Clear text display.  
Option to save individual recipes  
(incl. core temperature probe).  
Personalisation of automatic  
programmes.  
Information key with use indicators.  
Side-opening door opens up to  
110° angle.

##### Features

Three-point core temperature probe  
with automatic shut-off and  
estimation of cooking time.  
Automatic programmes.  
Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking  
time end, timer, stopwatch, long-term  
timer (certified by Star-K).  
60 W halogen light on the top.  
Enamelled side shelf supports with  
4 tray levels, pyrolysis-safe.

##### Selected digital services (Gaggenau Home Connect)

Automatic programmes.  
Remote monitoring and control.  
Recipes.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

##### Safety

Thermally insulated door with  
quintuple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature  
protection.  
Cleaning  
Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven  
air.

##### Planning notes

Door hinge not reversible.  
The door panel surface of the  
appliance extends 21 mm from the  
furniture cavity.  
The outer edge of the door handle  
extends 72 mm from the furniture  
cavity.  
Necessary lateral gap between  
appliance door and furniture panel of  
min. 5 mm.  
Consider the overhang, incl. the door  
handle, when planning to open  
drawers next to the appliance.  
When planning a corner solution, pay  
attention to the side-opening door  
and the minimum required distance  
to the wall.

For installation underneath cooktops:  
Distance between the underside of  
the cooktop and the top edge of the  
oven cavity: min. 15 mm. The planning  
notes for the cooktops (particularly  
regarding ventilation, gas/electric  
connection) must be taken into  
account.

To achieve the 550 mm installation  
depth, the connection cable needs to  
follow the slanted edge on the corner  
of the housing.


The mains socket needs to be planned  
outside the built-in niche.

The LAN port can be found at the  
back on the upper right side.

Please read the installation details  
regarding oven combination on  
page 62–63.

##### Connection

Energy efficiency class A at a range  
of energy efficiency classes from  
A+++ to D.  
Total connected load 3.7 kW.  
Plan a connection cable.  
Plan a LAN cable.

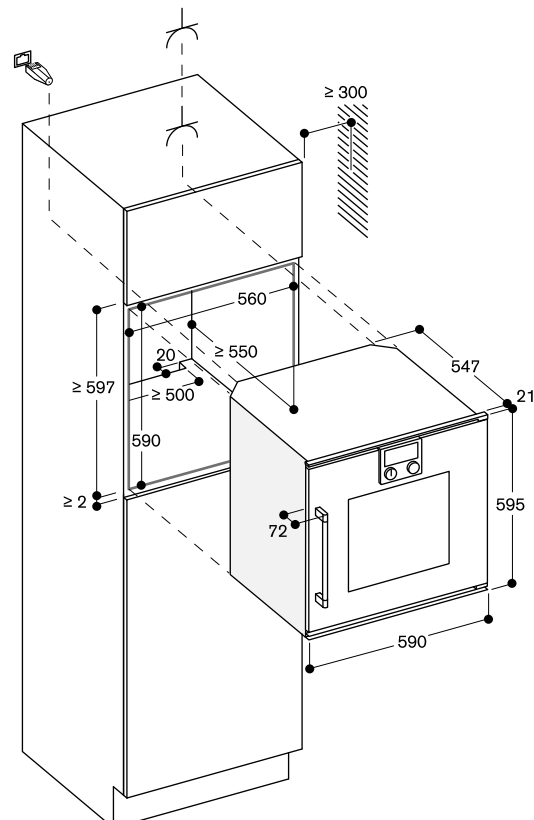



### Oven 200 series BOP 220/BOP 221

#### Controls at the top Right-hinged

##### BOP 220 102

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BOP 220 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BOP 220 132

Full glass door in Gaggenau Silver.  
Width 60 cm.

#### Left-hinged

##### BOP 221 102

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BOP 221 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BOP 221 132

Full glass door in Gaggenau Silver.  
Width 60 cm.



#### Included in the price

- 1 baking tray, enamelled pyrolysis-safe.
- 1 glass tray.
- 1 wire rack

#### Special accessories

##### BA 016 105

Pull-out system.  
Fully extendable telescopic rails and enamelled cast iron frame.

##### BA 026 115

Baking tray, enamelled.  
15 mm deep.

##### BA 036 105

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 046 118

Glass tray, 24 mm deep.

##### BA 056 115

Heating element for baking stone and Gastronorm roaster.

##### BA 056 133

Baking stone.  
Incl. baking stone support and pizza paddle (heating element must be ordered separately).  
Not in combination with pull-out system.

##### BA 226 105

Grill tray, enamelled, 30 mm deep.

##### BS 020 003

Pizza paddle. Serving and cutting board.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Flush installation.
- Pyrolytic system.
- 9 heating methods, with baking stone function.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 50 °C to 300 °C.
- Net volume 76 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Baking stone function.

#### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
60 W halogen light on the top.  
Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote monitoring and control.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Thermally insulated door with quintuple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.

#### Planning notes

Door hinge not reversible.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

For installation underneath cooktops:  
Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 62-63.


#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.

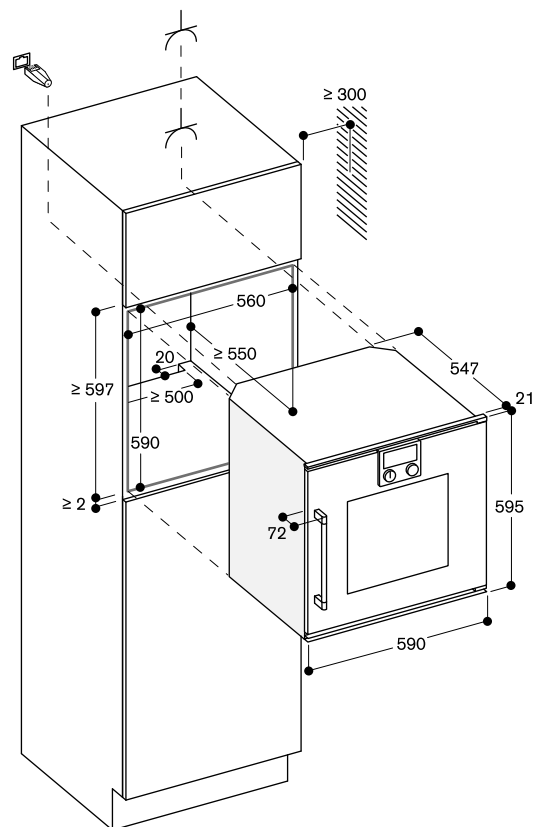



### Oven 200 series BOP 210/BOP 211

#### Controls at the top

##### Right-hinged

###### BOP 210 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

###### BOP 210 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BOP 210 132

Full glass door in Gaggenau Silver.  
Width 60 cm.

##### Left-hinged

###### BOP 211 102

Full glass door in Gaggenau  
Anthracite.  
Width 60 cm.

###### BOP 211 112

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BOP 211 132

Full glass door in Gaggenau Silver.  
Width 60 cm.



#### Included in the price

- 1 baking tray, enamelled  
pyrolysis-safe.
- 1 wire rack.
- 1 enamelled tray.

#### Special accessories

##### BA 036 102

Wire rack, chromium-plated.  
Without opening, with feet.

##### BA 046 118

Glass tray.  
24 mm deep.

##### BA 056 115

Heating element for baking stone and  
Gastronorm roaster.

##### BA 056 130

Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.

##### BA 216 102

Quadruple telescopic pull-out rack.  
For oven BOP 210/BOP 211.

##### BA 226 105

Grill tray, enamelled.  
30 mm deep.

##### BS 020 003

Pizza paddle. Serving and cutting board.

#### Highlights

- Flush installation.
- 9 heating methods, with baking  
stone function.
- TFT touch display.
- Panel-free appliance with surface  
control module.
- Electronic temperature control  
from 50 °C to 300 °C.
- Net volume 76 litres.

#### Heating methods

Hot air.  
Eco hot air.  
Top + bottom heat.  
Top heat.  
Bottom heat.  
Hot air + bottom heat.  
Full surface grill + circulated air.  
Full surface grill.  
Baking stone function.  
Handling  
Rotary knob and TFT touch display  
operation.  
Clear text display.  
Option to save individual recipes.  
Information key with use indicators.  
Side-opening door opens up to  
110° angle.

#### Features

Baking stone socket.  
Actual temperature display.  
Rapid heating.  
Timer functions: cooking time, cooking  
time end, timer, stopwatch, long-term  
timer (certified by Star-K).  
60 W halogen light on the top.  
Chromium-plated wire racks on the  
side with 4 rack levels.

#### Selected digital services

##### (Gaggenau Home Connect)

Remote control and monitoring.  
Recipes.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Safety

Thermally insulated door with triple  
glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature  
protection.

#### Cleaning

Gaggenau enamel.  
Heated catalyser to clean the oven  
air.

#### Planning notes

Door hinge not reversible.  
The door panel surface of the  
appliance extends 21 mm from the  
furniture cavity.  
The outer edge of the door handle  
extends 72 mm from the furniture  
cavity.  
Necessary lateral gap between  
appliance door and furniture panel of  
min. 5 mm.  
Consider the overhang, incl. the door  
handle, when planning to open  
drawers next to the appliance.  
When planning a corner solution, pay  
attention to the side-opening door  
and the minimum required distance  
to the wall.  
For installation underneath cooktops:  
Distance between the underside of  
the cooktop and the top edge of the  
oven cavity: min. 15 mm.

The planning notes for the cooktops  
(particularly regarding ventilation,  
gas/electric connection) must be  
taken into account.  
To achieve the 550 mm installation  
depth, the connection cable needs to  
follow the slanted edge on the corner  
of the housing.  
The mains socket needs to be planned  
outside the built-in niche.  
The LAN port can be found at the  
back on the upper right side.

Please read the installation details  
regarding oven combination on  
page 62-63.

#### Connection


Energy efficiency class A at a range  
of energy efficiency classes from  
A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.



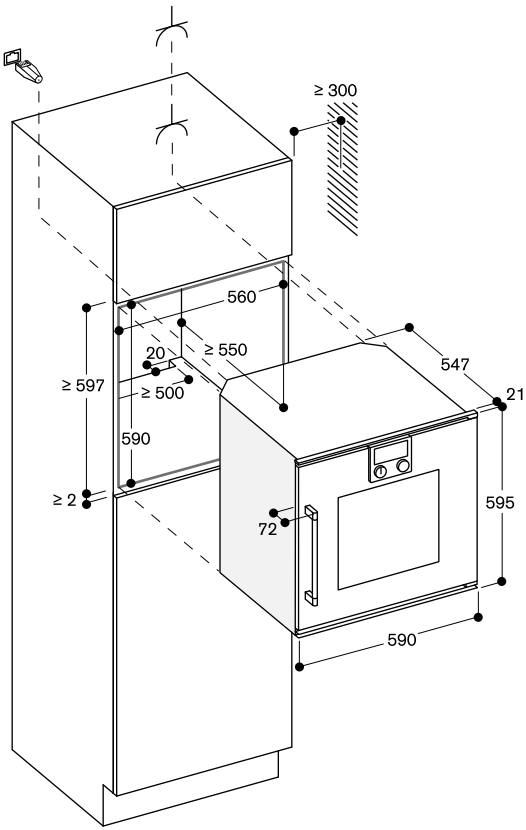

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Combi-steam oven 200 series BSP 270/BSP 271

##### Controls at the top

##### Right-hinged

##### BSP 270 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BSP 270 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BSP 270 131

Full glass door in Gaggenau Silver.  
Width 60 cm.

##### Left-hinged

##### BSP 271 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BSP 271 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BSP 271 131

Full glass door in Gaggenau Silver.  
Width 60 cm.



##### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.
- 1 outlet hose (3 m long).
- 1 water inlet hose (3 m long).
- 4 cleaning cartridges.

##### Installation accessories

##### GF 111 100

Water descaling system.

##### GF 121 110

Filter cartridge.

##### GZ 010 011

Extension for water inlet and outlet (2 m long).

##### Special accessories

##### BA 010 301

Triple telescopic pull-out rack.  
For combi-steam oven.

##### BA 020 361

Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.

##### BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

##### BA 020 382

Cooking container, non-stick, unperforated, 46 mm deep, 5.4 l.

##### BA 020 391

Insert, non-stick, perforated, 40 mm deep, 5 l.

##### BA 046 118

Glass tray.  
24 mm deep.

##### CL S10 040

Cleaning cartridges, set of 4.  
For combi-steam ovens.

##### GN 010 330

Adapter for gastronorm insert and roaster.

##### GN 114 130

Gastronorm insert, stainless steel, GN 1/3.

Unperforated, 40 mm deep, 1.5 l.

##### GN 114 230

Gastronorm insert, stainless steel, GN 2/3.

Unperforated, 40 mm deep, 3 l.

##### GN 124 130

Gastronorm insert, stainless steel, GN 1/3.

Perforated, 40 mm deep, 1.5 l.

##### GN 124 230

Gastronorm insert, stainless steel, GN 2/3.

Perforated, 40 mm deep, 3 l.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

##### Highlights

- Flush installation.
- Fixed inlet and outlet water connection.
- Cleaning system, fully automatic.
- Large cavity.
- LED light source.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres.

##### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Low temperature cooking.  
Sous-vide cooking.  
Full surface grill level 1 + humidity.  
Full surface grill level 2 + humidity.  
Full surface grill + circulated air.  
Dough proofing.  
Defrosting.  
Regenerating.

##### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

##### Features

Full surface grill 2 kW.  
Steam removal.  
Misting.  
Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

##### Selected digital services (Gaggenau Home Connect)

Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

##### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

##### Cleaning

Cleaning programme, fully automatic.  
Descaling programme for the steam generator.  
Drying function.  
Automatic drying of the cavity at the end of the cooking process.  
Strainer filter, removable.  
Demo cleaning programme.

##### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
Inlet hose can be extended once.  
The outlet hose must not be longer than a maximum of 5 m.  
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.  
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.  
The descaling system GF 111100 (3) may be installed when connecting the appliance if the water hardness exceeds 7° dH.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside the built-in niche.

##### Special accessories


(order as spare parts):  
Part No. 17002490 Descaling tablets

Please read the installation details regarding oven combination on page 62-63.

##### Connection



Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.15 kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.  
Inlet hose 3,0 m with connection pipe thread ISO228-G 3/4" (Ø 26,4 mm) extendable.  
Outlet hose (Ø 25 mm) 3,0 m (HT-Hose).



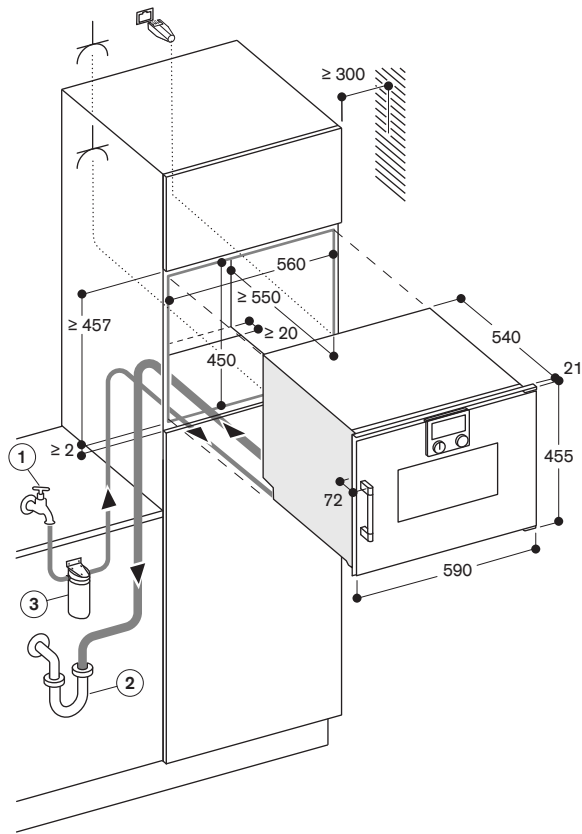


Socket

Side view of BSP 260/270 above BOP

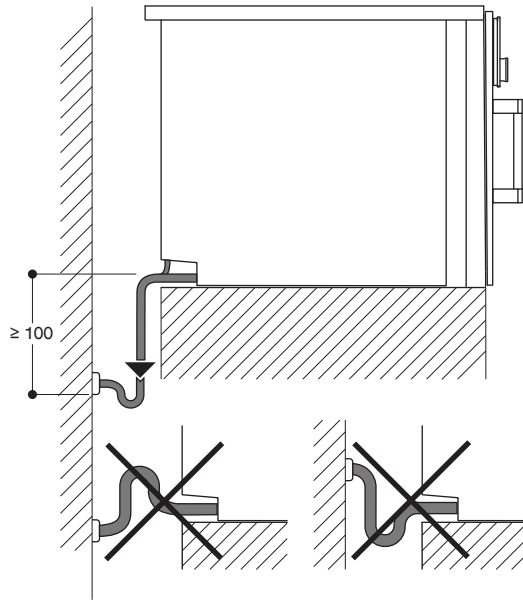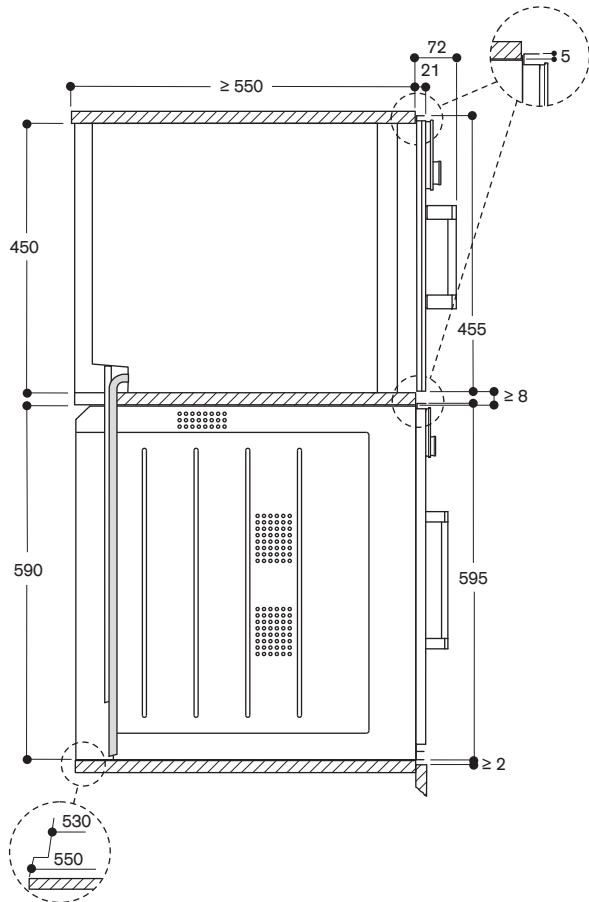

View from rear

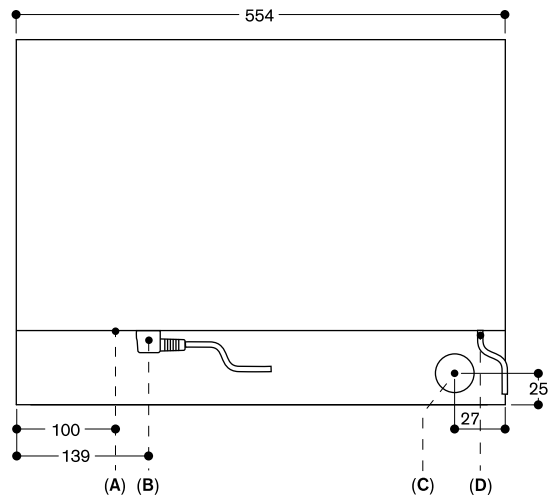

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Combi-steam oven 200 series BSP 260/BSP 261

#### Controls at the top Right-hinged

##### BSP 260 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BSP 260 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

##### BSP 260 131

Full glass door in Gaggenau Silver.  
Width 60 cm.

#### Left-hinged

##### BSP 261 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

##### BSP 261 111

Full glass door in Gaggenau Metallic  
Width 60 cm

##### BSP 261 131

Full glass door in Gaggenau Silver.  
Width 60 cm.



#### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.
- 1 outlet hose (3 m long).
- 1 water inlet hose (3 m long).

#### Installation accessories

##### GF 111 100

Water descaling system.

##### GF 121 110

Filter cartridge.

##### GZ 010 011

Extension for water inlet and outlet (2 m long).

#### Special accessories

##### BA 010 301

Triple telescopic pull-out rack.  
For combi-steam oven.

##### BA 020 361

Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.

##### BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

##### BA 020 382

Cooking container, non-stick, unperforated, 46 mm deep, 5.4 l.

##### BA 020 391

Insert, non-stick, perforated, 40 mm deep, 5 l.

##### BA 046 118

Glass tray.  
24 mm deep.

##### GN 010 330

Adapter for gastronorm insert and roaster.

##### GN 114 130

Gastronorm insert, stainless steel, GN 1/3.  
Unperforated, 40 mm deep, 1.5 l.

##### GN 114 230

Gastronorm insert, stainless steel, GN 2/3.  
Unperforated, 40 mm deep, 3 l.

##### GN 124 130

Gastronorm insert, stainless steel, GN 1/3.  
Perforated, 40 mm deep, 1.5 l.

##### GN 124 230

Gastronorm insert, stainless steel, GN 2/3.  
Perforated, 40 mm deep, 3 l.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Flush installation.
- Fixed inlet and outlet water connection.
- Large cavity.
- LED light source.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres.

#### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Low temperature cooking.  
Sous-vide cooking.  
Full surface grill level 1 + humidity.  
Full surface grill level 2 + humidity.  
Full surface grill + circulated air.  
Dough proofing.  
Defrosting.  
Regenerating.

#### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Full surface grill 2 kW.  
Steam removal.  
Misting.  
Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

#### Selected digital services (Gaggenau Home Connect)

Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
Descaling programme for the steam generator.  
Drying function.  
Automatic drying of the cavity at the end of the cooking process.  
Grease filter, dishwasher-safe.  
Strainer filter, removable.

#### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").  
Inlet hose can be extended once.  
The outlet hose must not be longer than a maximum of 5 m.  
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.  
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.  
The descaling system GF 111100 (3) may be installed when connecting the appliance if the water hardness exceeds 7° dH.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside the built-in niche.

#### Special accessories

(order as spare parts):  
Part No. 17002490 Descaling tablets


Please read the installation details regarding oven combination on page 62-63.

#### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.15 kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.  
Inlet hose 3,0 m with connection pipe thread ISO228-G 3/4" (Ø 26,4 mm) extendable.  
Outlet hose (Ø 25 mm) 3,0 m (HT-Hose).







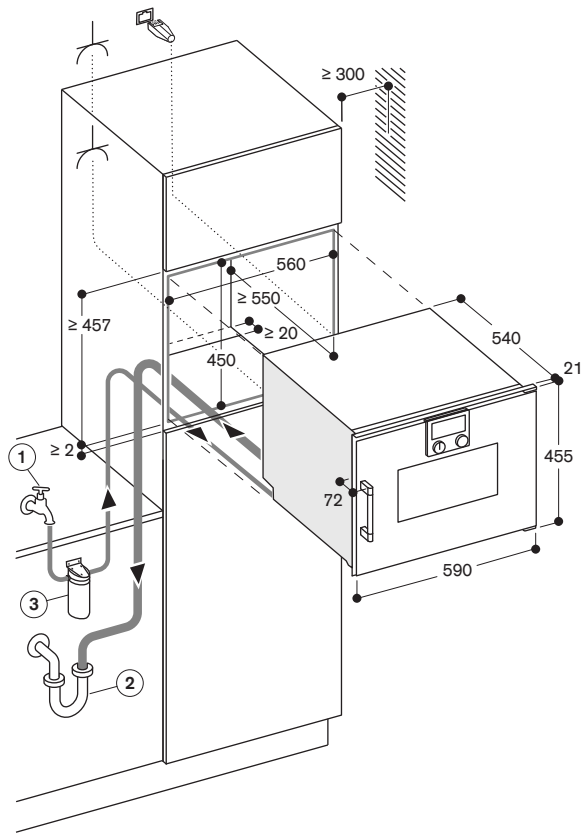


Socket

Side view of BSP 260/270 above BOP

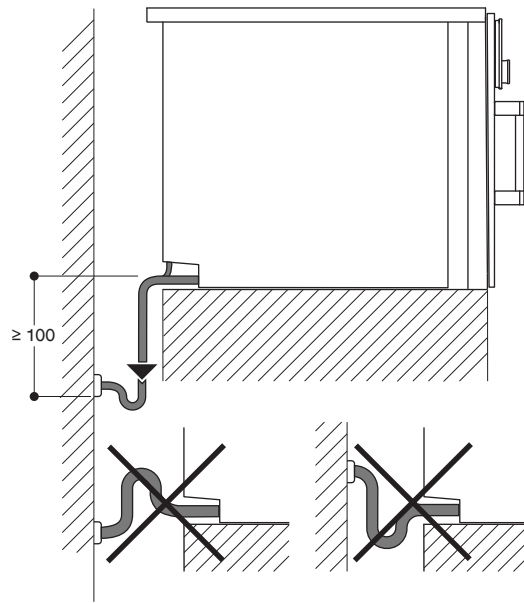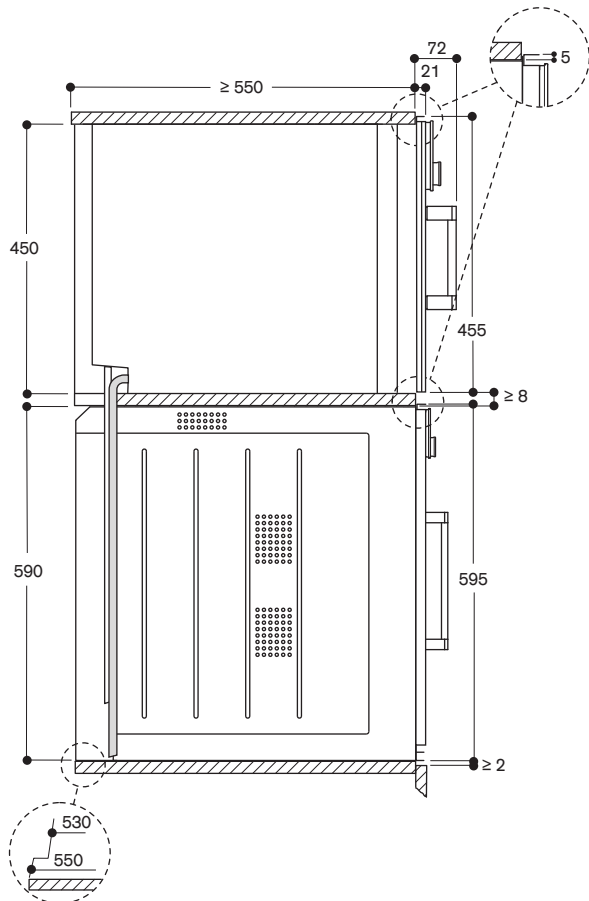

View from rear

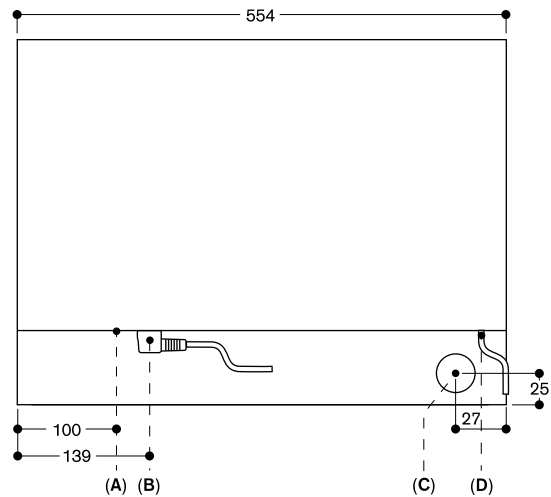

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Combi-steam oven 200 series BSP 250/BSP 251

#### Controls at the top

##### Right-hinged

###### BSP 250 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

###### BSP 250 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BSP 250 131

Full glass door in Gaggenau Silver.  
Width 60 cm.

##### Left-hinged

###### BSP 251 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

###### BSP 251 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BSP 251 131

Full glass door in Gaggenau Silver.  
Width 60 cm.



#### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.
- 1 plug-in core temperature probe.

#### Special accessories

##### BA 010 301

Triple telescopic pull-out rack  
For combi-steam oven.

##### BA 020 361

Cooking container, stainless steel,  
unperforated, 46 mm deep, 5.4 l.

##### BA 020 370

Cooking container, stainless steel,  
perforated, 40 mm deep, 5 l.

##### BA 020 382

Cooking container, non-stick,  
unperforated, 46 mm deep, 5.4 l.

##### BA 020 391

Insert, non-stick, perforated, 40 mm  
deep, 5 l.

##### BA 046 118

Glass tray.  
24 mm deep.

##### GN 010 330

Adapter for gastronorm insert and  
roaster.

##### GN 114 130

Gastronorm insert, stainless steel,  
GN 1/3  
Unperforated, 40 mm deep, 1.5 l.

##### GN 114 230

Gastronorm insert, stainless steel,  
GN 2/3  
Unperforated, 40 mm deep, 3 l.

##### GN 124 130

Gastronorm insert, stainless steel,  
GN 1/3

Perforated, 40 mm deep, 1.5 l

##### GN 124 230

Gastronorm insert, stainless steel,  
GN 2/3

Perforated, 40 mm deep, 3 l.

##### GN 340 230

Gastronorm roaster in cast aluminium.  
GN 2/3, height 165 mm, non-stick.

#### Highlights

- Flush installation.
- Water tank for fresh and waste water.
- Large cavity.
- LED light source.
- External steam generation.
- Steaming without pressure.
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill combinable with circulated air up to 230 °C and steam.
- Automatic programmes.
- Core temperature probe with estimation of cooking time.
- Hot air fan rotates in both directions for ideal heat distribution.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30 °C bis 230 °C.
- Net volume 50 litres

#### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Low temperature cooking.  
Sous-vide cooking.  
Full surface grill level 1 + humidity.  
Full surface grill level 2 + humidity.  
Full surface grill + circulated air.  
Dough proofing.  
Defrosting.  
Regenerating.

#### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes (incl. core temperature probe).  
Personalisation of automatic programmes.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Full surface grill 2 kW.  
2 removable 1.7 litre water tanks.  
Water level warning.  
Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programmes.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

#### Selected digital services (Gaggenau Home Connect)

Automatic programmes.  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
Descaling programme for the steam generator.  
Drying function.  
Automatic drying of the cavity at the end of the cooking process.  
Water tank, dishwasher-safe.  
Grease filter, dishwasher-safe.  
Strainer filter, removable.

#### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
The mains socket needs to be planned outside the built-in niche.  
The LAN port can be found at the back on the lower left side.

#### Special accessories


(order as spare parts):  
Part No. 17002490 Descaling tablets

Please read the installation details regarding oven combination on page 62-63.

#### Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Total connected load 3.15 kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.



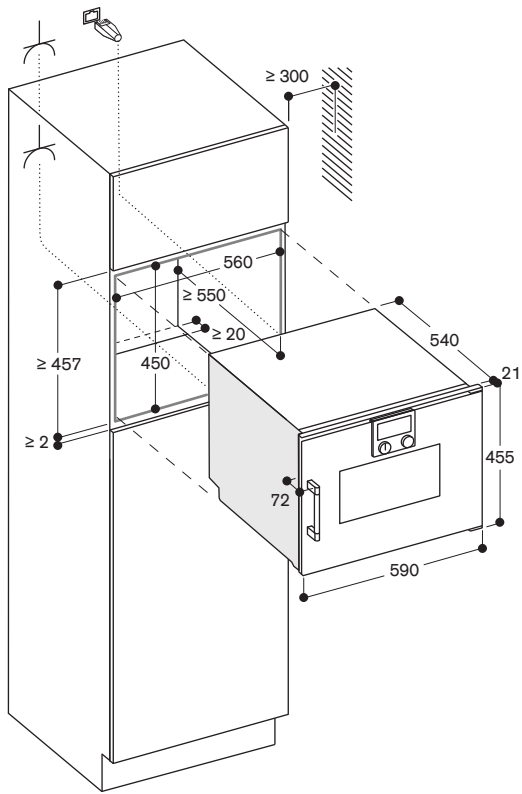

Socket

Side view of BSP 220/250 above BOP

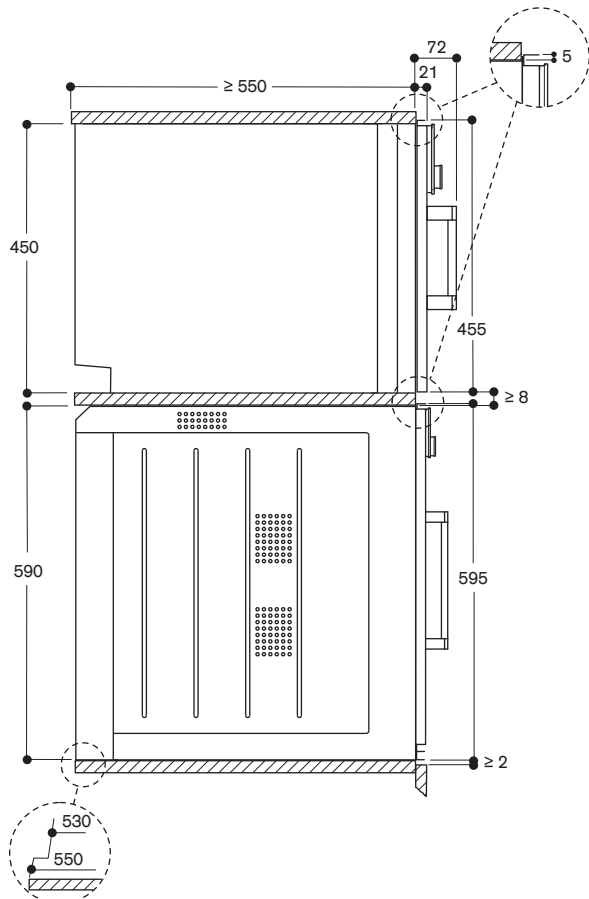

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Steam oven 200 Series BSP 220/BSP 221

#### Controls at the top

##### Right-hinged

###### BSP 220 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

###### BSP 220 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BSP 220 131

Full glass door in Gaggenau Silver.  
Width 60 cm.

##### Left-hinged

###### BSP 221 101

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

###### BSP 221 111

Full glass door in Gaggenau Metallic.  
Width 60 cm.

###### BSP 221 131

Full glass door in Gaggenau Silver.  
Width 60 cm.



#### Included in the price

- 1 cooking container, stainless steel, perforated.
- 1 cooking container, stainless steel, unperforated.
- 1 wire rack.

#### Special accessories

##### BA 220 360

Cooking container, stainless steel, unperforated, 35 mm deep, 5l.

##### BA 220 370

Cooking container, stainless steel, perforated, 35 mm deep, 5l.

##### BA 046 118

Glass tray.  
24 mm deep.

##### GN 114 130

Gastronorm insert, stainless steel, GN1/3.  
Unperforated, 40 mm deep, 1.5l.

##### GN 114 230

Gastronorm insert, stainless steel, GN2/3.  
Unperforated, 40 mm deep, 3l.

##### GN 124 130

Gastronorm insert, stainless steel, GN1/3.  
Perforated, 40 mm deep, 1.5l.

##### GN 124 230

Gastronorm insert, stainless steel, GN2/3.  
Perforated, 40 mm deep, 3l.

#### Highlights

- Flush installation.
- Water tank.
- Large cavity.
- LED light source.
- External steam generation.
- Steaming without pressure with 100% humidity from 30°C to 100°C.
- Sous-vide cooking with accurate temperature regulation.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control from 30°C bis 100°C.
- Net volume 59 litres.

#### Heating methods

100 % humidity.  
Sous-vide cooking.  
Dough proofing.  
Defrosting.  
Regenerating.  
Low temperature steaming.  
Handling  
Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Removable 1.7 litre water tank.  
Water level warning.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).  
Automatic boiling point detection.  
LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Recipes.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
Descaling programme for the steam generator.

#### Planning notes

Door hinge not reversible.  
No other electrical appliances should be installed above the BS.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

The mains socket needs to be planned outside the built-in niche.  
The LAN port can be found at the back on the lower left side.

#### Special accessories


(order as spare parts):  
Part No. 17002490 Descaling tablets

Please read the installation details regarding oven combination on page 62-63.

#### Connection


Total connected load 2.75kW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.



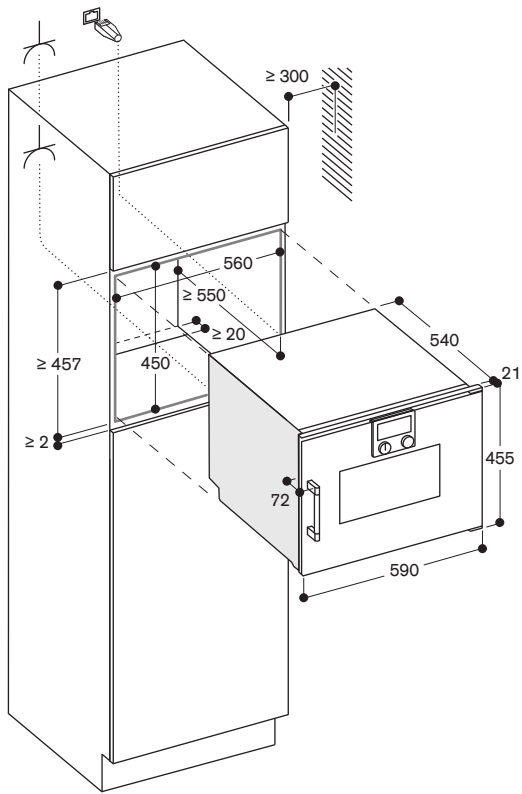

Socket

Side view of BSP 220/250 above BOP

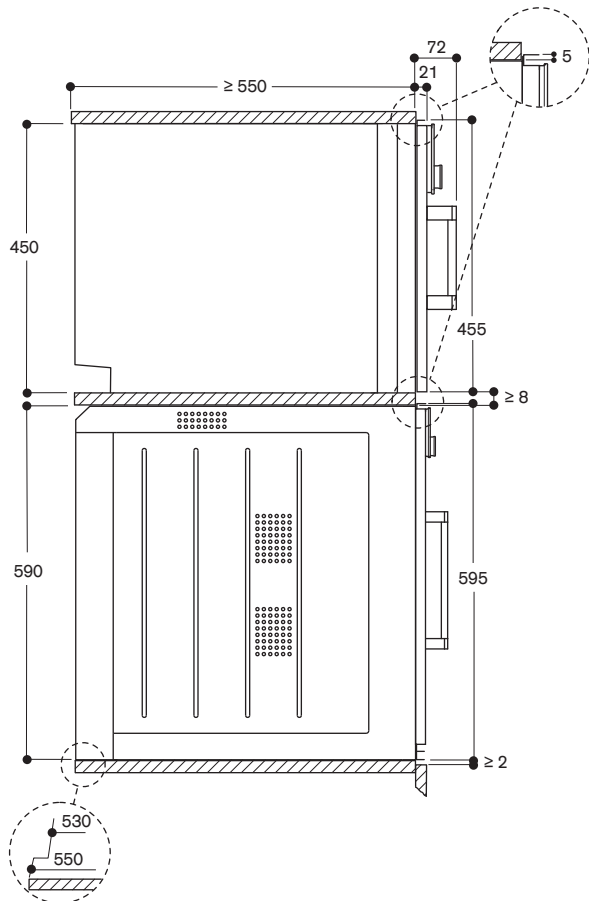

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Combi-microwave oven 200 series**  
**BMP 250/BMP 251**

**Controls at the top**  
**Right-hinged**

**BMP 250 100**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**BMP 250 110**  
 Full glass door in Gaggenau Metallic.  
 Width 60 cm.

**BMP 250 130**  
 Full glass door in Gaggenau Silver.  
 Width 60 cm.

**Left-hinged**

**BMP 251 100**  
 Full glass door in Gaggenau  
 Anthracite.  
 Width 60 cm.

**BMP 251 110**  
 Full glass door in Gaggenau Metallic.  
 Width 60 cm.

**BMP 251 130**  
 Full glass door in Gaggenau Silver.  
 Width 60 cm.

**Included in the price**

- 1 combination wire rack.
- 1 glass tray.

**Highlights**

- Flush installation.
- Single operation and combination of microwave, grill and oven.
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time.
- TFT touch display.
- Panel-free appliance with surface control module.
- Electronic temperature control.
- Interior volume 36 litres.

**Programmes**

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.  
 Oven operation with 4 heating methods:  
 Hot air 40 °C and from 100 °C to 250 °C,  
 Full surface grill + hot air from 100 °C to 250 °C,  
 Full surface grill + circulated air from 100 °C to 250 °C,  
 Full surface grill with 3 levels of intensity, maximum output 2000 W.  
 Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.  
 15 automatic programmes with weight indication, customisable:  
 4 defrosting programmes  
 4 cooking programmes  
 7 combination programmes  
 Option to save individual recipes.

**Handling**

Rotary knob and TFT touch display operation.  
 Clear text display.  
 Information key with use indicators.  
 Side-opening door opens up to 110° angle.

**Features**

Innowave.  
 Rapid heating.  
 4 tray levels.  
 Actual temperature display.  
 60 W halogen light on the side.  
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

**Safety**

Thermally insulated door with triple glazing.  
 Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

**Cleaning**

Hygienic stainless steel interior with glass ceramic base.  
 Interior back wall with catalytic coating.

**Planning notes**

Door hinge not reversible.  
 Plan the niche without back wall.  
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
 The door panel surface of the appliance extends 21 mm from the furniture cavity.  
 The outer edge of the door handle extends 72 mm from the furniture cavity.  
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.


When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.  
 The mains socket needs to be planned outside of the built-in niche.

Please read the installation details regarding oven combination on page 62-63.

**Connection**


Total connected load 3.1 kW.  
 Connection cable 1.5 m without plug.



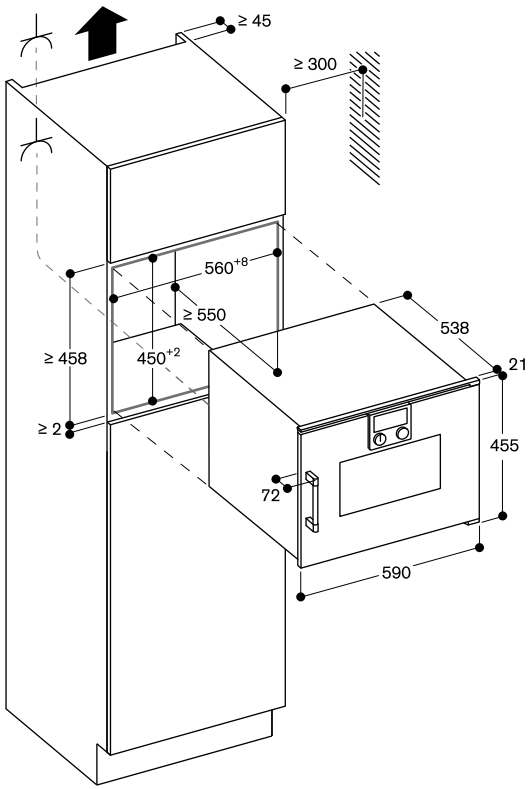

Socket

Side view of BMP over BOP

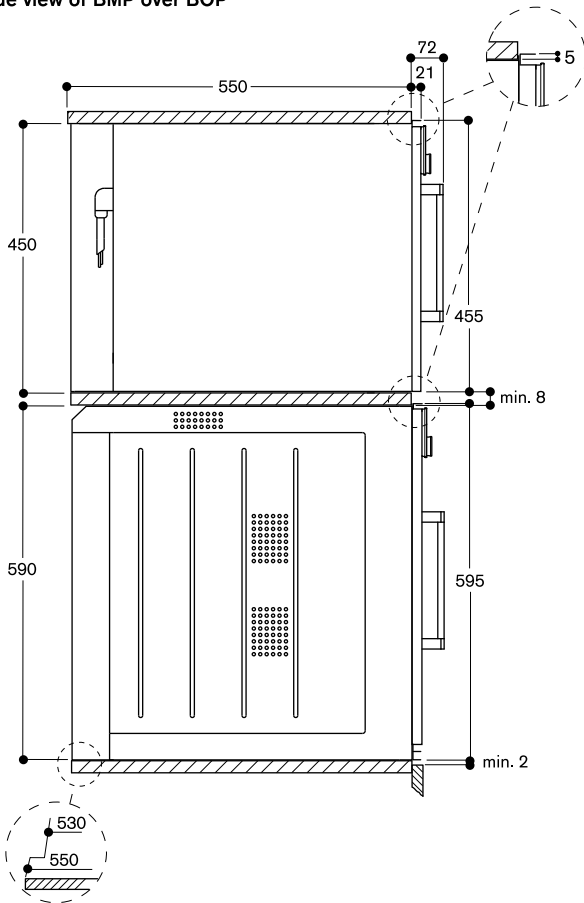

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Microwave oven 200 series**  
**BMP 224/BMP 225**

**Controls at the bottom**

**Right-hinged**

**BMP 224 100**

Full glass door in Gaggenau Anthracite.  
 Width 60 cm.

**BMP 224 110**

Full glass door in Gaggenau Metallic.  
 Width 60 cm.

**BMP 224 130**

Full glass door in Gaggenau Silver.  
 Width 60 cm.

**Left-hinged**

**BMP 225 100**

Full glass door in Gaggenau Anthracite.  
 Width 60 cm.

**BMP 225 110**

Full glass door in Gaggenau Metallic.  
 Width 60 cm.

**BMP 225 130**

Full glass door in Gaggenau Silver.  
 Width 60 cm.

**Included in the price**

- 1 glass tray.
- 1 wire rack.

**Highlights**

- Flush installation.
- Handleless door / automatic door opening.
- Single operation and combination of microwave and grill.
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time.
- TFT touch display.
- Electronic temperature control.
- Interior volume 21 litres.

**Programmes**

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.

Full surface grill with 3 levels of intensity, maximum output 1300 W.

Full surface grill with microwave output levels 360, 180 and 90 W combinable.

10 automatic programmes with weight indication:

3 defrosting programmes

4 cooking programmes

3 combination programmes

Option to save individual recipes.

**Handling**

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Information key with use indicators.

Side-opening door opens up to 110° angle.

**Features**

Innowave.

Actual temperature display.

25W interior light.

Hygienic stainless steel interior with glass ceramic base.

**Safety**

Thermally insulated door with double glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

**Planning notes**

Door hinge not reversible.

Minimum installation height 85 cm (top edge of niche bottom).

Height-adjustable feet.

Installation of BMP above BOP with intermediate shelf.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

Please read the installation details regarding oven combination on page 62-63.

**Connection**


Total connected load 2.0 kW.

Connection cable 1.7 m, pluggable.






Installation in a tall cupboard

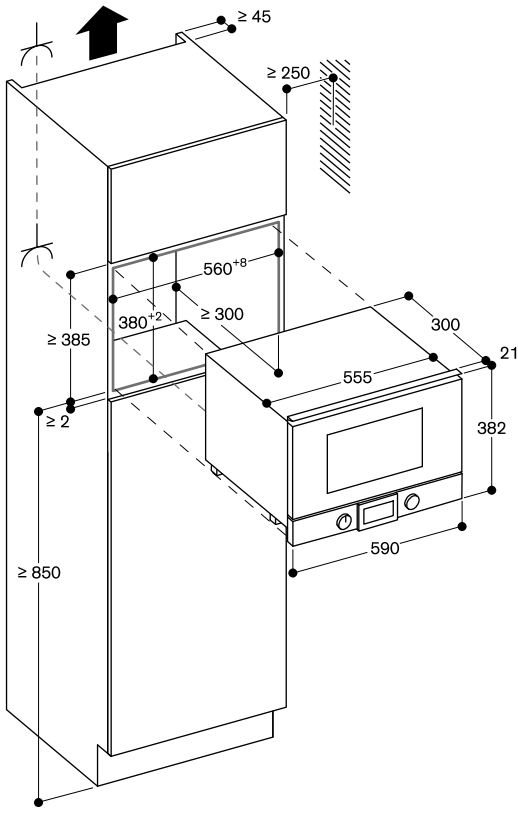


Socket

Side view of BMP 224/225 over BOP

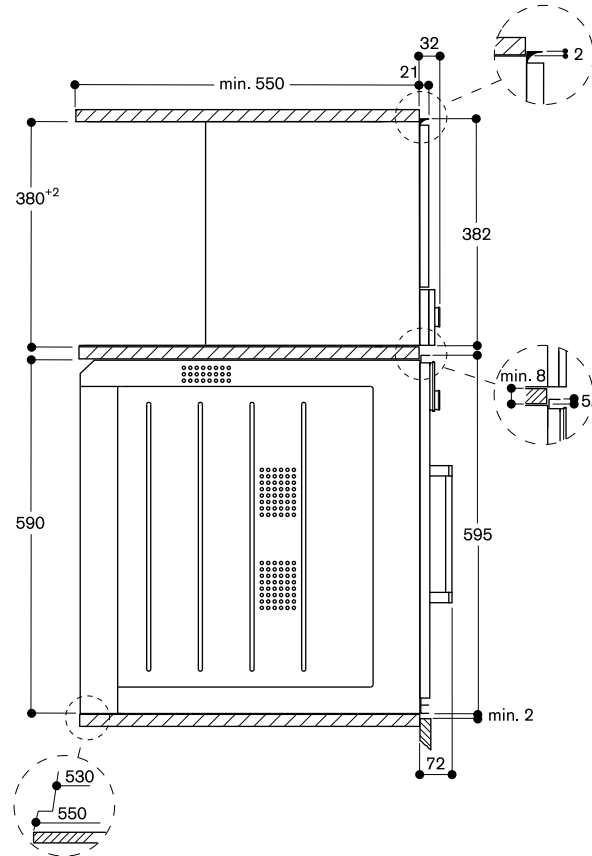

Installation in a wall-hanging cupboard

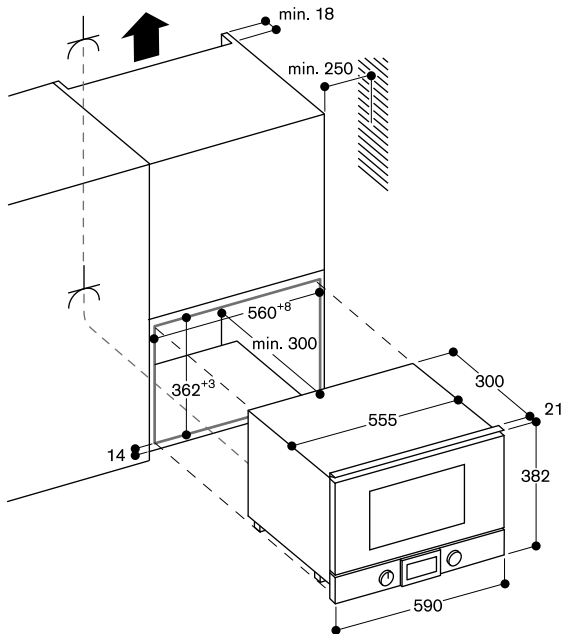



**Fully automatic espresso machine  
200 series  
CMP 250**

**Controls at the top  
Left-hinged**

**CMP 250 102**

Full glass door in Gaggenau Anthracite.  
Width 60 cm.

**CMP 250 112**

Full glass door in Gaggenau Metallic.  
Width 60 cm.

**CMP 250 132**

Full glass door in Gaggenau Silver.  
Width 60 cm.

**Included in the price**

- 1 assembly screws.
- 1 scoop.
- 1 test strip.
- 1 milk container (insulated).
- 1 connection hose for milk frother.
- 1 milk pipe.

**Highlights**

- Handless door / cushioned door closing system.
- Continuous flow heater means no waiting time and constant brewing temperature.
- Aroma brewing technology for a full aroma.
- Single portion cleaning.
- TFT touch display.
- Panel-free appliance with surface control module.
- One-touch operation.
- Personalisation function.
- 7 light settings.
- Electronic fill level control for milk, water and coffee to ensure a perfect result.

**Type of beverage**

Ristretto / 2 x Ristretto.  
Espresso / 2 x Espresso.  
Espresso Macchiato / 2 x Espresso Macchiato.  
Coffee / 2 x Coffee.  
Americano / 2 x Americano.  
Caffe Latte / 2 x Caffe Latte.  
Latte Macchiato / 2 x Latte Macchiato.  
Cappuccino / 2 x Cappuccino.  
Flat White / 2 x Flat White.  
Milk froth / 2 x Milk froth.  
Warm milk / 2 x Warm milk.  
Hot water / 2 x Hot water.

**Handling**

Door with cushioned door closing system.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Personalisation function, option to save 8 individualised beverages.  
4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
8 coffee strength levels from very mild to extra strong.  
3 coffee temperature levels.  
10 hot water temperature levels.  
4 coffee-milk ratio levels.  
Adjustable grinding level.  
Height-adjustable coffee dispenser 7 cm to 15 cm.  
Easy access to water tank, milk and coffee bean container behind the door.

**Features**

Maintenance-free grinding unit with ceramic discs.  
Separate drawer for second ground coffee type.  
Water pump with 19 bar pressure.  
Double grinding and brewing cycles for extra intensity for single beverage order.  
For double beverage order, two grinding and brewing cycles.  
Beverage dispenser with integrated milk system.  
Insulated stainless steel milk container for up to 0.5 litres.  
Integrated lightning with LEDs.  
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
Automatic adjustment of ground coffee quantity.  
Removable 2.4 litre water tank.  
Electronic water filter exchange indicator.

Electronic fill level control for drip tray and container for coffee residue.  
Hint: for energy-saving, the appliance switches to standby mode automatically after about 30 minutes. This timespan can be changed in the basic settings.

**Selected digital services  
(Gaggenau Home Connect)**

Coffee world: extended choice of coffee specialities from all over the world.  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Child lock.

**Cleaning**

Fully automatic rinse programme when machine is turned on/off.  
Automatic steam cleaning of the milk system after every beverage.  
Automatic cleaning and descaling programme.  
Emptying programme to prepare the appliance for holiday or transportation.  
Empty-grinding function to remove coffee residues from the system when switching bean types.  
Removable brewing unit.  
Dishwasher-safe coffee residue container and drip tray.  
Dishwasher-safe beverage dispenser.

**Planning notes**


Ideal installation height 95 cm to 145 cm (top edge of niche bottom).  
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When installing in a corner a side clearance is required.  
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.  
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.  
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).  
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.  
The LAN port can be found at the back on the lower right side.

Special accessories (order as spare parts - see also page 128-129):  
Part No. 17000705 Water filter  
Part No. region-specific Descaling tablets  
Part No. region-specific Cleaning tablets  
Part No. 00636455 Door hinge restrictor (92° opening angle)  
Part No. 11015223 Bean container with lid


Please read the installation details regarding oven combination on page 62-63.

**Connection**

Total connected load 1.6 kW.  
Connection cable 1.7 m with plug.  
Plan a LAN cable.

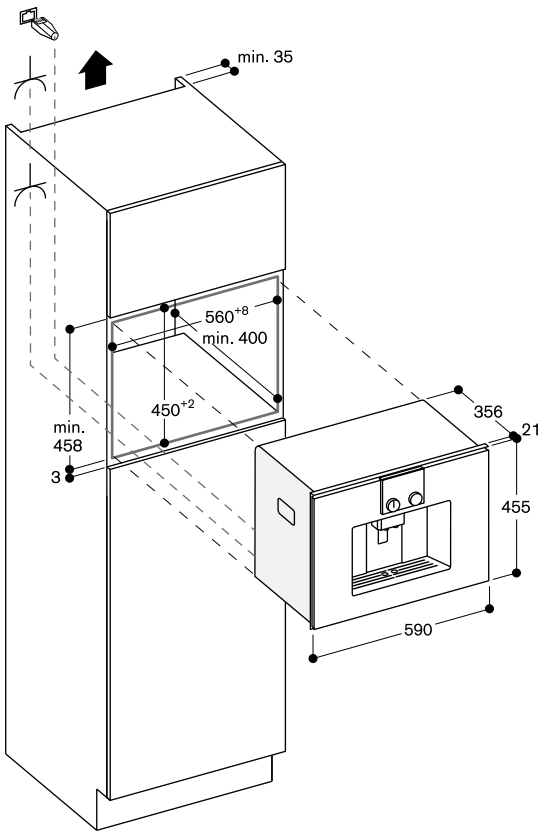

**Left corner installation**

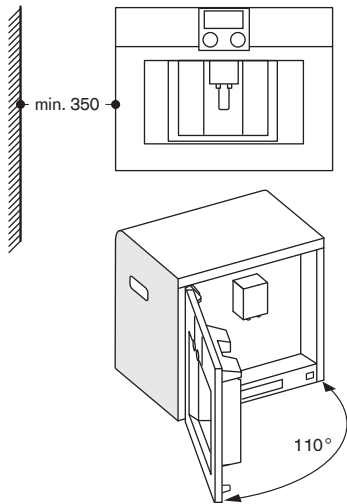

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Vacuating drawer 200 series DVP 221

#### DVP 221 100

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 14 cm.

#### DVP 221 110

Glass front in Gaggenau Metallic.  
Width 60 cm, Height 14 cm.

#### DVP 221 130

Glass front in Gaggenau Silver.  
Width 60 cm, Height 14 cm.

#### Included in the price

- 50 vacuuming bags, small.
- 50 vacuuming bags, big.
- 1 raised vacuuming platform.
- 1 adaptor f. vacuuming outside the chamber.
- 1 vacuuming hose.
- 1 adaptor for bottle plugs.
- 3 plugs for vacuuming of bottles.

#### Highlights

- Integrable in 14 cm high niche.
- Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm.
- 3 vacuuming levels for vacuuming in the chamber, max. 99%.
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%.
- Automatic connection recognition for vacuuming outside the chamber.
- Flush installation.
- Handleless drawer.
- Push-to-open system.

#### Application

Vacuating for sous-vide cooking.  
Vacuating for fast marinating and flavouring.  
Vacuating for extended storage.  
Vacuating of vacuuming containers outside the chamber.  
Vacuating of liquids in bottles outside the chamber.

#### Handling

Touch key operation.

#### Features

Net volume 7 litres.  
Capacity load max. 10 kg.  
Maximum size of vacuuming bags  
W 240 mm x L 350 mm.  
3 heat-sealing levels for different strengths of bag material.  
Sealing bar, non-stick coating, removable.  
Safety glass cover, opens automatically after vacuuming.  
Raised vacuuming platform, 44 mm, deployable.  
Utility space in vacuuming chamber, W 210 mm x L 275 mm.  
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.  
Drying programme for vacuuming pump.  
Warning function.

#### Planning notes


Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The panel surface of the appliance extends 21 mm from the furniture cavity.  
Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.  
Built-in under worktop or in single niche.  
The socket can be planned behind the appliance.

Special accessories (order as spare parts):  
Part No. 00578813  
vacuuming bags, small  
Part No. 00578814  
vacuuming bags, big

Please read the installation details regarding oven combination on page 62–63.


#### Connection

Total connected load 0,32kW.  
Connection cable 1.5 m, pluggable.

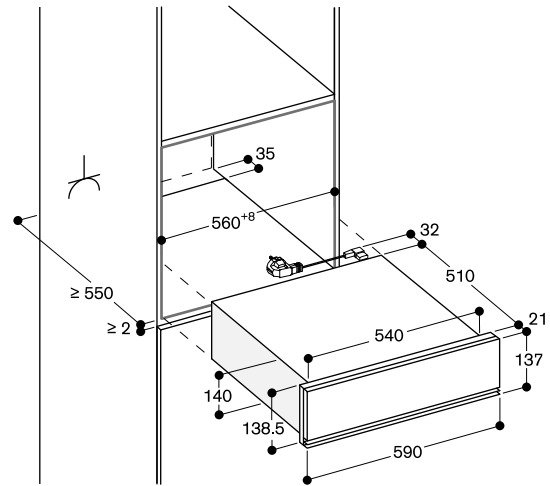

Socket

#### Side view DVP 221 below BSP, BMP, CMP

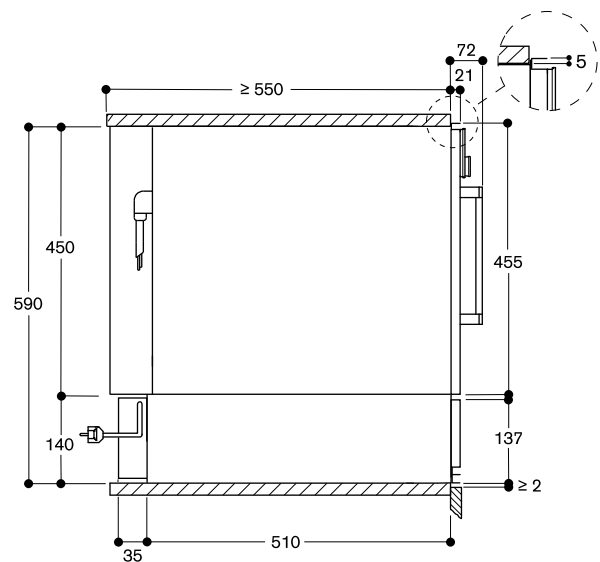



### Culinary warming drawer 200 series WSP 221

#### WSP 221 102

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 14 cm.

#### WSP 221 112

Glass front in Gaggenau Metallic.  
Width 60 cm, Height 14 cm.

#### WSP 221 132

Glass front in Gaggenau Silver.  
Width 60 cm, Height 14 cm.

#### Highlights

- Flush installation.
- Handleless drawer.
- Push-to-open system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programs via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions W547 mm × H 91 mm × D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

Please read additional information on Gaggenau Home Connect on page 459.


#### Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
Installation of BSP/BMP/CMP directly above WSP in 59 cm niche without intermediate floor.  
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 62-63.

#### Connection

Total connected load 0.82 kW.  
Connection cable 1.8 m, pluggable.

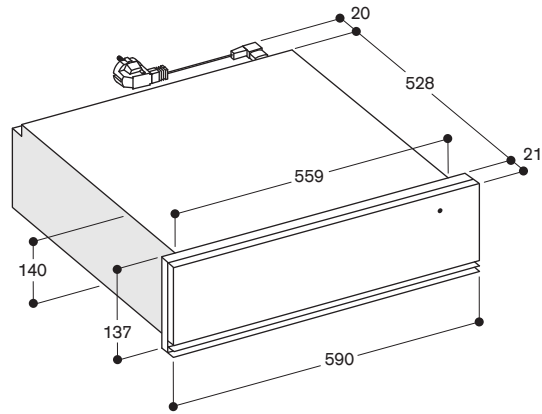

#### WSP 221 below BSP, BMP, CMP

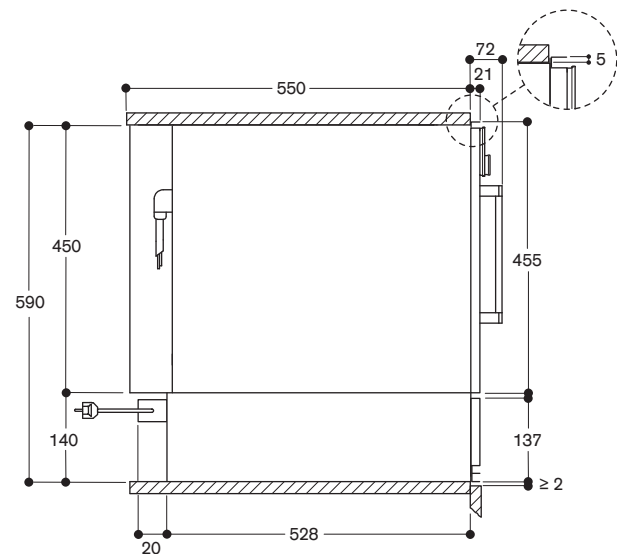



**Culinary warming drawer 200 series**  
**WSP 222**

**WSP 222 102**

Glass front in Gaggenau Anthracite.  
Width 60 cm, Height 29 cm.

**WSP 222 112**

Glass front in Gaggenau Metallic.  
Width 60 cm, Height 29 cm.

**WSP 222 132**

Glass front in Gaggenau Silver.  
Width 60 cm, Height 29 cm.

**Highlights**

- Flush installation.
- Handleless drawer.
- Push-to-open system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 30 °C to 80 °C.
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programs via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 54 litres.  
Volume capacity: Dinner service for 12 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions W547 mm x H 241 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

**Selected digital services**

**(Gaggenau Home Connect)**  
Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

Please read additional information on Gaggenau Home Connect on page 459.


**Planning notes**

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 62-63.

**Connection**

Total connected load 0,82 kW.  
Connection cable 1.8 m, pluggable.

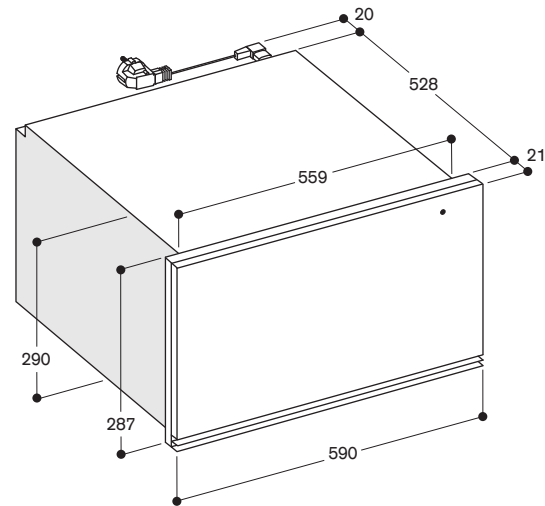


**WSP 222 below BOP**

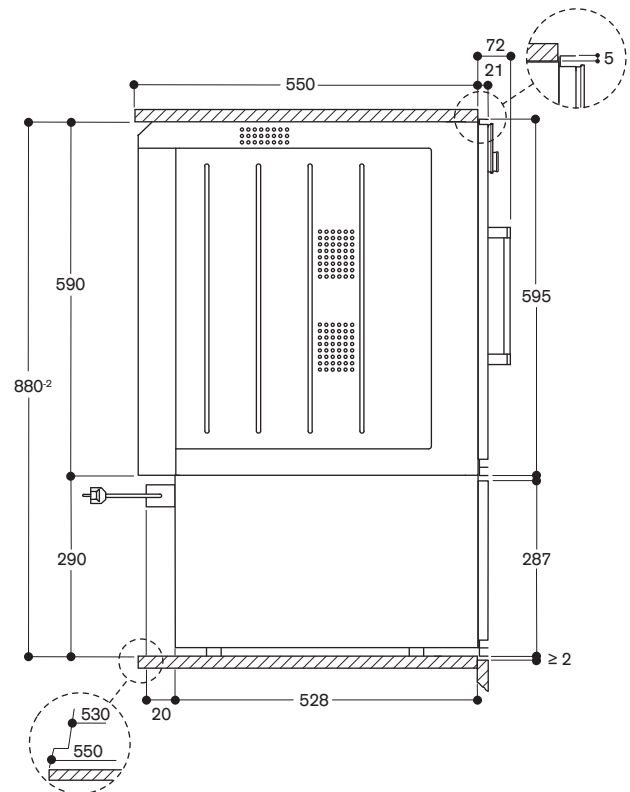

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------

## Accessories and special accessories 200 series

**BA 010 301**  
Triple telescopic pull-out rack.  
For combi-steam oven.



**BA 016 105**  
Pull-out system.  
Fully extendable telescopic rails and  
enamelled cast iron frame.



**BA 020 361**  
Cooking container, stainless steel,  
unperforated, 46 mm deep, 5.4 l.




**BA 020 370**  
Cooking container, stainless steel,  
perforated, 40 mm deep, 5 l.



**BA 020 382**  
Cooking container, non-stick,  
unperforated, 46 mm deep, 5.4 l.




**BA 020 391**  
Cooking container, non-stick,  
perforated, 40 mm deep, 5 l.



**BA 026 115**  
Baking tray, enamelled.  
15 mm deep.



**BA 036 105**  
Wire rack, chromium-plated.  
Without opening, with feet.




**BA 046 118**  
Glass tray.  
24 mm deep.




**BA 226 105**  
Grill tray, enamelled.  
30 mm deep.



**BA 216 102**  
Quadruple telescopic pull-out rack.  
For ovens BOP 210/BOP 211.



**BA 056 115**  
Heating element for baking stone and  
Gastronorm roaster.



**BA 056 130**  
Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.



**BA 056 133**  
Baking stone.  
Incl. baking stone support and pizza  
paddle (heating element must be  
ordered separately).  
Not in combination with pull-out  
system.

**BA 220 360**  
Cooking container, stainless steel,  
unperforated, 35 mm deep, 5 l.



**BA 220 370**  
Cooking container, stainless steel,  
perforated, 35 mm deep, 5 l.




**BS 020 003**  
Pizza paddle.  
Serving and cutting board.





**GN 010 330**

Adapter for gastronorm insert and roaster.

**GN 114 130**

Gastronorm insert, stainless steel, GN 1/3. Unperforated, 40 mm deep, 1.5l.

**GN 114 230**

Gastronorm insert, stainless steel, GN 2/3. Unperforated, 40 mm deep, 3l.

**GN 124 130**

Gastronorm insert, stainless steel, GN 1/3. Perforated, 40 mm deep, 1.5l.

**GN 124 230**

Gastronorm insert, stainless steel, GN 2/3. Perforated, 40 mm deep, 3l.

**GN 340 230**

Gastronorm roaster in cast aluminium. GN 2/3, height 165 mm, non-stick. For roasting in oven with roasting function. Lower and upper part can also be used as separate ovenproof dishes, height 100 and 65 mm. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (both to be ordered separately).

**CLS 100 40**

Cleaning cartridges, set of 4. For Combi-steam oven.

**GF 111 100**

Descaling and neutralising filter, for first installation. Descaling system, recommended to be installed if water hardness exceeds 7°dH or carbon hardness 5°dH. Filter head with integrated non-return valve and filter. Width 130 mm, Height 265 mm, Depth 121 mm. Water inlet 1.5 m with 3/4" connection.

**GF 121 110**

Filter cartridge.

**GZ 010 011**

Extension for water inlet and outlet (2 m long).



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect

## Accessories and special accessories 200 series



		Oven	Oven
		BOP 250/BOP 251	BOP 220/BOP 221
<b>Baking tray, enamelled</b>			
BA 026 115	15 mm deep.	•/◦	•/◦
<b>Pull-out rack</b>			
BA 016 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame.	◦	◦
BA 216 102	Quadruple fully extendable telescopic pull-out rack. For oven BOP 210/BOP 211.		
BA 010 301	Triple telescopic pull-out rack for combi-steam oven.		
<b>Oven surfaces with catalytic special enamelling</b>			
Part No. 664048	Oven ceiling, for retrofitting.		
Part No. 664248	Oven back wall, for retrofitting.		
<b>Baking stone</b>			
BA 056 130	Incl. baking stone support and pizza paddle (heating element must be ordered separately).		
BA 056 133	Incl. baking stone support and pizza paddle (heating element must be ordered separately).	◦	◦
<b>Cooking container, steam oven</b>			
BA 020 361	Cooking container, stainless steel, unperforated, 46 mm deep, 5.4 l.		
BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5 l.		
BA 020 382	Cooking container, non-stick, unperforated, 46 mm deep, 5.4 l.		
BA 020 391	Cooking container, non-stick, perforated, 40 mm deep, 5 l.		
BA 220 360	Cooking container, stainless steel, unperforated, 37.5 deep, 5 l.		
BA 220 370	Cooking container, stainless steel, perforated, 37.5 deep, 5 l.		
GN 114 130	GN 1/3, unperforated, 40 mm deep, 1.5 l.		
GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l.		
GN 124 130	GN 1/3, perforated, 40 mm deep, 1.5 l.		
GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l.		
<b>Gastronorm roaster, cast aluminium</b>			
GN 340 230	GN 2/3, height 165 mm, non-stick. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 456).	◦	◦ (without roaster function)
<b>GN-Adapter</b>			
GN 010 330	Adapter for gastronorm insert.		
<b>Glass tray</b>			
BA 046 118	24 mm deep.	•/◦	•/◦
<b>Wire rack</b>			
BA 036 105	No opening, with feet.	•/◦	•/◦
Part No. 435794	For grill tray BA 226 102, angled, no opening.		
Part No. 672921	For grill tray BA 226 105, with opening, and feet.	◦	◦
<b>Grill tray, enamelled</b>			
BA 226 105	30 mm deep.	◦	◦
<b>Heating element</b>			
BA 056 115	Necessary accessory for baking stone BA 056 133.	◦	◦
<b>Pizza paddle</b>			
BS 020 003	Pizza paddle. Serving and cutting board.	◦	◦
<b>Bean container</b>			
Part No. 11015223	Bean container with lid.		
<b>Cleaning and care</b>			
CL S10 040	Cleaning cartridges, set of 4.		
Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.		
Part No. 17000705	Water filter cartridge.		
Part No. 17000706	Water filter cartridge, set of 3.		
Part No. is region-specific	Descaling tablets available via customer service.		
Part No. is region-specific	Cleaning tablets available via customer service.		
<b>Water connection</b>			
GF 111 100	Descaling and neutralising filter, for first installation.		
GF 121 110	Filter cartridge for GF 111 100.		
GZ 010 011	Extension for water inlet and outlet hose.		
<b>Vacuuming bags</b>			
Part No. 00578813	Vacuuming bags, small.		
Part No. 00578814	Vacuuming bags, big.		

• Standard. ◦ Special accessory.



Oven

BOP 210/BOP 211



Combi-steam oven

BSP 270/BSP 271



Combi-steam oven

BSP 260/BSP 261



Combi-steam oven

BSP 250/BSP 251



Steam oven

BSP 220/BSP 221



Fully automatic espresso machine  
CMP 250



Vacuuming drawer

DVP 221

o

o

o

o

o

o

o

o

•/o

o

o

o

•/o

o

o

o

•/o

o

o

•/o

•/o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

•/o

•/o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

•/o

•/o

## Ovens 200 series



Appliance type	Oven	Oven
Side-opening door right-hinged / left-hinged	BOP 250/BOP 251	BOP 220/BOP 221
Full glass door in Gaggenau Anthracite	BOP 250/251 102	BOP 220/221 102
Full glass door in Gaggenau Metallic	BOP 250/251 112	BOP 220/221 112
Full glass door in Gaggenau Silver	BOP 250/251 132	BOP 220/221 132
<b>Dimensions</b>		
Width	(cm) 60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 595 x 547	590 x 595 x 547
Door panel extension from furniture cavity	(mm) 21	21
Niche dimensions W x H x D	(mm) 560 x 590 x 550	560 x 590 x 550
Net weight	(kg) 57	57
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>		
Net volume	(l) 76	76
Number of cooking compartments	1	1
Interior dimensions W x H x D	(mm) 487 x 383 x 405	487 x 383 x 405
Energy efficiency class with eco hot air		
Energy Efficiency Index (EEI)	96	96
Energy consumption with top / bottom heat	(kWh) 1.25	1.25
Energy consumption with eco hot air	(kWh) 0.83	0.83
Heat source	electric	electric
<b>Heating methods</b>		
Temperature range	(°C) 30-300	50-300
Hot air / Eco hot air / top + bottom heat	•/•/•	•/•/•
Top heat / bottom heat / hot air + bottom heat	•/•/•	•/•/•
Full surface grill + circulated air	•	•
Full surface grill	•	•
Compact grill	•	—
Baking stone function	•	•
Roaster function	•	—
Dough proofing / defrosting / keeping warm	•/•/—	—/—/—
<b>Handling</b>		
TFT touch display	•	•
Controls at the top / at the bottom	•/—	•/—
Clear text display	(No. of languages) 44	44
Individual recipes	50	50
Door opening angle	110°	110°
<b>Features</b>		
Electronic temperature control	•	•
Three-point core temperature probe	•	—
Automatic programmes	•	—
Baking stone socket	•	•
Roasting function	•	—
Actual temperature display	•	•
Rapid heating	•	•
Cooking time, cooking time end, timer, stopwatch	•	•
Long-term timer	•	•
Halogen light on the top	(W) 60	60
Tray levels	(No.) 4	4
Digital services (Gaggenau Home Connect) either via LAN or wireless via WiFi.	• <sup>3</sup>	• <sup>3</sup>
<b>Accessories</b>		
Enamelled baking tray	1	1
Size of largest baking tray	(cm <sup>2</sup> ) 1.200	1.200
Wire rack	1	1
Enamelled grill tray / wire rack for grill tray	BA 226 105 <sup>2</sup> / 672 921 <sup>2</sup>	BA 226 105 <sup>2</sup> / 672 921 <sup>2</sup>
Glass tray	1	1
<b>Safety</b>		
Thermally insulated door with multiple glazing	5-fold	5-fold
Child lock / safety shut-off	•/•	•/•
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Pyrolytic system	•	•
Catalytic coating on back wall / ceiling	—	—
Gaggenau enamel	•	•
Heated air cleaning catalyser	•	•
Grease filter in front of hot air fan	—	—
<b>Connection</b>		
Total connected load	(kW) 3.7	3.7

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Special accessory, see pages 126-129. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.



**Oven**  
 BOP 210/BOP 211  
 BOP 210/211 102  
 BOP 210/211 112  
 BOP 210/211 132

60  
 590 x 595 x 547  
 21  
 560 x 590 x 550  
 53

76  
 1  
 487 x 383 x 405



96  
 1.25  
 0.83  
 electric

50-300  
 •/•/•  
 •/•/•  
 •  
 —  
 •  
 —  
 — / — / —

•  
 •/—  
 44  
 50  
 110°

•  
 —  
 —  
 •  
 —  
 •  
 •  
 •  
 •  
 60  
 4  
 •<sup>3</sup>

1  
 1.350  
 1  
 1/—  
 BA 046 115<sup>2</sup>

3-fold  
 •/•  
 •

—  
 664 248<sup>2</sup> / 664 048<sup>2</sup>  
 •  
 •  
 —

3.7

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Combi-steam ovens and steam ovens 200 series



Appliance type	Combi-steam oven	Combi-steam oven
Side-opening door right-hinged / left-hinged	BSP 270/BSP 271	BSP 260/BSP 261
Full glass door in Gaggenau Anthracite	BSP 270/BSP 271 101	BSP 260/BSP 261 101
Full glass door in Gaggenau Metallic	BSP 270/BSP 271 111	BSP 260/BSP 261 111
Full glass door in Gaggenau Silver	BSP 270/BSP 271 131	BSP 260/BSP 261 131
<b>Dimensions</b>		
Width	(cm)	
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 455 x 540	590 x 455 x 540
Door panel extension from furniture cavity	(mm) 21	21
Niche dimensions W x H x D	(mm) 560 x 450 x 550	560 x 450 x 550
Net weight	(kg) 36	34
<b>Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)</b>		
Net volume	(l) 50	50
Number of cooking compartments	1	1
Interior dimensions W x H x D	(mm) 501 x 246 x 406	501 x 248 x 406
Energy efficiency class with hot air + 30 % humidity		
Energy Efficiency Index (EEI)	94.7	94.7
Energy consumption with hot air + 30 % humidity	(kWh) 0.72	0.72
Heat source	electric	electric
<b>Heating methods</b>		
Temperature range	(°C) 30-230	30-230
Hot air + 100 % humidity	•	•
Hot air + 80 % humidity	•	•
Hot air + 60 % humidity	•	•
Hot air + 30 % humidity	•	•
Hot air + 0 % humidity	•	•
100 % humidity	—	—
Low temperature cooking	•	•
Low temperature steaming	—	—
Sous-vide cooking	•	•
Full surface grill level 1 + humidity	•	•
Full surface grill level 2 + humidity	•	•
Full surface grill + Umluft	•	•
Dough proofing	•	•
Defrosting	•	•
Regenerating	•	•
<b>Handling</b>		
TFT touch display	•	•
Controls at the top / at the bottom	•/—	•/—
Clear text display	(No. of languages) 44	44
Individual recipes	50	50
Door opening angle	110°	110°
<b>Features</b>		
Steaming without pressure	•	•
Electronic temperature control	•	•
Full surface grill behind glass ceramic	2000	2000
Three-Point core temperature probe	•	•
Automatic programmes	•	•
Actual temperature display	•	•
Cooking time, cooking time end, timer, stopwatch	•	•
Long-term timer	•	•
Electronic boiling point detection	•	•
Water tank capacity / water level warning	(l) 1.7/•	1.7/•
LED light on the side	(W) 10	10
Tray levels / stainless steel cooking interior	(No.) 3/•	3/•
Digital services (Gaggenau Home Connect) either via LAN or wireless via WiFi. <sup>3</sup>	•	•
<b>Accessories</b>		
Size of largest baking tray	(cm <sup>2</sup> ) 810	810
Wire rack	1	1
Cooking container, stainless steel, 40 mm, perforated / unperforated	1/1	1/1
Cleaning cartridge	4	—
Descaling tablets	Part No. 17002490	Part No. 17002490
<b>Safety</b>		
Thermally insulated door with multiple glazing	3-fold	3-fold
Child lock / safety shut-off	•/•	•/•
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Cleaning aid / drying programme	•/•	•/•
Descaling aid / descaling programme	—/•	—/•
Automatic drying of the cavity at the end of the cooking process.	•	•
Grease filter in front of hot-air fan	—	•
<b>Connection</b>		
Total connected load	(kW) 3.15	3.15

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> Special accessory, see pages 126-129. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.



<b>Combi-steam oven</b>	<b>Steam oven</b>
BSP 250/BSP 251	BSP 220/BSP 221
BSP 250/BSP 251 101	BSP 220/BSP 221 101
BSP 250/BSP 251 111	BSP 220/BSP 221 111
BSP 250/BSP 251 131	BSP 220/BSP 221 131

60	60
590 x 455 x 540	590 x 455 x 540
21	21
560 x 450 x 550	560 x 450 x 550
36	34

50	59
1	1
501 x 248 x 406	473 x 278 x 446



94.7	
0.72	
electric	

30-230	30-100
--------	--------

•	—
•	—
•	—
•	—
•	—
—	•
•	—
—	•
•	—
•	—
•	—
•	•
•	•
•	•

•	•
•/—	•/—
44	44
50	—
110°	110°

•	•
•	•
2000	—
•	—
•	•
•	•
•	—
•	•
•	•
1.7/•	1.7/•
10	10
3/•	3/•
•	•

810	810
1	1
1/1	1/1
—	—
Part No. 17002490	Part No. 17002490

3-fold	3-fold
•/•	•/•
•	•

•/•	•/—
—/•	—/•
•	•
•	—

3.15	2.75
------	------

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Combi-microwave ovens and microwaves 200 series



Appliance type	Combi-microwave oven	Microwave
Side-opening door right-hinged / left-hinged	BMP 250/BMP 251	BMP 224/BM 225
Full glass door in Gaggenau Anthracite	BMP 250/251 100	BMP 224/225 100
Full glass door in Gaggenau Metallic	BMP 250/251 110	BMP 224/225 110
Full glass door in Gaggenau Silver	BMP 250/251 130	BMP 224/225 130
<b>Dimensions</b>		
Width	(cm) 60	60
Appliance dimensions W × H × D <sup>1</sup>	(mm) 590 × 455 × 538	590 × 382 × 300
Door panel extension from furniture cavity	(mm) 21	21
Niche dimensions W × H × D	(mm) 560 × 450 × 550	560 × 380 × 320
Net weight	(kg) 41	20
<b>Volume</b>		
Capacity	(l) 36	21
Interior dimensions W × H × D	(mm) 445 × 236 × 348	350 × 220 × 270
<b>Heating methods / Programmes</b>		
Maximum microwave output	(W) 1,000	900
Microwave output levels	(No.) 5	5
Hot air with temperature range	(°C) 40, 100-250	—
Full surface grill + hot air with temperature range	(°C) 100-250	—
Full surface grill + circulated air with temperature range	(°C) 100-250	—
Full surface grill as quartz grill with levels of intensity	(No.) 3	3
Maximum grill output	(W) 2,000	1,300
Hot air output	(W) 1,950	—
Maximum microwave output for combination with grill and oven	(W) 600	360
Sequential operation of up to 5 modes incl. programming of combined operation and rest time	•	•
Automatic weight feature	(No.) 15	10
<b>Handling</b>		
TFT touch display	•	•
Controls at the top / at the bottom	•/—	—/•
Automatic door opening	•	•
Clear text display (No. of languages)	25	25
Individual recipes	50	50
Door opening angle	110°	110°
<b>Features</b>		
Electronic temperature control	•	•
Actual temperature display	•	—
Rapid heating	•	—
Innowave	•	•
Cooking time, switch-off time, short-term timer, stop watch	•/•/•/•	•/—/—/—
Long-term timer	•	—
Interior lighting, side	(W) 60	25
Rack levels	(No.) 4	—
<b>Accessories</b>		
Glass tray	•	•
Wire rack	•	•
Glass rod	•	•
<b>Safety</b>		
Thermally insulated door with multiple glazing	•	•
Child lock / safety shut-off	•/•	•/•
Cooled housing with temperature protection	•	•
<b>Cleaning</b>		
Catalytic special enamelling at interior back wall	•	—
Stainless steel interior with ceramic base	•	•
<b>Connection</b>		
Total connected load	(kW) 3.1	1.99

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.



## Fully automatic espresso machine 200 series



<b>Appliance type</b>	<b>Fully automatic espresso machine</b>
Glass front in Gaggenau Anthracite	CMP 250 102
Glass front in Gaggenau Metallic	CMP 250 112
Glass front in Gaggenau Silver	CMP 250 132
<b>Dimensions</b>	
Width	(cm) 60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 455 x 426
Door panel extension from furniture cavity	(mm) 21
Niche dimensions W x H x D	(mm) 560 x 450 x 550
Net weight	(kg) 20
<b>Typ of beverage</b>	
	Ristretto / 2 x Ristretto
	Espresso / 2 x Espresso
	Espresso Macchiato / 2 x Espresso Macchiato
	Coffee / 2 x coffee
	Americano / 2 x Americano
	Caffe Latte / 2 x Caffe Latte
	Latte Macchiato / 2 x Latte Macchiato
	Cappuccino / 2 x Cappuccino
	Flat White / 2 x Flat White
	Milk froth / 2 x Milk froth
	Warm milk / 2 x Warm milk
	Hot water / 2 x Hot water
<b>Handling</b>	
TFT touch display	•
Controls at the top	•
Automatic door opening	•
Clear text display	(No. of languages) 25
Beverages can be personalised and memorised	(No.) 8
Beverage size settings	(No.) 3
Coffee strength levels	(No.) 8
Coffee temperature levels	(No.) 3
Hot water temperature levels	(°C)
Coffee-milk ratio levels	•
Height adjustable coffee dispenser up to	(cm) 15
<b>Programmable basic settings</b>	
— Lighting scenarios	(No.) 7
— Capacity unit	(ml/fl.oz.)
— Adjustability of dispensing per type and size of beverage to match the cup size	•
— Standby after	(min, h) 5 min to 12 h
— Water hardness	(No. of levels) 4, water-softening system
— Water filter	•
<b>Features</b>	
Aroma brewing technology	•
Grinding unit with ceramic discs	•
Automatic adjustment of ground coffee quantity	•
Continuous flow heater	•
Pump pressure	(bar) 19
Integrated milk system	•
Insulated milk container	(l) 0.5
Bean container	(g) 500
Separate container for second ground coffee type	•
Grinding level control	•
Volume of adjustable brewing chamber	(g) 8 to 12
Double grinding and brewing cycles for extra intensity for one beverage	•
Double grinding and brewing cycles for two beverages	•
Removable water tank	(l) 2.4
Water filter cartridge for water tank	installable
Single portion cleaning	•
Electronic water filter exchange indicator	•
Electronic fill level control for milk, water and coffee beans	•
Electronic fill level control for drip tray and coffee residues container	•
Integrated LED lighting	•
<b>Safety</b>	
Child lock	•
<b>Cleaning</b>	
Fully automatic rinse programme when switching on/off	•/•
Automatic quick rinsing of milk system	•
Automatic cleaning and descaling programme	•
Automatic cleaning programme	•
Automatic descaling programme	•
Removable brewing unit	•
Coffee residue container and drip tray removable and dishwasher-safe	•
Beverage dispenser removable and dishwasher-safe	•
Emptying programme to prepare the appliance for holiday or transportation	•
Empty-grinding function, if using a new type of beans	•
<b>Connection</b>	
Total connected load	(kW) 1.6

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.

## Vacuuming drawers 200 series



<b>Appliance type</b>		<b>Vacuuming drawer</b>
Glass front in Gaggenau Anthracite		DVP 221 100
Glass front in Gaggenau Metallic		DVP 221 110
Glass front in Gaggenau Silver		DVP 221 130
<b>Dimensions</b>		
Width	(cm)	60
Appliance dimensions W x H x D <sup>1</sup>	(mm)	590 x 140 x 542
Door panel extension from furniture cavity	(mm)	21
Niche dimensions W x H x D	(mm)	560 x 140 x 550
Net weight	(kg)	30
<b>Volume</b>		
Net volume	(l)	7
Interior dimensions W x H x D	(mm)	210 x 95 x 275
Maximum size of vacuuming bags W x L	(mm)	240 x 350
<b>Usage</b>		
Vacuuming levels		3, max. 99 %
Heat-sealing levels		3
Vacuuming of bags and containers		•
Vacuuming of vacuuming containers and bottles		•
Vacuuming of liquids		•
Drying program for vacuuming pump		•
Warming function		•
<b>Handling</b>		
Sensor Control		•
Handleless drawer		•
Recessed grip		—
Push-to-open system		•
Cushioned closing system		—
<b>Features</b>		
Stainless steel vacuuming chamber		•
Maximum load	(kg)	10
Applicable height	(mm)	80
Safety glass cover		•
Sealing bar, non-stick, removable		•
Raised vacuuming platform		•
Connection with tube for vacuuming outside the chamber		•
Utility space in vacuuming chamber, W x L	(mm)	210 x 275
Membrane avoiding reflow of liquids during external vacuuming		•
Vacuuming bags, small, 180 mm x 280 mm	(pcs.)	50
Vacuuming bags, large, 240 mm x 350 mm	(pcs.)	50
Plug for vacuuming bottles	(pcs.)	3
Adaptor for bottle plugs		•
<b>Connection</b>		
Total connected load	(kW)	0.32

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche.

## Warming drawers 200 series



Appliance type	Culinary warming drawer	Culinary warming drawer
Glass front in Gaggenau Anthracite	WSP 221 102	WSP 222 102
Glass front in Gaggenau Metallic	WSP 221 112	WSP 222 112
Glass front in Gaggenau Silver	WSP 221 132	WSP 222 132
<b>Dimensions</b>		
Width	(cm) 60	60
Appliance dimensions W x H x D <sup>1</sup>	(mm) 590 x 140 x 528	590 x 290 x 528
Door panel extension from furniture cavity	(mm) 21	21
Niche dimensions W x H x D	(mm) 560 x 140 x 550	560 x 290 x 550
Net weight	(kg) 17	21
<b>Volume</b>		
Net volume	(l) 20	54
Interior dimensions W x H x D	(mm) 547 x 91 x 410	547 x 241 x 410
Number of table settings	(No.) 6	12
<b>Heating methods</b>		
Defrosting of meals / proving of yeast dough	•	•
Preheating of small beverage containers	•	•
Keeping meals warm / slow cooking meals	•	•
Warming ovenware	•	•
Low temperature cooking	•	•
Temperature range 30°C to 80°C	(temperature levels) 6	6
Further heating methods via App	•	•
<b>Handling</b>		
Rotary knob	•	•
Status display, visible in the glass front	•	•
Handleless drawer	•	•
Push-to-open system	•	•
Cushioned closing system	—	—
<b>Features</b>		
Interior light	—	—
Maximum load	(kg) 25	25
Stainless steel interior with glass bottom	•	•
Fan for even heat distribution	•	•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	•	•
<b>Connection</b>		
Total connected load	(kW) 0.82	0.82

• Standard. — Not available. <sup>1</sup> Appliance depth: the immersion depth of the appliance in the niche. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.




# VARIO COOKTOPS

Overview	140
Vario cooktops 400 series	144
Cut-out dimensions for appliance combinations in the 400 series	180
Vario cooktops 200 series	186
Cut-out dimensions for appliance combinations in the 200 series	194
Accessories   special accessories	196
Technical specifications	198

## Overview


### Full surface induction



Area / output level	9	boost
<b>A</b> (1 big cookware)	3,500 W	5,500 W
<b>Total connected load</b>	7,400 W	

**CX 482**

With frame, it can be combined with other Vario Appliances




Area / output level	9	boost
<b>A</b> (1 big cookware)	3,500 W	5,500 W
<b>Total connected load</b>	7,400 W	

**CX 492**


With frame, it can be combined with other Vario Appliances

### Vario flex induction 400 series




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	3,700 W	

**VI 422**




Area / output level	12	boost
<b>A/B</b>	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	

**VI 462**



Area / output level	12	boost
<b>A/B</b>	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	


**VI 482**



Area / output level	12	boost
<b>A/C</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>B</b>	Ø 21cm	2,200 W 3,700 W
	Ø 26cm	2,600 W 3,700 W
	Ø 32cm	3,300 W 3,700 W
<b>Total connected load</b>	11,100 W	

**VI 492**


### Vario induction 400 series



Area / output level	12	boost
<b>A</b>	Ø 21cm	2,200 W 3,700 W
	Ø 26cm	2,600 W 3,700 W
	Ø 32cm	3,300 W 3,700 W
<b>Total connected load</b>	3,700 W	


**VI 414**

### Vario flex induction 200 series




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	3,700 W	

**VI 232**



Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	3,700 W	

**VI 242**




Area / output level	9	boost
<b>A/B</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	

**VI 262**

Vario special 400 and 200 series


Width 28 cm



Area / output level	10
<b>A</b>	1,800 W
Total connected load	1,800 W

VP 230


Width 28 cm



Area / output level	9
<b>A</b>	1,500 W
<b>B</b>	1,500 W
Total connected load	3,000 W

VR 230


Width 38 cm



Area / output level	12
<b>A</b>	3,000 W
Total connected load	3,000 W

VP 414

Width 38 cm




Area / output level	12
<b>A</b>	1,500 W
<b>B</b>	1,500 W
Total connected load	3,000 W

VR 414

Vario gas 400 series


Width 38 cm



Area / output level	12
<b>A</b> Wok burner	5,800 / 6,000 W
Total connected load gas	5,800 / 6,000 W
Total connected load electric	15.0 W

VG 415


Width 38 cm



Area / output level	12
<b>A</b> Standard-output burner	2,000 W
<b>B</b> High-output burner	4,000 W
Total connected load gas	6,000 W
Total connected load electric	15.0 W

VG 425

Width 90 cm




Area / output level	12
<b>A</b> Standard-output burner	2,000 W
<b>B</b> Wok burner	5,800 / 6,000 W
<b>C</b> High-output burner	4,000 W
Total connected load gas	17,800 W / 18,000 W
Total connected load electric	15.0 W

VG 491

Vario gas 200 series


Width 28 cm



Area / output level	9
<b>A</b> Wok burner	5,800 / 6,000 W
Total connected load gas	5,800 / 6,000 W
Total connected load electric	1.0 W

VG 231


Width 28 cm



Area / output level	9
<b>A</b> High-output natural gas burner	3,000 W
<b>B</b> Standard-output natural gas burner	1,900 W
Total connected load gas	4,900 W
Total connected load electric	2.0 W

VG 232

Width 60 cm



Area / output level	9
<b>A</b> High-output natural gas burner	3,000 W
<b>B</b> Standard-output natural gas burner	1,900 W
Total connected load gas	9,800 W
Total connected load electric	4.0 W

VG 264

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops
























Ventilation appliances

Cooling appliances







Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Recommended Cooktop Ventilation Combinations

• : Recommended combination — : not recommended 📶 : cooktop based ventilation control possible									
Product type	Picture	VIB		AC 400 width depends on configuration	AC 250 121 width 120 cm	AW 442 width 120 cm	AW 240 191 width 90 cm	AI 240 191 width 90 cm	
	Maximum width for cooktops combinations For integrated induction see dedicated pages.				100 cm 130 cm with fume collector	100 cm	80 cm	80 cm	
Vario Teppan Yaki 400 series		VP 414 / VG4... VR 414	40 cm						
Vario gas cooktop 400 series				•	•	•	•	•	
Vario electric grill 400 series									
Vario induction cooktop 400 series		VI4..	40 cm	•	• 📶	•	• 📶	• 📶	
Vario induction cooktop 400 series		VI 462	60 cm	•	• 📶	•	• 📶	• 📶	
Vario induction cooktop 400 series		VI 482	80 cm	•	• 📶	•	• 📶	—	
Vario induction cooktop 400 series		VI 492	90 cm	•	• 📶	•	—	—	
Vario gas cooktop 400 series		VG 491 / CG 492	90 cm	•	•	•	—	—	
Gas cooktop 400 series									
Vario Teppan Yaki 200 series		VP2.. / VI2.. / VR2.. VR 230	30 cm						
Vario flex induction cooktop 200 series				•	•	•	•	•	
Vario gas cooktop 200 series									
Vario electric grill 200 series									
Vario flex induction cooktop 200 series		VI 242	40 cm	•	•	•	•	•	
Vario flex induction cooktop 200 series		VI 262 / VG 264	60 cm	•	•	•	•	•	
Vario gas cooktop 200 series									
Integrated induction modules 400 series		CU 42..	21 cm 28 cm	•	•	—	—	—	
Full surface induction cooktop 400 series with frame		CX 482	80 cm	•	• 📶	•	• 📶	—	
Full surface induction cooktop 400 series		CX 492	90 cm	•	• 📶	•	—	—	
Flex induction cooktop 200 series		CI 261 / CI 262	60 cm	•	• 📶	•	•	•	
Flex induction cooktop 200 series		CI 272	70 cm	•	• 📶	•	• 📶	• 📶	
Flex induction cooktop 200 series		CI 282 / CI 283	80 cm	•	• 📶	•	• 📶	—	
Flex induction cooktop 200 series		CI 292	90 cm	•	• 📶	•	—	—	
Gas cooktop 200 series		CG 291	90 cm	•	•	•	—	—	
Gas cooktop 200 series		VG 295	90 cm	•	•	•	—	—	



									
AL 400 122 width 120 cm	AL 400 192 width 90 cm	AL 200 180 width 80 cm	AL 200 190 width 90 cm	VL 414 width 15.5 cm	VL 200 width 15 cm	AF 210 192 width 90 cm	AF 210 162 width 60 cm	AC 200 191 width 86 cm	AC 200 161 width 52 cm
120 cm	90 cm					90 cm	60 cm	90 cm	60 cm
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	-	•	-
•	•	•	-	-	-	•	-	•	-
•	•	-	•	-	-	•	-	•	-
•	•	-	-	-	-	•	•	•	•
•	•	-	-	-	-	•	•	•	•
-	-	-	-	-	-	-	-	-	-
•	•	•	-	-	-	•	-	•	-
-	•	-	•	-	-	•	-	•	-
-	-	-	-	-	-	•	•	•	•
-	-	-	-	-	-	•	-	•	-
-	•	•	-	-	-	•	-	•	-
-	•	-	•	-	-	•	-	•	-
-	•	-	-	-	-	•	-	•	-
-	•	-	-	-	-	•	-	•	-

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Full surface induction cooktop  
400 series  
CX 492**

**CX 492 111**  
Black glass ceramic.  
Stainless steel frame.  
Width 90 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Installation accessories**

**VA 420 004**

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 060 300**

Cooking sensor for temperature regulation within pots.

**GN 232 110**

Teppan Yaki plate made of multi ply material, GN 1/1.  
For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

One unique cooking surface of 3200 cm<sup>2</sup>.

Up to 6 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
Professional cooking function.  
Dynamic cooking function.  
Teppan Yaki function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Individual pot detection.  
Cooking timer for each cooking position.  
Stopwatch.  
Short-term timer.  
Information key with use indicators.  
Power management.

**Selected digital services  
(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
Residual heat indication.  
Child lock.  
Safety shut-off.  
Pause function.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.

Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180 and 182.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.


Appliance can be snapped into the worktop from above.

Appliance weight: approx. 31 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

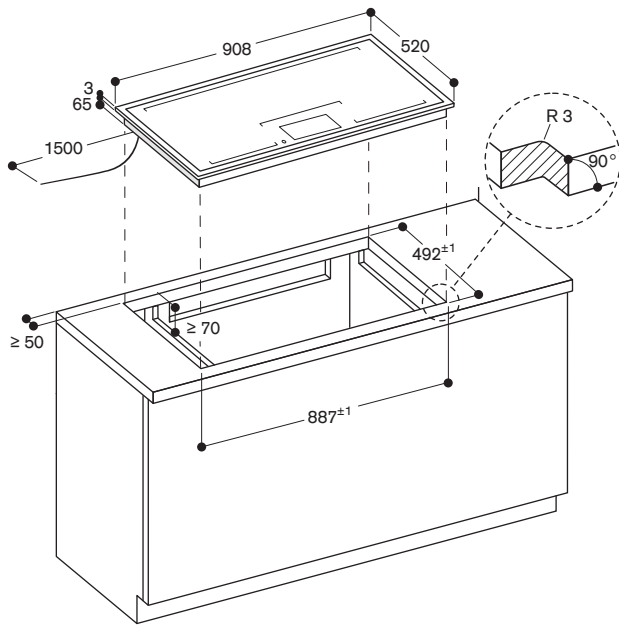


Installation of the cooktop; flush mounting

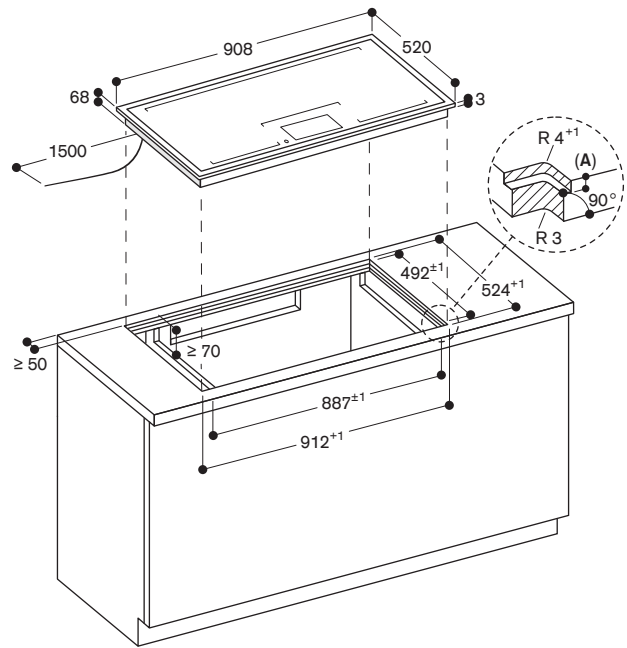


A: 3.5<sup>0.5</sup>

View from above

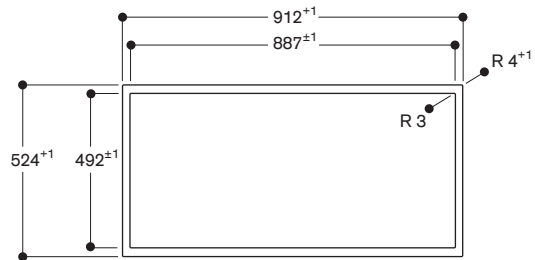


Longitudinal section

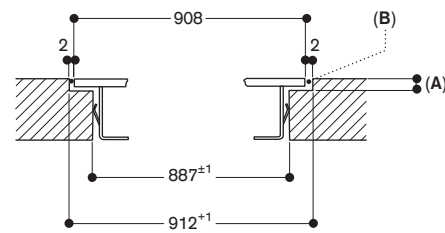

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

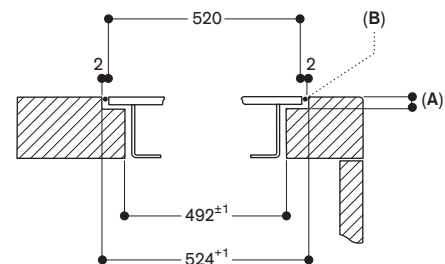

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.



**Full surface induction cooktop**  
**400 series**  
**CX 482**

**CX 482 111**  
 Black glass ceramic.  
 Stainless steel frame.  
 Width 80 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Installation accessories**

**VA 420 004**  
 Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**  
 Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 060 300**  
 Cooking sensor for temperature regulation within pots.

**GN 232 110**  
 Teppan Yaki plate made of multi ply material, GN1/1.  
 For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

One unique cooking surface of 2750 cm<sup>2</sup>.

Up to 5 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
 Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
 Professional cooking function.  
 Dynamic cooking function.  
 Teppan Yaki function.  
 Booster function for pots.  
 Booster function for pans.  
 Keep warm function.  
 Individual pot detection.  
 Cooking timer for each cooking position.  
 Stopwatch.  
 Short-term timer.  
 Information key with use indicators.  
 Power management.

**Selected digital services**  
**(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
 Remote monitoring.  
 Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
 Residual heat indication.  
 Child lock.  
 Safety shut-off.  
 Pause function.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.

Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180 and 182.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 7.4 kW.  
 Connecting cable 1.5 m without plug.  
 Power consumption standby/display off 0.5 W.

Power consumption standby/network 2.0 W.


Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

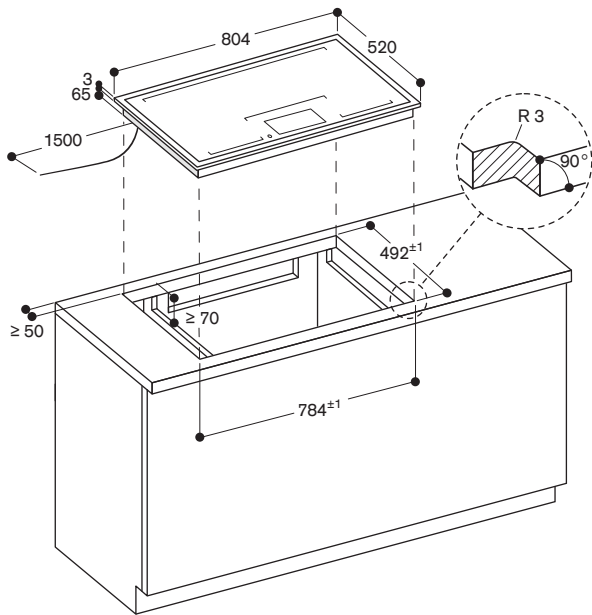


Installation of the cooktop; flush mounting

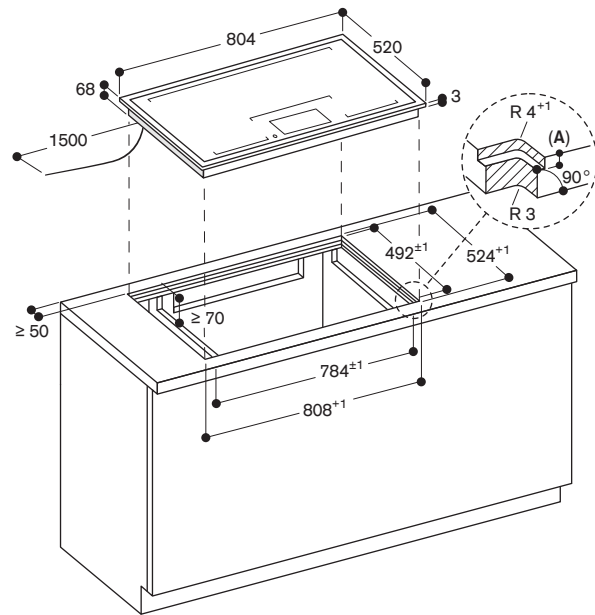


A: 3.5<sup>0.5</sup>

View from above

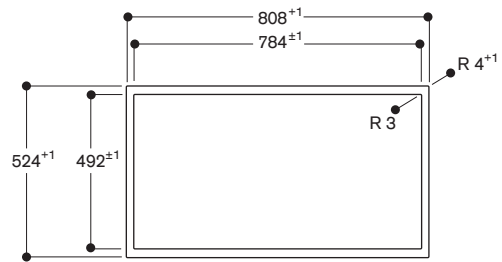


Longitudinal section

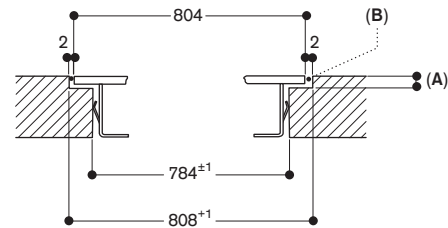

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

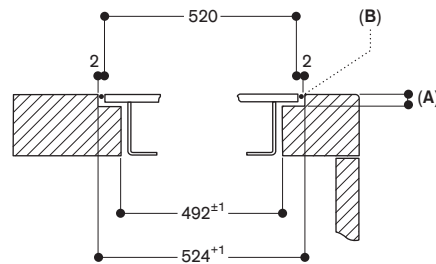

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.



**Vario flex induction cooktop  
400 series  
VI 492**

**VI 492 105**

Frameless.  
Width 90 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 450 010**

Stainless steel knobs 400 series for VI 492.

Electronic control.

Set of 5 knobs.

**CKI 450 000**

Black knobs 400 series for VI 492.

Electronic control.

Set of 5 knobs.

**Installation accessories**

**VA 420 004**

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply material.

For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminum.

Non-stick.

For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.

Non-stick coating.

For flex induction cooktop.

**CA 055 300**

Flex Pan large.

Non-stick coating.

For flex induction cooktop.

**WP 400 001**

Wok pan made of multiple-layer material.

With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

**WZ 400 000**

Wok attachment for wok pan.

Only for Vario induction cooktops.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Large cooking zone for pots up to ø 32 cm.
- Ideal for the original wok pan with round bottom, with wok ring.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W),

linked together 23x40 cm

(3300 W, with booster 3700 W).

2 flex induction cooking areas 23x20 cm

(2200 W, with booster 3700 W),

linked together 23x40 cm

(3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm

(2200 W, with booster 3700 W),

automatically switches to ø 26 cm

(2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.

Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

**Selected digital services**

**(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).

Remote monitoring.

Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

**Planning notes**

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180 and 182.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**

(order as spare parts):

Part No. 17006018

Frying sensor pan, ø 20 cm

Part No. 17006184

Frying sensor pan, ø 24 cm

Part No. 17006185

Frying sensor pan, ø 28 cm

Part No. 17006019

Frying sensor pan, ø 32 cm

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 23 kg.

Please read the installation details regarding air ducting on page 260.

**Connection**

Total connected load 11.1 kW.

Connecting cable 1.5 m without plug.


Connecting cables 0.3 m and 1 m for control knobs.

Power consumption standby/ display off 0.5 W.


Power consumption standby/ network 1.9 W.

Please check the user manual for how to switch off the WiFi module.

Length of connection cable, water in- and outlet see detailed drawing on page 149.




Installation of the cooktop; flush mounting

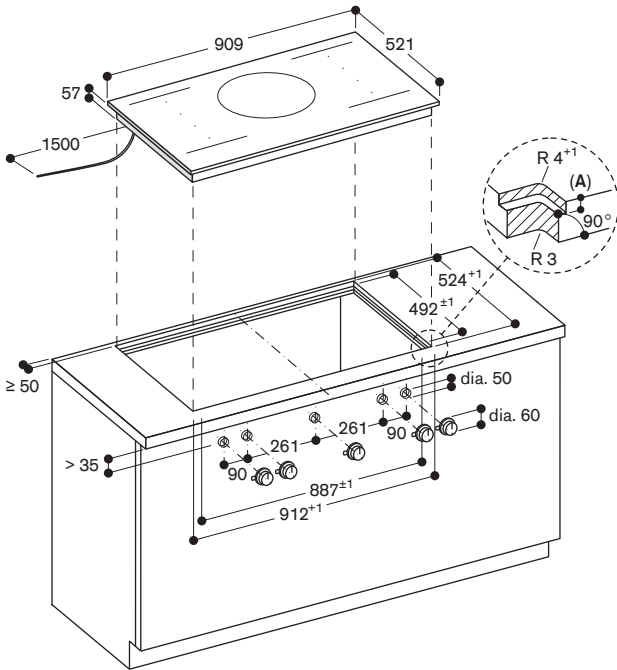


A:  $6.5^{+0.5}$

Longitudinal section

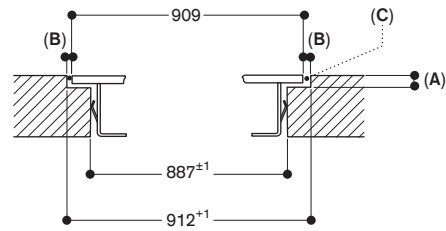


A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Cross-section

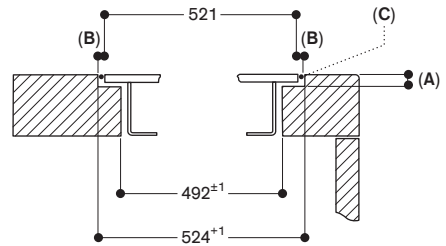


A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Installation of the control knob

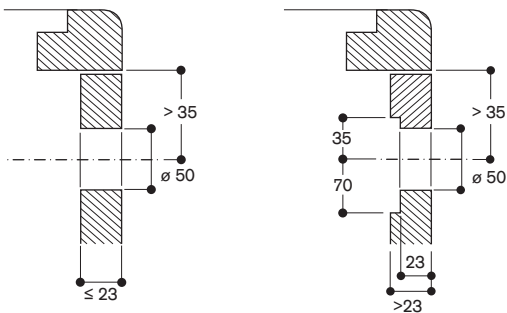

View from above

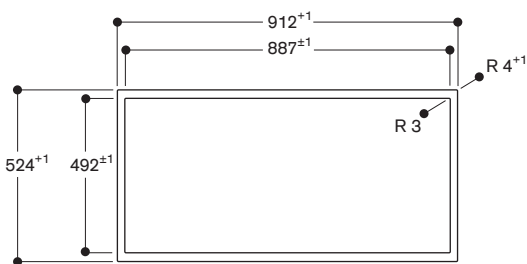

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario flex induction cooktop  
400 series  
VI 492**

**VI 492 115**

Stainless steel frame.  
Width 90 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 450 010**

Stainless steel knobs 400 series  
for VI 492.  
Electronic control.  
Set of 5 knobs.

**CKI 450 000**

Black knobs 400 series for VI 492.  
Electronic control.  
Set of 5 knobs.

**Installation accessories**

**VA 420 004**

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

**VA 420 010**

Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply  
material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**WP 400 001**

Wok pan made of multiple-layer  
material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.

**WZ 400 000**

Wok attachment for wok pan.  
Only for Vario induction cooktops.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Large cooking zone for pots up to ø 32 cm.
- Ideal for the original wok pan with round bottom, with wok ring.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas  
23x19 cm (2200 W, with booster  
3700 W), linked together 23x38 cm  
(3300 W, with booster 3700 W).  
2 flex induction cooking areas  
23x19 cm (2200 W, with booster  
3700 W), linked together 23x38 cm  
(3300 W, with booster 3700 W).  
1 induction cooking zone ø 21 cm  
(2200 W, with booster 3700 W),  
automatically switches to ø 26 cm  
(2600 W, with booster 3700 W) and to  
ø 32 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring,  
cooking zone and output level  
markings.  
Electronic power control in 12 output  
levels.  
User friendly control with bicoloured  
display (white / orange).

**Features**

Flex function for rectangular cooking  
areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services  
(Gaggenau Home Connect)**

Cooktop-based ventilation control  
(with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

Depending on the type of installation  
(surface-mounted or flush-mounted),  
the specific location of the cut-out  
and the knob positions may vary.  
The horizontal positioning of the  
knobs may be aligned with the  
specific cooking areas and zones.  
The drawing "Installation of the  
control knob" must be observed if the  
panel is more than 23 mm thick (there  
must be a recess at the rear).

If combining several Vario appliances  
of the 400 series, select combinations  
with or without appliance cover, and a  
connection strip VA 420 must be  
placed between the appliances.  
Depending on the type of installation,  
the corresponding connection strip  
must be provided.

The bearing capacity and stability, in  
the case of thinner worktops in  
particular, must be supported using  
suitable substructures. Take into  
account the appliance weight and  
additional loads.

Additional instructions for flush  
mounting:

Installation is possible in worktops  
made of stone, synthetics or solid  
wood. Heat resistance and watertight  
sealing of the cut edges must be  
observed. Concerning other materials  
please consult the worktop  
manufacturer.

The groove must be continuous and  
even, so that uniform placing of the  
appliance on the gasket is ensured.  
Do not use discontinuous lining.

The joint width may vary due to size  
tolerances of the combinations and of  
the worktop cut-out.

Please read additional planning notes  
on page 180 and 182.

If installing several appliances in  
individual cut-outs allow for a division  
bar of minimum 50 mm between the  
individual cut-outs.

Operates with magnetic (induction)  
iron pots and pans only. For an optimal  
heat distribution, the use of sandwich  
bottom cookware is recommended.

Special accessories  
(order as spare parts):

Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

Appliance can be snapped into the  
worktop from above.

Appliance weight: approx. 24 kg.

Please read the installation details  
regarding air ducting on page 260.


**Connection**

Total connected load 11.1 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for  
control knobs.

Power consumption standby/  
display off 0.5 W.


Power consumption standby/  
network 1.9 W.

Please check the user manual for how  
to switch off the WiFi module.






Installation of the cooktop; surface mounting

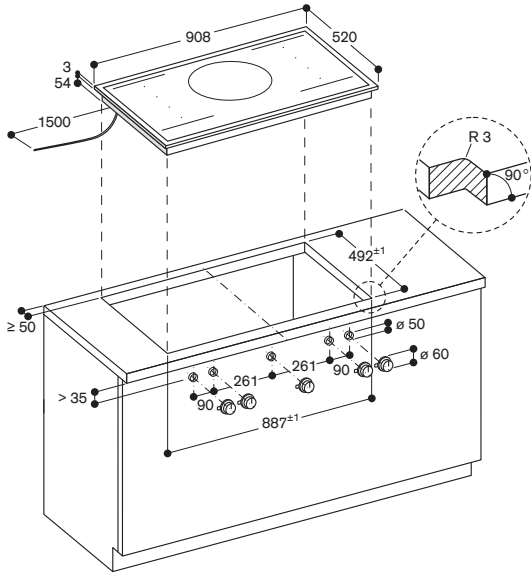


Installation of the cooktop; flush mounting

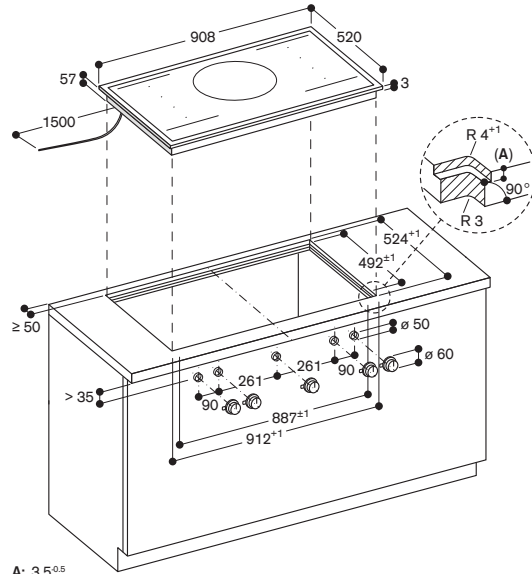


A: 3.5<sup>±0.5</sup>


Installation of the control knob

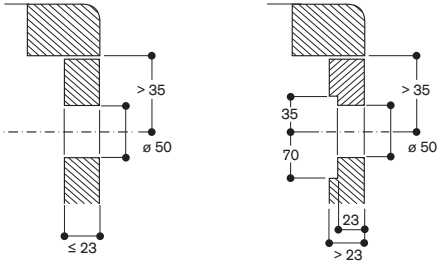


Installation of the control knob

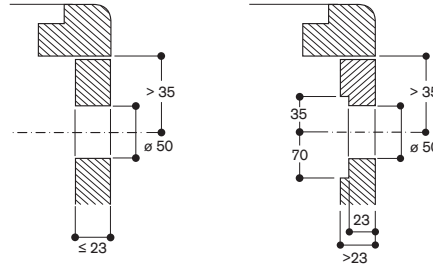

View from above

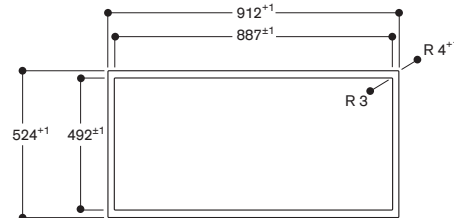


Longitudinal section

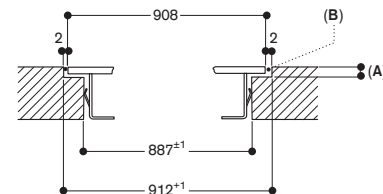

A: 3.5<sup>±0.5</sup>  
B: Fill with silicone

Cross-section

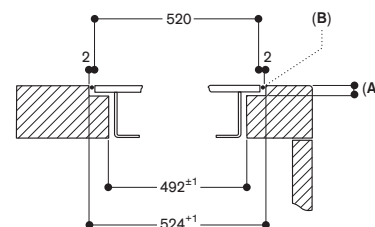

A: 3.5<sup>±0.5</sup>  
B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario flex induction cooktop  
400 series  
VI 482**

**VI 482 105**

Frameless.  
Width 80 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 440 010**

Stainless steel knobs 400 series for  
VI 462, VI 482, CV 482, CV 492  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**

Black knobs 400 series for VI 462,  
VI 482, CV 482, CV 492  
Electronic control.  
Set of 4 knobs.

**Installation accessories**

**VA 420 004**

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply  
material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W), with automatic extension up to 32x30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W), with automatic extension up to 32x30 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services  
(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

The horizontal positioning of the knobs may be aligned with the specific cooking areas.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**


(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 18 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 1.7 W.  
Please check the user manual for how to switch off the WiFi module.  
Length of connection cable, water in- and outlet see detailed drawing on page 153.




Installation of the cooktop; flush mounting

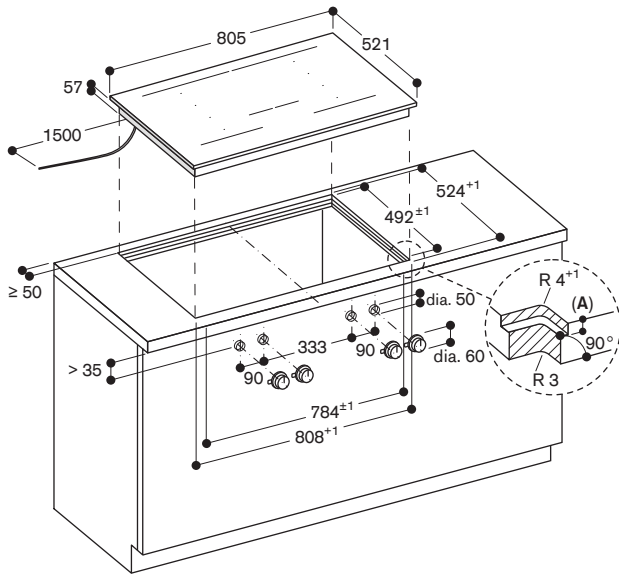


A:  $6.5^{+0.5}$


Installation of the control knob

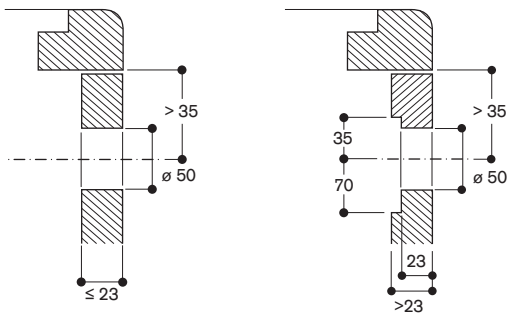

View from above

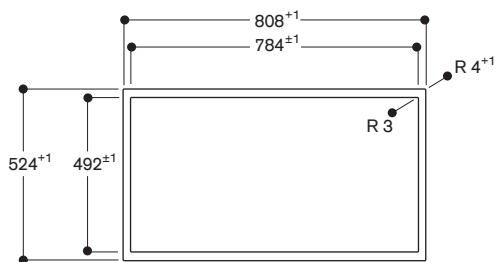


Longitudinal section

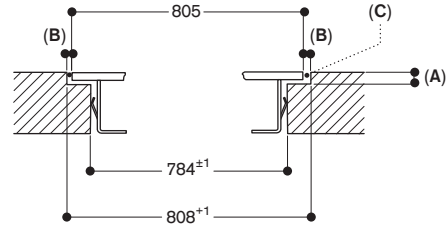

A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Cross-section

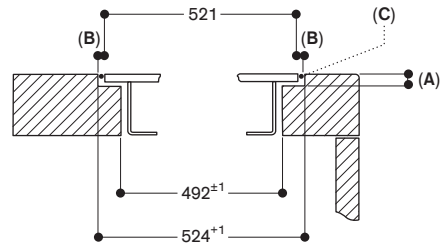

A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario flex induction cooktop  
400 series  
VI 482**

**VI 482 115**

Stainless steel frame.  
Width 80 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 440 010**

Stainless steel knobs 400 series for  
VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**

Black knobs 400 series for VI 462,  
VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**Installation accessories**

**VA 420 004**

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

**VA 420 010**

Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply  
material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W), with automatic extension up to 32x30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W), with automatic extension up to 32x30 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services**

**(Gaggenau Home Connect)**  
Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific cooking areas. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear). If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.

Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**

(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.


Appliance can be snapped into the worktop from above.

Appliance weight: approx. 20 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 1.7 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

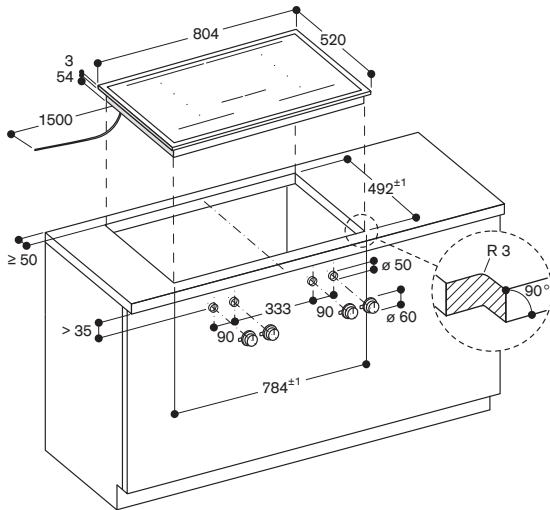


Installation of the cooktop; flush mounting

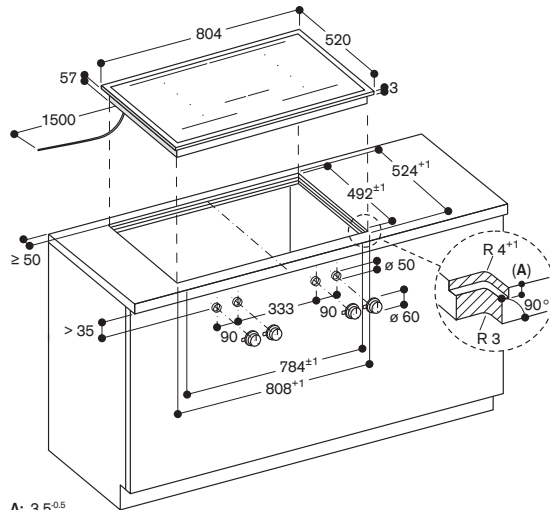


A: 3.5<sup>±0.5</sup>


Installation of the control knob

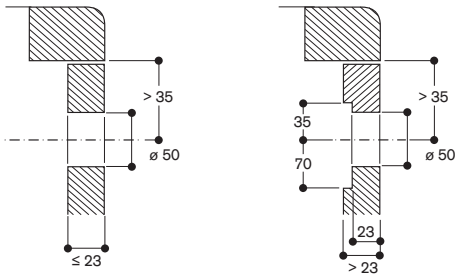


Installation of the control knob

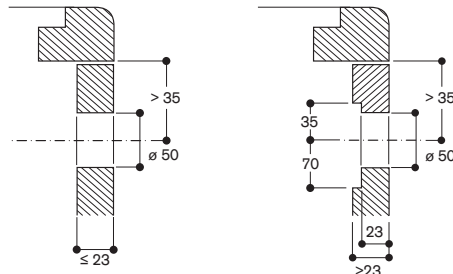

View from above

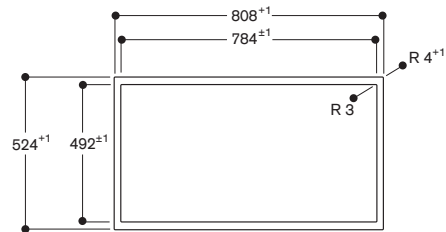


Longitudinal section

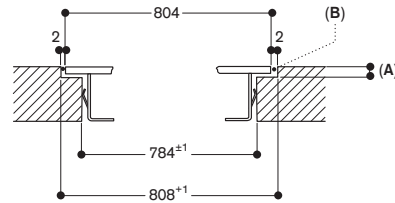

A: 3.5<sup>±0.5</sup>  
B: Fill with silicone

Cross-section

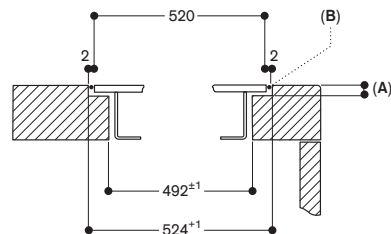

A: 3.5<sup>±0.5</sup>  
B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Vario flex induction cooktop 400 series VI 462

**VI 462 105**  
Frameless.  
Width 60 cm.  
Knobs need to be ordered separately.

#### Necessary Installation accessories

**CKI 440 010**  
Stainless steel knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**  
Black knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

#### Installation accessories

**VA 420 004**  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

#### Highlights

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W).

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

#### Features

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

#### Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 17 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 1.7 W.  
Please check the user manual for how to switch off the WiFi module.  
Length of connection cable, water in- and outlet see detailed drawing on page 157.




Installation of the cooktop; flush mounting

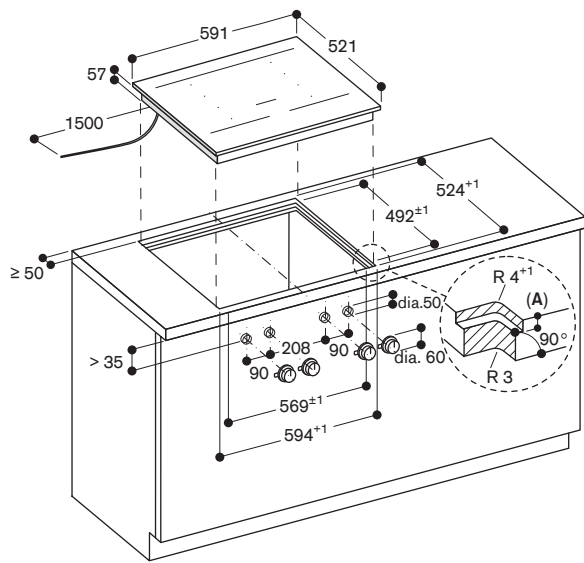


A: 6.5 $\pm 0.5$

Longitudinal section

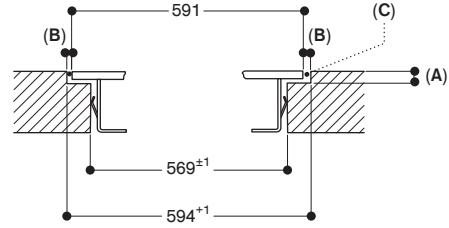


A: 6.5 $\pm 0.5$   
 B: 1.5  
 C: Fill with silicone

Cross-section

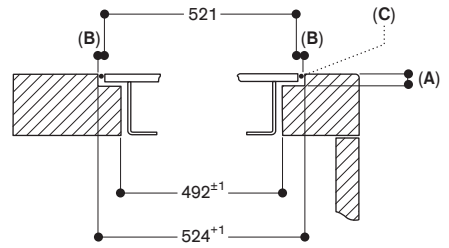


A: 6.5 $\pm 0.5$   
 B: 1.5  
 C: Fill with silicone

Installation of the control knob

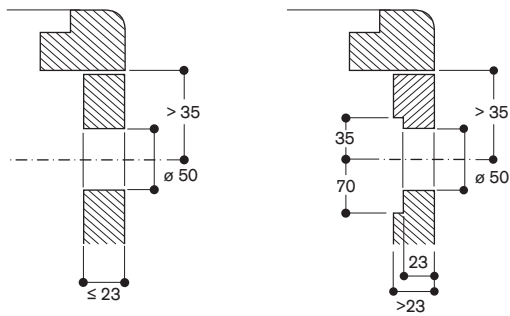

View from above

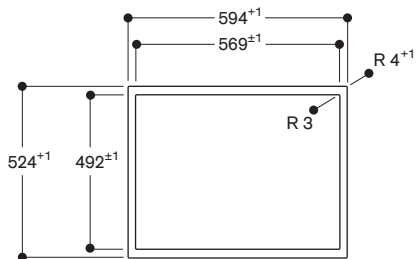



**Vario flex induction cooktop**  
400 series  
VI 462

**VI 462 115**  
Stainless steel frame.  
Width 60 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 440 010**  
Stainless steel knobs 400 series for VI 462, VI 482, CV 482, CV 492  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**  
Black knobs 400 series for VI 462, VI 482, CV 482, CV 492  
Electronic control.  
Set of 4 knobs.

**Installation accessories**

**VA 420 004**  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific cooking areas. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear). If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 260.


**Connection**

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 1.7 W.  
Please check the user manual for how to switch off the WiFi module.







Installation of the cooktop; surface mounting

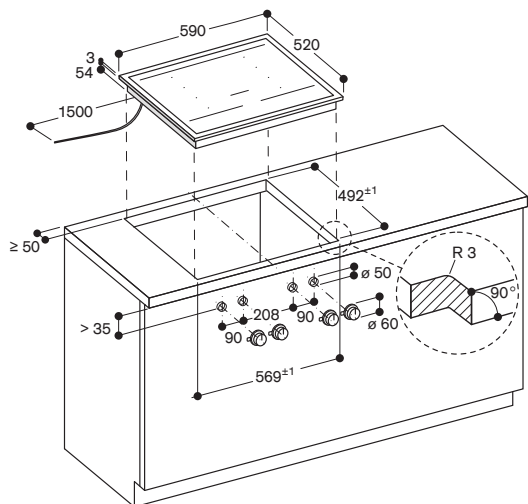


Installation of the cooktop; flush mounting

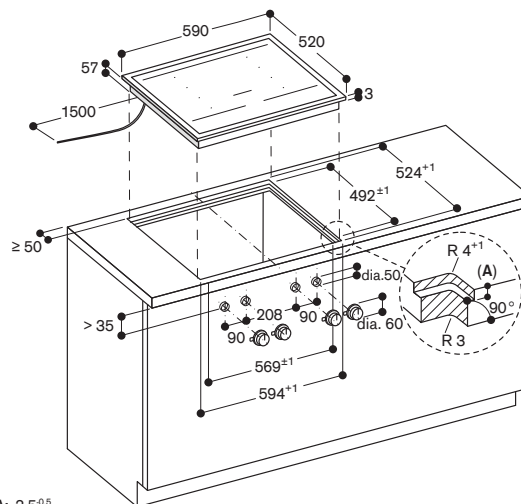


Installation of the control knob

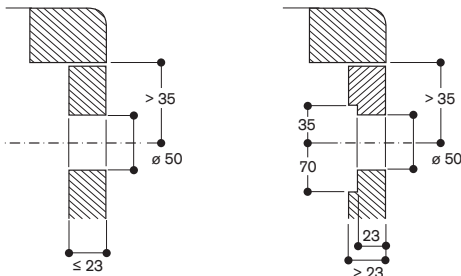


Installation of the control knob

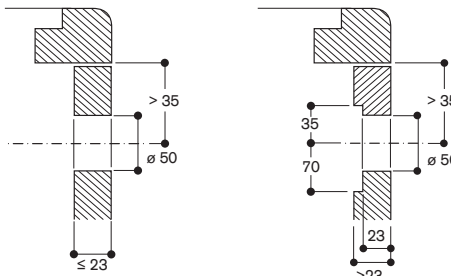

View from above

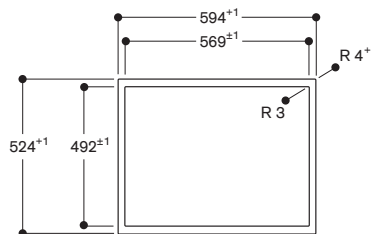


Longitudinal section

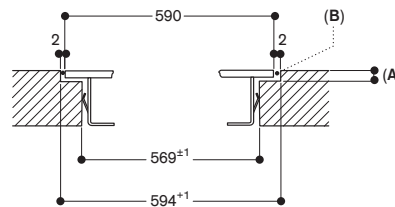

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

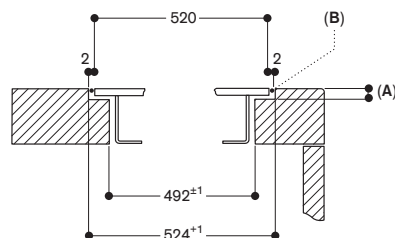

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario flex induction cooktop  
400 series  
VI 422**

**VI 422 105**

Frameless.  
Width 38 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 420 010**

Stainless steel knobs 400 series  
for VI 422.  
Electronic control.  
Set of 2 knobs.

**CKI 420 000**

Black knobs 400 series for VI 422.  
Electronic control.  
Set of 2 knobs.

**Installation accessories**

**VA 420 004**

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply  
material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminum.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 24x20 cm (2200 W, with booster 3700 W), linked together 24x40 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services  
(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

The horizontal positioning of the knobs may be aligned with the specific cooking areas.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 260.


Please read additional planning notes on page 180–183.

**Connection**

Total connected load 3.7 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5 W.  
Power consumption tandby/  
network 1.4 W.  
Please check the user manual for how to switch off the WiFi module.  
Length of connection cable, water in- and outlet see detailed drawing on page 161.




Installation of the cooktop; flush mounting

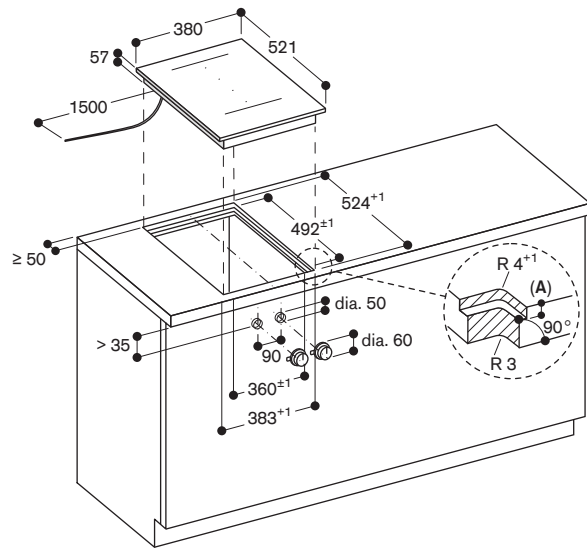


A:  $6.5^{+0.5}$


View from above



Installation of the control knob

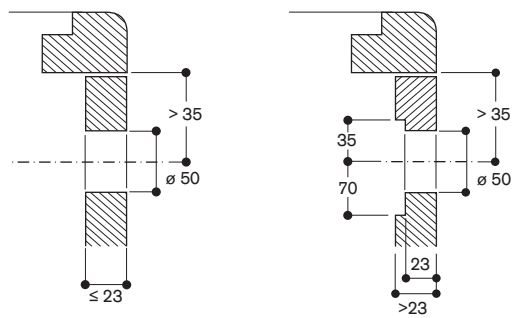


Longitudinal section

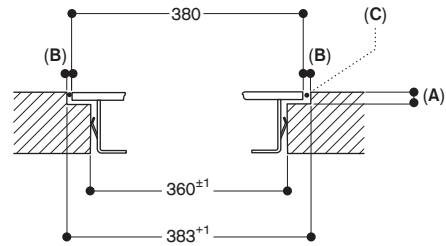

A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Cross-section

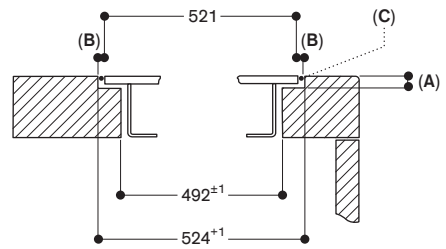

A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario flex induction cooktop**  
400 series  
VI 422

**VI 422 115**  
Stainless steel frame.  
Width 38 cm.  
Knobs need to be ordered separately.

**Necessary Installation accessories**

**CKI 420 010**  
Stainless steel knobs 400 series for VI 422.  
Electronic control.  
Set of 2 knobs.

**CKI 420 000**  
Black knobs 400 series for VI 422.  
Electronic control.  
Set of 2 knobs.

**Installation accessories**

**VA 420 004**  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick. For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

2 flex induction cooking areas 24x19 cm (2200 W, with booster 3700 W), linked together 24x38 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific cooking areas. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear). If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):

Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 10 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 3.7 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 1.4 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

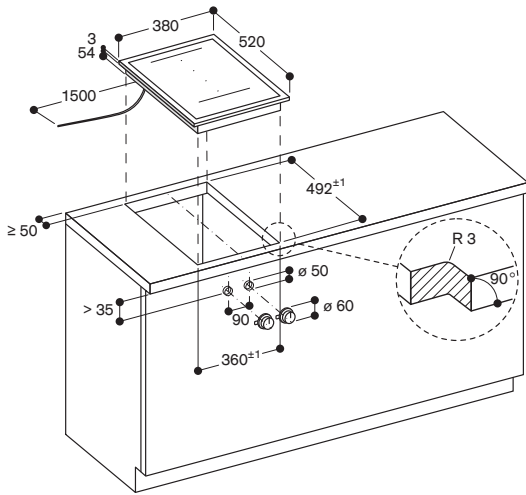


Installation of the cooktop; flush mounting

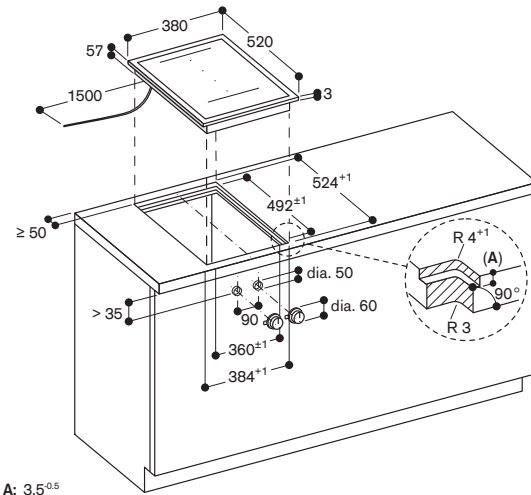


A: 3.5<sup>0.5</sup>


Installation of the control knob

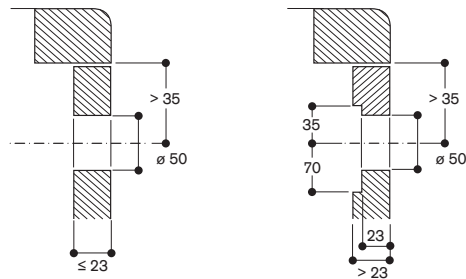


Installation of the control knob

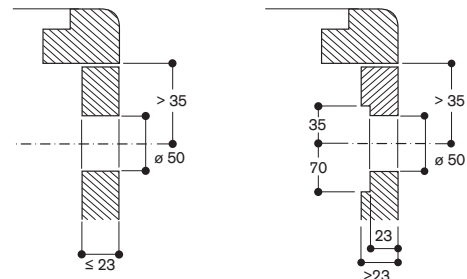

View from above




Longitudinal section

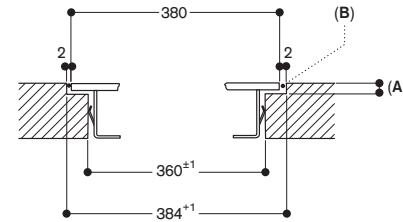

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

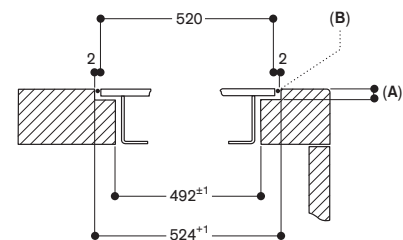

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.



#### Vario induction cooktop 400 series VI 414

##### VI 414 105

Frameless.  
Width 38 cm.  
Knob needs to be ordered separately.

#### Necessary Installation accessories

##### CKI 410 010

Stainless steel knob 400 series for VI 414.  
Electronic control.  
Set of 1 knob.

##### CKI 410 000

Black knob 400 series for VI 414.  
Electronic control.  
Set of 1 knob.

#### Installation accessories

##### VA 420 004

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer material.

With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

##### WZ 400 000

Wok attachment for wok pan.  
Only for Vario induction cooktops.

#### Highlights

- 32 cm cooking zone with booster function.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.
- Ideal for the original wok pan with round bottom, with wok ring.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

#### Features

Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

#### Planning notes

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories  
(order as spare parts):

Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 260.


Please read additional planning notes on page 180-183.

#### Connection

Total connected load 3.7 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 1.4 W.  
Please check the user manual for how to switch off the WiFi module.  
Length of connection cable, water in- and outlet see detailed drawing on page 164.




Installation of the cooktop; flush mounting

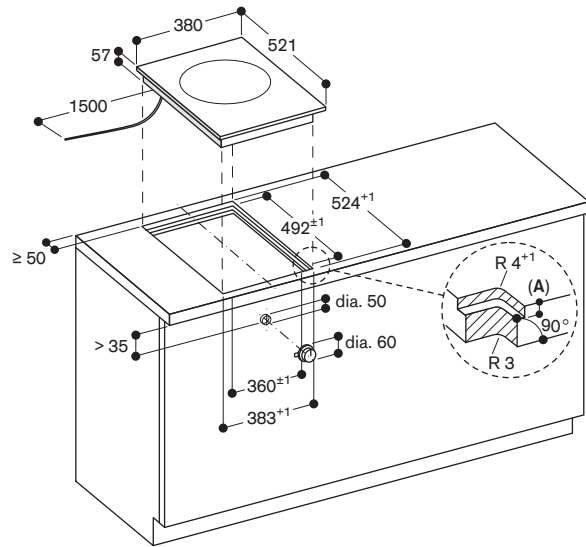


A:  $6.5^{+0.5}$

View from above




Longitudinal section

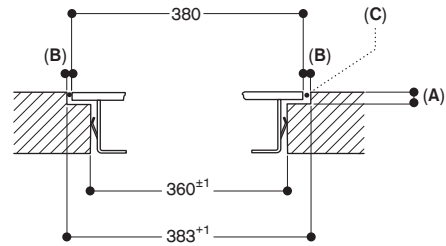


A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Cross-section

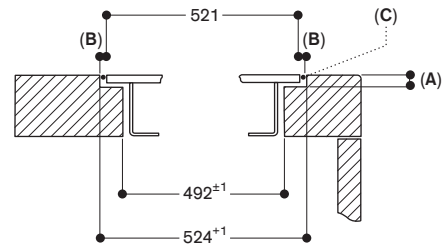

A:  $6.5^{+0.5}$   
 B: 1.5  
 C: Fill with silicone

Installation of the control knob

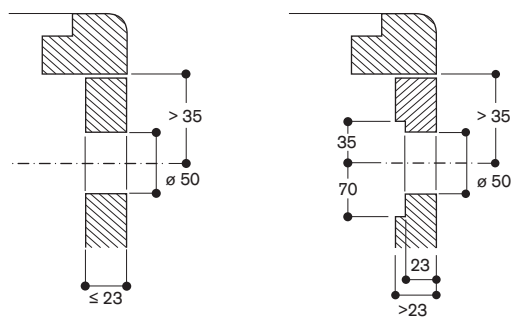

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Vario induction cooktop 400 series VI 414

##### VI 414 115

Stainless steel frame.  
Width 38 cm.  
Knob needs to be ordered separately.

#### Necessary Installation accessories

##### CKI 410 010

Stainless steel knob 400 series  
for VI 414.  
Electronic control.  
Set of 1 knob.

##### CKI 410 000

Black knob 400 series for VI 414.  
Electronic control.  
Set of 1 knob.

#### Installation accessories

##### VA 420 004

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

##### VA 420 010

Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer  
material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.

##### WZ 400 000

Wok attachment for wok pan.  
Only for Vario induction cooktops.

#### Highlights

- 32 cm cooking zone with booster function.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Ideal for the original wok pan with round bottom, with wok ring.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

#### Features

Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories  
(order as spare parts):

Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 10 kg.

Please read the installation details regarding air ducting on page 260.


#### Connection

Total connected load 3.7.  
Connecting cable 1.5 without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/  
display off 0.5.  
Power consumption standby/  
network 1.4.  
Please check the user manual for how to switch off the WiFi module.






Installation of the cooktop; surface mounting

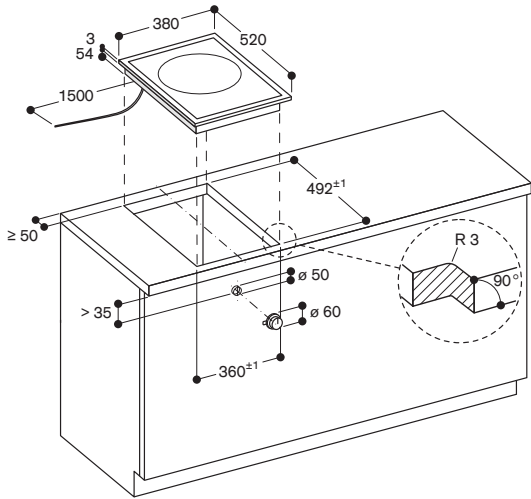


Installation of the cooktop; flush mounting

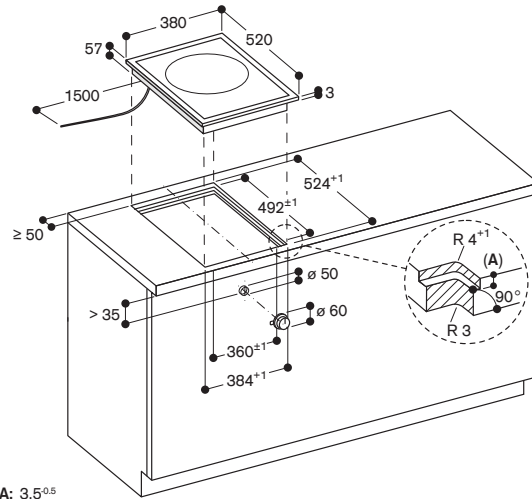


A: 3.5<sup>0.5</sup>


Installation of the control knob

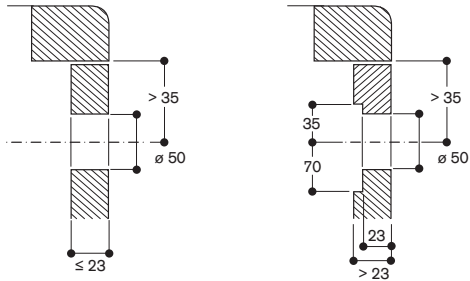


Installation of the control knob

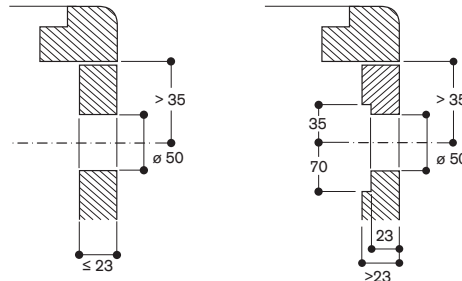

View from above




Longitudinal section

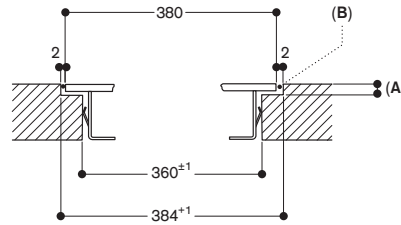

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

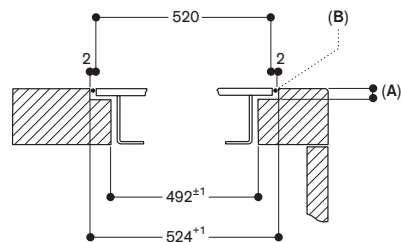

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.



### Vario gas cooktop 400 series VG 491

#### VG 491 115F

Stainless steel.  
Width 90 cm.  
Liquid gas 28–37 mbar.  
Knobs need to be ordered separately.

#### VG 491 215

Stainless steel.  
Width 90 cm.  
Natural gas 20 mbar.  
Knobs need to be ordered separately.

#### Included in the price

1 wok attachment ring.

#### Necessary Installation accessories

##### CKG 450 010

Stainless steel knobs 400 series for VG 491.  
Electronic control.  
Set of 5 knobs.

##### CKG 450 000

Black knobs 400 series for VG 491.  
Electronic control.  
Set of 5 knobs.

#### Installation accessories

##### VA 420 004

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

##### VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.

#### Highlights

- Five multi-ring burners, up to 18 kW.
- Full electronic power level regulation on 12 levels.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Precise and reproducible flame size.
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition.
- Simmer function for cooking on a very low output level.
- Solid smooth-surface cast iron pan supports.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

##### VG 491 115F

1 multi-ring wok burner (300–5800 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (165–4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (165–2000 W), suitable for pots up to max. ø 24 cm.

##### VG 491 215

1 multi-ring wok burner (300–6000 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (165–4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (165–2000 W), suitable for pots up to max. ø 24 cm.

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level regulation plus simmer function.  
Automatic fast ignition.

#### Features

Simmer function.  
Three-part cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

#### Safety

Electronic flame monitoring with automatic re-ignition.  
Residual heat indication.  
Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific burners. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear). If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180–183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.

Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.

No intermediate shelf required.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

Installation in a 90 cm wide lower cabinet is required.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 76 cm.

The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product. The combination with VL 414 is not recommended, since the air extraction from the centre burner cannot be guaranteed due to the distance.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 31.

#### Connection


Total connected load gas 17.8/18.0 kW.  
Total connected load electric 15.0/15.0 W.

Connecting cable 1.4 m with plug.  
Connecting cables 0.3 m and 1 m for control knobs.

Installation of the cooktop; surface mounting

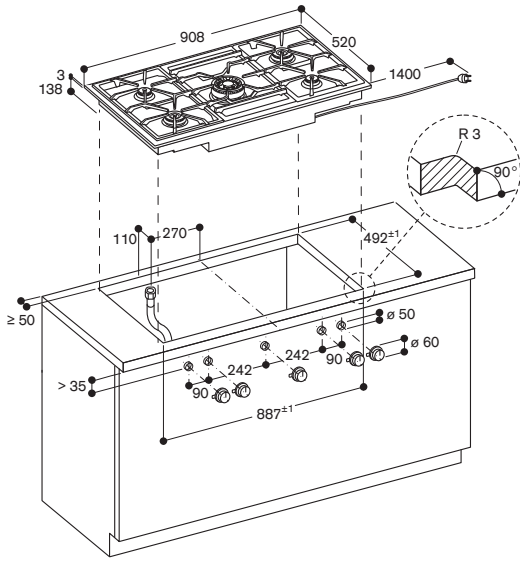


Installation of the cooktop; flush mounting

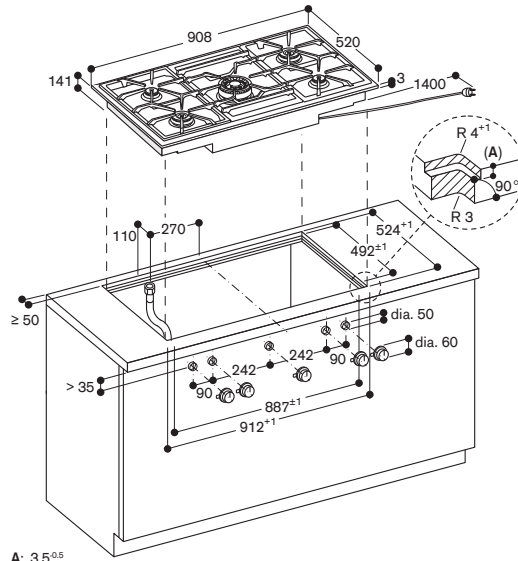


A: 3.5<sup>±0.5</sup>  
6.5<sup>±0.5</sup> in combinations with frameless induction cooktops


Installation of the control knob

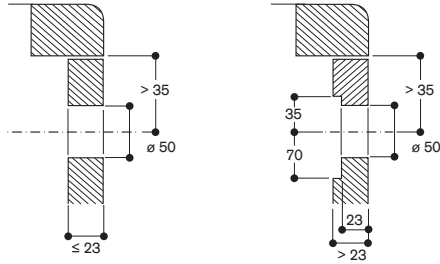


Installation of the control knob

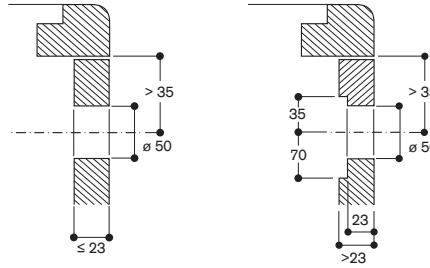

View from above

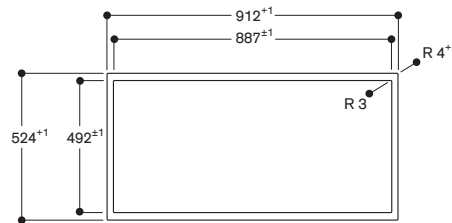


Longitudinal section

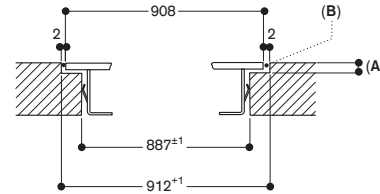

A: 3.5<sup>±0.5</sup>  
6.5<sup>±0.5</sup> in combinations with frameless induction cooktops  
B: Fill with silicone

Cross-section

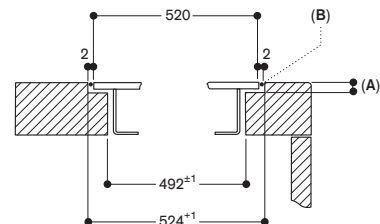

A: 3.5<sup>±0.5</sup>  
6.5<sup>±0.5</sup> in combinations with frameless induction cooktops  
B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Vario gas wok 400 series VG 415

##### VG 415 115F

Stainless steel.  
Width 38 cm.  
Liquid gas 28–37 mbar.  
Wok burner with up to 5.8 kW.  
Knob needs to be ordered separately.

##### VG 415 215

Stainless steel.  
Width 38 cm.  
Natural gas 20 mbar.  
Wok burner with up to 6 kW.  
Knob needs to be ordered separately.

#### Included in the price

1 wok attachment ring.

#### Necessary Installation accessories

##### CKG 410 010

Stainless steel knob 400 series for VG 415.  
Electronic control.  
Set of 1 knob.

##### CKG 410 000

Black knob 400 series for VG 415.  
Electronic control.  
Set of 1 knob.

#### Installation accessories

##### VA 420 004

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

##### VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

##### VA 440 010

Stainless steel appliance cover with mounting strip.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.

#### Highlights

- Multi-ring burner with up to 6 kW.
- Full electronic power level regulation on 12 levels.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Precise and reproducible flame size.
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition.
- Simmer function for cooking on a very low output level.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

##### VG415115F

1 multi-ring wok burner (300 W–5800 W), suitable for pots up to max. ø 32 cm.

##### VG 415 215

1 multi-ring wok burner (300 W–6000 W), suitable for pots up to max. ø 32 cm.

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level regulation plus simmer function.  
Automatic fast ignition.

#### Features

Simmer function.  
Cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

#### Safety

Electronic flame monitoring with automatic re-ignition.  
Residual heat indication.  
Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.  
No intermediate shelf required.  
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.  
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. If operated next to the downdraft ventilation VL 414, the ventilation moulding AA 414 is recommended to ensure maximum performance of the cooktop.


With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 70 cm.

The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product. Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 15 kg.

#### Connection


Total connected load gas 5.8/6.0 kW.  
Total connected load electric 15.0/15.0 W.  
Connecting cable 1.4 m with plug.  
Connecting cables 0.3 m and 1 m for control knobs.

Installation of the cooktop; surface mounting

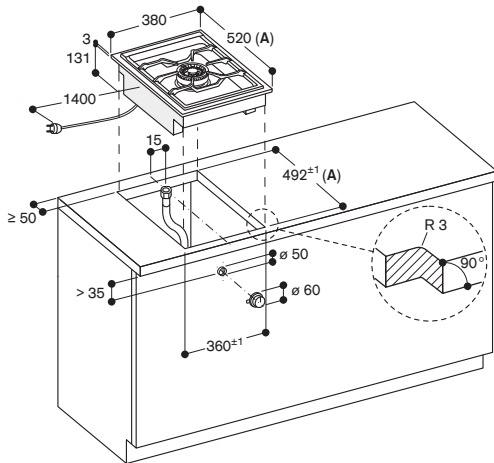

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)


Installation of the cooktop; flush mounting

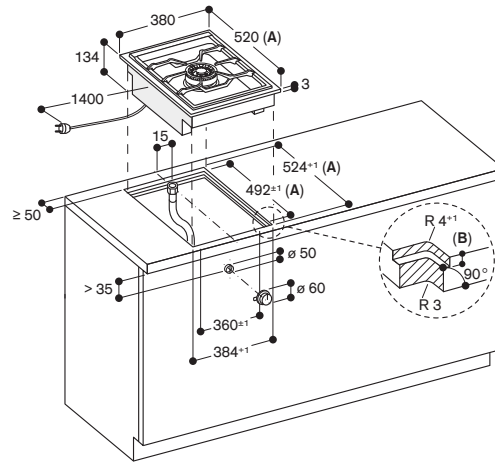


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)

B: 3.5<sup>+0.5</sup> mm  
6.5<sup>+0.5</sup> mm in combinations with frameless induction cooktops


Installation of the control knob

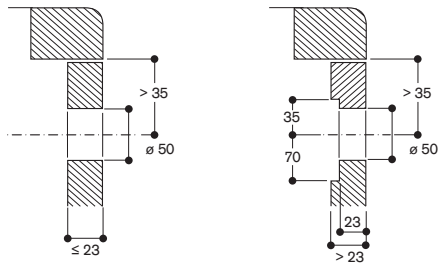

Installation of the control knob

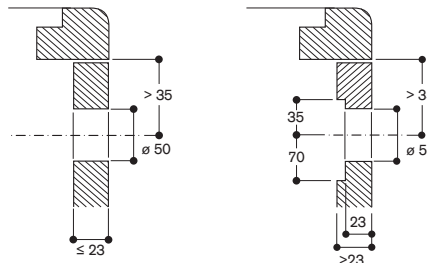


View from above




A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

Longitudinal section

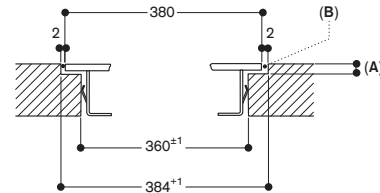

A: 3.5<sup>+0.5</sup> mm  
6.5<sup>+0.5</sup> mm in combinations with frameless induction cooktops  
B: Fill with silicone

Cross-section

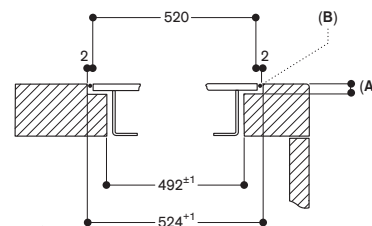

A: 3.5<sup>+0.5</sup> mm  
6.5<sup>+0.5</sup> mm in combinations with frameless induction cooktops  
B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

All measurements in mm.



**Vario gas cooktop 400 series**  
**VG 425**

#### **VG 425 115F**

Stainless steel.  
Width 38 cm.  
Liquid gas 28–37 mbar.  
Knobs need to be ordered separately.

#### **VG 425 215**

Stainless steel.  
Width 38 cm.  
Natural gas 20 mbar.  
Knobs need to be ordered separately.

#### **Necessary Installation accessories**

##### **CKG 420 010**

Stainless steel knobs 400 series for VG 425.

Electronic control.  
Set of 2 knobs.

##### **CKG 420 000**

Black knobs 400 series for VG 425.  
Electronic control.  
Set of 2 knobs.

#### **Installation accessories**

##### **VA 420 004**

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

##### **VA 420 010**

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

##### **VA 440 010**

Stainless steel appliance cover with mounting strip.

#### **Highlights**

- Multi-ring burner with up to 4 kW.
- Full electronic power level regulation on 12 levels.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Precise and reproducible flame size.
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition.
- Simmer function for cooking on a very low output level.
- Solid smooth-surface cast iron pan supports.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### **Cooking zones**

##### **VG425115F**

1 two-ring high output burner (165 W–4000 W), suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner (165 W–2000 W), suitable for pots up to max. ø 24 cm.

##### **VG 425 215**

1 two-ring high output burner (165 W–4000 W), suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner (165 W–2000 W), suitable for pots up to max. ø 24 cm.

#### **Handling**

Control knobs with illuminated ring, cooking zone and output level markings.

One-handed operation.

Full electronic control in 12 output levels for exact power level regulation plus simmer function.

Automatic fast ignition.

#### **Features**

Simmer function.

Cast iron pan support with flat, continuous pot surface.

Brass burner rings.

#### **Safety**

Electronic flame monitoring with automatic re-ignition.

Residual heat indication.

Safety shut-off.

#### **Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.

Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.

No intermediate shelf required.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.

The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 70 cm.

The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 14 kg.

#### **Connection**


Total connected load gas 6.0/6.0 kW.

Total connected load electric 15.0/15.0 W.

Connecting cable 1.4 m with plug.


Connecting cables 0.3 m and 1 m for control knobs.

Installation of the cooktop; surface mounting

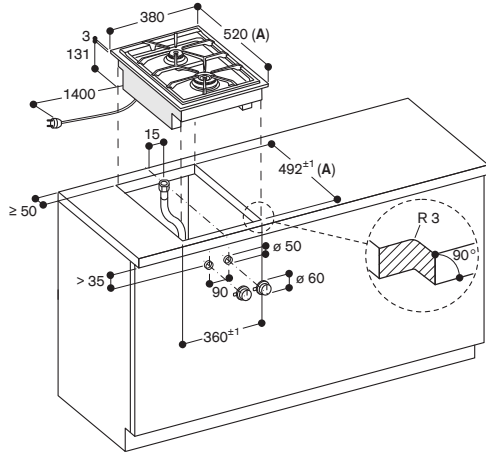


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

Installation of the cooktop; flush mounting

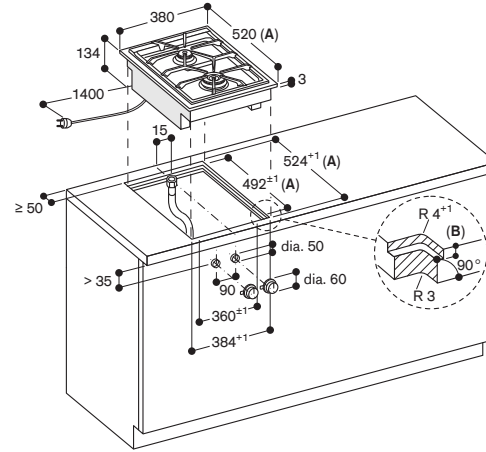


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)  
 B:  $3.5^{+0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction cooktops


Installation of the control knob

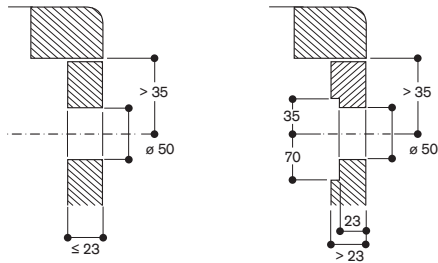

Installation of the control knob

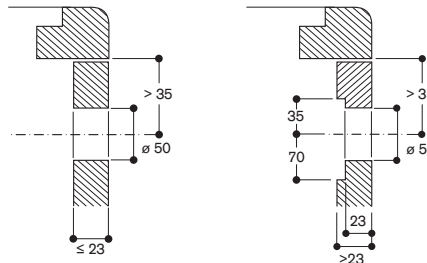


View from above




A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

Longitudinal section

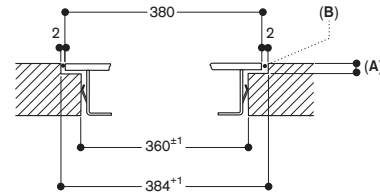

A:  $3.5^{+0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction cooktops  
 B: Fill with silicone

Cross-section

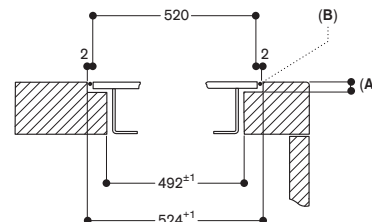

A:  $3.5^{+0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction cooktops  
 B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

All measurements in mm.



#### Vario Teppan Yaki 400 series VP 414

**VP 414 115**  
Stainless steel.  
Width 38 cm.  
Knobs need to be ordered separately.

#### Included in the price

2 spatula.

#### Necessary Installation accessories

**CKP 420 010**  
Stainless steel knobs 400 series  
for VP 414.  
Electronic control.  
Set of 2 knobs.

**CKP 420 000**  
Black knobs 400 series for VP 414.  
Electronic control.  
Set of 2 knobs.

#### Installation accessories

**VA 420 004**  
Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

**VA 420 010**  
Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

**VA 440 010**  
Stainless steel appliance cover with  
mounting strip.

#### Highlights

- Cooking directly on the hard-chromed metal surface, without any pots or pans.
- Exact temperature control up to 240°C.
- Optimum heat distribution.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Cooking zones

Usable area W 31 x D 44 cm.

#### Handling

Control knobs with illuminated ring, cooking zone and temperature markings.  
Electronic temperature control from 120°C to 240°C.

#### Features

Two zones, each 1500 W, can be operated together as a complete surface or each half separately.  
Keeping warm setting.  
Cleaning stage.  
Even with traces of use, always easy to clean like a cast pan.

#### Safety

Safety shut-off.  
Pre-heat and residual heat indicator.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.

If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.  
Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.


A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 12 kg.


#### Connection

Total connected load 3.0 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.






Installation of the cooktop; surface mounting

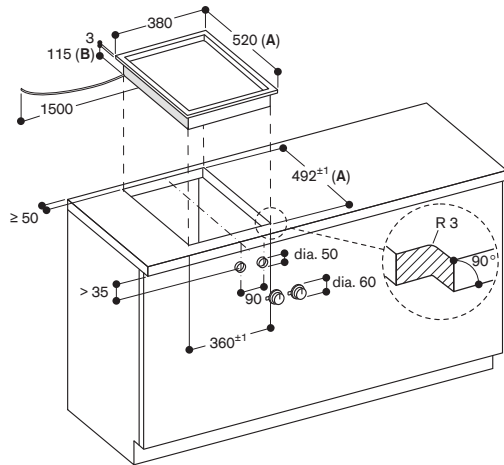


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
 B: 130 mm in the area of the cable clamp (left, on the rear side)

Installation of the cooktop; flush mounting

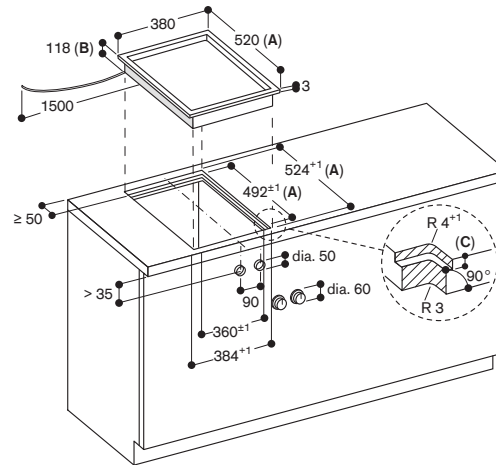


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)  
 B: 133 mm in the area of the cable clamp (left, on the rear side)  
 C: 3.5<sup>+0.5</sup>  
 6.5<sup>+0.5</sup> in combinations with frameless induction cooktops


Installation of the control knob

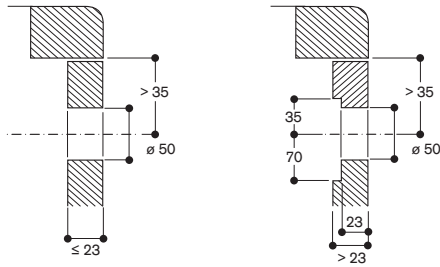

Installation of the control knob

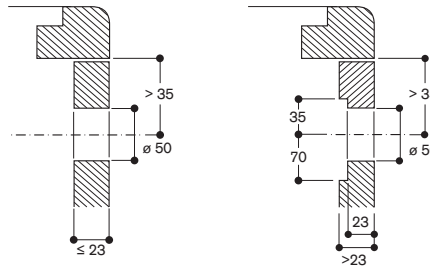


View from above




A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

Longitudinal section

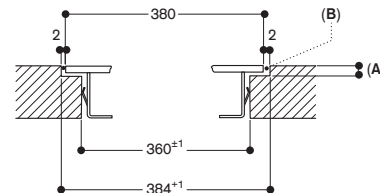

A: 3.5<sup>+0.5</sup>  
 6.5<sup>+0.5</sup> in combinations with frameless induction cooktops  
 B: Fill with silicone

Cross-section

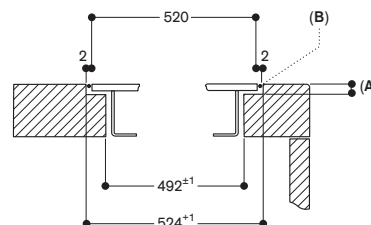

A: 3.5<sup>+0.5</sup>  
 B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Vario electric grill 400 series VR 414

##### VR 414 115

Stainless steel.  
Width 38 cm.  
Knobs need to be ordered separately.

##### Included in the price

- 1 cast pan, half size.
- 2 cast grills.
- 1 lava stone.
- 1 cleaning brush.

##### Necessary Installation accessories

###### CKR 420 010

Stainless steel knobs 400 series for VR 414.

Electronic control.  
Set of 2 knobs.

###### CKR 420 000

Black knobs 400 series for VR 414.  
Electronic control.  
Set of 2 knobs.

##### Installation accessories

###### VA 420 004

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

###### VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

###### VA 440 010

Stainless steel appliance cover with mounting strip.

##### Special accessories

###### LV 030 000

Lava stone for refilling.

##### Highlights

- Two zones can be operated together or separately.
- Cast pan, half size, for simultaneous frying and grilling on two separate surfaces.
- Open cast grill, lava stone.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

##### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic control in 12 output levels.

##### Features

Cooktop, lava stone trough and grease collecting insert from stainless steel.  
Two zones, each 1500 W, can be operated together as a complete surface or each half separately.  
Two-part cast grill.

##### Safety

Safety shut-off.  
Pre-heat and residual heat indicator.

##### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary. If installing with the appliance cover VA 440 take into account the additional space required for the depth.  
If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180-183.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.


A minimum lateral clearance of at least 100 mm from adjacent heat-sensitive furniture or from the wall must be observed.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 26 kg.

##### Connection

Total connected load 3.0 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.




Installation of the cooktop; surface mounting

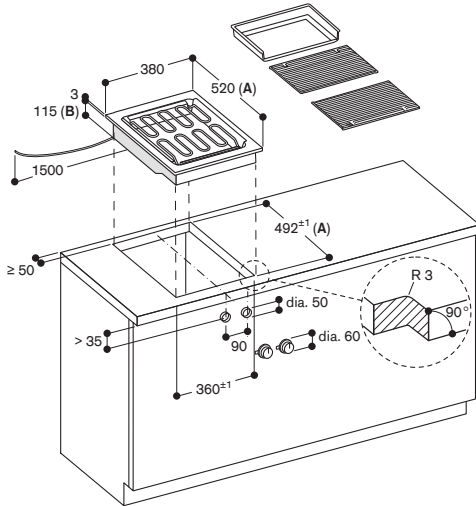


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
 B: 130 mm in the area of the cable clamp (left, on the rear side)

Installation of the cooktop; flush mounting

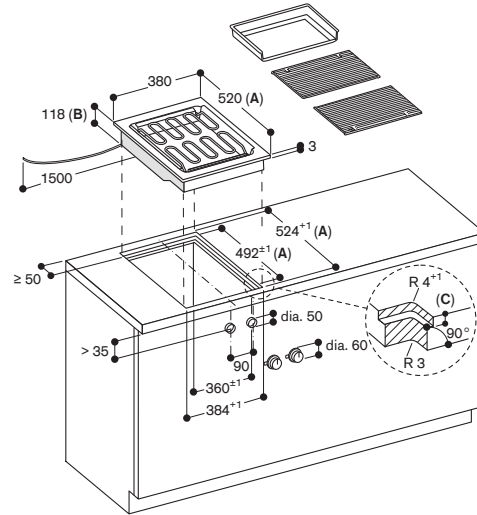


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)  
 B: 133 mm in the area of the cable clamp (left, on the rear side)  
 C: 3.5<sup>-0.5</sup>  
 6.5<sup>+0.5</sup> in combinations with frameless induction cooktops


Installation of the control knob

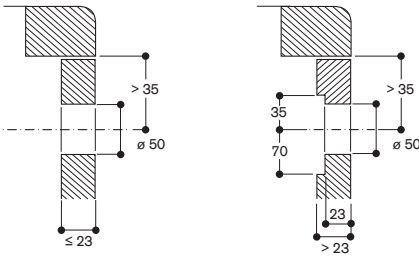

Installation of the control knob

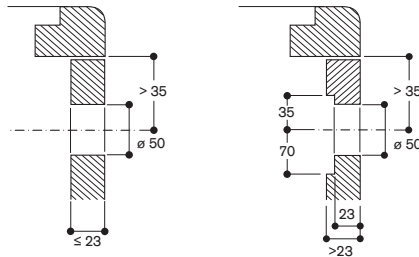


View from above




A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

Longitudinal section

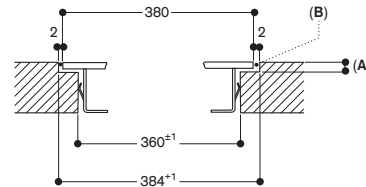

A: 3.5<sup>-0.5</sup>  
 6.5<sup>+0.5</sup> in combinations with frameless induction cooktops  
 B: Fill with silicone

Cross-section

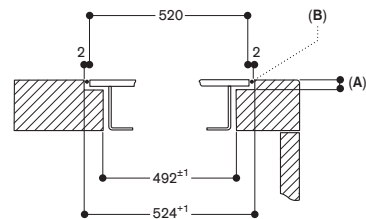

A: 3.5<sup>-0.5</sup>  
 6.5<sup>+0.5</sup> in combinations with frameless induction cooktops  
 B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

All measurements in mm.



### Vario downdraft ventilation 400 series VL 414

#### VL 414 115

Stainless steel.  
Width 15.5 cm.  
Air extraction / Air recirculation.  
Motorless.  
Knob needs to be ordered separately.



#### Necessary Installation accessories

##### CKV 410 010

Stainless steel knob 400 series  
for VL 414.  
Electronic control.  
Set of 1 knob.

##### CKV 410 000

Black knob 400 series for VL 414.  
Electronic control.  
Set of 1 knob.

#### In combination with remote fan units

AR 400 142 Air extraction  
AR 401 142  
AR 403 122  
AR 413 122 Air recirculation  
AR 410 110

#### Installation accessories

##### AD 410 040

Flexibel connecting piece.  
DN 150 flat.

##### AD 851 041

Connecting piece for extension with  
flat duct DN 150 for extra deep  
worktop.

##### VA 420 004

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

##### VA 420 010

Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

#### Special accessories

##### AA 414 010

Ventilation moulding for VL 414 next to  
gas appliance.

**Installation accessories for air ducting  
you will find at the pages 336–341.**

#### Highlights

- Highly efficient, low noise ventilation system especially with remote fan unit AR 410 110.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Minimal planning and easy installation.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Output

Power levels depend on the remote fan unit.

Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

#### Features

Control knob with illuminated ring.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic sensor controlled or manual run on function.  
Large-scale metal grease filter with high grease absorption.  
Removable, dishwasher-safe grease filter unit.  
Grease filter and activated charcoal filter saturation indicator.  
Airflow-optimised interior for efficient air circulation.  
Interval ventilation, 6 min.  
Enamelled ventilation grille, dishwasher-safe.  
Air exhaust bend included in delivery.  
Overflow 250 ml capacity.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop).  
Remote control and monitoring  
Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.  
Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.  
Energy consumption 40.4 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 57 dB / max. 71 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is Lmax 26 m. For each VL one remote fan unit is recommended.

Maximum cooktop(s) width between two VL: 80 cm except with the CX 482. Vario cooktops like Vario electric grill and Vario gas wok should be placed between 2 VL.

Air recirculation is not recommended in combination with Vario electric grill. For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>.

If operated next to gas appliances, the ventilation moulding AA 414 010 is recommended to ensure maximum performance of the cooktop.

Appliance can be snapped into the worktop from above.

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 180–183.


#### Connection

Total connected load 10 W.  
Connecting cable 1.75 m, pluggable.  
Connecting cables 0.3 m and 1 m for control knobs.  
Plan a LAN cable.

Installation of the downdraft ventilation;  
surface mounting

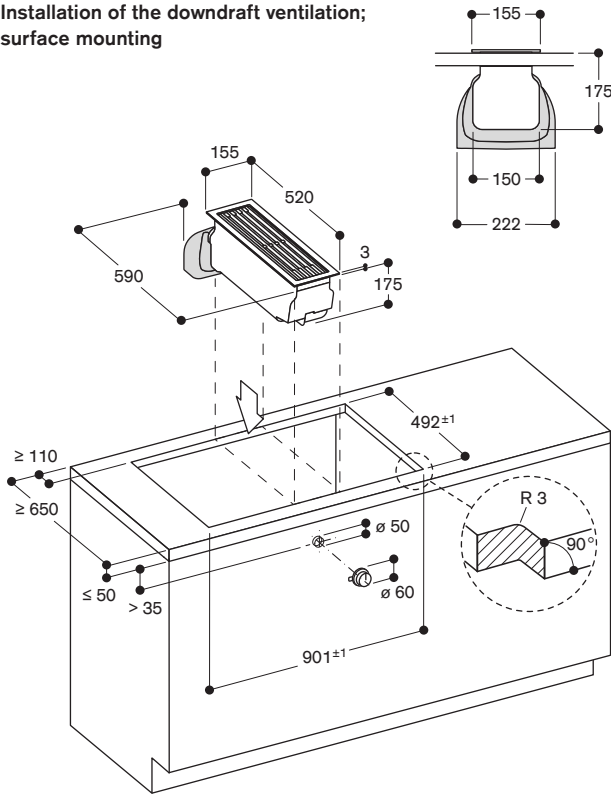


Installation of the downdraft ventilation;  
flush mounting

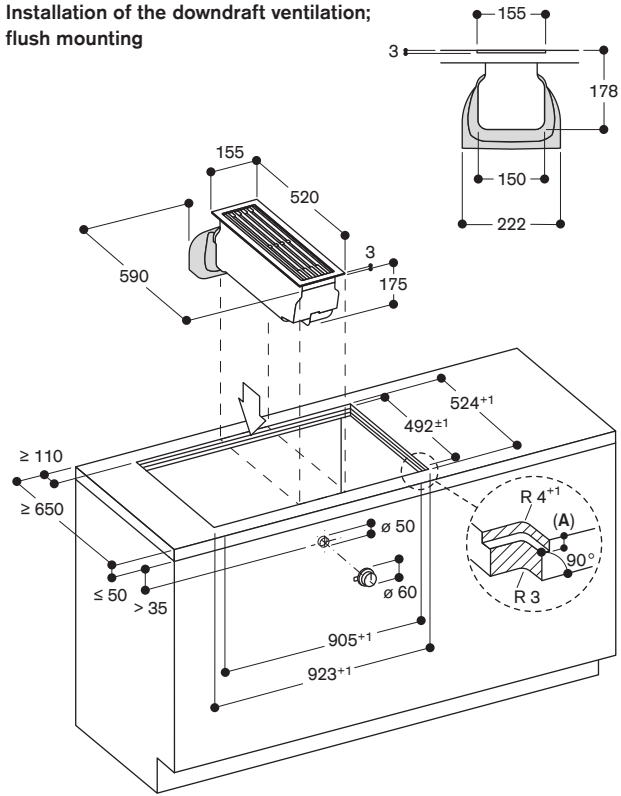


A: 3.5<sup>-0.5</sup> in combination with at least one framed appliance  
6.5<sup>+0.5</sup> in combination with at least one frameless induction cooktop

Installation of the control knob

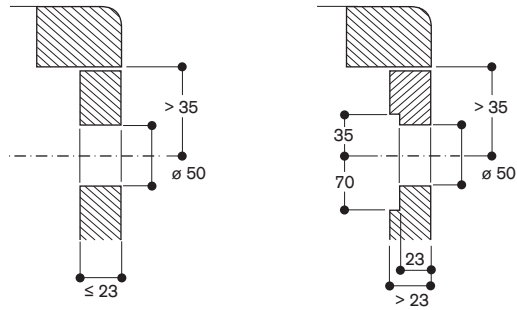


Installation of the control knob

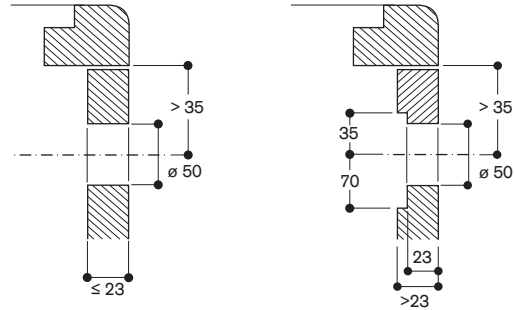


Installation accessories

AD 410 040 : Flexibel connecting piece, DN 150 flat





AD 851 041: Connecting piece VL for extension with  
flat duct DN150 for extra deep worktop



### Sample combinations without VL 414 ventilation element for flush mounting

Cut-out dimensions for appliance combinations in the 400 series for flush mounting. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.


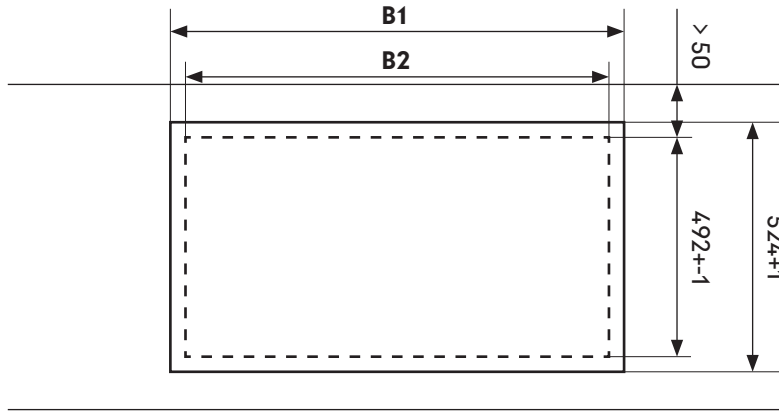


For dimension A:  
 3,5 - 0,5 in combinations with only framed appliances  
 6,5 +0,5 in combinations with at least one frameless induction cooktops

Cooktops	Appliances size [mm]	Dimension B1 [mm]	Dimension B2 [mm]	# of VA420004
	380 / 380	766 +1	748 +1	1
	380 / 380 / 380	1148 +1	1130 +1	2
	380 / 380 / 380 / 380	1530 +1	1512 +1	3
	591 / 380	977 +1	959 +1	1
	380 / 591 / 380	1359 +1	1341 +1	2
	805 / 380	1191 +1	1173 +1	1
	909 / 380	1295 +1	1277 +1	1

### Sample combinations with VL 414 ventilation element for flush mounting

Cut-out dimensions for appliance combinations in the 400 series for flush mounting. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.

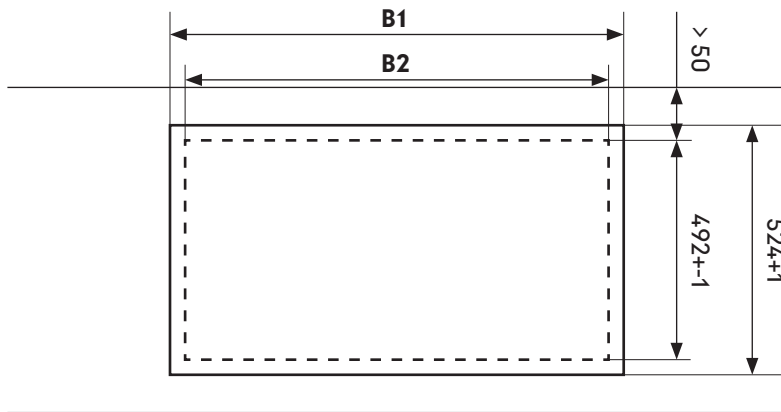


For dimension A:  
 3,5 - 0,5 in combinations with only framed appliances  
 6,5 +0,5 in combinations with at least one frameless induction cooktops








Cooktops	Appliances size [mm]	Dimension B1 [mm]	Dimension B2 [mm]	# of VA420004
	380 / 155 / 380	923 +1	905 +-1	2
	380 / 155 / 380 / 155	1080 +1	1062 +-1	3
	380 / 155 / 380 / 155 / 380	1462 +1	1444 +-1	4
	380 / 155 / 380 / 155 / 380 / 155 / 380	2001 +1	1983 +-1	6
	380 / 155 / 380 / 380 / 155 / 380	1844 +1	1826 +-1	5
	155 / 591 / 155	909 +1	891 +-1	2
	155 / 591 / 155 / 380	1291 +1	1273 +-1	3
	380 / 155 / 591 / 155 / 380	1673 +1	1655 +-1	4
	380 / 155 / 805 / 155 / 380	1887 +1	1869 +-1	4

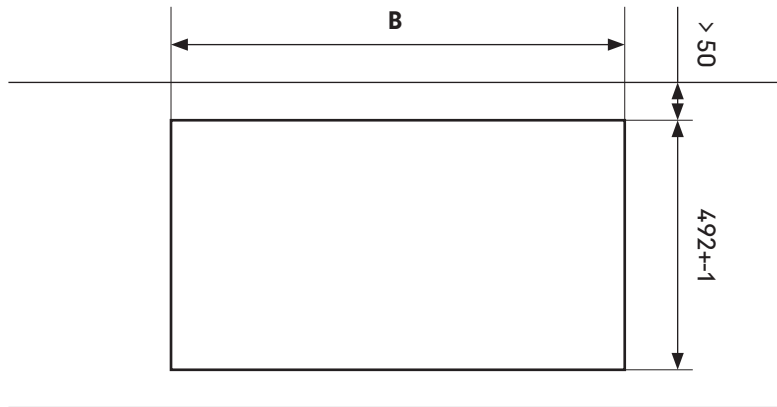Recommended position for gas wok and grill

## Sample combinations without VL 414 ventilation element for surface mounting

Cut-out dimensions for appliance combinations in the 400 series for Surface mounting. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.




Cooktops	Appliances size [mm]	Dimension B [mm]	# of VA420010
	380 / 380	743 +-1	1
	380 / 380 / 380	1126 +-1	2
	380 / 380 / 380 / 380	1509 +-1	3
	590 / 380	953 +-1	1
	380 / 590 / 380	1336 +-1	2
	804 / 380	1167 +-1	1
	908 / 380	1271 +-1	1



### Sample combinations with VL 414 ventilation element for surface mounting

Cut-out dimensions for appliance combinations in the 400 series for Surface mounting. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.

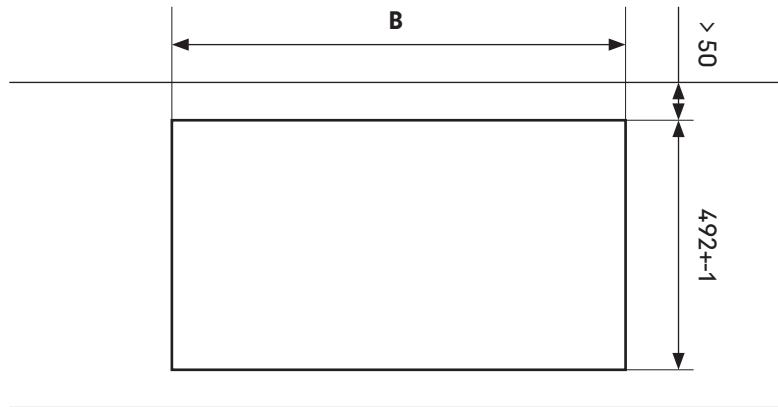


Cooktops	Appliances size [mm]	Dimension B [mm]	# of VA420010
	380 / 155 / 380	901 +1	2
	380 / 155 / 380 / 155	1059 +1	3
	380 / 155 / 380 / 155 / 380	1442 +1	4
	380 / 155 / 380 / 155 / 380 / 155 / 380	1983 +1	6
	380 / 155 / 380 / 380 / 155 / 380	1825 +1	5
	155 / 590 / 155	886 +1	2
	155 / 590 / 155 / 380	1269 +1	3
	380 / 155 / 590 / 155 / 380	1652 +1	4
	380 / 155 / 804 / 155 / 380	1866	4

Recommended position for gas wok and grill

## Cut-out dimensions for appliance combinations in the 400 series

### Calculation of the width of the cut-out for a surface mounting


Example using a combination of VI 414, VI 422, VP 414 and 2 VL 414

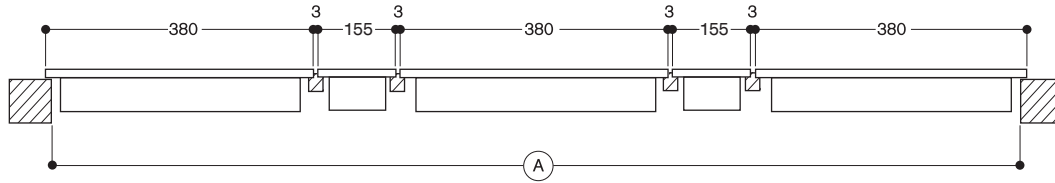

		Example		Your combination
Total width of all appliances	in mm	$(3 \times 380) + (2 \times 155)$	1.450	.....
+ Number of connection strips	x 3 mm	4 x 3	+ 12	.....
- Lateral appliance projection	(10 mm / side)	20	- 20	- 20
(A) Total width of the cut-out	(in mm)		1.442 +/- 1	..... +/- 1

### Calculation of the width of the cut-out for a flush mounting

Example using a combination of VI 414, VI 422, VP 414 and 2 VL 414

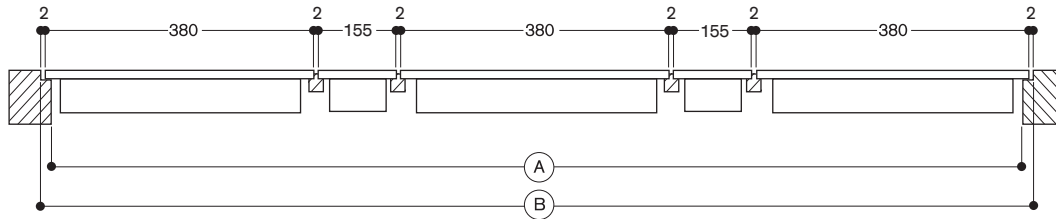

		Example		Your combination
Total width of all appliances	in mm	$(3 \times 380) + (2 \times 155)$	1.450	.....
+ Number of connection strips	x 2 mm	4 x 2	+ 8	.....
- Lateral appliance projection	(7 mm / side)	14	- 14	- 14
(A) Total width of the cut-out	(in mm)		1.444 +/- 1	..... +/- 1
+ Lateral appliance projection	(7 mm / side)	14	+ 14	+ 14
+ Silicone joint (2mm circumference)		2 x 2	+ 4	+ 4
(B) Total width with groove	(in mm)		1.462 +/- 1	..... 0/+ 1

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------



**Vario flex induction cooktop 200 series**  
**VI 262**

**VI 262 120**  
Black aluminium control panel.  
Width 60 cm.

**Included in the price**  
1 glass scraper.

**Installation accessories**

**VV 200 010**  
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick. For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.

**Cooking zones**

2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring. Integrated control panel. Electronic power control in 9 output levels.

**Features**

Cooking area marking. Flex function for rectangular cooking areas. Frying sensor function. Pot detection. Booster function for each cooking area.

**Safety**

Residual heat indication. Operation indicator. Safety shut-off.

**Planning notes**

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm


Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 260.



Please read additional planning notes on page 194-195.

**Connection**

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.



**Installation of the cooktop; surface mounting**

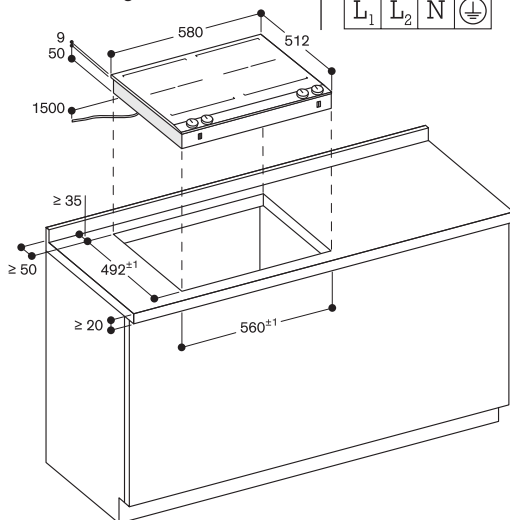

**Vario flex induction cooktop 200 series**  
**VI 242**

**VI 242 120**  
Black aluminium control panel.  
Width 38 cm.

**Included in the price**  
1 glass scraper.

**Installation accessories**

**VV 200 010**  
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick. For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.

**Cooking zones**

2 flex induction cooking areas 24x19 cm (2200 W, with booster 3700 W), linked together 24x38 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring. Integrated control panel. Electronic power control in 9 output levels.

**Features**

Cooking area marking. Flex function for rectangular cooking areas. Frying sensor function. Pot detection. Booster function for both cooking areas.

**Safety**

Residual heat indication. Operation indicator. Safety shut-off.

**Planning notes**

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 260.


Please read additional planning notes on page 194-195.

**Connection**

Total connected load 3.7 kW.  
Connecting cable 1.5 m without plug.



**Installation of the cooktop; surface mounting**

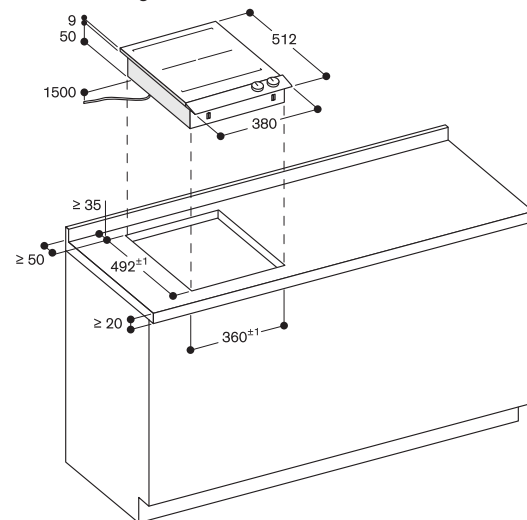



**Vario flex induction cooktop  
200 series  
VI 232**

**VI 232 121**  
Black aluminium control panel.  
Width 28 cm.

**Included in the price**  
1 glass scraper.

**Installation accessories**  
**VV 200 010**  
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**  
**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminum.  
Non-stick. For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**VD 200 020**  
Black appliance cover.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.

**Cooking zones**

2 flex induction cooking areas 21x19 cm (2200 W, with booster 3700 W), linked together 21x38 cm (3300 W, with booster 3700 W).

**Handling**

Control knobs with illuminated ring. Integrated control panel. Electronic power control in 9 output levels.

**Features**

Cooking area marking. Flex function for rectangular cooking areas. Frying sensor function. Pot detection. Booster function for both cooking areas.

**Safety**

Residual heat indication. Operation indicator. Safety shut-off.

**Planning notes**

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm


Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 260.


Please read additional planning notes on page 194-195.

**Connection**

Total connected load 3.7 kW.  
Connecting cable 1.5 m without plug.



**Installation of the cooktop;  
surface mounting**

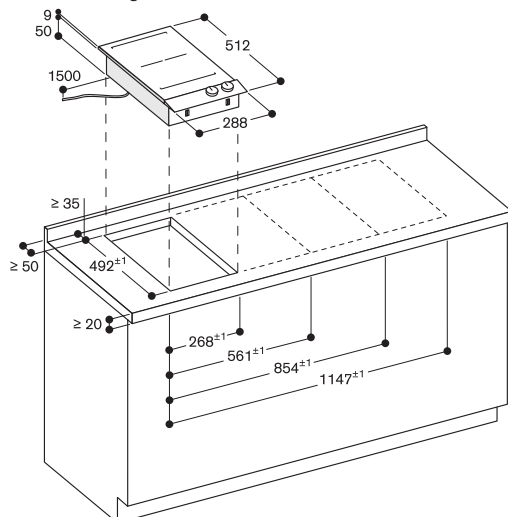

All measurements in mm.



**Vario gas cooktop 200 series**  
**VG 264**

**VG 264 120F**  
Black aluminium control panel.  
Width 60 cm.  
Liquid gas 28-37 mbar.

**VG 264 220**  
Black aluminium control panel.  
Width 60 cm.  
Natural gas 20 mbar.

**Installation accessories**

**VV 200 010**  
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination with other Vario appliances of the 200 series.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Solid smooth-surface cast pan supports for easy and safe positioning of cookware.
- Up to 9.8 kW on 4 burners.

**Cooking zones**

2 high output burner (560 W-3000 W), suitable for pots up to max. ø 22 cm.  
2 standard burners (380 W-1900 W), suitable for pots up to max. ø 20 cm.

**Handling**

Control knobs with illuminated ring.  
Integrated control panel.  
One-handed operation.  
Electric ignition.

**Features**

Two-part cast iron pan support with continuous pot surface.  
Enamelled burner cover.

**Safety**

Thermoelectric safety pilot.  
Residual heat indication.  
Operation indicator.

**Planning notes**

**VG 264 120F**  
Special nozzles for natural gas 20 mbar can be ordered as spare parts.

**VG 264 220**  
Special nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts.

No intermediate shelf required.  
Appliance can be snapped into the worktop from above.  
A minimum lateral clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 65 cm.


The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product.  
Appliance weight: approx. 15 kg.

Please read additional planning notes on page 194-195.

**Connection**


Total connected load gas 9.8/9.8 kW.  
Total connected load electric 10.0/10.0 W.  
Connecting cable 1.5 m with plug.

**Installation of the cooktop; surface mounting**

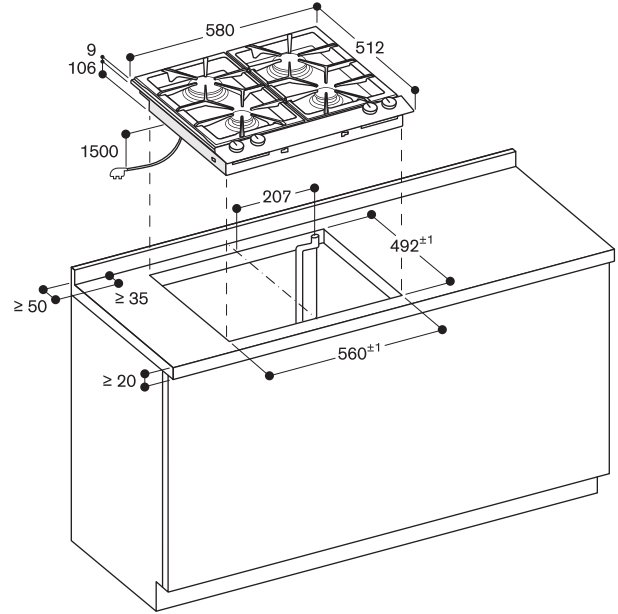

Minimum distance from the appliance cut-out to the side wall 150 mm.

**Gas connection**

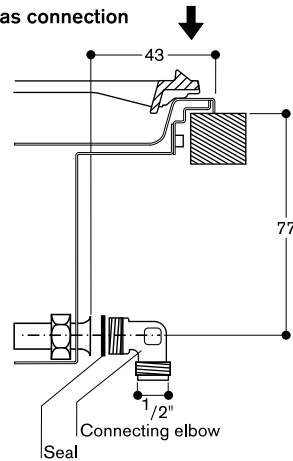



**Vario gas wok 200 series**  
**VG 231**

**VG 231 120F**

Black aluminium control panel.  
Width 28 cm.  
Liquid gas 28–37 mbar.  
Wok burner with up to 5.8 kW.

**VG 231 220**

Black aluminium control panel.  
Width 28 cm.  
Natural gas 20 mbar.  
Wok burner with up to 6 kW.

**Included in the price**

1 wok attachment ring.

**Installation accessories**

**VV 200 010**

Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**

Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**

**VD 200 020**

Black appliance cover.

**WP 400 001**

Wok pan made of multiple-layer material.  
With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Multi-ring burner of solid, heat-resistant brass as used in professional kitchen.
- Total output up to 6 kW.

**Cooking zones**

**VG 231 120F**

1 multi-ring wok burner (300 W–5800 W), suitable for pots up to max. ø 30 cm.

**VG 231 220**

1 multi-ring wok burner (300 W–6000 W), suitable for pots up to max. ø 30 cm.

**Handling**

Control knobs with illuminated ring. Integrated control panel. One-handed operation. Electric ignition. To close the cover, the cast iron pan support can be easily reversed.

**Features**

Cast iron pan support. Brass burner rings.

**Safety**

Thermoelectric safety pilot. Residual heat indication. Operation indicator.

**Planning notes**

**VG 231 120F**

Special nozzles for natural gas 20 mbar can be ordered as spare parts.

**VG 231 220**

Special nozzles for liquid gas 28–30/37 mbar can be ordered as spare parts.


Appliance can be snapped into the worktop from above. A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 65 cm. The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product. Appliance weight: approx. 11 kg.

Please read additional planning notes on page 194–195.

**Connection**


Total connected load gas 5.8/6.0 kW.  
Total connected load electric 10.0/10.0 W.  
Connecting cable 1.5 m with plug.

**Installation of the cooktop; surface mounting**

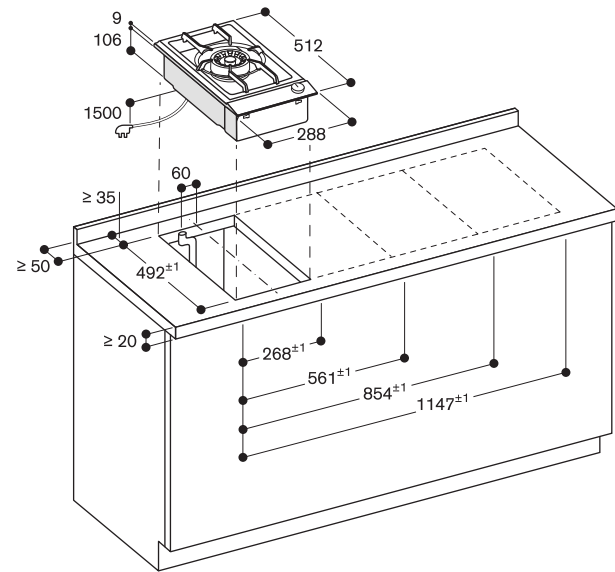

Minimum distance from the appliance cut-out to the side wall 150 mm.

**Gas connection**

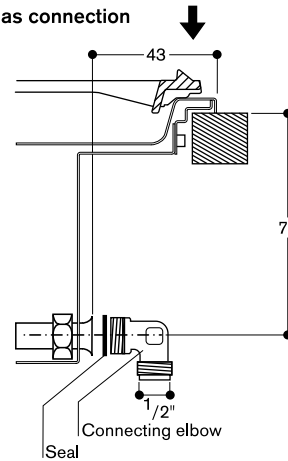



#### Vario gas cooktop 200 series VG 232

##### VG 232 120F

Black aluminium control panel.  
Width 28 cm.  
Liquid gas 28–37 mbar.

##### VG 232 220

Black aluminium control panel.  
Width 28 cm.  
Natural gas 20 mbar.

#### Installation accessories

##### VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series.

##### VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series.

#### Special accessories

##### VD 200 020

Black appliance cover.

#### Highlights

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Solid smooth-surface cast pan supports for easy and safe positioning of cookware.

#### Cooking zones

1 high output burner (560 W–3000 W), suitable for pots up to max. ø 22 cm.  
1 standard burner (380 W–1900 W), suitable for pots up to max. ø 20 cm.

#### Handling

Control knobs with illuminated ring.  
Integrated control panel.  
One-handed operation.  
Electric ignition.

#### Features

Cast pan support with continuous pot surface.  
Enamelled burner cover.

#### Safety

Thermoelectric safety pilot.  
Residual heat indication.  
Operation indicator.

#### Planning notes

VG 232 120F  
Special nozzles for natural gas 20 mbar can be ordered as spare parts.

#### VG 232 220

Special nozzles for liquid gas 28–30/37 mbar can be ordered as spare parts.


Appliance can be snapped into the worktop from above.  
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 65 cm.  
The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product.  
Appliance weight: approx. 9 kg.

Please read additional planning notes on page 194–195.

#### Connection


Total connected load gas 4.9/4.9 kW.  
Total connected load electric 10.0/10.0 W.  
Connecting cable 1.5 m with plug.

#### Installation of the cooktop; surface mounting

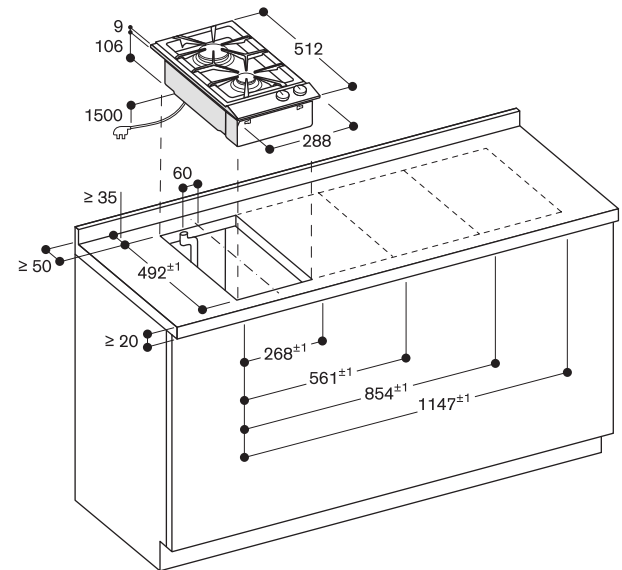

Minimum distance from the appliance cut-out to the side wall 150 mm.

#### Gas connection

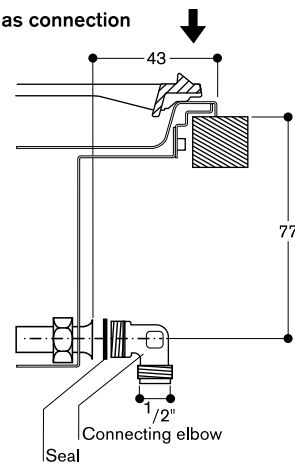





**Vario Teppan Yaki 200 series**  
**VP 230**

**VP 230 120**  
Black aluminium control panel.  
Width 28 cm.

**Included in the price**  
2 spatula.

**Installation accessories**

**VV 200 010**  
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**

**VD 200 020**  
Black appliance cover.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.
- Cooking directly on the metal surface, without any pots or pans.
- Exact temperature control up to 240 °C.
- Keeping warm setting.

**Cooking zones**

Useable area: 844 cm<sup>2</sup>.

**Handling**

Control knobs with illuminated ring.  
Integrated control panel.  
Electronic temperature control from 140 °C to 240 °C.

**Features**

Heating element with 1800 W.  
Keeping warm setting.  
Cleaning stage.  
Stainless steel frame seamlessly welded with the stainless steel surface.

**Safety**

Pre-heat and residual heat indicator.  
Operation indicator.  
Safety shut-off.

**Planning notes**

The distance from the upper edge of the work surface to the upper edge of the intermediate shelf must be at least 150 mm.  
Appliance can be snapped into the worktop from above.  
A minimum lateral clearance of at least 30 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Intermediate shelf required; after installation, this shelf must only be removed using tools to guarantee the touch protection from below.  
Appliance weight: approx. 9 kg.


Please read additional planning notes on page 194-195.

**Connection**

Total connected load 1.8 kW.  
Connecting cable 1.8 m without plug.



**Installation of the cooktop; surface mounting**

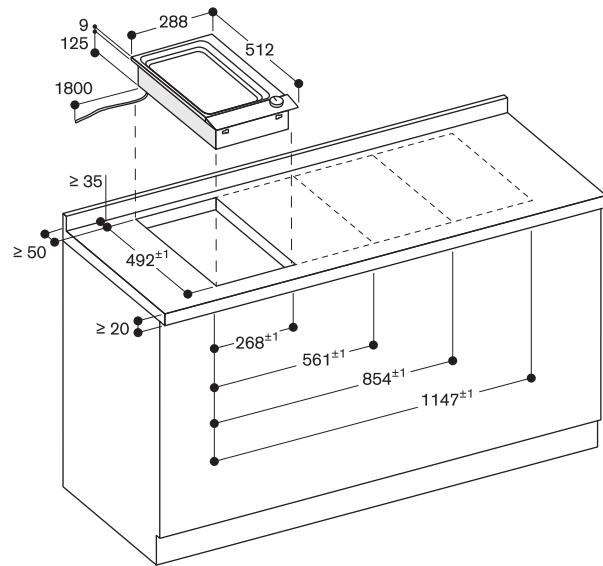



**Vario electric grill 200 series**  
**VR 230**

**VR 230 120**  
Black aluminium control panel.  
Width 28 cm.

**Included in the price**

- 1 cast grill.
- 1 lava stones.
- 1 cleaning brush.

**Installation accessories**

**VV 200 010**

Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**

Black connection strip for combination with other Vario appliances of the 200 series.

**Special accessories**

**LV 030 000**

Lava stones for refilling.

**VD 200 020**

Black appliance cover.

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Control panel for comfortable and secure operation.
- 2 zones, separately controlled.
- Open cast grill, lava stone.

**Handling**

Control knobs with illuminated ring.  
Integrated control panel.  
9 switching levels.

**Features**

2 separately controllable swing-out grilling elements (1500 W).  
Join function.  
Cast grill.  
Stainless steel lavastone container and grease collecting insert, dishwasher-safe.

**Safety**

Pre-heat and residual heat indicator.  
Operation indicator.  
Safety shut-off.

**Planning notes**

Appliance can be snapped into the worktop from above.  
A minimum clearance of at least 200 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Appliance weight: approx. 17 kg.


Please read additional planning notes on page 194-195.

**Connection**

Total connected load 3.0 kW.  
Connecting cable 1.8 m without plug.



**Installation of the cooktop; surface mounting**

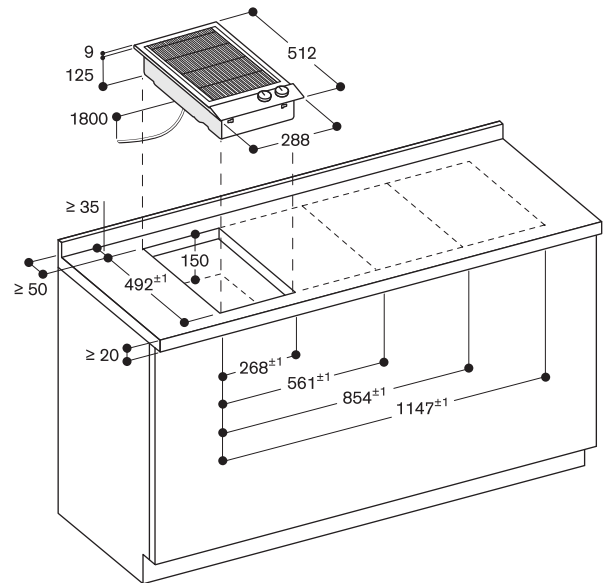



**Vario downdraft ventilation  
200 series  
VL 200**

**VL 200 120**  
Black aluminium control panel.  
Width 15 cm.  
Air extraction / Air recirculation.  
Motorless.



**In combination with remote fan units**

- AR 400 142 Air extraction
- AR 401 142
- AR 403 122
- AR 413 122 Air recirculation
- AR 410 110

**Installation accessories**

**AD 410 040**  
Flexibel connecting piece for VL 200.  
DN 150 flat.

**AD 851 041**  
Connecting piece VL 200 for  
extension with flat duct DN 150 for  
extra deep worktop.

**VV 200 010**  
Stainless steel connection strip for  
combination with other Vario  
appliances of the 200 series.

**VV 200 020**  
Black connection strip for combination  
with other Vario appliances of the  
200 series.

**Special accessories**

**LS 041 001**  
Ventilation moulding for VL 200 next  
to gas appliance.  
Stainless steel.

**Installation accessories for air ducting  
you will find at the pages 336-341.**

**Highlights**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Highly efficient ventilation system at the cooktop integrated in the worktop.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Minimal planning and easy installation.
- Low-noise system with the motor AR 410 110.
- Air extraction or air recirculation system.

**Output**

Power levels depend on the remote fan unit.  
Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

**Features**

Control knobs with illuminated ring.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic sensor controlled or manual run on function.  
Large-scale metal grease filter with high grease absorption.  
Removable, dishwasher-safe grease filter unit.  
Grease filter and activated charcoal filter saturation indicator.  
Airflow-optimised interior for efficient air circulation.  
Interval ventilation, 6 min.  
Enamelled ventilation grille, dishwasher-safe.  
Air exhaust bend included in delivery.  
Overflow 250 ml capacity.

**Consumption data**

Consumption data is referred to a configuration with the remote fan unit AR 403 122.  
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 48.3 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 56 dB / max. 71 dB normal mode.

**Planning notes**

The equivalent ducting length to ensure good performance is Lmax 26 m.  
For each VL one remote fan unit is recommended.  
Maximum cooktop width between 2 VL: 80 cm.  
Vario cooktops like Vario electric grill and Vario gas wok should be placed between 2 VL.  
If installed next to gas appliances, the ventilation moulding LS 041 001 is recommended to ensure maximum performance of the cooktop.  
When having installed the ventilation moulding LS 041 001 the wok pan WP 400 001 can not be used.  
Air recirculation is not recommended in combination with Vario electric grill.  
For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>.


When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 312-315.


**Connection**

Connecting cable 1.7 m between VL and remote fan unit.


**Installation of the downdraft ventilation; surface mounting**

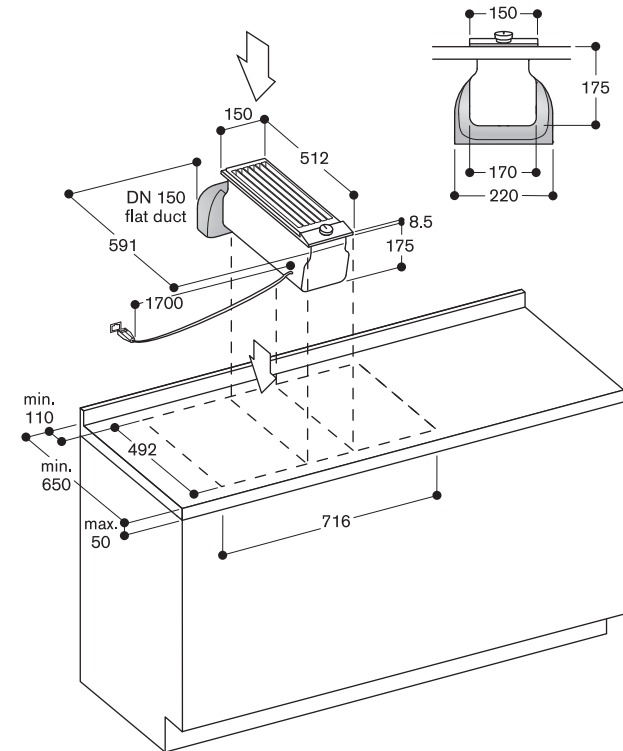

**AD 410 040: Flexibel connecting piece for VL, DN 150 flat**









**AD 851 041: Connecting piece VL for extension with flat duct DN 150 for extra deep worktop**

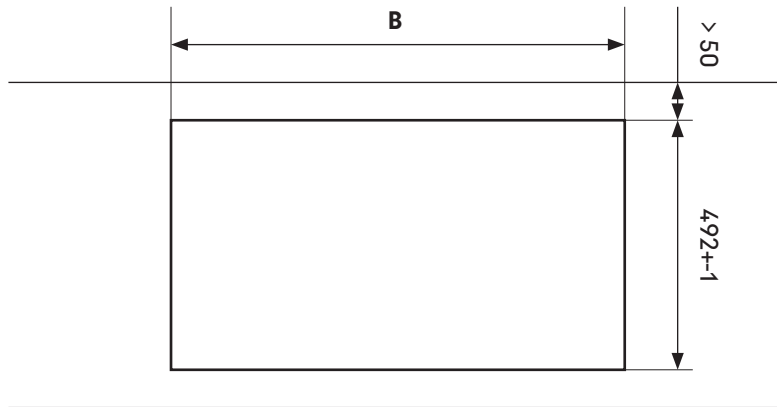

## Sample combinations without ventilation VL 200 element


Cut-out dimensions for appliance combinations in the 200 series. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.



Cooktops	Appliances size [mm]	Dimension B [mm]	# of VV200010 / VV200020
	288	561 +-1	1
	288	854 +-1	2
	288	1147 +-1	3
	380 / 288	653 +-1	1
	580 / 288	853 +-1	1

### Sample combinations with ventilation VL 200 element

Cut-out dimensions for appliance combinations in the 200 series. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.

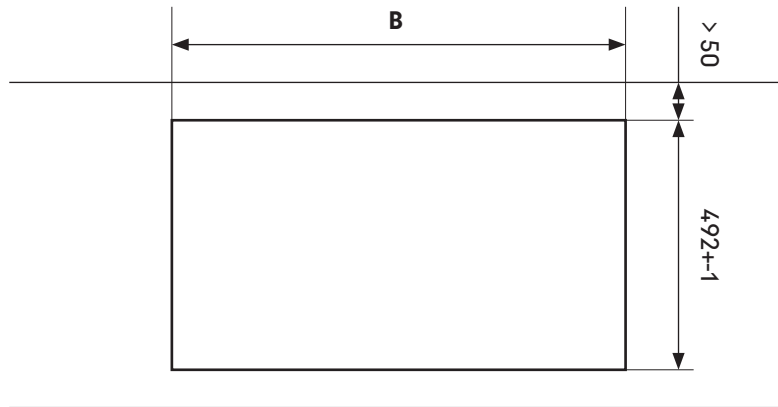

Cooktops	Appliances size [mm]	Dimension B [mm]	# of VV200010 / VV200020
	288 / 150	716 +-1	2
	380 / 150 / 380	900 +-1	2
	288 / 150 / 150	871 +-1	3
	288 / 150 / 150	1164 +-1	4
	288 / 150 / 150	1457 +-1	5
	380 / 150 / 288	808 +-1	3
	150 / 580 / 150	870 +-1	2
	288 / 150 / 580 / 150	1163 +-1	3

Recommended position for gas wok and grill

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Accessories and special accessories for Vario cooktops 400 series

**CA 414 110F**  
Socket.



**CA 414 100F**  
Black socket.



**CA 060 300**  
Cooking sensor for temperature regulation within pots.



**LV 030 000**  
Lava stone for refilling.



**VA 440 010**  
Stainless steel appliance cover with mounting strip.



**WP 400 001**  
Wok pan made of multiple-layer material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.



**WZ 400 000**  
Wok attachment for wok pan.



**AA 414 010**  
Ventilation moulding for VL 414 next to gas appliance.



**VA 420 004**  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting.



**VA 420 010**  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting.



## Accessories and special accessories for Vario cooktops 200 series

**LV 030 000**

Lava stone for refilling.



**VD 200 020**

Black appliance cover.



**LS 041 001**

Ventilation moulding for VL 200 next to gas appliance.

Stainless steel.



**VV 200 010**

Stainless steel connection strip for combination with other Vario appliances of the 200 series.



**VV 200 020**

Black connection strip for combination with other Vario appliances of the 200 series.



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Vario induction cooktops 400 series



Appliance type	Full surface induction cooktop	Full surface induction cooktop
Frameless for flush mounting	—	—
Stainless steel frame 3 mm for surface or flush mounting	CX 492 111	CX 482 111
<b>Dimensions</b>		
Width	(cm) 90	90
Depth	(cm) 52	52
Immersion depth	(cm) 6.5	6.5
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	—/—	—/—
TFT touch display / Twist-Pad control / Sensor control	•/—/—	•/—/—
Bicoloured display (white/orange)	—	—
Respective knobs (Stainless steel / Black) <sup>5</sup>	—	—
<b>Cooking zones</b>		
Number of cooking zones or items of cookware	6	5
Full surface induction cooktop	•	•
Flex induction cooking areas 23 × 19 cm (2200, with booster 3700 W) / linked together 23 × 38 cm (3300, with booster 3700 W)	—	—
Flex induction cooking areas 24 × 19 cm (2200, with booster 3700 W) / linked together 24 × 38 cm (3300, with booster 3700 W)	—	—
Automatic extension up to 30cm width (3300, with booster 3700 W)	—	—
Induction cooking zone		
ø 21cm (2200, with booster 3700 W) / ø 26 cm (2600, with booster 3700 W) / ø 32 cm (3300, with booster 3700 W)	—	—
<b>Features</b>		
Number of output levels	17	17
Flex function for rectangular cooking areas	—	—
Cooking sensor function / Frying sensor function	•/—	•/—
Number of frying sensor functions	—	—
Professional cooking function	•	•
Booster function for pots / pans	•/•	•/•
Keep warm function	•	•
Cooking timer: Number of cooking zones	6	6
Short-term timer	•	•
Stopwatch	•	•
Residual heat indicator	•	•
Child lock / Safety shut-off / Display cleaning protection	•/•/•	•/•/•
Pause function	•	•
Options menu	•	•
Hood control	• <sup>2</sup>	• <sup>2</sup>
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	• <sup>3</sup>	• <sup>3</sup>
<b>Accessories</b>		
Teppan Yaki made of multi ply material, GN1/1 (for full surface induction)	GN 232 110 <sup>1</sup>	GN 232 110 <sup>1</sup>
Teppan Yaki made of multi ply material (for flex induction)	—	—
Griddle plate in cast aluminium (for flex induction)	—	—
Flex Pan set, 3 pcs. (for flex induction)	—	—
Flex Pan large (for flex induction)	—	—
Frying sensor pan (available via customer service), ø 20 cm	—	—
Frying sensor pan (available via customer service), ø 24 cm	—	—
Frying sensor pan (available via customer service), ø 28 cm	—	—
Frying sensor pan (available via customer service), ø 32 cm	—	—
Cooking sensor	• / CA 060 300 <sup>1</sup>	• / CA 060 300 <sup>1</sup>
Wok attachment for for wok pan	—	—
Wok pan	—	—
<b>Connection</b>		
Total connected load electric	(kW) 7.4	7.4

• Standard. — Not available. <sup>1</sup> Special accessories. <sup>2</sup> In combination with suitable hood. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>5</sup> Knobs need to be ordered separately.



Induction cooktop	Induction cooktop	Induction cooktop	Induction cooktop	Induction cooktop
VI 492 105 VI 492 115	VI 482 105 VI 482 115	VI 462 105 VI 462 115	VI 422 105 VI 422 115	VI 414 105 VI 414 115
90	80	60	38	38
52	52	52	52	52
5.7	5.7	5.7	5.7	5.7
•/— —/•/•	•/— —/•/•	•/— —/•/•	•/— —/•/•	•/— —/•/•
• • •	• • •	• • •	• • •	• • •
CKI 450 010 / CKI 450 000	CKI 440 010 / CKI 440 000	CKI 440 010 / CKI 440 000	CKI 420 010 / CKI 420 000	CKI 410 010 / CKI 410 000
5	4	4	2	1
—	—	—	—	—
4	4	4	—	—
—	—	—	2	—
—	2	1	—	—
1	—	—	—	1
12	12	12	12	12
•	•	•	•	•
—/•	—/•	—/•	—/•	—/•
5	4	4	2	1
—	—	—	—	—
•/—	•/—	•/—	•/—	•/—
—	—	—	—	—
—	—	—	—	—
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
—/•/—	—/•/—	—/•/—	—/•/—	—/•/—
—	—	—	—	—
•	•	•	•	•
• <sup>2</sup>	• <sup>2</sup>	• <sup>2</sup>	• <sup>2</sup>	• <sup>2</sup>
• <sup>3</sup>	• <sup>3</sup>	• <sup>3</sup>	• <sup>3</sup>	• <sup>3</sup>
—	—	—	—	—
CA 051 300 <sup>1</sup>	CA 051 300 <sup>1</sup>	CA 051 300 <sup>1</sup>	CA 051 300 <sup>1</sup>	—
CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	—
CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
17006018 <sup>1</sup>	17006018 <sup>1</sup>	17006018 <sup>1</sup>	17006018 <sup>1</sup>	17006018 <sup>1</sup>
17006184 <sup>1</sup>	17006184 <sup>1</sup>	17006184 <sup>1</sup>	17006184 <sup>1</sup>	17006184 <sup>1</sup>
17006185 <sup>1</sup>	17006185 <sup>1</sup>	17006185 <sup>1</sup>	—	17006185 <sup>1</sup>
17006019 <sup>1</sup>	—	—	—	17006019 <sup>1</sup>
—	—	—	—	—
WZ 400 000 <sup>1</sup>	—	—	—	WZ 400 000 <sup>1</sup>
WP 400 001 <sup>1</sup>	—	—	—	WP 400 001 <sup>1</sup>
11.1	7.4	7.4	3.7	3.7

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Vario induction cooktops 200 series



Appliance type	Flex induction cooktop	Flex induction cooktop	Flex induction cooktop
	VI 262 120	VI 242 120	VI 232 121
Surface mounting / Flush mounting	•/—	•/—	•/—
<b>Dimensions</b>			
Width	(cm) 60	38	28
Depth	(cm) 51.2	51.2	51.2
Immersion depth	(cm) 5	5	5
<b>Operation</b>			
Knobs in furniture front / Knobs on integrated control panel	—/•	—/•	—/•
TFT touch display / Twist-Pad control / Sensor control	—/—/—	—/—/—	—/—/—
Bicoloured display (white/orange)	—	—	—
Cooking zones / combinations			
Number of cooking zones or items of cookware	4	2	2
Full surface induction cooktop	—	—	—
Flex induction cooking areas 21 × 19 cm (2200, with booster 3700 W) / linked together 21 × 38 cm (3300, with booster 3700 W)	—	—	2
Flex induction cooking areas 23 × 19 cm (2200, with booster 3700 W) / linked together 23 × 38 cm (3300, with booster 3700 W)	4	—	—
Flex induction cooking areas 24 × 19 cm (2200, with booster 3700 W) / linked together 24 × 38 cm (3300, with booster 3700 W)	—	2	—
<b>Features</b>			
Number of output levels	9	9	9
Flex function for rectangular cooking areas	•	•	•
Cooking sensor function / Frying sensor function	—/•	—/•	—/•
Number of frying sensor functions	4	2	2
Professional cooking function	—	—	—
Booster function for pots / pans	•/—	•/—	•/—
Keep warm function	—	—	—
Cooking timer: Number of cooking zones	—	—	—
Short-term timer	—	—	—
Stopwatch	—	—	—
Residual heat indicator	•	•	•
Child lock / Safety shut-off / Display cleaning protection	—/•/—	—/•/—	—/•/—
<b>Pause function</b>			
Options menu	—	—	—
Hood control	—	—	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—	—	—
<b>Accessories</b>			
Teppan Yaki made of multi ply material (for flex induction)	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
Griddle plate in cast aluminium (for flex induction)	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>
Flex Pan set, 3 pcs. (for flex induction)	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
Flex Pan large (for flex induction)	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
Frying sensor pan (available via customer service), ø 20 cm	17006018 <sup>1</sup>	17006018 <sup>1</sup>	17006018 <sup>1</sup>
Frying sensor pan (available via customer service), ø 24 cm	—	17006184 <sup>1</sup>	—
Cooking sensor	—	—	—
Appliance cover (Stainless steel / Black)	—/—	—/—	— / VD 200 020 <sup>1</sup>
<b>Connection</b>			
Total connected load electric	(kW) 7.4	3.7	3.7

• Standard. — Not available. <sup>1</sup> Special accessory.

Accessories | Energy Label |  
Gaggenau Home Connect

Dishwashers |  
Washing machine

Cooling appliances

Ventilation  
appliances

Cooktops

Vario cooktops

Ovens 200 series

Ovens 400 series

Gaggenau  
Expressive series

EB 333

## Vario gas cooktops 400 series



Appliance type	Gas cooktop	Gas cooktop
	VG 491 115F	VG 491 215
Stainless steel frame 3 mm / Stainless steel brushed / shot blasted	•/—/—	•/—/—
Surface-mounted / flush installation / welded	•/•/—	•/•/—
Liquid gas 28-37 mbar / natural gas 20 mbar	•/—	—/•
<b>Dimensions</b>		
Width	(cm) 90	90
Depth	(cm) 52.0	52.0
Immersion depth	(cm) 14.1	14.1
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	•/—	•/—
Respective knobs (Stainless steel / Black) <sup>2</sup>	CKG 450 010 / CKG 450 000	CKG 450 010 / CKG 450 000
<b>Cooking zones</b>		
Number of cooking zones or items of cookware	5	5
Multi-ring wok burner (300-5800 W)	1	—
Multi-ring wok burner (300-6000 W)	—	1
Two-ring high output burner (165-4000 W)	2	2
Two-ring standard output burner (165-2000 W)	2	2
<b>Features</b>		
Number of output levels	12	12
Electronic output control	•	•
Automatic fast ignition / Electric ignition	•/—	•/—
Electronic flame monitoring with automatic re-ignition	•	•
Simmer function	•	•
Residual heat indicator	•	•
Safety shut-off	•	•
Cast pan support	3-part	3-part
<b>Accessories</b>		
Wok attachment ring	•	•
Wok pan	WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>
Appliance cover (Stainless steel / Black)	—/—	—/—
<b>Connection</b>		
Total connected load gas (up to)	(kW) 17.8	18,0
Total connected load electric	(W) 15.0	15.0

• Standard. — Not available. <sup>1</sup> Special accessory. <sup>2</sup> Knobs need to be ordered separately.



Gas wok	Gas wok	Gas cooktop	Gas cooktop
VG 415 115F	VG 415 215	VG 425 115	VG 425 215
•/—/—	•/—/—	•/—/—	•/—/—
•/•/—	•/•/—	•/•/—	•/•/—
•/—	—/•	•/—	—/•
38	38	38	38
52.0	52.0	52.0	52.0
13.4	13.4	13.4	13.4
•/—	•/—	•/—	•/—
CKG 410 010 / CKG 410 000	CKG 410 010 / CKG 410 000	CKG 420 010 / CKG 420 000	CKG 420 010 / CKG 420 000
1	1	2	2
1	—	—	—
—	1	—	—
—	—	1	1
—	—	1	1
12	12	12	12
•	•	•	•
•/—	•/—	•/—	•/—
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
1-part	1-part	1-part	1-part
•	•	—	—
WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>	—	—
VA 440 010 <sup>1</sup> / —	VA 440 010 <sup>1</sup> / —	VA 440 010 <sup>1</sup> / —	VA 440 010 <sup>1</sup> / —
5.8	6.0	6.0	6.0
15.0	15.0	15.0	15.0

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops


Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Vario gas cooktops 200 series



Appliance type	Gas cooktop VG 264 120F	Gas cooktop VG 264 220	Gas wok VG 231 120F	Gas wok VG 231 220	Gas cooktop VG 232 120F	Gas cooktop VG 232 220
Stainless steel frame / Stainless steel brushed / shot blasted	-/-*	-/-*	-/-*	-/-*	-/-*	-/-*
Surface-mounted / flush installation / welded	*/-/-	*/-/-	*/-/-	*/-/-	*/-/-	*/-/-
Liquid gas 28-37 mbar / Natural gas 20 mbar	* <sup>2</sup> /-	-/* <sup>3</sup>	* <sup>2</sup> /-	-/* <sup>3</sup>	* <sup>2</sup> /-	-/* <sup>3</sup>
<b>Dimensions</b>						
Width	(cm) 60	60	28	28	28	28
Depth	(cm) 51.2	51.2	51.2	51.2	51.2	51.2
Immersion depth	(cm) 10.6	10.6	10.6	10.6	10.6	10.6
<b>Operation</b>						
Knobs in furniture front / Knobs on integrated control panel	-/*	-/*	-/*	-/*	-/*	-/*
Knobs in furniture front / Knobs on integrated control panel	-/*	-/*	-/*	-/*	-/*	-/*
Number of cooking zones	4	4	1	1	2	2
Number of cooking zones or items of cookware	4	4	1	1	2	2
Multi-ring wok burner (300-5800 W)	-	-	1	-	-	-
Multi-ring wok burner (300-6000 W)	-	-	-	1	-	-
Two-ring high output burner (165-4000 W)	2	2	-	-	1	1
Two-ring standard output burner (165-2000 W)	2	2	-	-	1	1
<b>Features</b>						
Number of output levels	9	9	9	9	9	9
Electronic output control	-	-	-	-	-	-
Automatic fast ignition / Electric ignition	-/*	-/*	-/*	-/*	-/*	-/*
Electronic flame monitoring with automatic re-ignition	-	-	-	-	-	-
Simmer function	-	-	-	-	-	-
Residual heat indicator	*	*	*	*	*	*
Safety shut-off	-	-	-	-	-	-
Cast pan support	2-part	2-part	1-part	1-part	1-part	1-part
<b>Accessories</b>						
Wok attachment ring	-	-	*	*	-	-
Wok pan	-	-	WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>	-	-
Appliance cover (Stainless steel / Black)	- / -	- / -	- / VD 200 020 <sup>1</sup>	- / VD 200 020 <sup>1</sup>	- / VD 200 020 <sup>1</sup>	- / VD 200 020 <sup>1</sup>
<b>Connection</b>						
Total connected load gas (up to)	(kW) 9.8	9.8	5.8	6.0	4.9	4.9
Total connected load electric	(W) 4.0	4.0	1.0	1.0	2.0	2.0

\* Standard. — Not available. <sup>1</sup> Special accessory. <sup>2</sup> Nozzles for natural gas 20 mbar can be ordered as spare parts. <sup>3</sup> Nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts. <sup>4</sup> Nozzles for liquid gas 50 mbar can be ordered as spare parts.

## Vario special cooktops 400 and 200 series



Appliance type	Teppan Yaki	Electric grill	Teppan Yaki	Electric grill
	VP 414 115	VR 414 115	VP 230 120	VR 230 120
Stainless steel frame 3 mm / Stainless steel brushed / shot blasted	•/—/—	•/—/—	—/—/•	—/—/•
Surface mounting / Flush mounting	•/•	•/•	•/—	•/—
<b>Dimensions</b>				
Width	(cm) 38	38	28	28
Depth	(cm) 52	52	51.2	51.2
Immersion depth	(cm) 11.8	11.8	12.5	12.5
<b>Operation</b>				
Knobs in furniture front / Knobs on integrated control panel	•/—	•/—	—/•	—/•
Respective knobs (Stainless steel / Black) <sup>2</sup>	CKP 420 010 / CKP 420 000	CKR 420 010 / CKR 420 000	—	—
<b>Cooking zones</b>				
Number of cooking zones	2	2	1	2
Output	(kW) 2 x 1.5	2 x 1.5	1.8	2 x 1.5
Temperature range	(°C) 120—240	—	140—240	—
<b>Features</b>				
Number of output levels	12	12	10	9
Electronic temperature control	•	•	•	—
Two zones can be operated together / separately	•/•	•/•	—/•	—/•
Cast grill	—	2	—	1
Stainless steel container with lava stones	—	•	—	•
Grease collecting insert	—	•	—	•
Hard-chromed cooking surface	•	—	—	—
Stainless steel sandwich cooking surface	—	—	•	—
Keep warm function	•	—	•	—
Residual heat indicator	•	•	•	•
Child lock / Safety shut-off	—/•	—/•	—/•	—/•
Cleaning stage	•	—	—	—
<b>Accessories</b>				
Cast pan, half size	—	•	—	—
Appliance cover (Stainless steel / Black)	VA 440 010 <sup>1</sup> / —	VA 440 010 <sup>1</sup> / —	— / VD 200 020 <sup>1</sup>	— / VD 200 020 <sup>1</sup>
Cleaning brush	—	•	—	•
Spatula	2	—	2	—
<b>Connection</b>				
Total connected load	(kW) 3.0	3.0	1.8	3.0

• Standard. —Not available. <sup>1</sup> Special accessory. <sup>2</sup> The knobs must be ordered separately.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect





---

# COOKTOPS


---

Overview	208
Gas cooktops	212
Integrated Induction cooktops	216
Induction cooktops	222
Flex induction cooktops with integrated ventilation system	230
Flex induction cooktops	240
Planning notes for induction cooktops	260
Glass ceramic cooktops	261
Accessories   special accessories	264
Technical specifications	266

## Overview

### Integrated induction modules


Width 21 cm



Area / output level	12	boost
<b>A</b> Ø 21 cm	2,000 W	2,300 W
Total connected load	2,300 W	

**CU 421**

Width 28 cm




Area / output level	12	boost
<b>A</b> Ø 28 cm	2,300 W	2,700 W
Total connected load	2,700 W	

**CU 428**

### Full surface induction


Width 80 cm

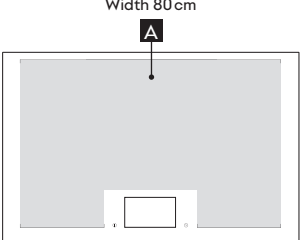

Area / output level	9	boost
<b>A</b> (1 big cookware)	3,500 W	5,500 W
Total connected load	7,400 W	

**CX 482**  
With frame, it can be combined with other Vario Appliances

Width 90 cm






Area / output level	9	boost
<b>A</b> (1 big cookware)	3,500 W	5,500 W
Total connected load	7,400 W	

**CX 492**  
With frame, it can be combined with other Vario Appliances

### Flex induction with integrated ventilation system

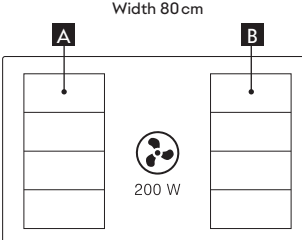
Width 80 cm





Area / output level	9	boost
<b>A/B</b> 	2,200 W	3,700 W
	3,300 W	3,700 W
Total connected load	7,400 W	

**CV 282**

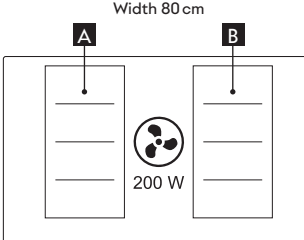
Width 80 cm







Area / output level	12	boost
<b>A/B</b> 	2,200 W	3,700 W
	3,300 W	3,700 W
Total connected load	7,400 W	

**CV 482**


Width 90 cm



Area / output level	12	boost
<b>A/B</b> 	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
Total connected load	7,400 W	


**CV 492**

Flex induction 200 series




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>B</b> Ø 14.5 cm	1,600 W	2,200 W
<b>C</b> Ø 21 cm	2,500 W	3,700 W
<b>Total connected load</b>	7,400 W	

CI 261




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	

CI 262




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	

CI 272




Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
	2,600 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	

CI 282



Area / output level	9	boost
<b>A</b> Ø 18 cm	1,800 W	3,100 W
<b>B</b> Ø 14.5 cm	1,400 W	2,200 W
<b>C</b> Ø 24 cm	2,200 W	3,700 W
<b>D</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>Total connected load</b>	7,400 W	


CI 283



Area / output level	9	boost
<b>A</b>	2,200 W	3,700 W
	3,300 W	3,700 W
<b>B</b> Ø 21 cm	2,200 W	3,700 W
Ø 26 cm	2,600 W	3,700 W
Ø 32 cm	3,300 W	3,700 W
<b>Total connected load</b>	11,100 W	


CI 292

Gas 200 and 400 series




Area / output level	12
<b>A</b> Economy burner	1,000 W
<b>B</b> Standard-output burner	1,750 W
<b>C</b> High-output burner	3,000 W
<b>D</b> Dual-wok multi-crown burner	5,000 W
<b>Total connected load gas</b>	12,500 W
<b>Total connected load electric</b>	1.0 W

CG 291



Area / output level	12
<b>A</b> Wok burner	5,800 / 6,000 W
<b>B</b> High-output burner	4,000 W
<b>C</b> Standard-output burner	2,000 W
<b>Total connected load gas</b>	17,800 W / 18,000 W
<b>Total connected load electric</b>	15.0 W

CG 492



Area / output level	9
<b>A</b> Standard-output burner	2,000 W
<b>B</b> Wok burner	5,800 / 6,000 W
<b>C</b> High-output burner	4,000 W
<b>Total connected load gas</b>	17,800 W / 18,000 W
<b>Total connected load electric</b>	10.0 W

VG 295

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops
























Ventilation appliances







Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Recommended Cooktop Ventilation Combinations

<ul style="list-style-type: none"> <li>•: Recommended combination</li> <li>—: not recommended</li> <li>📶: cooktop based ventilation control possible</li> </ul>									
Product type	Picture	VIB		AC 400 width depends on configuration	AC 250 121 width 120 cm	AW 442 width 120 cm	AW 240 191 width 90 cm	AI 240 191 width 90 cm	
Maximum width for cooktop combinations For integrated induction see dedicated pages.					100 cm 130 cm with fume collector	100 cm	80 cm	80 cm	
Vario Teppan Yaki 400 series		VP 414 / VG4... VR 414	40 cm						
Vario gas cooktop 400 series				•	•	•	•	•	
Vario electric grill 400 series									
Vario induction cooktop 400 series		VI4..	40 cm	•	• 📶	•	• 📶	• 📶	
Vario induction cooktop 400 series		VI 462	60 cm	•	• 📶	•	• 📶	• 📶	
Vario induction cooktop 400 series		VI 482	80 cm	•	• 📶	•	• 📶	—	
Vario induction cooktop 400 series		VI 492	90 cm	•	• 📶	•	—	—	
Vario gas cooktop 400 series		VG 491 / CG 492	90 cm	•	•	•	—	—	
Gas cooktop 400 series									
Vario Teppan Yaki 200 series		VP2.. / VI2.. / VR2.. VR 230	30 cm						
Vario flex induction cooktop 200 series				•	•	•	•	•	
Vario gas cooktop 200 series									
Vario electric grill 200 series									
Vario flex induction cooktop 200 series		VI 242	40 cm	•	•	•	•	•	
Vario flex induction cooktop 200 series		VI 262 / VG 264	60 cm	•	•	•	•	•	
Vario gas cooktop 200 series									
Integrated induction modules 400 series		CU 42..	21 cm 28 cm	•	•	—	—	—	
Full surface induction cooktop 400 series with frame		CX 482	80 cm	•	• 📶	•	• 📶	—	
Full surface induction cooktop 400 series		CX 492	90 cm	•	• 📶	•	—	—	
Flex induction cooktop 200 series		CI 261 / CI 262	60 cm	•	• 📶	•	•	•	
Flex induction cooktop 200 series		CI 272	70 cm	•	• 📶	•	• 📶	• 📶	
Flex induction cooktop 200 series		CI 282 / CI 283	80 cm	•	• 📶	•	• 📶	—	
Flex induction cooktop 200 series		CI 292	90 cm	•	• 📶	•	—	—	
Gas cooktop 200 series		CG 291	90 cm	•	•	•	—	—	
Gas cooktop 200 series		VG 295	90 cm	•	•	•	—	—	

									
AL 400 122 width 120 cm	AL 400 192 width 90 cm	AL 200 180 width 80 cm	AL 200 190 width 90 cm	VL 414 width 15.5 cm	VL 200 width 15 cm	AF 210 192 width 90 cm	AF 210 162 width 60 cm	AC 200 191 width 86 cm	AC 200 161 width 52 cm
120 cm	90 cm					90 cm	60 cm	90 cm	60 cm
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	•	•	•
•	•	-	-	•	-	•	-	•	-
•	•	•	-	-	-	•	-	•	-
•	•	-	•	-	-	•	-	•	-
•	•	-	-	-	-	•	•	•	•
•	•	-	-	-	-	•	•	•	•
-	-	-	-	-	-	-	-	-	-
•	•	•	-	-	-	•	-	•	-
-	•	-	•	-	-	•	-	•	-
-	-	-	-	-	-	•	•	•	•
-	-	-	-	-	-	•	-	•	-
-	•	•	-	-	-	•	-	•	-
-	•	-	•	-	-	•	-	•	-
-	•	-	-	-	-	•	-	•	-
-	•	-	-	-	-	•	-	•	-

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



#### Gas cooktop 400 series

##### CG 492

##### CG 492 111F

Stainless steel.  
Width 100.2 cm.  
Liquid gas 28-37 mbar.  
Wok burner with up to 5.8 kW.

##### CG 492 211

Stainless steel.  
Width 100.2 cm.  
Natural gas 20 mbar.  
Wok burner with up to 6 kW.

#### Included in the price

1 wok attachment ring.

#### Necessary installation accessories

##### CA 429 410

Frame set including decorative frame (to be welded in stainless steel worktop) and holding frame.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

#### Highlights

- Five multi-ring burners, up to 18 kW.
- Full electronic power level regulation on 12 levels.
- Precise and reproducible flame size.
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition.
- Simmer function for cooking on a very low output level.
- Solid smooth-surface cast iron pan supports on the same level as the worktop.
- Solid stainless steel control knob.

#### Cooking zones

##### CG492111F

1 multi-ring wok burner (300 W-5800 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (165 W-4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (165 W-2000 W), suitable for pots up to max. ø 24 cm.

##### CG492211

1 multi-ring wok burner (300 W-6000 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (165 W-4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (165 W-2000 W), suitable for pots up to max. ø 24 cm.

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level regulation plus simmer function.  
Automatic fast ignition.

#### Features

Simmer function.  
Three-part cast iron pan support with flat, continuous pot surface, on the same level as the worktop.  
Brass burner rings.

#### Safety

Electronic flame monitoring with automatic re-ignition.  
Residual heat indication.  
Safety shut-off.

#### Planning notes

The frame set (necessary installation accessory) can be sent in advance to the manufacturer of the stainless steel or granite worktop for fitting. Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance is not operable without power supply).  
The horizontal positioning of the knobs may be aligned with the specific burners.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
Minimum worktop depth 70 cm.  
Air intake from above.  
No intermediate shelf required.  
Due to the separate frame welded into the worktop, all parts remain fully accessible.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

The appliance can be fixed from above.

A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.


With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 76 cm.

The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product. Appliance weight: approx. 35 kg.

#### Connection

Total connected load gas 17.8/18.0 kW.  
Total connected load electric 15.0/15.0 W.  
Connecting cable 1.4 m with plug.


Installation of the cooktop; flush mounting

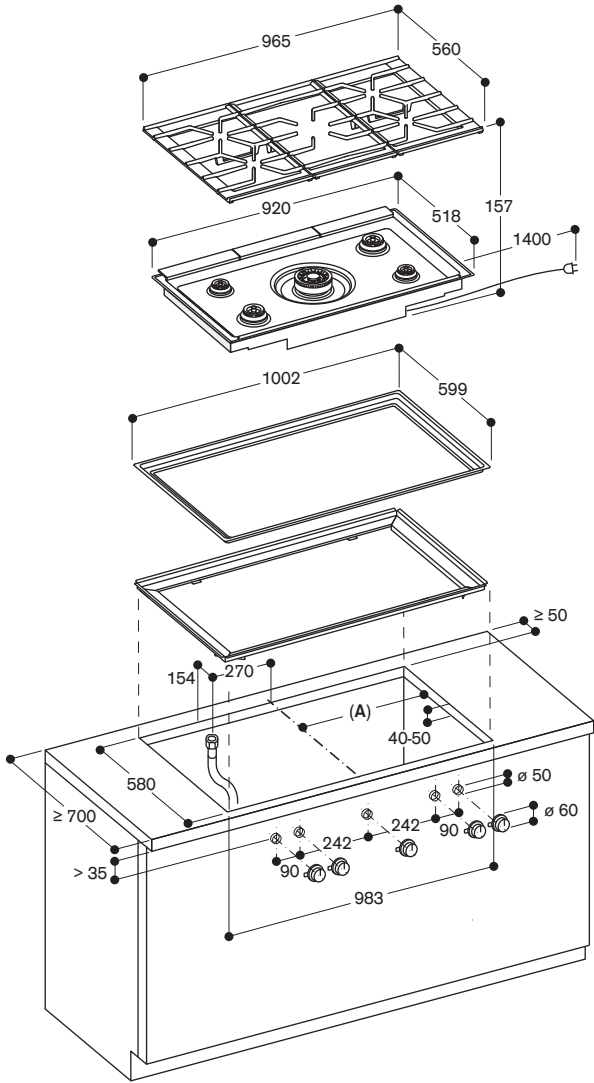


A: 491.5

For further installation options, see the installation instructions


View from above

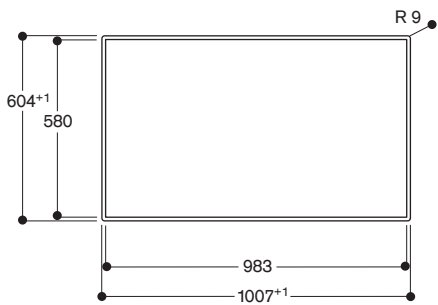


Cross-section

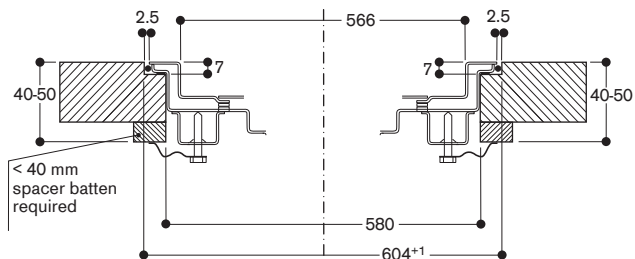

Longitudinal section

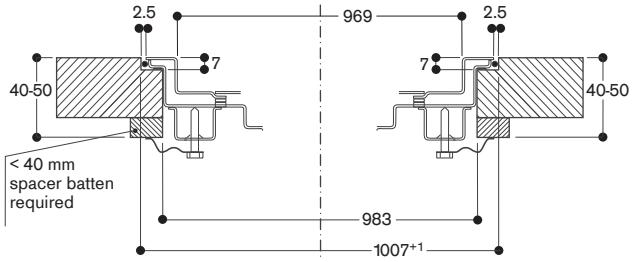

Installation of the control knob

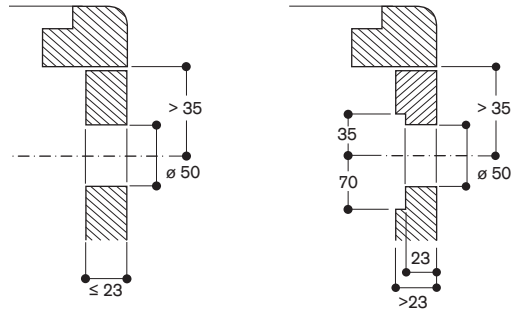

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Gas cooktop 200 series

#### VG 295

#### VG 295 150F

Width 90 cm.  
Liquid gas 28–37 mbar.  
Wok burner with up to 5.8 kW.

#### VG 295 250

Width 90 cm.  
Natural gas 20 mbar.  
Wok burner with up to 6 kW.

#### Included in the price

1 wok attachment ring.

#### Special accessories

#### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.

#### Highlights

- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Multi-ring burner of solid, heat-resistant brass as used in professional kitchen.
- Solid smooth-surface cast iron pan supports.
- Up to 17.8 kW on 5 burners.

#### Cooking zones

##### VG 295 150F

1 multi-ring wok burner (300 W–5800 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (170 W–4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (170 W–2000 W), suitable for pots up to max. ø 24 cm.

##### VG 295 250

1 multi-ring wok burner (300 W–6000 W), suitable for pots up to max. ø 32 cm.  
2 two-ring high output burners (170 W–4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (170 W–2000 W), suitable for pots up to max. ø 24 cm.

#### Handling

Control knobs with illuminated ring.  
Integrated control panel.  
One-handed operation.  
Electric ignition.

#### Features

Three-part cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

#### Safety

Thermoelectric safety pilot.  
Residual heat indication.  
Operation indicator.

#### Planning notes

VG 295 150F  
Special nozzles for natural gas  
20 mbar can be ordered as spare parts.

##### VG 295 250

Special nozzles for liquid gas  
28–30/37 mbar can be ordered as spare parts.


No intermediate shelf required.  
Appliance can be snapped into the worktop from above.  
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.  
Installation in a 90 cm wide lower cabinet is required.  
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 76 cm.

The minimum distance to a ventilation above is shown at the planning hints for the individual ventilation product.  
Appliance weight: approx. 29 kg.

#### Connection


Total connected load gas 17.8/18.0 kW.  
Total connected load electric 10 W.  
Connecting cable 1.5 m with plug.

#### Installation of the cooktop; surface mounting

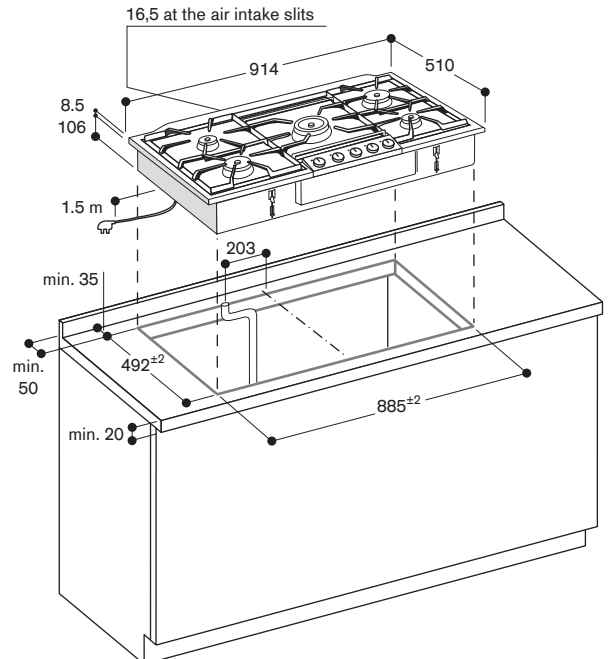

Minimum distance from the appliance cut-out to the side wall 300 mm.

#### Gas connection

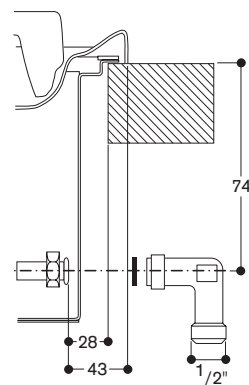





### Gas cooktop 200 series CG 291

#### CG 291 210

Stainless steel.  
Width 90 cm.  
Natural gas 20 mbar.  
Nozzles for liquid gas 28-30/37 mbar included.

#### Included in the price

- 1 cross support for espresso.
- 1 wok attachment ring.

#### Special accessories

##### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

#### Highlights

- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Multi-ring burner with up to 5 kW.

#### Cooking zones

1 multi-ring wok burner (300 W–5000 W).  
1 high output burner (500 W–3000 W), suitable for pots up to max. ø 26 cm.  
2 standard burners (350 W–1750 W), suitable for pots up to max. ø 20 cm.  
1 economy burner (330 W–1000 W), suitable for pots up to max. ø 14 cm.

#### Handling

Control knobs with cooking zone and output level markings for 9 levels.  
One-handed operation.  
Electric ignition.

#### Features

Three-part cast iron pan support with continuous pot surface.  
Enamelled burner cover.

#### Safety

Thermoelectric safety pilot.


#### Planning notes

The cooktop can only be surface-mounted.  
Special nozzles can be ordered as spare parts.  
Installation in a 85 cm niche or a 88 cm niche with the included spacers.  
Air intake from above.  
Intermediate shelf is required.  
Appliance must be fixed from underneath.  
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
The minimum distance between the cooktop surface and a cabinet above, out of combustible material, needs to be 65 cm.  
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.  
Appliance weight: approx. 17 kg.

#### Connection

Total connected load gas 12.5 kW.  
Connecting cable 1.0 m without plug.

#### Installation of the cooktop; surface mounting

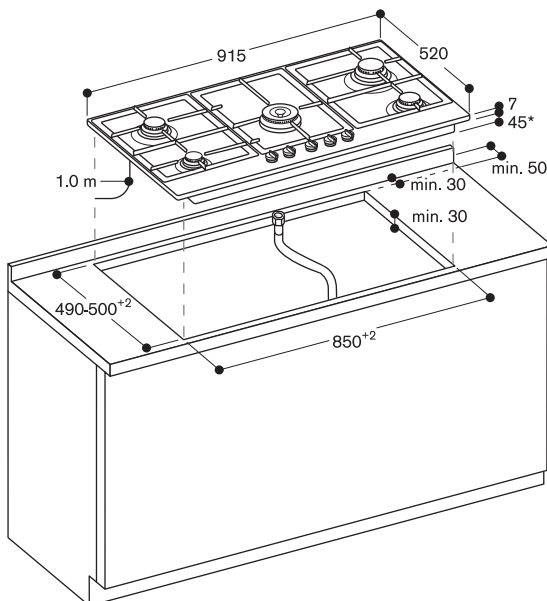

\* 61 mm in the area of the gas connection at the back right



**Integrated induction module**  
**400 series**  
**CU 428**

**CU 428 100**

Integrated induction module ø 28 cm.  
 Knob needs to be ordered separately.

**Necessary installation accessories**

**CKU 410 010**

Stainless steel knob 400 series for  
 CU 421, CU 428.  
 Electronic control.  
 Set of 1 knob.

**CKU 410 000**

Black knob 400 series for  
 CU 421, CU 428.  
 Electronic control.  
 Set of 1 knob.

**CA 420 000**

Installation kit for integrated  
 induction.  
 One installation kit needed per  
 kitchen.

**Necessary Special accessories**

**SP 415 000**

Enhanced surface protector.  
 For pots and pans ø 15–18 cm.  
 For CU 421, CU 428.

**SP 419 000**

Enhanced surface protector.  
 For pots and pans ø 19–23 cm.  
 For CU 421, CU 428.

**SP 424 000**

Enhanced surface protector.  
 For pots and pans ø 24–28 cm.  
 For CU 428.

**SP 400 000**

Set of 4 enhanced surface protectors.  
 For pots and pans ø 10–28 cm.  
 For CU 421, CU 428.

**Highlights**

- Use of cookware directly on the worktop, in combination with 12 mm Dekton worktops.
- Integrated 28 cm cooking zone with booster function.
- Cooking zone center light, for operation and residual heat indication directly on the surface.
- Can be combined perfectly with other integrated induction modules of the 400 series.
- Solid stainless steel control knob with illuminated ring, also available in black finishing.

**Cooking zone**

1 induction cooking zone ø 28 cm  
 (2200 W, with booster 2700 W)

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings for precise control.  
 Electronic power control in 12 output levels.  
 Cooking zone center light indication.

**Features**

Booster function.  
 Keep warm function.  
 Options menu.

**Safety**

Only operates with enhanced surface protector.  
 Operation indicator.  
 Pot detection.  
 2-stage residual heat indication directly on the surface and knob.  
 Safety shut-off.

**Planning notes**


The integrated induction module must be installed under Dekton worktops in 12 mm thickness. Do not install other appliances below, e.g. ovens, refrigerators or dishwashers. The bearing capacity and stability, must be supported using suitable substructures. Take into account the appliance weight and additional loads. A 10 mm hole needs to be planned in the center of the cooking zone. Markings to indicate the cooking zone need to be planned. No other cut-outs permitted in the same worktop piece. The elaboration of the Dekton is done by local fabricators, for a list of recommended fabricators, please contact your local representative. For Dekton fabricators: Refer to Specification sheet "Marking and drilling protocol for Gaggenau Induction" by Cosentino.  
 Minimum distances:  
 Cooking zone center to lateral edge of worktop 400 mm.  
 Cooking zone center to front and rear edge of worktop 400 mm.  
 Cooking zone center to next cooking zone center 450 mm or 550 mm depending on combination.  
 Minimum distances at the back wall of the furniture and openings, refer to dimensional drawings.  
 Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
 Appliance weight: approx. 4.7 kg.

Please read the installation details regarding air ducting on page 260.


**Connection**

Total connected load 2.7 kW.  
 Connecting cable 1.5 m without plug.  
 Connecting cable 1 m for control knob.




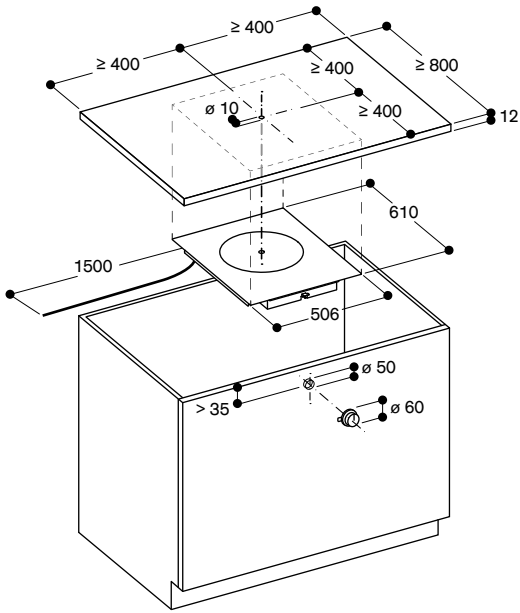


Cross section

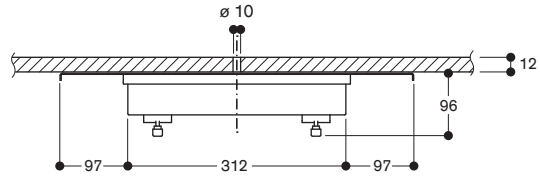

Longitudinal section

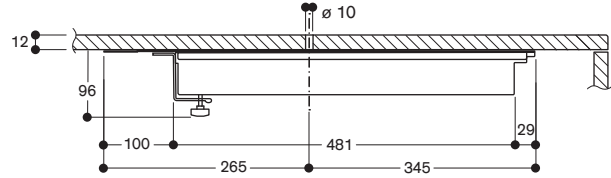


View from above

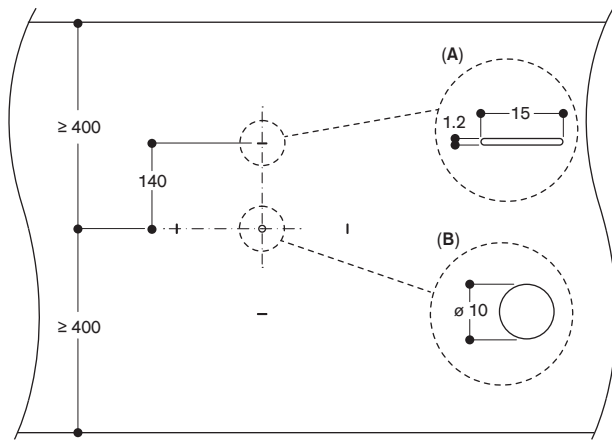

A: Surface marking  
B: Drilling

Installation of the control knob

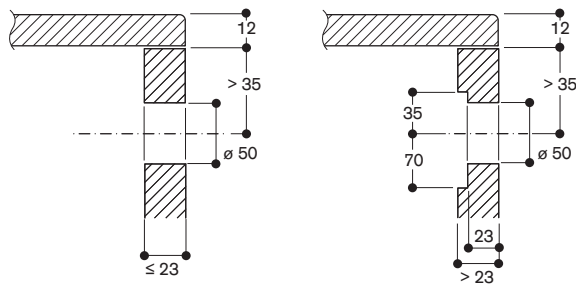

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Integrated induction module**  
**400 series**  
**CU 421**

**CU 421 100**

Integrated induction module ø 21 cm.  
 Knob needs to be ordered separately.

**Necessary installation accessories**

**CKU 410 010**

Stainless steel knob 400 series for  
 CU 421, CU 428.  
 Electronic control.  
 Set of 1 knob.

**CKU 410 000**

Black knob 400 series for  
 CU 421, CU 428.  
 Electronic control.  
 Set of 1 knob.

**CA 420 000**

Installation kit for integrated  
 induction.  
 One installation kit needed per  
 kitchen.

**Necessary Special accessories**

**SP 410 000**

Enhanced surface protector.  
 For pots and pans ø 10-14 cm.  
 For CU 421.

**SP 415 000**

Enhanced surface protector.  
 For pots and pans ø 15-18 cm.  
 For CU 421, CU 428.

**SP 419 000**

Enhanced surface protector.  
 For pots and pans ø 19-23 cm.  
 For CU 421, CU 428.

**SP 400 000**

Set of 4 enhanced surface protectors.  
 For pots and pans ø 10-28 cm.  
 For CU 421, CU 428.

**Highlights**

- Use of cookware directly on the worktop, in combination with 12 mm Dekton worktops.
- Integrated 21 cm cooking zone with booster function.
- Cooking zone center light, for operation and residual heat indication directly on the surface.
- Can be combined perfectly with other integrated induction modules of the 400 series.
- Solid stainless steel control knob with illuminated ring, also available in black finishing.

**Cooking zone**

1 induction cooking zone ø 21 cm  
 (2000 W, with booster 2300 W)

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings for precise control.  
 Electronic power control in 12 output levels.  
 Cooking zone center light indication.

**Features**

Booster function.  
 Keep warm function.  
 Options menu.

**Safety**

Only operates with enhanced surface protector.  
 Operation indicator.  
 Pot detection.  
 2-stage residual heat indication directly on the surface and knob.  
 Safety shut-off.

**Planning notes**

The integrated induction module must be installed under Dekton worktops in 12 mm thickness. Do not install other appliances below, e.g. ovens, refrigerators or dishwashers. The bearing capacity and stability, must be supported using suitable substructures. Take into account the appliance weight and additional loads. A 10 mm hole needs to be planned in the center of the cooking zone.

Markings to indicate the cooking zone need to be planned. No other cut-outs permitted in the same worktop piece. The elaboration of the Dekton is done by local fabricators; for a list of recommended fabricators, please contact your local representative. For Dekton fabricators: Refer to Specification sheet "Marking and drilling protocol for Gaggenau Induction" by Cosentino.

Minimum distances:

Cooking zone center to lateral edge of worktop 350 mm.

Cooking zone center to front and rear edge of worktop 400 mm.

Cooking zone center to next cooking zone center 350 mm or 450 mm depending on combination.

Minimum distances at the back wall of the furniture and openings, refer to dimensional drawings.


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
 Appliance weight: approx. 4.5 kg.

Please read the installation details regarding air ducting on page 260.


**Connection**

Total connected load 2.3 kW.  
 Connecting cable 1.5 m without plug.  
 Connecting cable 1 m for control knob.




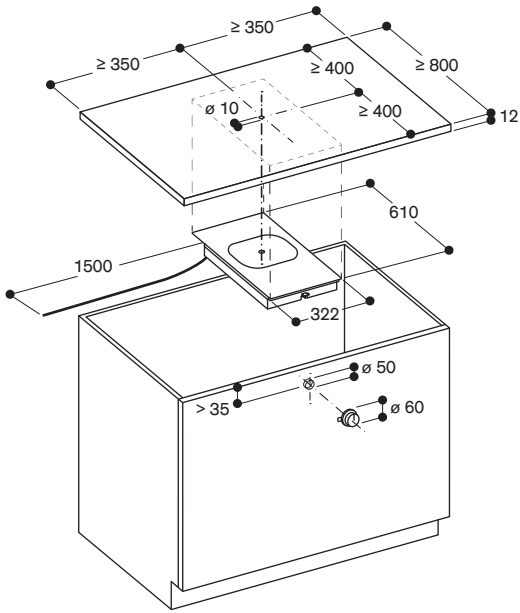


Cross section

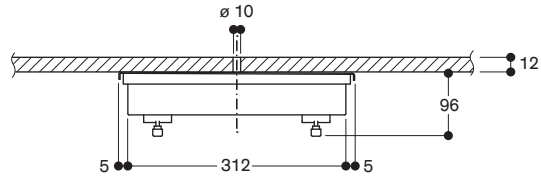

Longitudinal section

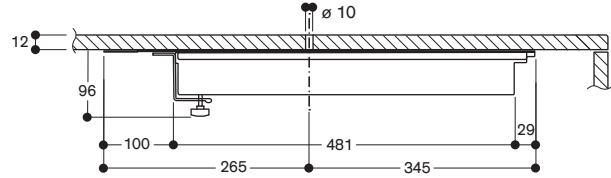


View from above

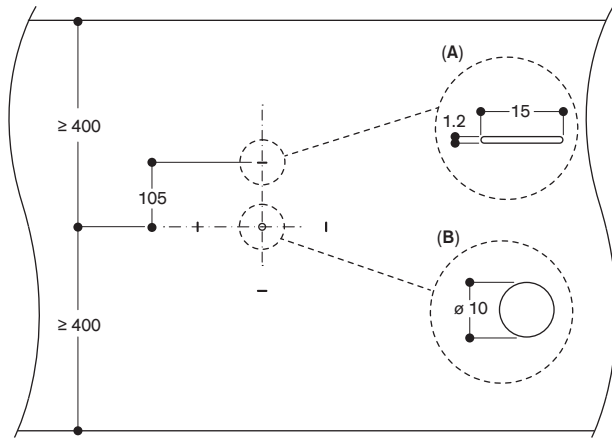

A: Surface marking  
B: Drilling

Installation of the control knob

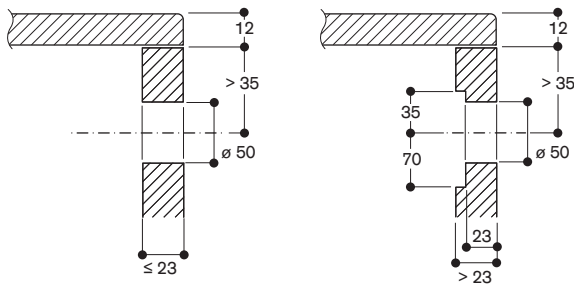

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect


## Planning examples for combinations of integrated induction modules 400 series

### Good to know — for correct planning and installation

- Can only be combined with 12mm Dekton.
- Minimum distances are mandatory.
- No other cut-outs are allowed in the same worktop piece. The worktop can consist of several pieces with joints between them to realize further cut-outs (e.g. sink).
- Holes and cooking zone markings must be pre-elaborated in the Dekton worktop by the recommended and trained fabricators.
- For a list of recommended fabricators, please contact your local representative.
- For Dekton fabricators: Refer to Specification sheet "Marking and drilling protocol for Gaggenau Induction" by Cosentino.

### Planning Example 1

Combination of two medium modules — CU 421 100 and CU 421 100

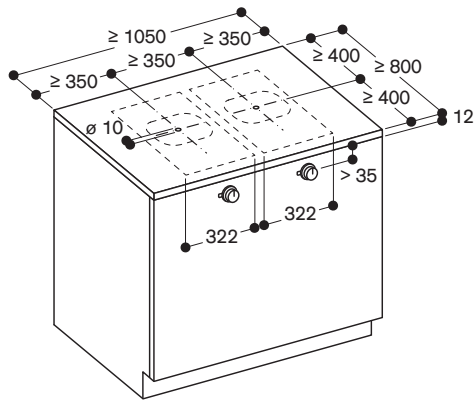

#### List of components (stainless steel knobs)

- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 2 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 410 000 (Enhanced Surface Protector for pots and pans ø 10-14 cm)
- 1 x SP 415 000 (Enhanced Surface Protector for pots and pans ø 15-18 cm)
- 1 x SP 419 000 (Enhanced Surface Protector for pots and pans ø 19-23 cm)

#### List of components (black knobs)


- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 2 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 410 000 (Enhanced Surface Protector for pots and pans ø 10-14 cm)
- 1 x SP 415 000 (Enhanced Surface Protector for pots and pans ø 15-18 cm)
- 1 x SP 419 000 (Enhanced Surface Protector for pots and pans ø 19-23 cm)

#### Recommended ventilation solutions

- AC 400 (1 filter module)
- AC 250

### Planning Example 2

Combination of one medium and one large module — CU 421 100 and CU 428 100

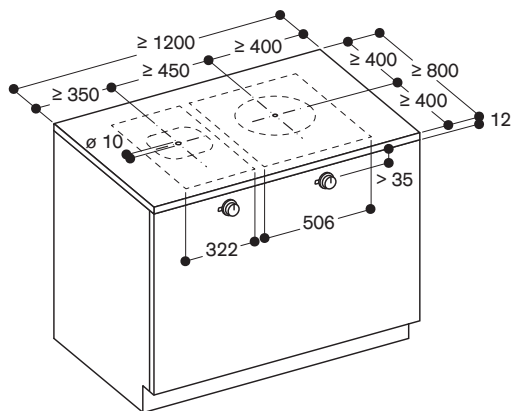

#### List of components (stainless steel knobs)

- 1 x CU 421 100 (Integrated induction module ø 21 cm)
- 1 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10–28 cm)

#### List of components (black knobs)


- 1 x CU 421 100 (Integrated induction module ø 21 cm)
- 1 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10–28 cm)

#### Recommended ventilation solutions

- AC 400 (1 filter module)
- AC 250

### Planning Example 3

Combination two large modules — CU 428 100 and CU 428 100

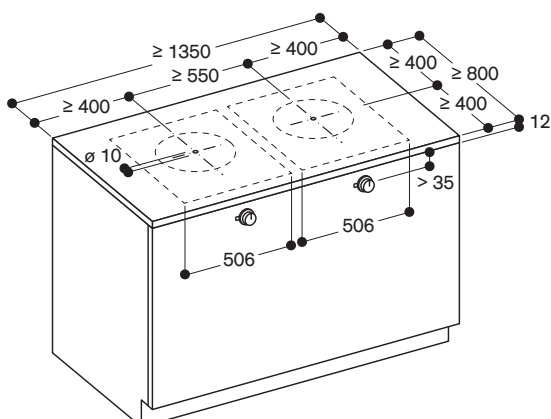

#### List of components (stainless steel knobs)

- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 415 000 Enhanced Surface Protector for pots and pans ø 15-18 cm
- 1 x SP 419 000 Enhanced Surface Protector for pots and pans ø 19-23 cm
- 1 x SP 424 000 Enhanced Surface Protector for pots and pans ø 24-28 cm

#### List of components (black knobs)


- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 415 000 Enhanced Surface Protector for pots and pans ø 15-18 cm
- 1 x SP 419 000 Enhanced Surface Protector for pots and pans ø 19-23 cm
- 1 x SP 424 000 Enhanced Surface Protector for pots and pans ø 24-28 cm

#### Recommended ventilation solutions

- AC 400 (1 filter module with fume collector or 2 filter modules)
- AC 250

**Planning Example 4**

Combination of two medium modules and one large module – CU 421 100 and CU 428 100 and CU 421 100

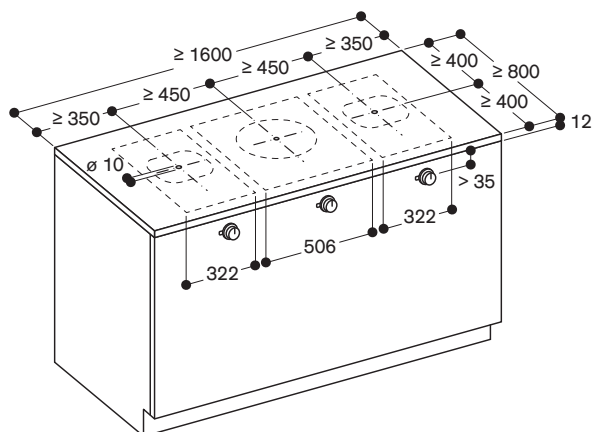**List of components (stainless steel knobs)**

- 1 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 3 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**List of components (black knobs)**


- 1 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 3 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**Recommended ventilation solutions**

- AC 400 (2 filter modules)
- AC 250

**Planning Example 5**

Combination of one medium module and two large modules – CU 428 100 and CU 428 100 and CU 421 100

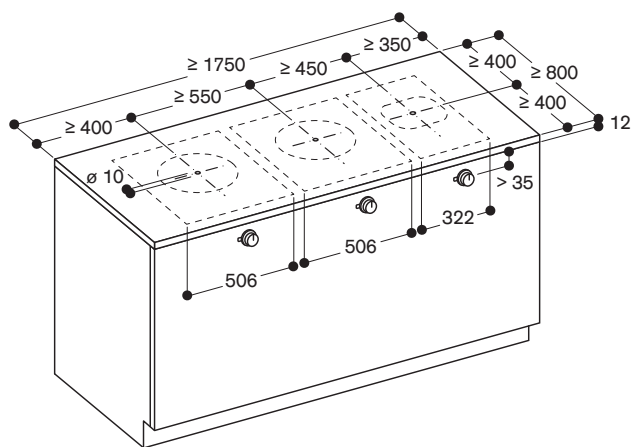**List of components (stainless steel knobs)**

- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 1 x CU 421 100 (Integrated induction module ø 21 cm)
- 3 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**List of components (black knobs)**


- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 1 x CU 421 100 (Integrated induction module ø 21 cm)
- 3 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**Recommended ventilation solutions**

- AC 400 (2 filter modules)
- AC 250 with fume collector

**Planning Example 6**

Combination of 2 medium modules and two large modules – CU 421 100 and CU 428 100 and CU 428 100 and CU 421 100

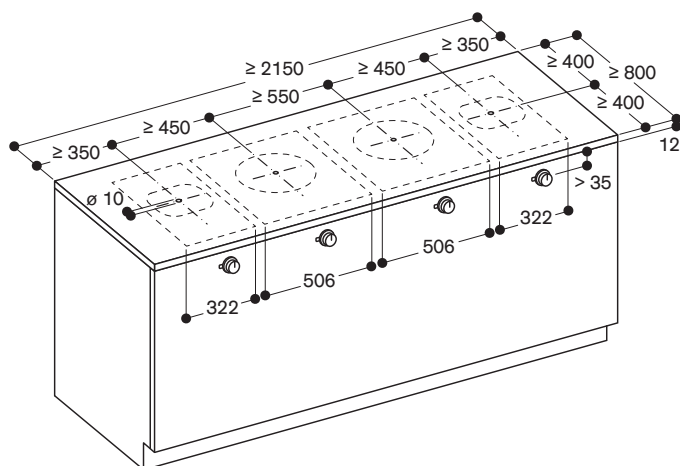**List of components (stainless steel knobs)**

- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 4 x CKU 410 010 (1 knob, integrated induction, stainless steel)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**List of components (black knobs)**

- 2 x CU 428 100 (Integrated induction module ø 28 cm)
- 2 x CU 421 100 (Integrated induction module ø 21 cm)
- 4 x CKU 410 000 (1 knob, integrated induction, black)
- 1 x CA 420 000 (Installation kit integrated induction)
- 1 x SP 400 000 (Set of 4 enhanced Surface Protector for pots and pans ø 10-28 cm)

**Recommended ventilation solutions**

- AC 400 (2 filter modules with fume collector)



**Full surface induction cooktop**  
**400 series**  
**CX 492**

**CX 492 101**  
 Black glass ceramic.  
 Frameless.  
 Width 90 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Special accessories**

**CA 060 300**  
 Cooking sensor for temperature regulation within pots.

**GN 232 110**  
 Teppan Yaki plate made of multi ply material, GN1/1.  
 For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Frameless for flush mounting.

**Cooking zones**

One unique cooking surface of 3200 cm<sup>2</sup>.  
 Up to 6 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
 Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
 Professional cooking function.  
 Dynamic cooking function.  
 Teppan Yaki function.  
 Booster function for pots.  
 Booster function for pans.  
 Keep warm function.  
 Individual pot detection.  
 Cooking timer for each cooking position.  
 Stopwatch.  
 Short-term timer.  
 Information key with use indicators.  
 Power management.

**Selected digital services (Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
 Remote monitoring.  
 Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
 Residual heat indication.  
 Child lock.  
 Safety shut-off.  
 Pause function.

**Planning notes**

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.  
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
 The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Appliance must be fixed from underneath.


Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.  
 Appliance weight: approx. 31 kg.

Please read the installation details regarding air ducting on page 260.

Please read additional planning notes on page 180-183.


**Connection**

Total connected load 7.4 kW.  
 Connecting cable 1.5 m without plug.  
 Power consumption standby/display off 0.5 W.  
 Power consumption standby/network 2.0 W.  
 Please check the user manual for how to switch off the WiFi module.






Installation of the cooktop; flush mounting

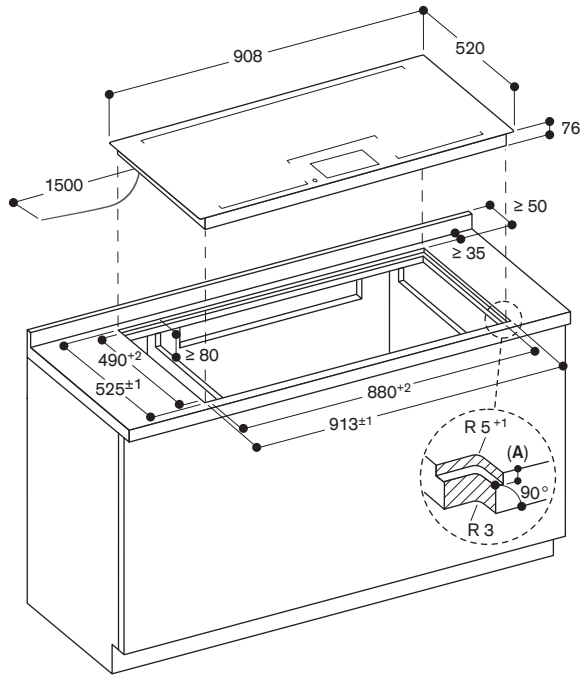


A:  $6,5^{+0,5}$

View from above

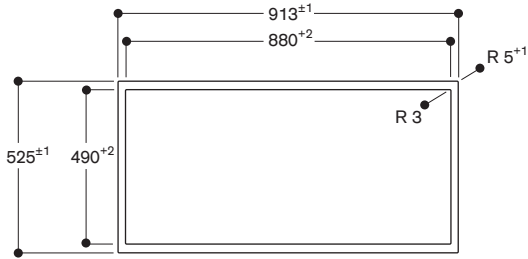


Longitudinal section

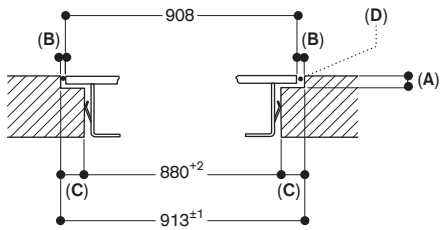

A:  $6,5^{+0,5}$   
 B: 2,5  
 C: 16,5  
 D: Fill with silicone

Cross-section

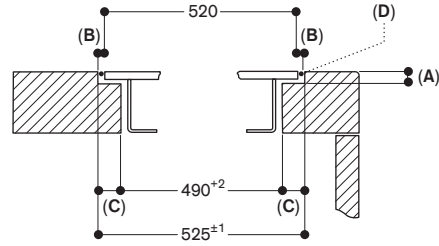

A:  $6,5^{+0,5}$   
 B: 2,5  
 C: 17,5  
 D: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Full surface induction cooktop  
400 series  
CX 492**

**CX 492 111**  
Black glass ceramic.  
Stainless steel frame.  
Width 90 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Installation accessories**

**VA 420 004**

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**

Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 060 300**

Cooking sensor for temperature regulation within pots.

**GN 232 110**

Teppan Yaki plate made of multi ply material, GN 1/1.  
For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

One unique cooking surface of 3200 cm<sup>2</sup>.

Up to 6 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
Professional cooking function.  
Dynamic cooking function.  
Teppan Yaki function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Individual pot detection.  
Cooking timer for each cooking position.  
Stopwatch.  
Short-term timer.  
Information key with use indicators.  
Power management.

**Selected digital services  
(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
Residual heat indication.  
Child lock.  
Safety shut-off.  
Pause function.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.

Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180 and 182.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.


Appliance can be snapped into the worktop from above.

Appliance weight: approx. 31 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

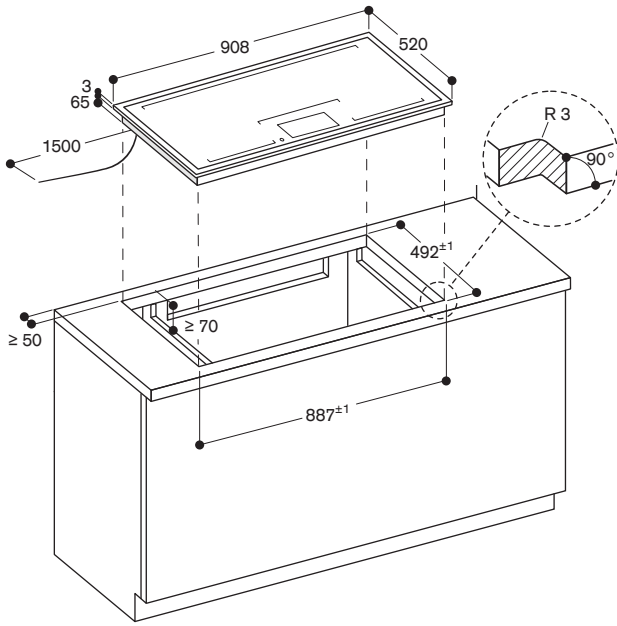


Installation of the cooktop; flush mounting

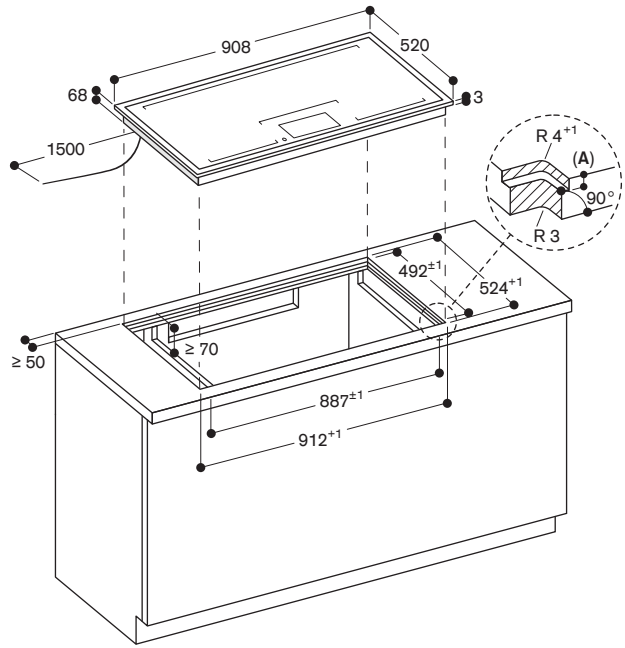


A: 3.5<sup>0.5</sup>

View from above

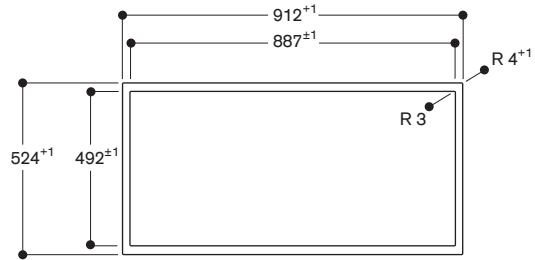


Longitudinal section

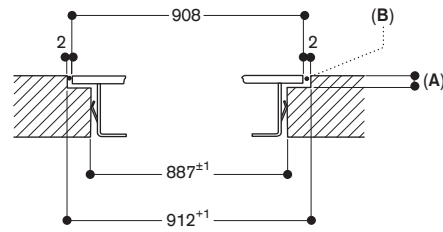

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

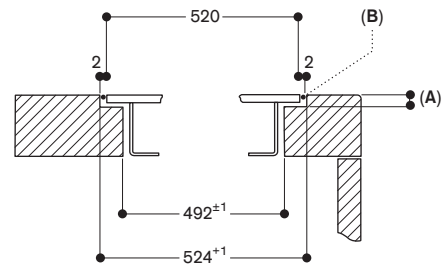

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Full surface induction cooktop**  
**400 series**  
**CX 482**

**CX 482 101**  
 Black glass ceramic.  
 Frameless.  
 Width 80 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Special accessories**

**CA 060 300**  
 Cooking sensor for temperature regulation within pots.

**GN 232 110**  
 Teppan Yaki plate made of multi ply material, GN 1/1.  
 For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Frameless for flush mounting.

**Cooking zones**

One unique cooking surface of 2750 cm<sup>2</sup>.  
 Up to 5 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
 Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
 Professional cooking function.  
 Dynamic cooking function.  
 Teppan Yaki function.  
 Booster function for pots.  
 Booster function for pans.  
 Keep warm function.  
 Individual pot detection.  
 Cooking timer for each cooking position.  
 Stopwatch.  
 Short-term timer.  
 Information key with use indicators.  
 Power management.

**Selected digital services (Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
 Remote monitoring.  
 Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
 Residual heat indication.  
 Child lock.  
 Safety shut-off.  
 Pause function.

**Planning notes**

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.  
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
 The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
 Appliance must be fixed from underneath.


Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.  
 Appliance weight: approx. 26 kg.

Please read the installation details regarding air ducting on page 260.


Please read additional planning notes on page 180-183.

**Connection**

Total connected load 7.4 kW.  
 Connecting cable 1.5 m without plug.  
 Power consumption standby/display off 0.5 W.  
 Power consumption standby/network 2.0 W.  
 Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

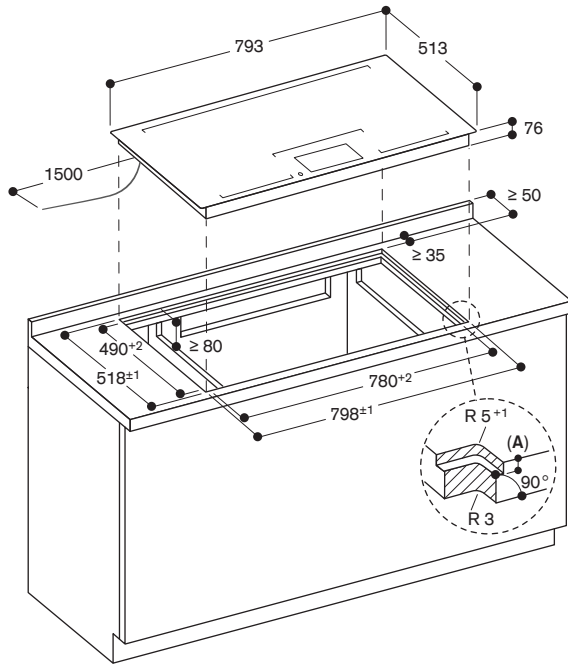


A:  $6.5^{+0.5}$

View from above

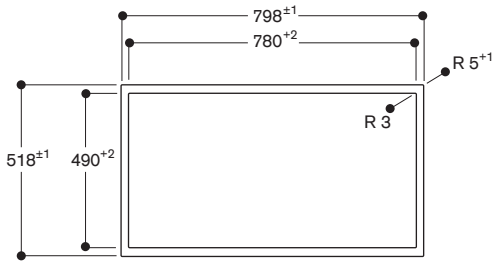


Longitudinal section

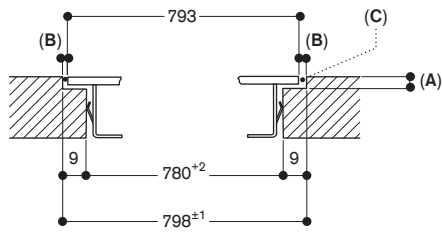

A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

Cross-section

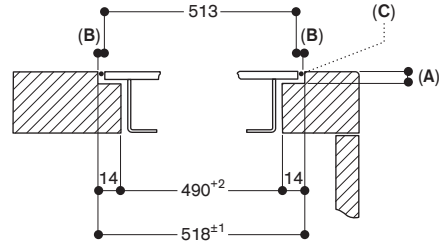

A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Full surface induction cooktop**  
**400 series**  
**CX 482**

**CX 482 111**  
 Black glass ceramic.  
 Stainless steel frame.  
 Width 80 cm.

**Included in the price**

- 1 wireless cooking sensor for temperature regulation.

**Installation accessories**

**VA 420 004**  
 Connection strip for combination with other Vario appliances of the 400 series for flush mounting.

**VA 420 010**  
 Connection strip for combination with other Vario appliances of the 400 series for surface mounting.

**Special accessories**

**CA 060 300**  
 Cooking sensor for temperature regulation within pots.

**GN 232 110**  
 Teppan Yaki plate made of multi ply material, GN1/1.  
 For full surface induction cooktops.

**Highlights**

- One single big cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output for big cookware of up to 5.5 kW.
- Precision crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

**Cooking zones**

One unique cooking surface of 2750 cm<sup>2</sup>.

Up to 5 items of cookware can be placed simultaneously on the cooktop.

**Handling**

Easy to use colour graphic TFT touch display with use indications.  
 Electronic power control in 17 output levels.

**Features**

Cooking sensor function.  
 Professional cooking function.  
 Dynamic cooking function.  
 Teppan Yaki function.  
 Booster function for pots.  
 Booster function for pans.  
 Keep warm function.  
 Individual pot detection.  
 Cooking timer for each cooking position.  
 Stopwatch.  
 Short-term timer.  
 Information key with use indicators.  
 Power management.

**Selected digital services**  
**(Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
 Remote monitoring.  
 Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
 Residual heat indication.  
 Child lock.  
 Safety shut-off.  
 Pause function.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, select combinations with or without appliance cover, and a connection strip VA 420 must be placed between the appliances.

Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 180 and 182.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**


Total connected load 7.4 kW.  
 Connecting cable 1.5 m without plug.  
 Power consumption standby/display off 0.5 W.

Power consumption standby/network 2.0 W.


Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

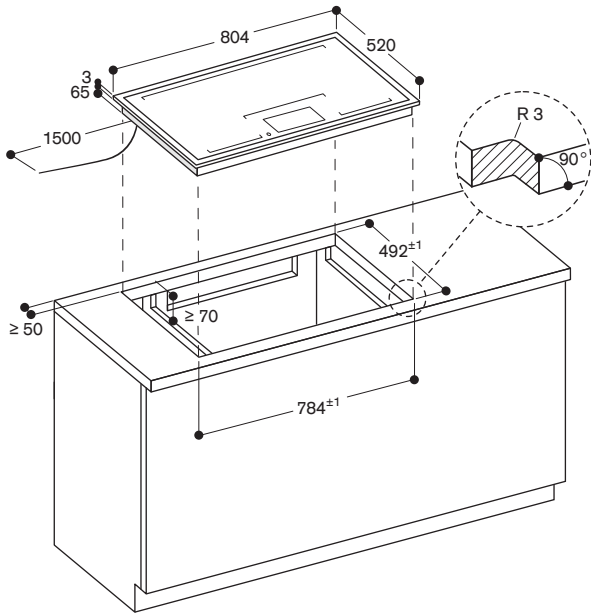


Installation of the cooktop; flush mounting

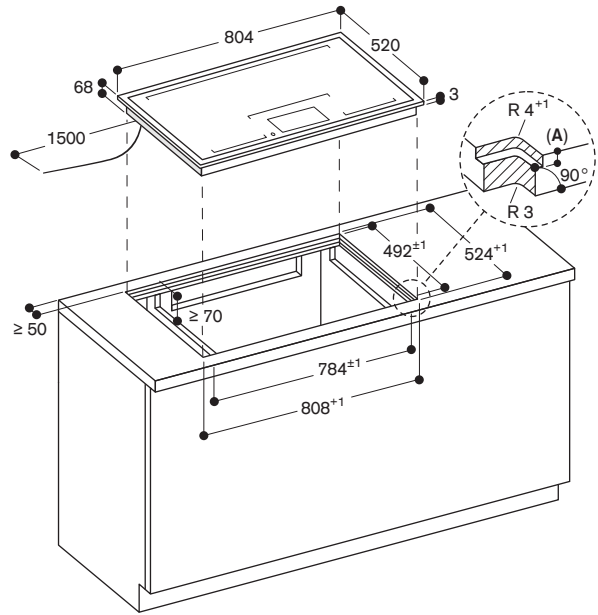


A: 3.5<sup>0.5</sup>

View from above

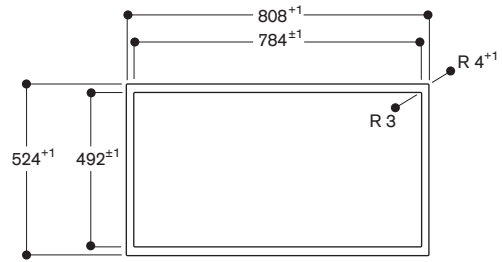


Longitudinal section

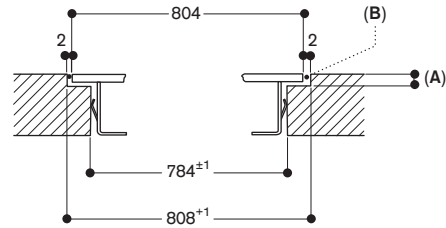

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

Cross-section

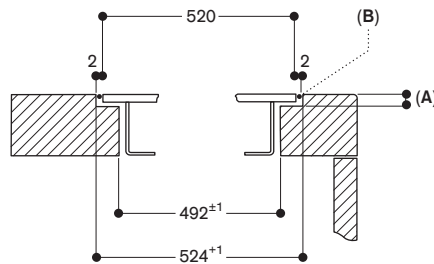

A: 3.5<sup>0.5</sup>  
B: Fill with silicone

All measurements in mm.



**Flex induction cooktop with integrated ventilation system 400 series**  
CV 492

**CV 492 10S**

Frameless.  
Width 90 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.  
Knobs need to be ordered separately.

**CV 492 10SM\***

Frameless with matte finish glass surface.  
Width 90 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.  
Knobs need to be ordered separately.



\* Expected to be available from mid 2025

**Necessary installation accessories**

**CKI 440 010**

Stainless steel knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**

Black knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CA 082 011**

Kit unducted air recirculation.

**CA 082 061**

Kit ducted air recirculation, 60 cm worktop depth.

**CA 082 071**

Kit ducted air recirculation, 70 cm worktop depth.

**CA 084 010**

4 acoustic filters for air extraction mode.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 282 112**

4 activated charcoal filters with highly efficient odour reduction and allergen deactivation.

**Installation accessories for air ducting you will find at the pages 336-341.**

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Highly efficient ventilation system integrated in the cooktop.
- Fully automatic ventilation system functions.
- Large-scale metal grease filter, easy to remove, dishwasher-safe.
- Energy-saving, low-noise fan.
- Air extraction or air recirculation system.
- Integrated activated charcoal filter easily removable from above for air recirculation system.
- Solid stainless steel control knob with black coating.
- Choice of a gloss or a non-reflective matte finish for the glass surface.
- Easy control of all functions with bicoloured display.

**Cooking zones**

2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W), with automatic extension up to 32 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W), with automatic extension up to 32 × 30 cm (3300 W, with booster 3700 W).

**Performance of ventilation system**

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Air extraction:  
532 / 636 m<sup>3</sup>/h.  
70 / 74 dB (A) re 1 pW.  
Air recirculation:  
487 / 611 m<sup>3</sup>/h.  
67 / 72 dB (A) re 1 pW.

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).  
Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic activation of the ventilation system when a cooking zone is used.  
Interval ventilation, 6 min.  
Automatic sensor controlled or manual run on function.  
Activated charcoal filter saturation indicator.  
Removable, dishwasher-safe grease filter unit.

High-grade black zinc die-casted cover for ventilation system, dishwasher-safe.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Airflow-optimised interior for efficient air circulation.  
Stopwatch.  
Short-term timer.  
Memory function.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring of ventilation.  
Remote monitoring of cooking zones.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Consumption data**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 56.9 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 61 dB / max. 70 dB normal mode.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Safety shut-off.  
Detachable, dishwasher-safe two-stage overflow protection.  
Removable overflow container, 0,9-litre capacity, dishwasher-safe.

**Planning notes**

Bottom cabinet width: min. 60 cm.  
Worktop depth: min. 60 cm.  
The unducted recirculation set CA.082.011 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.  
The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).  
In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.  
For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm<sup>2</sup>.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**

(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

The equivalent ducting length to ensure good performance is L<sub>max</sub> 28 m.  
Please refer to the "General planning notes" in the ventilation chapter for the calculation of the equivalent ducting length.

The appliance must be freely accessible from below.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 30 kg.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.


The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.

Comply with the clearances from underneath the worktop to the overflow container: min. 300 mm to remove and empty the container. Do not install other appliances below, e.g. ovens, refrigerators or dishwashers.

Please read additional planning notes on page 238-239.


**Connection**

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.







Installation of the cooktop; flush mounting

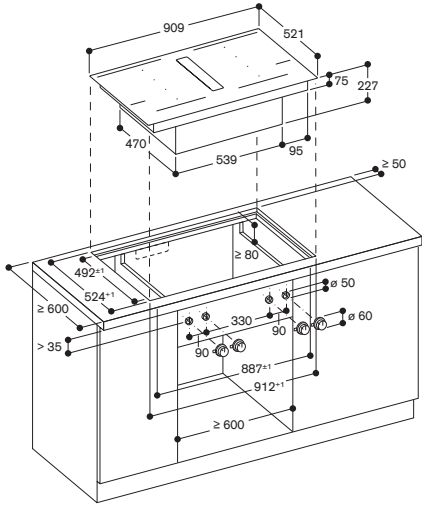


Installation of the control knob




View from above



Longitudinal section




Cross-section



- A: 6.5<sup>-0.5</sup>
- B: 1.5
- C: Fill with silicone


- A: 6.5<sup>-0.5</sup>
- B: 1.5
- C: Fill with silicone

Front view

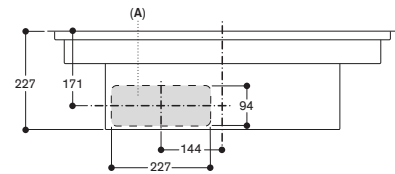


A: Connected directly at the rear

Side view with unducted recirculation; flush mounting

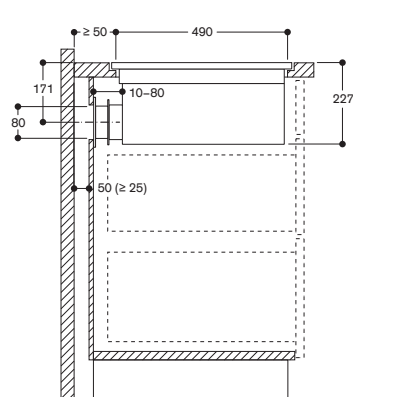


Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Front view – furniture cut-out for unducted recirculation; flush mounting

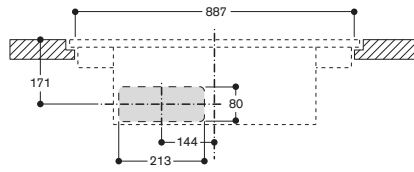

Front view of CV 492 with ducted recirculation

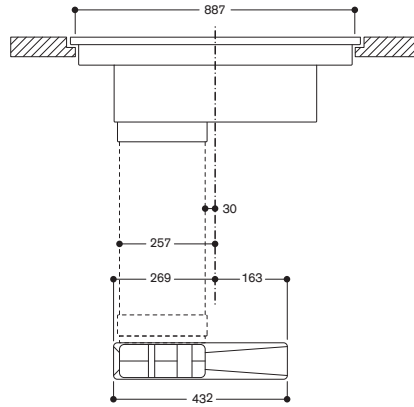


Side view with kit ducted air recirculation 700 mm worktop depth; flush mounting

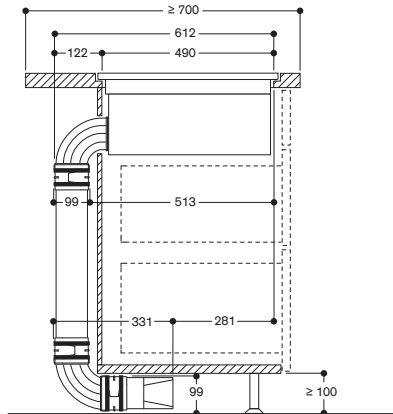

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Side view with kit ducted air recirculation 600 mm worktop depth; flush mounting

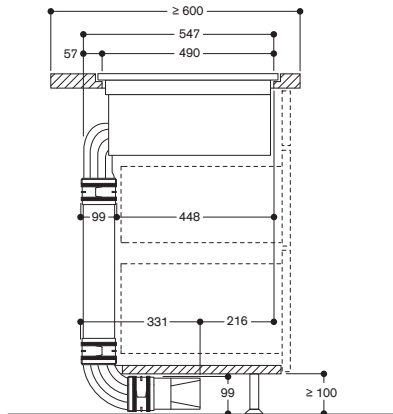

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

All measurements in mm.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Flex induction cooktop with integrated ventilation system 400 series**  
CV 482

**CV 482 105**

Frameless.  
Width 80 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.  
Knobs need to be ordered separately.



**Necessary installation accessories**

**CKI 440 010**

Stainless steel knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CKI 440 000**

Black knobs 400 series for VI 462, VI 482, CV 482, CV 492.  
Electronic control.  
Set of 4 knobs.

**CA 082 011**

Kit unducted air recirculation.

**CA 082 061**

Kit ducted air recirculation, 60 cm worktop depth.

**CA 082 071**

Kit ducted air recirculation, 70 cm worktop depth.

**CA 084 010**

4 acoustic filters for air extraction mode.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 282 112**

4 activated charcoal filters with high efficient odour reduction for air recirculation mode.

**Installation accessories for air ducting you will find at the pages 336-341.**

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Highly efficient ventilation system integrated in the cooktop.
- Fully automatic ventilation system functions.
- Large-scale metal grease filter, easy to remove, dishwasher-safe.
- Energy-saving, low-noise fan.
- Air extraction or air recirculation system.
- Integrated activated charcoal filter easily removeable from above for air recirculation system.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Frameless for flush mounting.

**Cooking zones**

2 flex induction cooking areas 24 × 20 cm (2200 W, with booster 3700 W), linked together 24 × 40 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 24 × 20 cm (2200 W, with booster 3700 W), linked together 24 × 40 cm (3300 W, with booster 3700 W).

**Performance of ventilation system**

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Air extraction:  
532 / 636 m<sup>3</sup>/h.  
70 / 74 dB (A) re 1 pW.  
Air recirculation:  
487 / 611 m<sup>3</sup>/h.  
67 / 72 dB (A) re 1 pW.

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).  
Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

**Features**

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic activation of the ventilation system when a cooking zone is used.  
Interval ventilation, 6 min.  
Automatic sensor-controlled or manual run-on function.  
Grease filter and activated charcoal filter saturation indicator.  
Removable, dishwasher-safe grease filter unit.  
High-grade black zinc die-casted cover for ventilation system, dishwasher-safe.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Airflow-optimised interior for efficient air circulation.  
Stopwatch.  
Short-term timer.

Memory function.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring of ventilation.  
Remote monitoring of cooking zones.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Consumption data**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 56.9 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 61 dB / max. 70 dB normal mode.

**Safety**

Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.  
Detachable, dishwasher-safe two-stage overflow protection.  
Removable overflow container, 0,9-litre capacity, dishwasher-safe.

**Planning notes**

Bottom cabinet width: min. 60 cm.  
Worktop depth: min. 60 cm.  
Immersion depth 227 mm.  
The unducted recirculation set CA 082 011 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.  
The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).  
In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.  
For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm<sup>2</sup>.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**

(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

The equivalent ducting length to ensure good performance is L<sub>max</sub> 28 m.  
Please refer to the "General planning notes" in the ventilation chapter for the calculation of the equivalent ducting length.  
The appliance must be freely accessible from below.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 30 kg.  
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.


The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.

Comply with the clearances from underneath the worktop to the overflow container: min. 300 mm to remove and empty the container. Do not install other appliances below, e.g. ovens refrigerators or dishwashers.


Please read additional planning notes on page 238-239.

**Connection**


Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Connecting cables 0.3 m and 1 m for control knobs.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

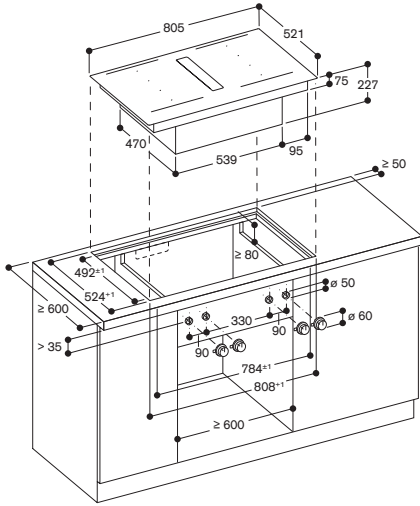


Installation of the control knob



View from above




Longitudinal section




A: 6.5<sup>±0.5</sup>  
B: 1.5  
C: Fill with silicone

Cross-section




A: 6.5<sup>±0.5</sup>  
B: 1.5  
C: Fill with silicone

Front view

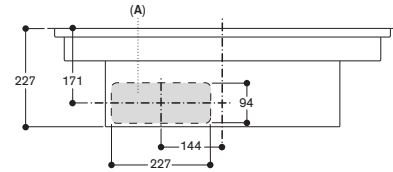


A: Connected directly at the rear

Side view with unducted recirculation; flush mounting

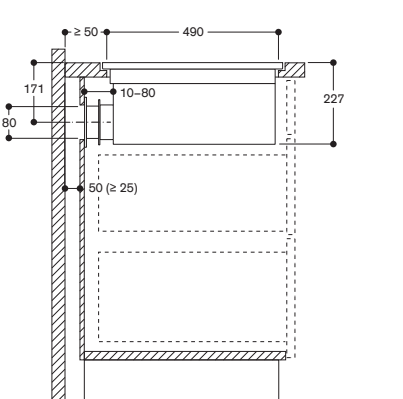


Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Front view – furniture cut-out for unducted recirculation; flush mounting

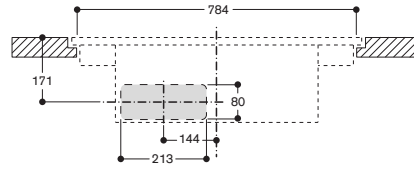

Front view of CV 482 with ducted recirculation

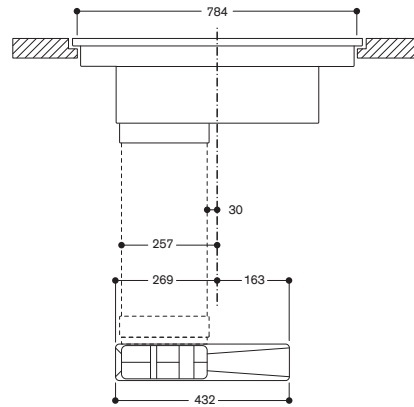


Side view with kit ducted air recirculation 700 mm worktop depth; flush mounting

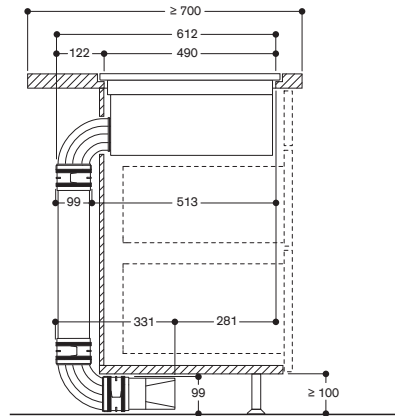

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Side view with kit ducted air recirculation 600 mm worktop depth; flush mounting

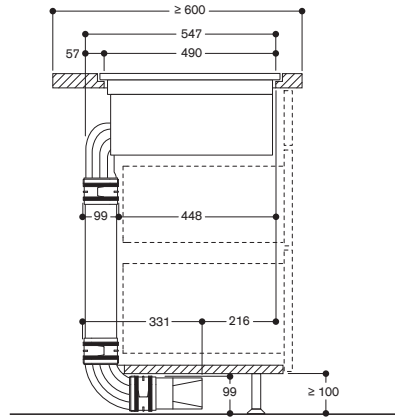

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )



**Flex induction cooktop with integrated ventilation system 200 series**  
**CV 282**

**CV 282 101**

Frameless.  
Width 80 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.

**CV 282 101M\***

Frameless with matte finish glass surface.  
Width 80 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.



\* Expected to be available from mid 2025

**Necessary installation accessories**

**CA 082 011**

Kit unducted air recirculation.

**CA 082 061**

Kit ducted air recirculation,  
60cm worktop depth.

**CA 082 071**

Kit ducted air recirculation,  
70cm worktop depth.

**CA 084 010**

4 acoustic filters for air extraction mode.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 060 300**

Cooking sensor for temperature regulation within pots.

**CA 282 112**

4 activated charcoal filters with highly efficient odour reduction and allergen deactivation.

**Installation accessories for air ducting you will find at the pages 336-341.**

**Highlights**

- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Highly efficient ventilation system integrated in the cooktop.
- Fully automatic ventilation system functions.
- Large-scale metal grease filter, easy to remove, dishwasher-safe.
- Energy-saving, low-noise fan.
- Air extraction or air recirculation system.
- Integrated activated charcoal filter easily removeable from above for air recirculation system.
- Twist-Pad control with removable, black magnetic knob.
- Choice of a gloss or a non-reflective matte finish for the glass surface.
- Easy control of all functions with bicoloured display.

**Cooking zones**

2 flex induction cooking areas 24 × 20 cm (2200 W, with booster 3700 W), linked together 24 × 40 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 24 × 20 cm (2200 W, with booster 3700 W), linked together 24 × 40 cm (3300 W, with booster 3700 W).

**Performance of ventilation system**

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Odour reduction for air recirculation in accordance with EN 61591.  
Air extraction:  
532 / 636 m<sup>3</sup>/h.  
70 / 74 dB (A) re 1 pW.  
Air recirculation:  
487 / 611 m<sup>3</sup>/h.  
67 / 72 dB (A) re 1 pW.

**Handling**

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control of the cooking zone in 17 output levels.  
Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

**Features**

Flex function for rectangular cooking areas.  
Automatic pot detection when the cooktop is switched on.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic activation of the ventilation system when a cooking zone is used.  
Interval ventilation, 6 min.  
Automatic sensor controlled or manual run on function.  
Activated charcoal filter saturation indicator.

Removable, dishwasher-safe grease filter unit.  
High-grade black zinc die-casted cover for ventilation system, dishwasher-safe.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Airflow-optimised interior for efficient air circulation.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Memory function.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring of ventilation.  
Remote monitoring of cooking zones.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Consumption data**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 56.9 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 61dB / max. 70 dB normal mode.

**Safety**

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.  
Detachable, dishwasher-safe two-stage overflow protection.  
Removable overflow container, 0,9-litre capacity, dishwasher-safe.

**Planning notes**

Bottom cabinet width: min. 60 cm.  
Worktop depth: min. 60 cm.  
The unducted recirculation set CA 082 011 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.  
The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).  
In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.  
For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm<sup>2</sup>.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm


The equivalent ducting length to ensure good performance is L<sub>max</sub> 28 m.  
Please refer to the "General planning notes" in the ventilation chapter for the calculation of the equivalent ducting length.

The appliance must be freely accessible from below.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 27 kg.  
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.  
Comply with the clearances from underneath the worktop to the overflow container: min. 300 mm to remove and empty the container. Do not install other appliances below, e.g. ovens, refrigerators or dishwashers.


Please read additional planning notes on page 238-239.

**Connection**


Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

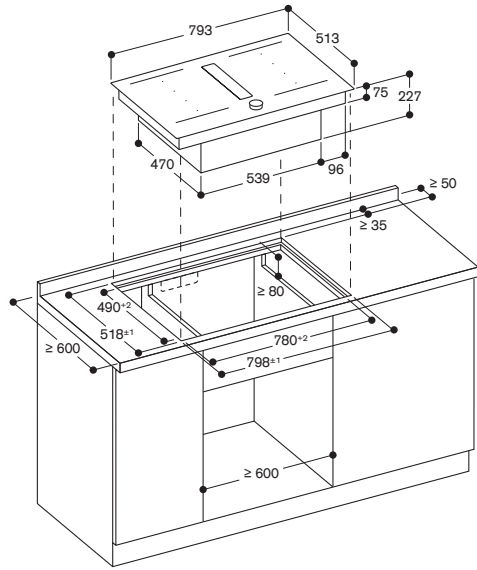


View from above




Longitudinal section



Cross section




Front view

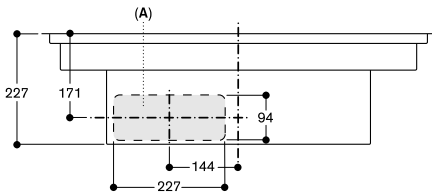


A: Connected directly at the rear

Side view with unducted recirculation; flush mounting

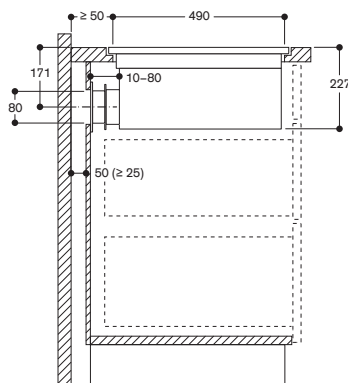


Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Front view - furniture cut-out for unducted recirculation flush mounting

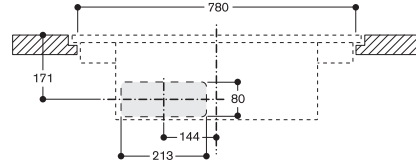

Front view of CV 282 with ducted recirculation

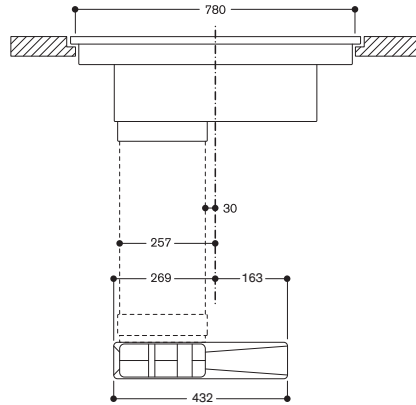


Side view with kit ducted air recirculation 700 mm worktop depth; flush mounting

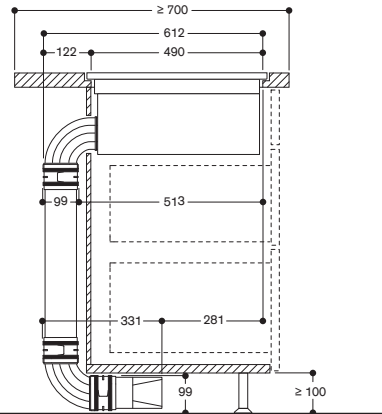

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Side view with kit ducted air recirculation 600 mm worktop depth; flush mounting

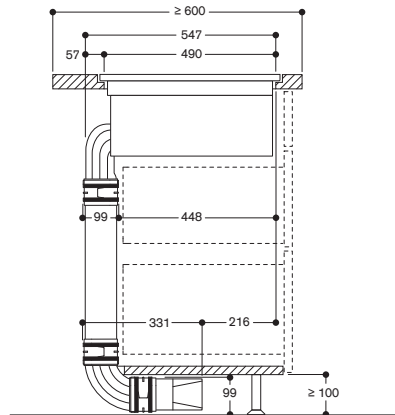

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

All measurements in mm.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



**Flex induction cooktop with integrated ventilation system 200 series**  
**CV 282**

**CV 282 111**

Stainless steel frame.  
Width 80 cm.  
Air extraction / Air recirculation.  
Ducting needs to be ordered separately.



**Necessary installation accessories**

**CA 082 011**

Kit unducted air recirculation.

**CA 082 061**

Kit ducted air recirculation,  
60 cm worktop depth.

**CA 082 071**

Kit ducted air recirculation,  
70 cm worktop depth.

**CA 084 010**

4 acoustic filters for air extraction  
mode.

**Special accessories**

**CA 051 301**

Teppan Yaki plate made of multi ply  
material.  
For flex induction cooktop.

**CA 052 300**

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 060 300**

Cooking sensor for temperature  
regulation within pots.

**CA 230 100**

Black magnetic knob for induction  
cooktop 200 series.  
Stainless steel knob with black  
coating.

**CA 282 112**

4 activated charcoal filters with  
highly efficient odour reduction and  
allergen deactivation.

**Installation accessories for air ducting  
you will find at the pages 336-341.**

**Highlights**

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Highly efficient ventilation system integrated in the cooktop.
- Fully automatic ventilation system functions.
- Large-scale metal grease filter, easy to remove, dishwasher-safe.
- Energy-saving, low-noise fan.
- Air extraction or air recirculation system.
- Integrated activated charcoal filter easily removable from above for air recirculation system.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

**Cooking zones**

2 flex induction cooking areas 23 x 19 cm (2200 W, with booster 3700 W), linked together 23 x 38 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23 x 19 cm (2200 W, with booster 3700 W), linked together 23 x 38 cm (3300 W, with booster 3700 W).

**Performance of ventilation system**

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Air extraction:

532 / 636 m<sup>3</sup>/h.

70 / 74 dB (A) re 1 pW.

Air recirculation:

487 / 611 m<sup>3</sup>/h.

67 / 72 dB (A) re 1 pW.

**Handling**

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control in 17 output levels.

Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

**Features**

Flex function for rectangular cooking areas.

Automatic pot detection when the cooktop is switched on.

Professional cooking function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Automatic sensor-controlled performance adjustment of the ventilation system.

Automatic activation of the ventilation system when a cooking zone is used.

Interval ventilation, 6 min.

Automatic sensor controlled or manual run on function.

Activated charcoal filter saturation indicator.

Removable, dishwasher-safe grease filter unit.

High-grade black zinc die-casted cover for ventilation system, dishwasher-safe.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised interior for efficient air circulation.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Memory function.

Options menu.

Power management.

**Selected digital services (Gaggenau Home Connect)**

Remote control and monitoring of ventilation.

Remote monitoring of cooking zones.

Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Consumption data**

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 56.9 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class -.

Grease filter efficiency class B.

Sound level min. 61 dB / max. 70 dB normal mode.

**Safety**

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

Detachable, dishwasher-safe

two-stage overflow protection.

Removable overflow container,

0,9-litre capacity, dishwasher-safe.

**Planning notes**

Bottom cabinet width: min. 60 cm.

Worktop depth: min. 60 cm.

Immersion depth 223 mm.

The unducted recirculation set

CA 082 011 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.

The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).

In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.

For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm<sup>2</sup>.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

**Special accessories**

(order as spare parts):

Part No. 17006018

Frying sensor pan, ø 20 cm

The equivalent ducting length to ensure good performance is Lmax 28 m.

Please refer to the "General planning notes" in the ventilation chapter for the calculation of the equivalent ducting length.

The appliance must be freely accessible from below.

Appliance must be fixed from underneath.

Appliance weight: approx. 29 kg.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Comply with the clearances from underneath the worktop to the overflow container: min. 300 mm to remove and empty the container. Do not install other appliances below, e.g. ovens, refrigerators or dishwashers.

Please read additional planning notes on page 238-239.

**Connection**


Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.


Power consumption standby/  
display off 0.5 W.

Power consumption standby/  
network 2.0 W.


Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

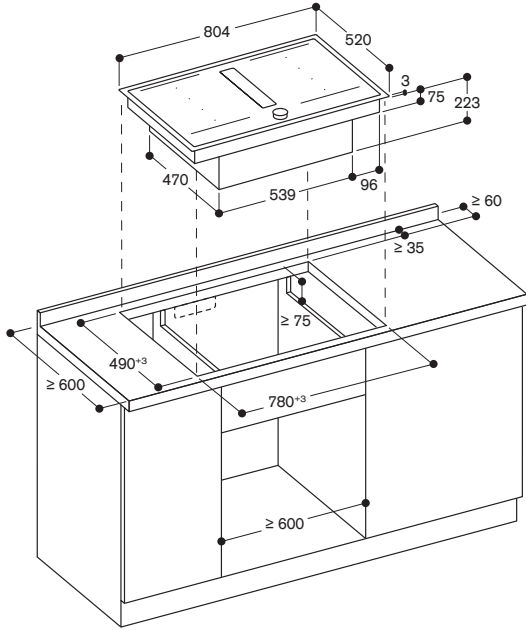


Front view

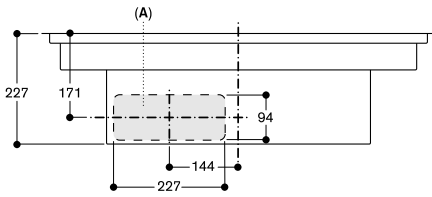


A: Connected directly at the rear

Side view of CV 282 111 with unducted recirculation

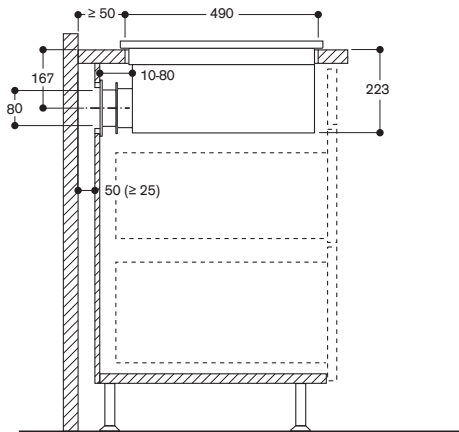


A: Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Front view - furniture cut-out for unducted recirculation surface mounting

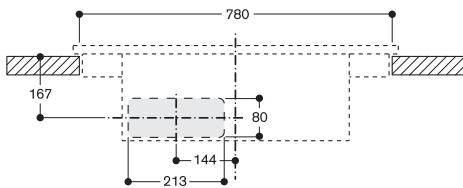

Front view of CV 282 with ducted recirculation

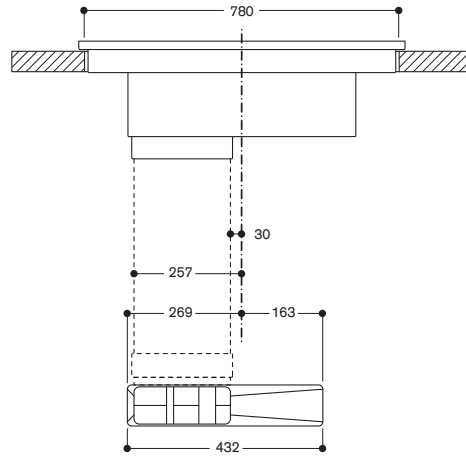


Side view with kit ducted air recirculation 700 mm worktop depth; surface mounting

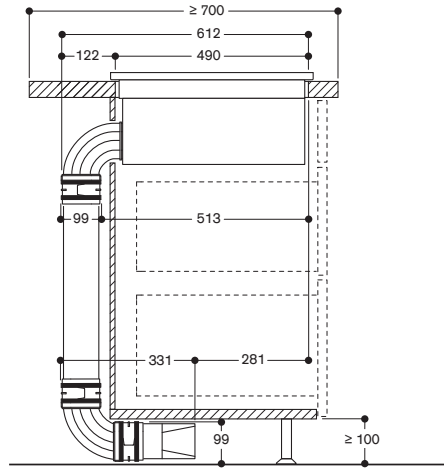

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Side view with kit ducted air recirculation 600 mm worktop depth; surface mounting

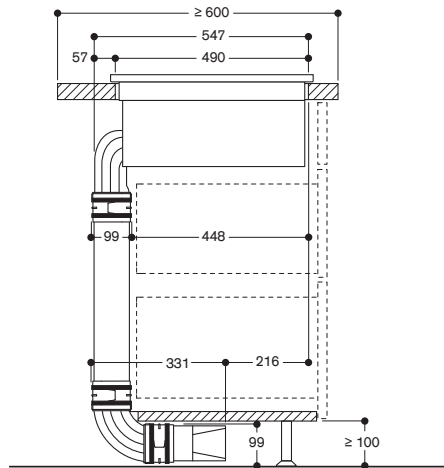

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

All measurements in mm.

## Planning examples for flex induction cooktop with integrated ventilation system

### Good to know — for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- The air extraction ducting can be connected to the rear. The respective connecting pieces are available for this purpose.
- The appliance must be accessible from underneath.


### Air recirculation

- Installation with air recirculation kits
- Filters can be replaced from above.
- Allow accessibility from below.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm<sup>2</sup>).
- The unducted recirculation set CA 082 011 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.

### Planning example 1

#### CV 282 / CV 482 / CV 492 with unducted air recirculation

Wall installation, worktop depth 60 cm, Vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm. Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2 \text{ }^\circ\text{C}$ ).

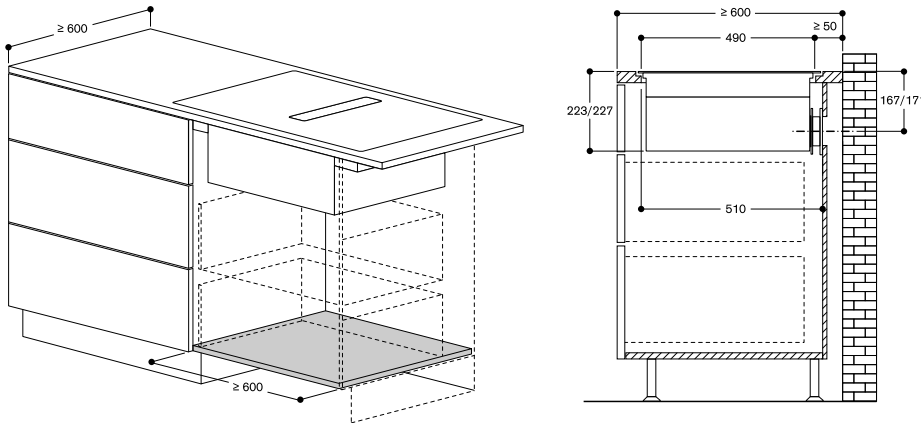


#### List of components:

- 1 x CA 082 011 Recirculation kit

### Planning example 2

#### CV 282 / CV 482 / CV 492 with unducted air recirculation

Island installation, worktop depth 120 cm, Vertical aperture of min. 25 mm behind the back panel of the furniture. Suggested for ideal performance are 50 mm. Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2 \text{ }^\circ\text{C}$ ).

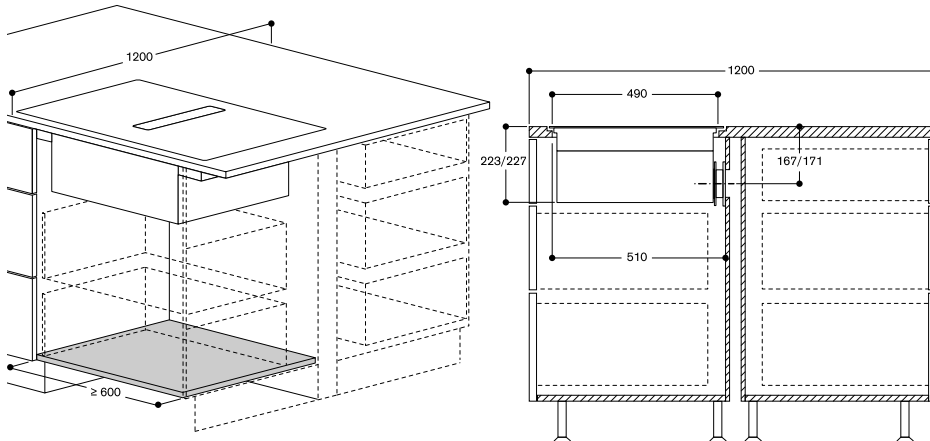


#### List of components:

- 1 x CA 082 011 Recirculation kit

### Planning example 3

#### CV 282 / CV 482 / CV 492 with ducted recirculation

Island installation, worktop depth 90 cm. Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2 \text{ }^\circ\text{C}$ ).

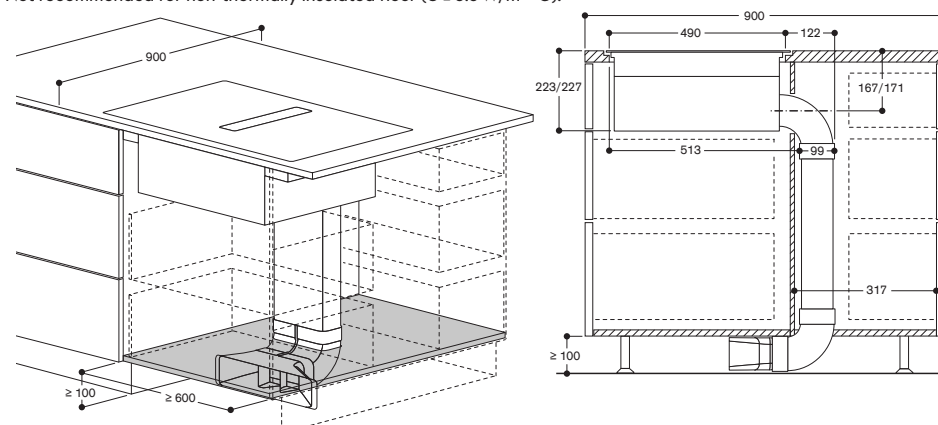

#### List of components:

- 1 x CA 082 071 Kit ducted air recirculation, 70 cm worktop depth




**Air extraction**

- Appliance is directly accessible with male flat duct DN 150.
- For all extraction installations please foresee acoustic filter (CA 084 010)
- Depending on the distance between the appliance and the extraction wall you may need more ducts.
- For optimum air circulation, we recommend ducts with DN 150. Ducting and connection pieces are available as special accessories.
- Two flat ducts must be connected with a flat duct connecting piece.

**Planning example 4****CV 282 / CV 482 / CV 492 with air extraction installation**


Wall installation, worktop depth 60 cm, direct connection to flat wall outlet.

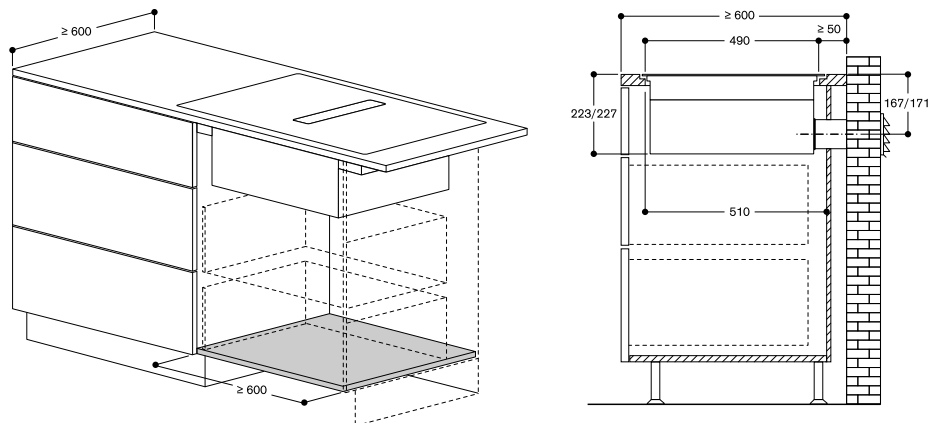**List of components:**

- 1 x CA 084 010 Extraction kit
- 1 x AD 857 015 Flat duct DN 150 (0,5 meter)
- 1 x AD 850 050 Wall outlet DN 150 flat

**Planning example 5****CV 282 / CV 482 / CV 492 with air extraction installation**


Wall or island installation, worktop depth 70 cm, ducting directed to the outside via the cellar.

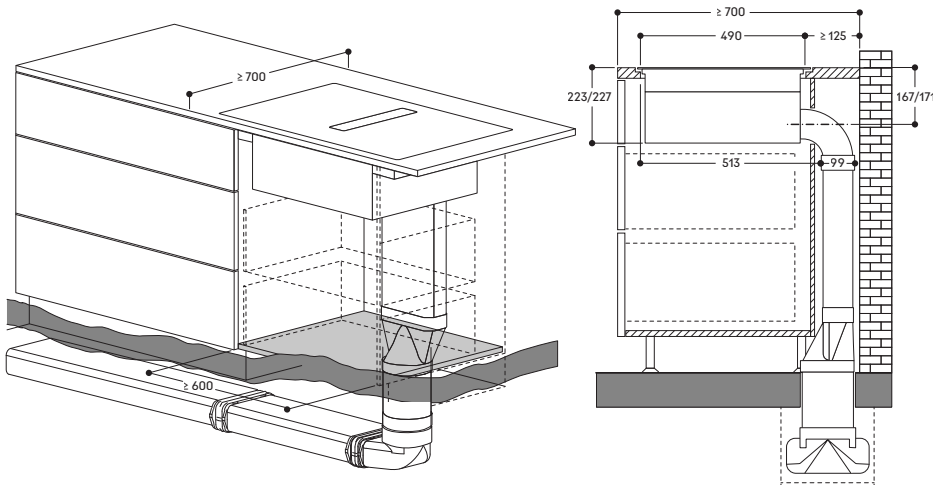**List of components:**

- 1 x CA 084 010 Extraction kit
- 1 x AD 857 030 Flat duct bend 90° vertical DN150 flat
- 1 x AD 857 015 Flat duct DN 150 (0.5 meter)
- 3 x AD 857 040 Flat duct connecting piece
- 1 x AD 857 041 Flat duct adapter round DN 150 to DN 150 flat
- 1 x AD 752 010 Round duct DN 150
- 1 x AD 857 042 Duct bend 90° DN 150
- 1 x AD 857 010 Flat duct DN 150 (1 meter)
- 1 x AD 990 091 Adhesive tape

**Planning example 6****CV 282 / CV 482 / CV 492 with air extraction installation**

Wall installation, worktop depth 65 cm, ducting behind the cabinet and in the plinth.

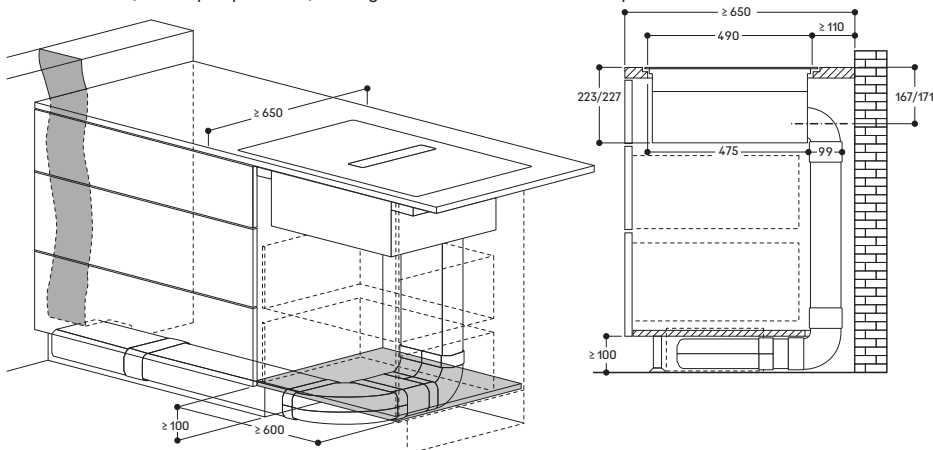**List of components:**

- 1 x CA 084 010 Extraction kit
- 1 x AD 857 010 Flat duct DN 150 (1 meter)
- 1 x AD 857 015 Flat duct DN 150 (0.5 meter)
- 1 x AD 857 030 Flat duct bend 90° vertical DN 150 flat
- 1 x AD 857 031 Flat duct bend 90° horizontal
- 1 x AD 857 033 Short flat duct bend 90° vertical DN 150°
- 4 x AD 857 040 Flat duct connecting piece

All measurements in mm.



### Flex induction cooktop 200 series CI 292

#### CI 292 102

Frameless.  
Width 90 cm.

#### Special accessories

##### CA 051 301

Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

##### CA 052 300

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

##### CA 050 300

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

##### CA 055 300

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

##### CA 230 100

Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Frameless for flush mounting.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Cooking sensor function for temperature control in pots.
- Frying sensor function for temperature control in pans.
- Large cooking zone for pots up to ø 32 cm.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services

##### (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories

(order as spare parts):


Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 11.1 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

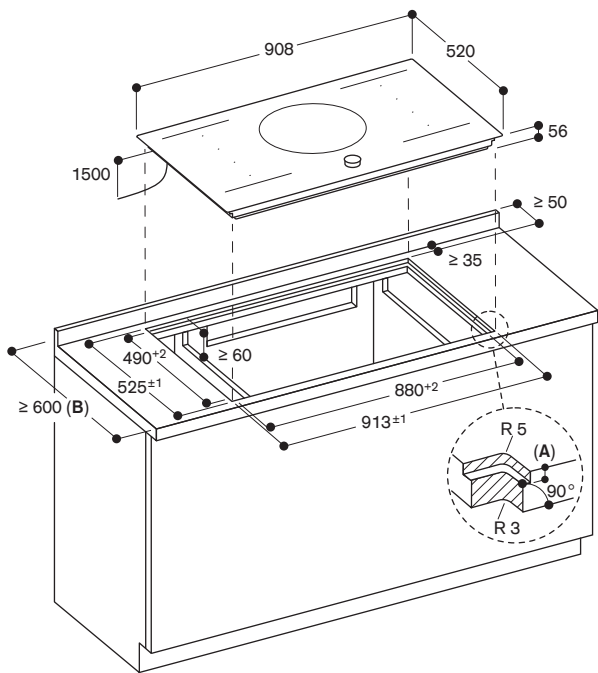


A:  $6.5^{+0.5}$   
 B: Please check the installation manual in case the worktop depth is below 600 mm.

Cross-section

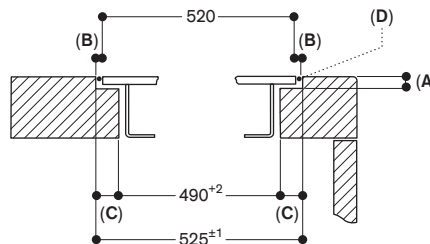


A:  $6.5^{+0.5}$   
 B: 2.5  
 C: 17.5  
 D: Fill with silicone

View from above

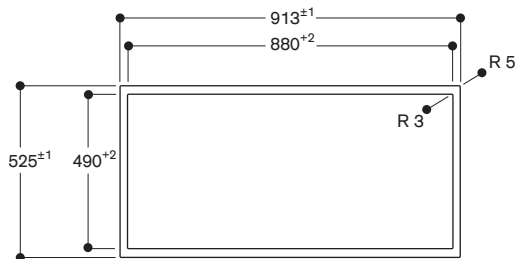

Longitudinal section

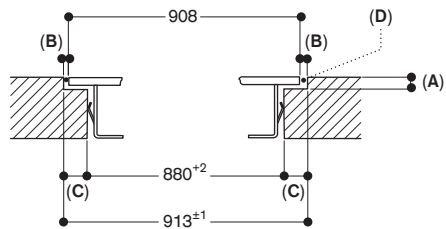

A:  $6.5^{+0.5}$   
 B: 2.5  
 C: 16.5  
 D: Fill with silicone

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Flex induction cooktop 200 series CI 292

**CI 292 112**  
Stainless steel frame.  
Width 90 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Cooking sensor function for temperature control in pots.
- Frying sensor function for temperature control in pans.
- Large cooking zone for pots up to ø 32 cm.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm  
Part No. 17006019  
Frying sensor pan, ø 32 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 23 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 11.1 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

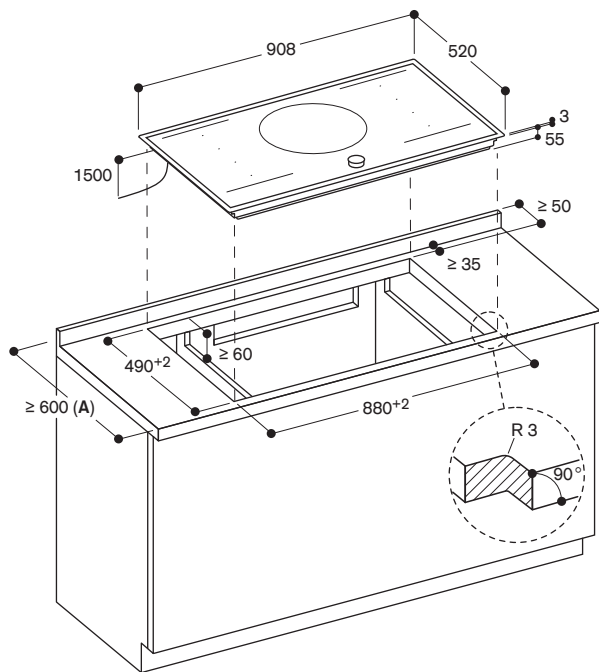

A: Please check the installation manual in case the worktop depth is below 600 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Flex induction cooktop 200 series CI 283

**CI 283 103**  
Frameless.  
Width 80 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Frameless for flush mounting.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Cooking sensor function for temperature control in pots.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 21 × 20 cm (2200 W, with booster 3700 W), linked together 21 × 40 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 24 cm (2200 W, with booster 3700 W).  
1 induction cooking zone ø 18 cm (1800 W, with booster 3100 W).  
1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 16 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1m without plug.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

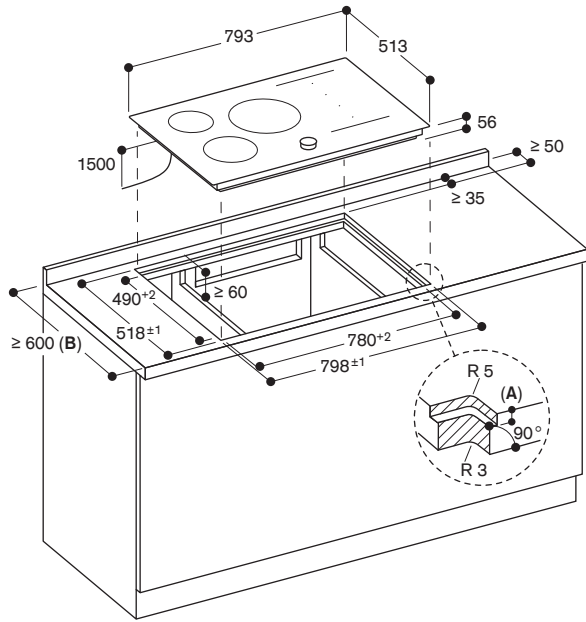


A:  $6.5^{+0.5}$   
 B: Please check the installation manual in case the worktop depth is below 600 mm.

Cross-section

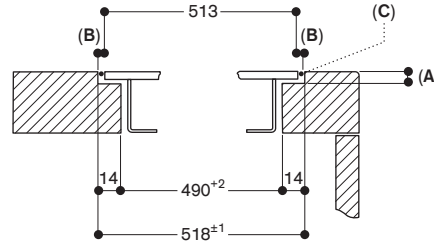


A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

View from above

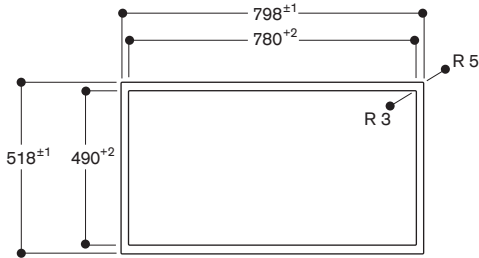

Longitudinal section

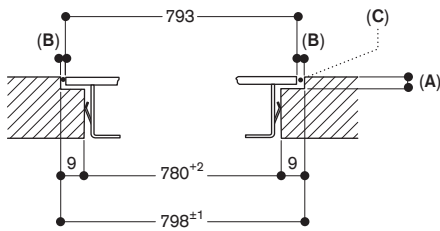

A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Flex induction cooktop 200 series**  
**CI 283**

**CI 283 113**  
Stainless steel frame.  
Width 80 cm.

**Special accessories**

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

**Highlights**

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Cooking sensor function for temperature control in pots.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

**Cooking zones**

2 flex induction cooking areas 21 × 19 cm (2200 W, with booster 3700 W), linked together 21 × 38 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 24 cm (2200 W, with booster 3700 W).  
1 induction cooking zone ø 18 cm (1800 W, with booster 3100 W).  
1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

**Handling**

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

**Features**

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

**Selected digital services (Gaggenau Home Connect)**

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

**Safety**

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

**Planning notes**

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories (order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 260.


**Connection**

Total connected load 7.4 kW.  
Connecting cable 1.1m without plug.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.





Installation of the cooktop; surface mounting

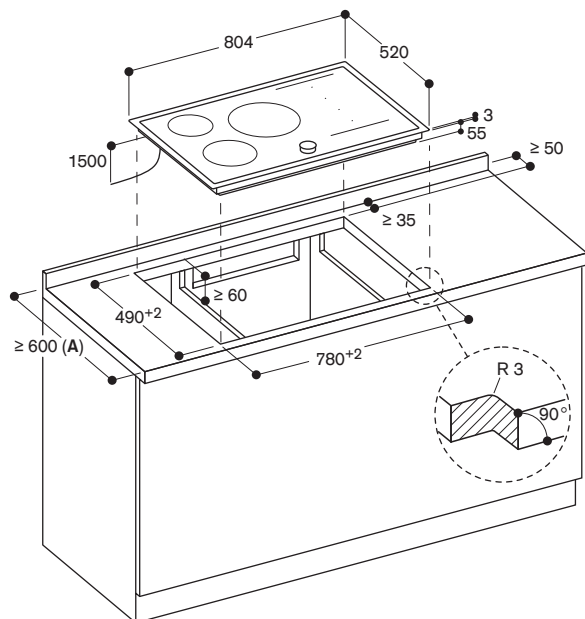

A: Please check the installation manual in case the worktop depth is below 600 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Flex induction cooktop 200 series CI 282

**CI 282 102**  
Frameless.  
Width 80 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Frameless for flush mounting.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23 × 20 cm (2200 W, with booster 3700 W), linked together 23 × 40 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories


(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 18 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

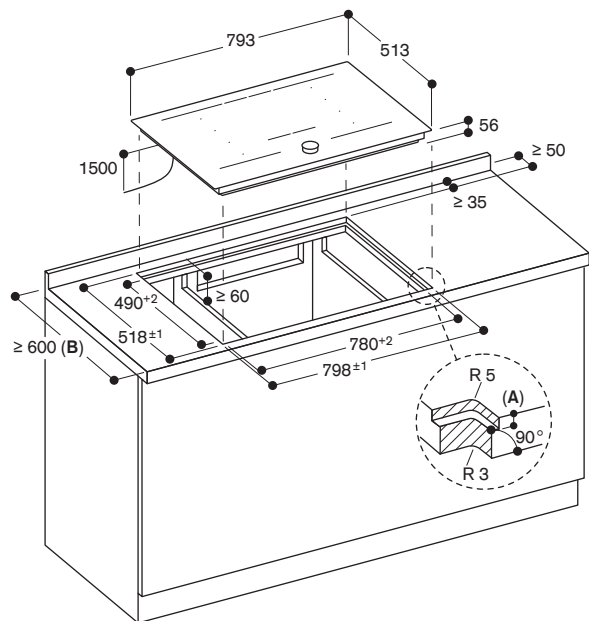


A:  $6.5^{+0.5}$   
 B: Please check the installation manual in case the worktop depth is below 600 mm.

Cross-section

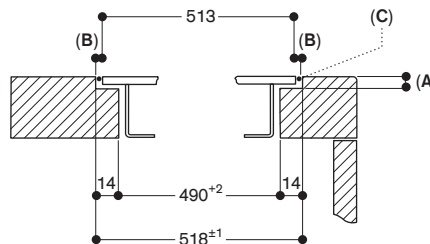


A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

View from above

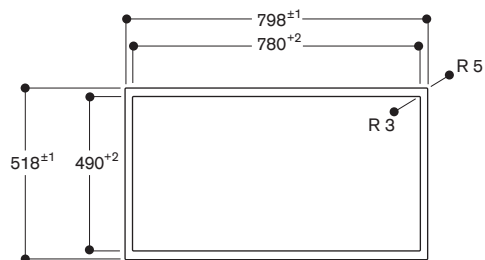

Longitudinal section

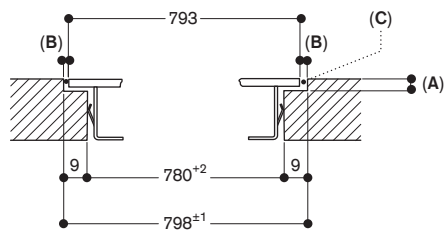

A:  $6.5^{+0.5}$   
 B: 2.5  
 C: Fill with silicone

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Flex induction cooktop 200 series CI 282

**CI 282 112**  
Stainless steel frame.  
Width 80 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas  
22.5 × 19 cm (2200 W, with booster 3700 W),  
linked together 22.5 × 38 cm (3300 W,  
with booster 3700 W), with automatic  
extension up to 30 × 30 cm (3300 W,  
with booster 3700 W).  
2 flex induction cooking areas  
22.5 × 19 cm (2200 W, with booster 3700 W),  
linked together 22.5 × 38 cm (3300 W,  
with booster 3700 W), with automatic  
extension up to 30 × 30 cm (3300 W,  
with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories

(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.


Appliance must be fixed from underneath.

Appliance weight: approx. 17 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/  
display off 0.5 W.  
Power consumption standby/  
network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



Installation of the cooktop; surface mounting

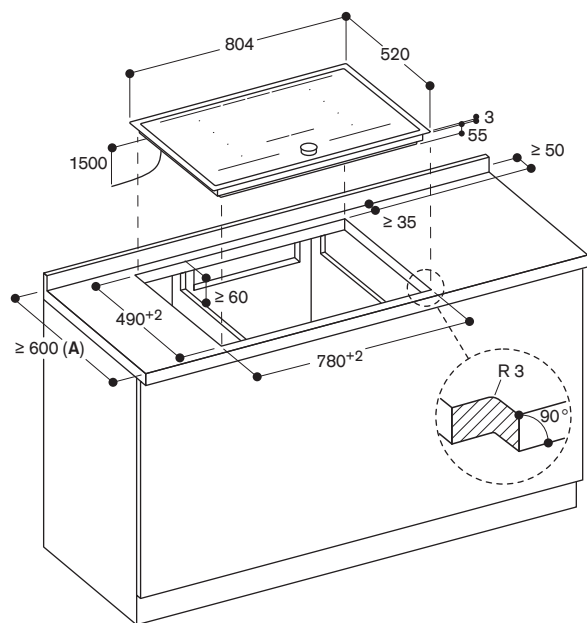

A: Please check the installation manual in case the worktop depth is below 600 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Flex induction cooktop 200 series CI 272

**CI 272 103**  
Frameless.  
Width 70 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Frameless for flush mounting.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories


(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 16 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

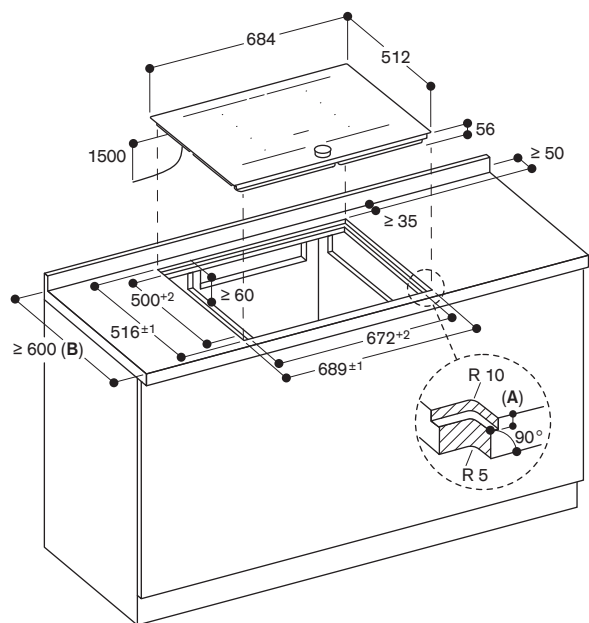


- A:  $6.5^{+0.5}$
- B: Please check the installation manual in case the worktop depth is below 600 mm.

Cross-section

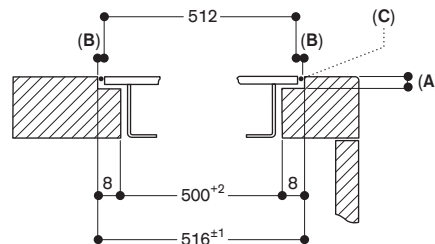


- A:  $6.5^{+0.5}$
- B: 2.5
- C: Fill with silicone

View from above

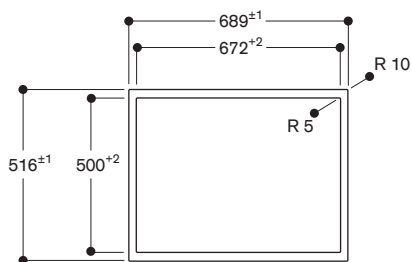

Longitudinal section

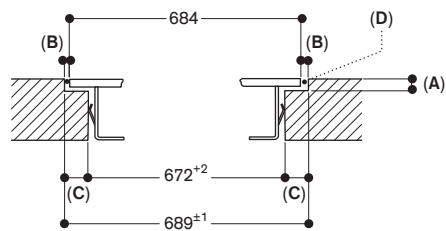

- A:  $6.5^{+0.5}$
- B: 2.5
- C: 8.5
- D: Fill with silicone

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Flex induction cooktop 200 series CI 272

**CI 272 113**  
Stainless steel frame.  
Width 70 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating

#### Highlights

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 22.5 × 19 cm (2200 W, with booster 3700 W), linked together 22.5 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 22.5 × 19 cm (2200 W, with booster 3700 W), linked together 22.5 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories

(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.


Appliance must be fixed from underneath.

Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 260.


#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.





Installation of the cooktop; surface mounting

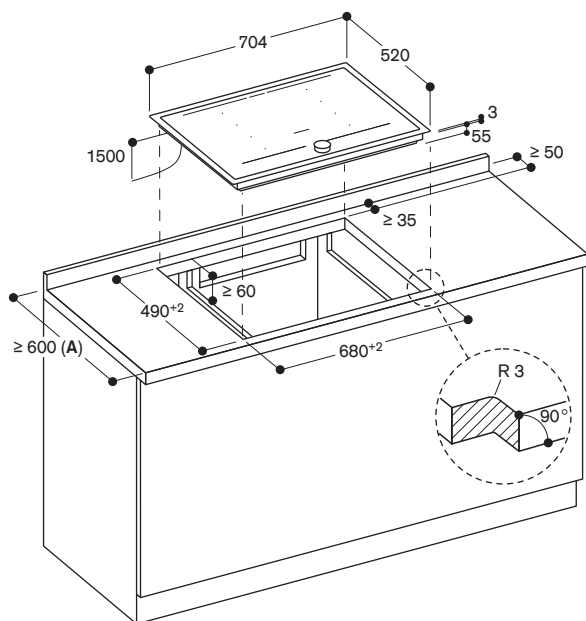

A: Please check the installation manual in case the worktop depth is below 600 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Flex induction cooktop 200 series CI 262

**CI 262 105**  
Frameless.  
Width 60 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Frameless for flush mounting.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 23 × 19 cm (2200 W, with booster 3700 W), linked together 23 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 16 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.




Installation of the cooktop; flush mounting

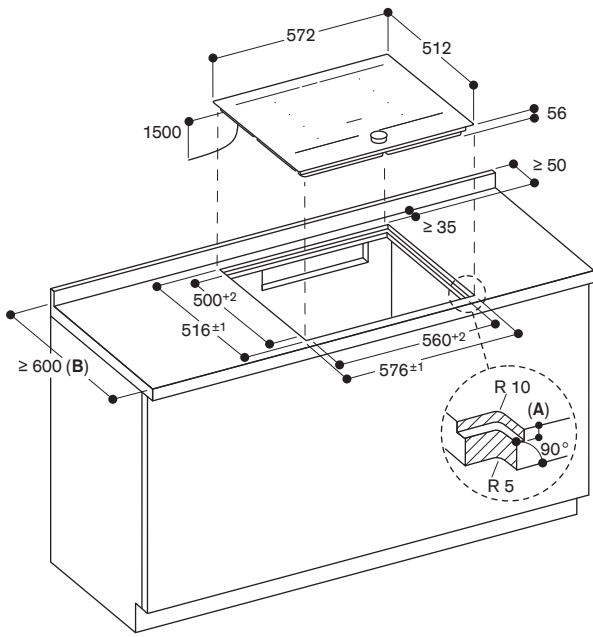


A: 6.5<sup>+0.5</sup>  
 B: Please check the installation manual in case the worktop depth is below 600 mm.

Cross-section

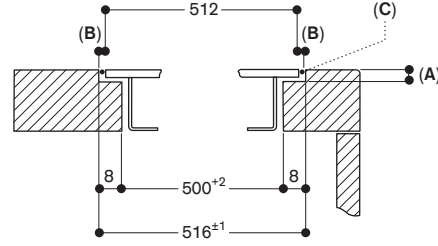


A: 6.5<sup>+0.5</sup>  
 B: 2.5  
 C: Fill with silicone  
 measurements in mm

View from above

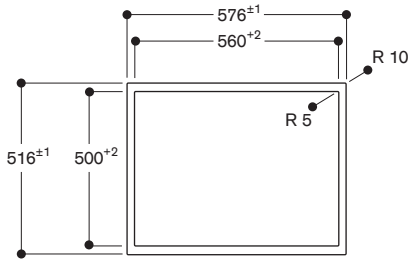

Longitudinal section

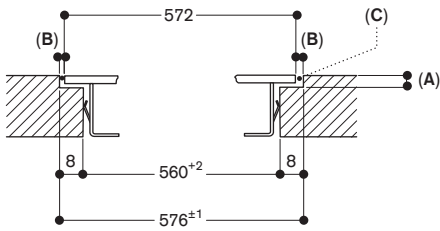

A: 6.5<sup>+0.5</sup>  
 B: 2.5  
 C: Fill with silicone

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Flex induction cooktop 200 series CI 262

**CI 262 115**  
Stainless steel frame.  
Width 60 cm.

#### Special accessories

**CA 051 301**  
Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

**CA 052 300**  
Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

**CA 050 300**  
Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

**CA 055 300**  
Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

**CA 230 100**  
Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Cooking sensor function for temperature control in pots.
- Professional cooking function for splitting the cooktop into predefined heat areas.
- Frying sensor function for temperature control in pans.
- Twist-Pad control with removable magnetic knob.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 22.5 × 19 cm (2200 W, with booster 3700 W), linked together 22.5 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 22.5 × 19 cm (2200 W, with booster 3700 W), linked together 22.5 × 38 cm (3300 W, with booster 3700 W), with automatic extension up to 30 × 30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

#### Special accessories


(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm  
Part No. 17006184  
Frying sensor pan, ø 24 cm  
Part No. 17006185  
Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 16 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/ display off 0.5 W.  
Power consumption standby/ network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



#### Installation of the cooktop; surface mounting

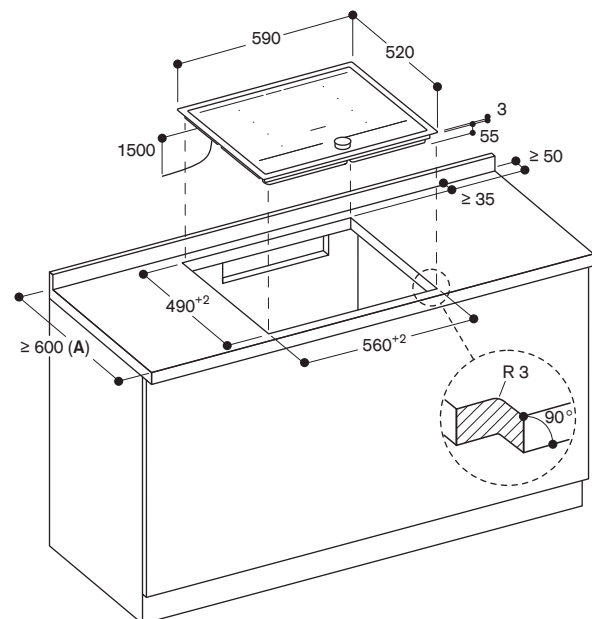

A: Please check the installation manual in case the worktop depth is below 600 mm.



### Flex induction cooktop 200 series CI 261

**CI 261 115**  
Stainless steel frame.  
Width 60 cm.

#### Special accessories

##### CA 051 301

Teppan Yaki plate made of multi ply material.  
For flex induction cooktop.

##### CA 052 300

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktop.

##### CA 050 300

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.

##### CA 055 300

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.

##### CA 230 100

Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.

#### Highlights

- Sturdy stainless steel frame.
- Flex function for combining the rectangular cooking areas.
- Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width.
- Sensor control with direct selection of output level.
- Easy control of all functions with bicoloured display.

#### Cooking zones

2 flex induction cooking areas 22.5 × 19 cm (2200 W, with booster 3700 W), linked together 22.5 × 38 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 21 cm (2500 W, with booster 3700 W).  
1 induction cooking zone ø 14.5 cm (1600 W, with booster 2200 W).

#### Handling

Sensor control with direct selection of output level.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.  
Personalisation function via Home Connect.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.

Please read additional information on Gaggenau Home Connect on page 459.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.  
Pause function.

#### Planning notes

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.


Special accessories  
(order as spare parts):  
Part No. 17006018  
Frying sensor pan, ø 20 cm

The wok pan WP 400 001 cannot be used with this appliance.  
Appliance must be fixed from underneath.  
Appliance weight: approx. 12 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.1 m without plug.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 2.0 W.  
Please check the user manual for how to switch off the WiFi module.



#### Installation of the cooktop; surface mounting

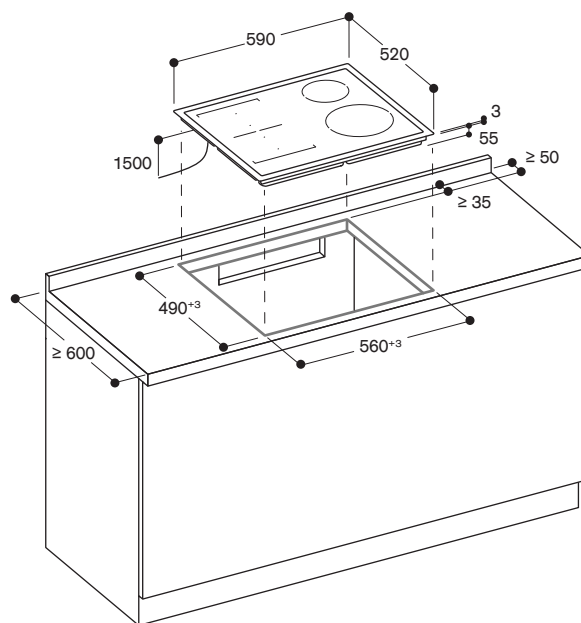

## Installation notes for induction cooktops and glass ceramic cooktops

Applies to CU42., CI 26./27./28./29., CX 492/482, VI 414/422/462/482/492, VI 232/242/262 and CE 261/291.

### Intake air ducting

Induction cooktops have a cooling fan to protect the appliance's electronics from overheating. In the case of insufficient air circulation in the cabinet, the appliance's output will be reduced to prevent electronic damage.

#### A Air duct behind a cabinet or built-in oven

An open cross-section of a minimum of 20 mm is needed across the full width and full height of the cabinet. Cabinets with a closed bottom also need a respective cross-section in the air duct area.

#### B Intake through the cabinet's back wall

In the cabinet's back wall, plan a recess of at least 45 mm (91 mm for CU 421 / CU 428) in height from the worktop's bottom edge.

The minimum width is

- 300 mm for a 30 cm induction cooktop
- 350 mm for a 40 cm induction cooktop (also CU 421 / CU 428)
- 550 mm for a Vario cooktop or a 60 cm to 80 cm induction cooktop
- 820 mm for a 90 cm induction cooktop

### Intermediate shelf

To prevent the content of drawers underneath the cooktop from heating up, the use of an intermediate shelf is required for glass ceramic cooktops.

Width of cut-out at least

- 100 mm for a 60 to 80 cm induction cooktop

- \* does not apply to 90 cm cooktops
- \*\* min. 65 mm for cooktops with frame as well as VI 462 / 482 / 492 for surface mounting
- min. 70 mm for cooktops without frame, for CX 482 / 492 with frame as well as for VI 462 / 482 / 492 for flush mounting.
- min. 80 mm for CX 482 / 492 without frame
- min. 115 mm for CU 421 / 428

### Combination with other appliances

Installation above dishwasher or washing machine is not permitted.

### Combination with AL 400

In addition to the measures mentioned above, the following unobstructed cross sections must be planned between the cabinet and the AL 400 to allow for proper intake and exhaust air circulation for the induction cooktop.

#### A In front of the air duct




20 mm distance between the back side of drawers, an oven or the cabinet's interior wall.

#### B Adjacent to the air duct

The resulting gap between the air duct and the cabinet's side wall needs to remain open.

#### C At the housing's rear edge

The resulting cross section between the housing and the wall, as well as between the housing and the floor, must remain open.

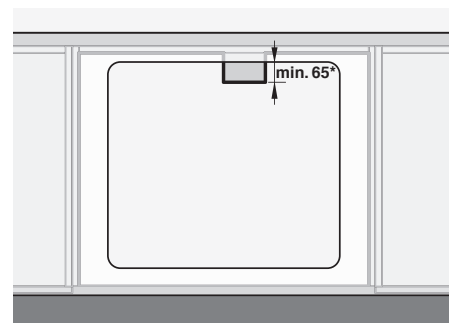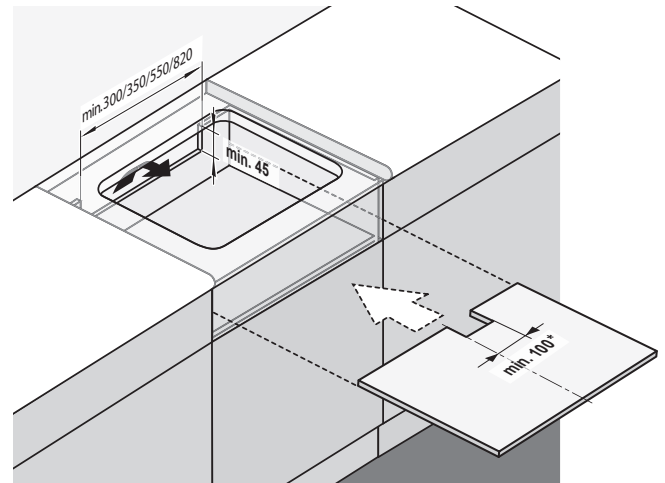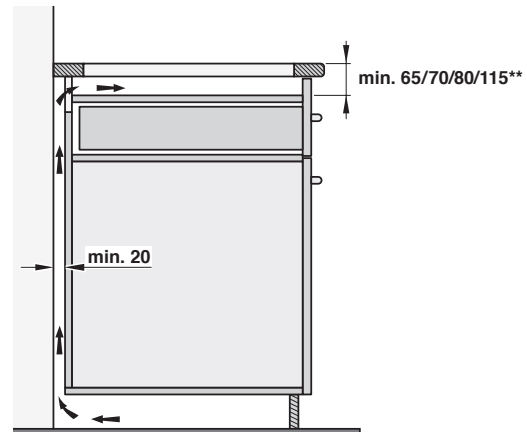



**Glass ceramic cooktop 200 series**  
**CE 291**

**CE 291 101**

Frameless.  
Width 90 cm.

**Included in the price**

1 glass scraper.

**Highlights**

- Frameless for flush mounting.
- Frying sensor function.
- Three-ring cooking zone up to 27 cm.
- Large roasting zone.
- Sensor control with direct selection of output level.

**Cooking zones**

2 Super-Quick cooking zones ø 18 cm (1800 W); together they convert to 18 x 41.5 cm (4400 W) roasting zone.  
1 Super-Quick cooking zone ø 12 cm (750 W), converts to ø 21 cm (2100 W, with booster 2600 W) cooking zone.  
1 Super-Quick cooking zone ø 14.5 cm (1050 W), converts to ø 21 cm (2200 W) or ø 27 cm (3080 W) cooking zone.  
1 Super-Quick cooking zone ø 14.5 cm (1200 W, with booster 1600 W).

**Handling**

Sensor control with direct selection of output level.  
Cooking zone marking.  
Electronic power control in 17 output levels.

**Features**

Frying sensor function for ø 21 cm cooking zone.  
Booster function.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.

**Safety**

Main switch.  
Operation indicator.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.


**Planning notes**

Immersion depth 51 mm, depth at plug socket 51 mm.  
The cooktop must not be installed lower than the top edge of the worktop.  
Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.  
The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.  
Installation possible in a 60 cm wide lower cabinet.  
Appliance must be fixed from underneath.  
Cooktop clamping range: 20-50 mm.  
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.  
Appliance weight: approx. 13 kg.


Please read the installation details regarding air ducting on page 260.

**Connection**

Total connected load 11.0 kW.  
Plan a connection cable.




**Installation of the cooktop; flush mounting**

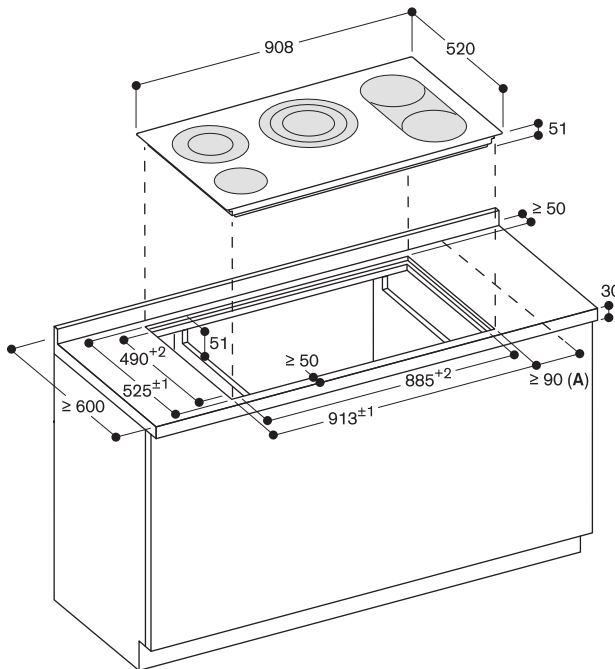


A: Minimum distance from the hob cut-out to the wall.


**View from above**

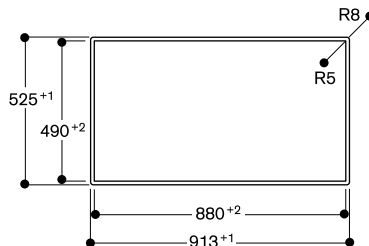

**Longitudinal section**



**Cross section**





#### Glass ceramic cooktop 200 series

##### CE 291

#### CE 291 111

Stainless steel frame.  
Width 90 cm.

#### Included in the price

1 glass scraper.

#### Highlights

- Sturdy stainless steel frame.
- Frying sensor function.
- Three-ring cooking zone up to 27 cm.
- Large roasting zone.
- Sensor control with direct selection of output level.

#### Cooking zones

2 Super-Quick cooking zones  $\varnothing$  18 cm (1800 W); together they convert to 18 x 41.5 cm (4400 W) roasting zone.  
1 Super-Quick cooking zone  $\varnothing$  12 cm (750 W), converts to  $\varnothing$  21 cm (2100 W, with booster 2600 W) cooking zone.  
1 Super-Quick cooking zone  $\varnothing$  14.5 cm (1050 W), converts to  $\varnothing$  21 cm (2200 W) or  $\varnothing$  27 cm (3080 W) cooking zone.  
1 Super-Quick cooking zone  $\varnothing$  14.5 cm (1200 W, with booster 1600 W).

#### Handling

Sensor control with direct selection of output level.  
Cooking zone marking.  
Electronic power control in 17 output levels.

#### Features

Frying sensor function for  $\varnothing$  21 cm cooking zone.  
Booster function.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.

#### Safety

Main switch.  
Operation indicator.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.



#### Planning notes

Immersion depth 49 mm, depth at plug socket 50 mm.  
Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.  
The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.  
Installation possible in a 60 cm wide lower cabinet.  
Appliance must be fixed from underneath.  
Cooktop clamping range: 20–50 mm.  
Appliance weight: approx. 13 kg.


Please read the installation details regarding air ducting on page 260.

#### Connection

Total connected load 11.0 kW.  
Plan a connection cable.



#### Installation of the cooktop; surface mounting

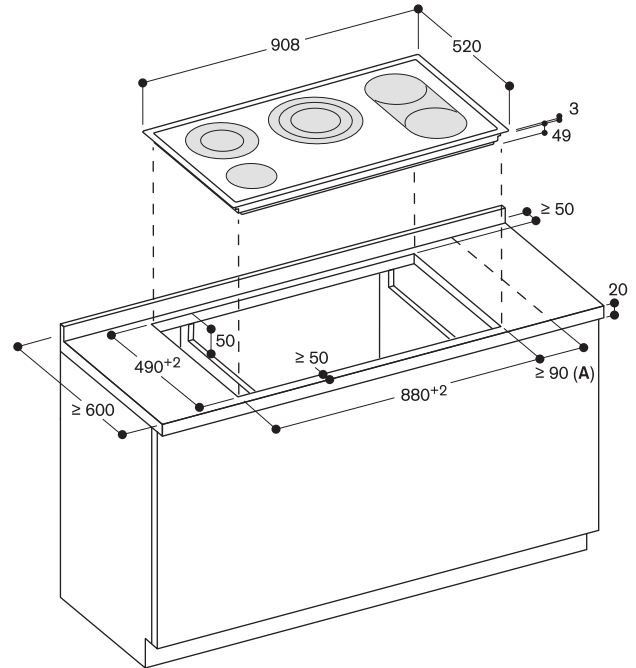

A: Minimum distance from the hob cut-out to the wall.




**Glass ceramic cooktop 200 series**
**CE 261**

CE261114

 Stainless steel frame.  
 Width 60 cm.

**Included in the price**

1 glass scraper.

**Highlights**

- Sturdy stainless steel frame.
- Sensor control with direct selection of output level.

**Cooking zones**

- 1 Super-Quick cooking zone  $\varnothing$  17 cm (1800 W), switches to 17 x 26,5 cm (2600 W) roasting zone.
- 1 Super-Quick cooking zone  $\varnothing$  14,5 cm (1200 W), converts to  $\varnothing$  21 cm (2100 W, with booster function 3000 W) cooking zone.
- 1 Super-Quick cooking zone  $\varnothing$  18 cm (2000 W).
- 1 Super-Quick cooking zone  $\varnothing$  14,5 cm (1200 W).

**Handling**

Sensor control with direct selection of output level.  
 Cooking zone marking.  
 Electronic power control in 17 output levels.

**Features**

Booster function.  
 Cooking timer for up to 99 minutes.  
 Short-term timer.  
 Options menu.

**Safety**

Main switch.  
 Operation indicator.  
 2-stage residual heat indication.  
 Child lock.  
 Safety shut-off.





**Planning notes**

Immersion depth 49 mm, depth at plug socket 50 mm.  
 Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.  
 The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.  
 Installation possible in a 60 cm wide lower cabinet.  
 Appliance must be fixed from underneath.  
 Cooktop clamping range: 20–50 mm.  
 Appliance weight: approx. 8 kg.

Please read the installation details regarding air ducting on page 260.

**Connection**

Total connected load 8,3 kW.  
 Plan a connection cable.

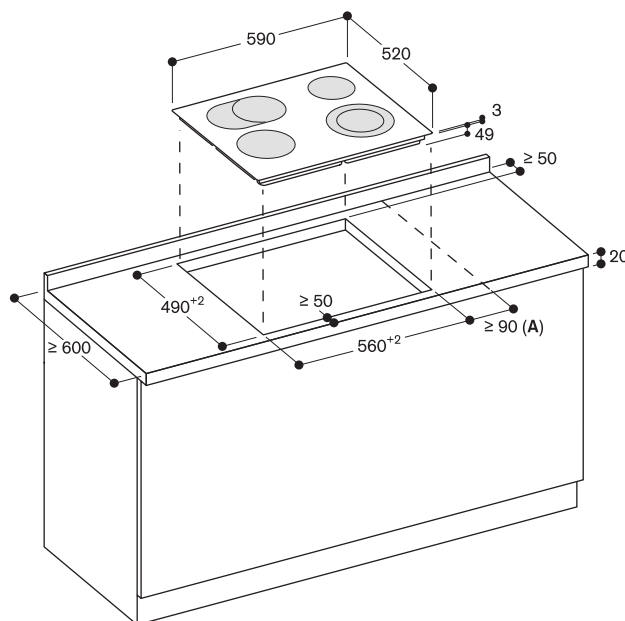
**Installation of the cooktop; surface mounting**


A: Minimum distance from the hob cut-out to the wall.

All measurements in mm.

## Accessories and special accessories for cooktops

### GN 232 110

Teppan Yaki plate made of multi ply material, GN 1/1.  
For full surface induction cooktop.



### CA 051 301

Teppan Yaki plate made of multi ply material.  
For flex induction cooktops.



### CA 052 300

Griddle plate in cast aluminium.  
Non-stick.  
For flex induction cooktops.



### CA 050 300

Flex Pan set, 3 pcs.  
Non-stick coating.  
For flex induction cooktop.



### CA 055 300

Flex Pan large.  
Non-stick coating.  
For flex induction cooktop.



### SP 410 000

Enhanced surface protector.  
For pots and pans ø 10–14 cm.  
For CU421.



### SP 415 000

Enhanced surface protector.  
For pots and pans ø 15–18 cm.  
For CU 421, CU 428.



### SP 419 000

Enhanced surface protector.  
For pots and pans ø 19–23 cm.  
For CU 421, CU 428.



### SP 424 000

Enhanced surface protector.  
For pots and pans ø 24–28 cm.  
For CU 421, CU 428.



### SP 400 000

Set of 4 enhanced surface protectors.  
For pots and pans ø 10–28 cm.  
For CU 421, CU 428.



### WP 400 001

Wok pan made of multiple-layer material.  
With round bottom and handle,  
ø 36 cm, 6 litres, height 10 cm.



### WZ 400 000

Wok attachment for wok pan.



### CA 060 300

Cooking sensor for temperature regulation within pots.



### CA 230 100

Black magnetic knob for induction cooktop 200 series.  
Stainless steel knob with black coating.



### CA 414 110F

Socket.



### CA 414 100F

Black socket.



### CA 429 410

Frame set including decorative frame (to be welded in) and holding frame.



### VA 420 004

Connection strip for combination with other Vario appliances of the 400 series for flush mounting.




### VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting



**CA 082 011**

Kit unducted air recirculation for CV 282 / CV 482 / CV 492 consists of 4 activated charcoal filters with highly efficient odour reduction and allergen deactivation and telescopic connector.

**CA 082 061**


Kit ducted air recirculation, 60 cm worktop depth for CV 282 / CV 482 / CV 492 consists of 4 activated charcoal filters with highly efficient odour reduction and allergen deactivation, extra short flat duct bend, flat duct, flat duct bend, flat duct connecting pieces and diffuser.

**CA 082 071**


Kit ducted air recirculation, 70 cm worktop depth for CV 282 / CV 482 / CV 492 consists of 4 activated charcoal filters with highly efficient odour reduction and allergen deactivation, flat duct bends, flat duct, flat duct connecting pieces and diffuser.

**CA 084 010**

4 acoustic filters for air extraction mode for CV 282 / CV 482 / CV 492.

**CA 282 112**

4 recirculation replenishment filters for CV 282 / CV 482 / CV 492 with highly efficient odour reduction and allergen deactivation.

**AD 857 033**

Short flat duct bend 90° for installation of CV 282 / CV 482 / CV 492 in 65 cm deep worktops for exhaust and ducted recirculation.

**AD 857 034**

Extra short flat duct bend 90° for installation of CV 282 / CV 482 / CV 492 in 60 cm deep worktops for exhaust and ducted recirculation.



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect

## Gas cooktops 400 series



Appliance type	Gas cooktop	Gas cooktop
	CG 492 111F	CG 492 211
Stainless steel frame 3 mm / Stainless steel brushed / shot blasted	-/•/-	-/•/-
Surface mounting / Flush mounting / Welded	-/•/•	-/•/•
Liquid gas 28-37 mbar / Natural gas 20 mbar	•/-	-/•
<b>Dimensions</b>		
Width	(cm) 100	100
Depth	(cm) 59.9	59.9
Immersion depth	(cm) 15.7	15.7
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	•/-	•/-
<b>Cooking zones</b>		
Number of cooking zones or items of cookware	5	5
Multi-ring wok burner (300-5800 W)	1	—
Multi-ring wok burner (300-6000 W)	—	1
Two-ring high output burner (165-4000 W)	2	2
Two-ring standard burner (165-2000 W)	2	2
<b>Features</b>		
Number of output levels	12	12
Electronic output control	•	•
Automatic fast ignition / Electric ignition	•/-	•/-
Electronic flame monitoring with automatic re-ignition	•	•
Simmer function	•	•
Residual heat indicator	•	•
Safety shut-off	•	•
Cast pan support	3-part	3-part
<b>Accessories</b>		
Wok attachment ring	•	•
Wok pan	WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>
Appliance cover (Stainless steel / Black)	-/-	-/-
<b>Connection</b>		
Total connected load gas (up to)	(kW) 17.8	18.0
Total connected load electric	(W) 15.0	15.0

• Standard. — Not available. <sup>1</sup> Special accessory.

## Gas cooktops 200 series



Appliance type	Gas cooktop VG 295 150F	Gas cooktop VG 295 250	Gas cooktop CG 291 210
Stainless steel frame / Stainless steel brushed / shot blasted	-/-/•	-/-/•	-/•/-
Surface mounting / Flush mounting / Welded	•/-/-	•/-/-	•/-/-
Liquid gas 28-37 mbar / Natural gas 20 mbar	• <sup>2</sup> /-	-/• <sup>3</sup>	-/• <sup>5</sup>
<b>Dimensions</b>			
Width (cm)	90	90	90
Depth (cm)	51	51	52
Immersion depth (cm)	10.6	10.6	4.5
<b>Operation</b>			
Knobs in furniture front / Knobs on integrated control panel	-/•	-/•	-/•
<b>Cooking zones</b>			
Number of cooking zones or items of cookware	5	5	5
Multi-ring wok burner (1550-4000 W)	-	-	-
Multi-ring wok burner (300-5000 W)	-	-	1
Multi-ring wok burner (300-5800 W)	1	-	-
Multi-ring wok burner (300-6000 W)	-	1	-
Two-ring high output burner (170-4000 W)	2	2	-
Two-ring standard burner (170-2000 W)	2	2	-
High output burner (500-3000 W)	-	-	1
Standard burner (290-1750 W)	-	-	-
Standard burner (350-1750 W)	-	-	2
Economy burner (330-1000 W)	-	-	1
<b>Features</b>			
Number of output levels	9	9	9
Electronic output control	-	-	-
Automatic fast ignition / Electric ignition	-/•	-/•	-/•
Electronic flame monitoring with automatic re-ignition	-	-	-
Simmer function	-	-	-
Residual heat indicator	•	•	-
Safety shut-off	-	-	-
Cast pan support	3-part	3-part	3-part
<b>Accessories</b>			
Wok attachment ring	•	•	•
Wok pan	WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>	WP 400 001 <sup>1</sup>
Appliance cover (Stainless steel / Black)	-/-	-/-	-/-
<b>Connection</b>			
Total connected load gas (up to) (kW)	17.8	18.0	12.5
Total connected load electric (W)	10.0	10.0	1.0

• Standard. — Not available. <sup>1</sup> Special accessory. <sup>2</sup> Nozzles for natural gas 20 mbar can be ordered as spare parts. <sup>3</sup> Nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts. <sup>4</sup> Nozzles for liquid gas 50 mbar can be ordered as spare parts. <sup>5</sup> Nozzles for liquid gas 28-30/37 mbar are included. <sup>6</sup> Nozzles for liquid gas 50 mbar are included.

## Induction cooktops 400 series



Appliance type	Integrated induction module	Integrated induction module
Integrated induction module	CU 428 100	CU 421 100
Frameless for flush mounting		
Stainless steel frame 3mm for surface or flush mounting		
<b>Dimensions</b>		
Width	(cm) 50,6 <sup>5</sup>	33,3 <sup>5</sup>
Depth	(cm) 61 <sup>5</sup>	61 <sup>5</sup>
Immersion depth	(cm) 9.6	9.6
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	•/—	•/—
TFT touch display / Twist-Pad control / Sensor control	—/—/—	—/—/—
Bicoloured display (white/orange)	—	—
Respective knobs (Stainless steel / Black) <sup>4</sup>	CKU 410 010 / CKU 410 000	CKU 410 010 / CKU 410 000
<b>Cooking zones / combinations</b>		
Number of cooking zones or items of cookware	1	1
Full surface induction cooktop	—	—
Induction cooking zone ø 21 cm (2000, with booster 2300 W)	—	•
Induction cooking zone ø 28 cm (2200, with booster 2700 W)	•	—
<b>Features</b>		
Number of output levels	12	12
Flex function for rectangular cooking areas	—	—
Cooking sensor function / Frying sensor function	—/—	—/—
Frying sensor function: Number of cooking zones	—	—
Professional cooking function	—	—
Booster function for pots / pans	•/—	•/—
Keep warm function	•	•
Cooking timer: Number of cooking zones	—	—
Short-term timer	—	—
Stopwatch	—	—
Residual heat indicator	•	•
Child lock / Safety shut-off / Display cleaning protection	—/•/—	—/•/—
Pause function	—	—
Options menu	•	•
Hood control	—	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—	—
<b>Accessories</b>		
Teppan Yaki plate made of multi ply material, GN1/1 (for full surface induction)	—	—
Teppan Yaki made of multi ply material (for flex induction)	—	—
Griddle plate in cast aluminium (for flex induction)	—	—
Flex Pan set, 3 pcs. (for flex induction)	—	—
Flex Pan large (for flex induction)	—	—
Cooking sensor	—	—
Enhanced surface protector for pots and pans ø 10-14 cm	—	SP 410 000 <sup>1</sup>
Enhanced surface protector for pots and pans ø 15-18 cm	SP 415 000 <sup>1</sup>	SP 415 000 <sup>1</sup>
Enhanced surface protector for pots and pans ø 19-23 cm	SP 419 000 <sup>1</sup>	SP 419 000 <sup>1</sup>
Enhanced surface protector for pots and pans ø 24-28 cm	SP 424 000 <sup>1</sup>	—
Set of 4 enhanced surface protectors for pots and pans ø 10-28 cm	SP 400 000 <sup>1</sup>	SP 400 000 <sup>1</sup>
<b>Connection</b>		
Total connected load electric	(kW) 2.7	2.3

• Standard. — Not available. <sup>1</sup> Special accessories. <sup>2</sup> In combination with suitable hood. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>4</sup> Knobs need to be ordered separately. <sup>5</sup> Aluminium diffuser plate.



Full surface induction cooktop	Full surface induction cooktop
CX 492 101	CX 482 101
CX 492 111	CX 482 111
90	80
52	51.3 / 52
7.6 / 6.5	7.6 / 6.5
-/-	-/-
•/-/-	•/-/-
-	-
-	-
6	5
•	•
-	-
-	-
17	17
-	-
•/-	•/-
-	-
•	•
•/•	•/•
•	•
6	5
•	•
•	•
•	•
•/•	•/•
•	•
•	•
• <sup>2</sup>	• <sup>2</sup>
• <sup>3</sup>	• <sup>3</sup>
GN 232 110 <sup>1</sup>	GN 232 110 <sup>1</sup>
CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
-	-
-	-
-	-
CA 060 300 <sup>1</sup>	CA 060 300 <sup>1</sup>
-	-
-	-
-	-
-	-
7.4	7.4

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Induction cooktops with integrated ventilation system 400 and 200 series



Appliance type	Flex induction cooktop with integrated ventilation system	Flex induction cooktop with integrated ventilation system
Frameless for flush mounting	CV 492 105	CV 482 105
Frameless for flush mounting with matte finish glass surface	CV 492 105M	—
Stainless steel frame for surface or flush mounting	—	—
<b>Dimensions</b>		
Width	(cm) 90	80
Depth	(cm) 52.1	52.1
Immersion depth	(cm) 22.7	22.7
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	•/—	•/—
TFT touch display / Twist-Pad control / Sensor control	•/—/—	•/—/—
Bicoloured display (white/orange)	•	•
Respective knobs (Stainless steel / Black) <sup>2</sup>	CKI 440 010 / CKI 440 000	CKI 440 010 / CKI 440 000
<b>Cooking zones / combinations</b>		
Number of cooking zones or items of cookware	4	4
Flex induction cooking areas 23 × 19 cm (2200, with booster 3700 W) / linked together 23 × 38 cm (3300, with booster 3700 W)	4	—
Flex induction cooking areas 24 × 19 cm (2200, with booster 3700 W) / linked together 24 × 38 cm (3300, with booster 3700 W)	—	4
Automatic extension up to 30 cm/32 cm width (3300, with booster 3700 W)	2	—
<b>Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) 359/470/532/636	359/470/532/636
Air recirculation	(m <sup>3</sup> /h) 280/382/487/611	280/382/487/611
<b>Consumption data according to EU regulation 65/2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 56.9	56.9
Ventilation efficiency class	A**	A**
Illumination efficiency class	—	—
Grease filter efficiency class	B**	B**
Sound level min. / max. normal mode	dB(A) 61/70	61/70
<b>Features cooking</b>		
Number of output levels	12	12
Flex function for rectangular cooking areas	•	•
Cooking sensor function / Frying sensor function	•/•	•/•
Frying sensor function: Number of cooking zones	4	4
Professional cooking function	—	—
Booster function for pots / pans	•/—	•/—
Memory function	—	—
Keep warm function	—	—
Cooking timer: Number of cooking zones	—	—
Short-term timer	•	•
Stopwatch	•	•
Residual heat indicator	•	•
Child lock / Safety shut-off / Display cleaning protection	—/•/•	—/•/•
Pause function	—	—
Options menu	•	•
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>	•	•
<b>Features ventilation</b>		
Power levels	3 plus intensive	3 plus intensive
Fan technology	BLDC	BLDC
Fan	1	1
Fan output	(W) 170	170
Fully automatic ventilation system functions	•	•
Automatic function	•	•
Run-on function automatic	•	•
Run-on function	(min) • / 20-30 min.	• / 20-30 min.
Interval ventilation	(min) • / 6 min.	• / 6 min.
Grease filter saturation indicator	•	•
Activated charcoal filter saturation indicator	•	•
Grease filter art	Metal grease filter	Metal grease filter
Grease filter units	2	2
Overflow container	•	•
Exhaust air connection bottom / side / back	—/—/•	—/—/•
<b>Accessories</b>		
Teppan Yaki made of multi ply material (for flex induction)	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
Griddle plate in cast aluminium (for flex induction)	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>
Flex Pan set, 3 pcs. (for flex induction)	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
Flex Pan large (for flex induction)	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
Frying sensor pan (available via customer service), ø 20-32 cm <sup>4</sup>	17006... <sup>1</sup>	17006... <sup>1</sup>
Cooking sensor	—	—
Recirculation Module	CA 082 011 <sup>1</sup> , CA 082 061 <sup>1</sup> , CA 082 071 <sup>1</sup>	CA 082 011 <sup>1</sup> , CA 082 061 <sup>1</sup> , CA 082 071 <sup>1</sup>
Acoustic filter for air extraction mode	CA 084 010 <sup>1</sup>	CA 084 010 <sup>1</sup>
<b>Connection</b>		
Total connected load electric	(kW) 7.4	7.4

• Standard. — Not available. <sup>1</sup> Special accessories. <sup>2</sup> Knobs need to be ordered separately. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>4</sup> Please find the suitable cookware on the product pages. \*\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.





Flex induction cooktop with integrated ventilation system	Flex induction cooktop with integrated ventilation system
CV 282 101	—
CV 282 101M	—
—	CV 282 111
80	80
51.2	52
22.7	22.3
—/—	—/—
•/•/—	•/•/—
•	•
—	—
4	4
—	4
4	—
—	—
359/470/532/636 280/382/487/611	359/470/532/636 280/382/487/611
56.9	56.9
A**	A**
—	—
B**	B**
61/70	61/70
17	17
•	•
•/•	•/•
4	4
•	•
•/•	•/•
•	•
•	•
4	4
•	•
•	•
•	•
•/•/—	•/•/—
•	•
•	•
•	•
3 plus intensive	3 plus intensive
BLDC	BLDC
1	1
170	170
•	•
•	•
•	•
• / 20-30 min.	• / 20-30 min.
• / 6 min.	• / 6 min.
•	•
•	•
Metal grease filter	Metal grease filter
2	2
•	•
—/—/•	—/—/•
CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>
CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
17006... <sup>1</sup>	17006... <sup>1</sup>
CA 060 300 <sup>1</sup>	CA 060 300 <sup>1</sup>
CA 082 011 <sup>1</sup> , CA 082 061 <sup>1</sup> , CA 082 071 <sup>1</sup>	CA 082 011 <sup>1</sup> , CA 082 061 <sup>1</sup> , CA 082 071 <sup>1</sup>
CA 084 010 <sup>1</sup>	CA 084 010 <sup>1</sup>
7.4	7.4

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine





Accessories | Energy Label |  
Gaggenau Home Connect

## Flex induction cooktops 200 series



Appliance type	Flex induction cooktop	Flex induction cooktop
Frameless for flush mounting	CI 292 102	CI 283 103
Stainless steel frame for surface or flush mounting	CI 292 112	CI 283 113
<b>Dimensions</b>		
Width	(cm) 90	80
Depth	(cm) 52	51.3 / 52
Immersion depth	(cm) 5.6 / 5.5	5.6 / 5.5
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	—/—	—/—
TFT touch display / Twist-Pad control / Sensor control	—/•/—	—/•/—
Bicoloured display (white/orange)	•	•
<b>Cooking zones / combinations</b>		
Number of cooking zones or items of cookware	5	5
Full surface induction cooktop	—	—
Flex induction cooking areas 21 × 19 cm (2200, with booster 3700 W) / linked together 21 × 38 cm (3300, with booster 3700 W)	—	2
Flex induction cooking areas 23 × 19 cm (2200, with booster 3700 W) / linked together 23 × 38 cm (3300, with booster 3700 W)	4	—
Flex induction cooking areas 24 × 19 cm (2200, with booster 3700 W) / linked together 24 × 38 cm (3300, with booster 3700 W)	—	—
Automatic extension up to 30 cm/32 cm width (3300, with booster 3700 W)	—	—
Induction cooking zone ø 21 cm (2200, with booster 3700 W) / ø 26 cm (2600, with booster 3700 W) / ø 32 cm (3300, with booster 3700 W)	1	—
Induction cooking zone ø 18 cm (1800, with booster 3100 W) / Roaster zone 18 × 28 cm (2000, with booster 3700 W)	—	—
Induction cooking zone ø 15 cm (1400, with booster 2200 W)	—	1
Induction cooking zone ø 15 cm (1600, with booster 2200 W)	—	—
Induction cooking zone ø 19 cm (1800, with booster 3100 W)	—	1
Induction cooking zone ø 21 cm (2200, with booster 3700 W)	—	—
Induction cooking zone ø 21 cm (2500, with booster 3700 W)	—	—
Induction cooking zone ø 24 cm (2200, with booster 3700 W)	—	1
Induction cooking zone ø 28 cm (2400, with booster 3700 W)	—	—
<b>Features</b>		
Number of output levels	17	17
Flex function for rectangular cooking areas	•	•
Cooking sensor function / Frying sensor function	•/•	•/•
Frying sensor function: Number of cooking zones	5	2
Professional cooking function	•	•
Booster function for pots / pans	•/•	•/•
Keep warm function	•	•
Cooking timer: Number of cooking zones	5	5
Short-term timer	•	•
Stopwatch	•	•
Residual heat indicator	•	•
Child lock / Safety shut-off / Display cleaning protection	•/•/•	•/•/•
Pause function	—	—
Options menu	•	•
Hood control	• <sup>2</sup>	• <sup>2</sup>
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi	• <sup>3</sup>	• <sup>3</sup>
<b>Accessories</b>		
Teppan Yaki made of multi ply material, GN1/1 (for full surface induction)	—	—
Teppan Yaki made of multi ply material (for flex induction)	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
Griddle plate in cast aluminium (for flex induction)	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>
Flex Pan set, 3 pcs. (for flex induction)	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
Flex Pan large (for flex induction)	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
Frying sensor pan (available via customer service), ø 20–32 cm <sup>4</sup>	17006... <sup>1</sup>	17006... <sup>1</sup>
Cooking sensor	CA 060 300 <sup>1</sup>	—
Black magnetic knob (for induction cooktop series 200)	CA 230 100 <sup>1</sup>	CA 230 100 <sup>1</sup>
<b>Connection</b>		
Total connected load electric	(kW) 11.1	7.4

• Standard. — Not available. <sup>1</sup> Special accessories. <sup>2</sup> In combination with suitable hood. <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>4</sup> Please find the suitable cookware on the product pages.

			
Flex induction cooktop	Flex induction cooktop	Flex induction cooktop	Flex induction cooktop
CI 282 102	CI 272 103	CI 262 105	CI 261 115
CI 282 112	CI 272 113	CI 262 115	CI 261 115
80	70	60	60
51.3 / 52	51.2 / 52	51.2 / 52	52
5.6 / 5.5	5.6 / 5.5	5.6 / 5.5	5.5
—/—	—/—	—/—	—/—
—/•/—	—/•/—	—/•/—	—/•/•
•	•	•	•
4	4	4	4
—	—	—	—
—	—	—	—
4	4	4	2
2	—	—	—
2/—	1/—	1/—	1/—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	1
—	—	—	—
—	—	—	1
—	—	—	—
—	—	—	—
17	17	17	17
•	•	•	•
•/•	•/•	•/•	—/—
4	4	4	—
•	•	•	—
•/•	•/•	•/•	•/•
•	•	•	•
4	4	4	4
•	•	•	•
•	•	•	—
•	•	•	—
•/•/•	•/•/•	•/•/•	•/•/—
—	—	—	•
•	•	•	•
•2	•2	•2	•2
•3	•3	•3	•3
—	—	—	—
CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>	CA 051 301 <sup>1</sup>
CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>	CA 052 300 <sup>1</sup>
CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>	CA 050 300 <sup>1</sup>
CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>	CA 055 300 <sup>1</sup>
17006... <sup>1</sup>	17006... <sup>1</sup>	17006... <sup>1</sup>	17006... <sup>1</sup>
CA 060 300 <sup>1</sup>	CA 060 300 <sup>1</sup>	CA 060 300 <sup>1</sup>	—
CA 230 100 <sup>1</sup>	CA 230 100 <sup>1</sup>	CA 230 100 <sup>1</sup>	—
7.4	7.4	7.4	7.4

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Glass ceramic cooktops 200 series



Appliance type	Glass ceramic cooktop	Glass ceramic cooktop
Frameless for flush mounting	CE 291 101	
Stainless steel frame for surface or flush mounting	CE 291 111	CE 261 114
<b>Dimensions</b>		
Width	(cm) 90	60
Depth	(cm) 52	52
Immersion depth	(cm) 5.1 / 4.9	4.9
<b>Operation</b>		
Knobs in furniture front / Knobs on integrated control panel	—/—	—/—
TFT touch display / Twist-Pad control / Sensor control	—/—/•	—/—/•
Cooking zones / combinations		
Number of cooking zones or items of cookware	5	4
Super-Quick cooking zone ø 18 cm (1800 W) / together convertible to roasting zone 18 x 41.5 cm (4400 W)	2	—
Super-Quick cooking zone ø 18 cm (2000 W)	—	1
Super-Quick cooking zone ø 17 cm (1800 W) / Roaster zone 17 x 26.5 cm (2600 W)	—	1
Super-Quick cooking zone ø 14.5 cm (1200, with booster 1600 W)	1	—
Super-Quick cooking zone ø 14.5 cm (1200 W)	—	1
Super-Quick cooking zone ø 14.5 cm (1050 W) / ø 21 cm (2200 W) / ø 27 cm (3080 W)	1	—
Super-Quick cooking zone ø 14.5 cm (1200 W) / ø 21 cm (2100, with booster 3000W)	—	1
Super-Quick cooking zone ø 12 cm (750 W) / ø 21 cm (2100, with booster 2600 W)	1	—
<b>Features</b>		
Number of output levels	17	17
Frying sensor function: Number of cooking zones	1 x 21 cm	—
Booster function for pots / pans	•	•
Cooking timer: Number of cooking zones	5	4
Residual heat indicator	•	•
Child lock / safety shut-off / display cleaning protection	•/•/—	•/•/—
Options menu	•	•
<b>Connection</b>		
Total connected load electric	(kW) 11.0	8.3

• Standard. — Not available.

Accessories | Energy Label |  
Gaggenau Home Connect

Dishwashers |  
Washing machine

Cooling appliances

Ventilation  
appliances

Cooktops


Vario cooktops

Ovens 200 series

Ovens 400 series

Gaggenau  
Expressive series

EB 333

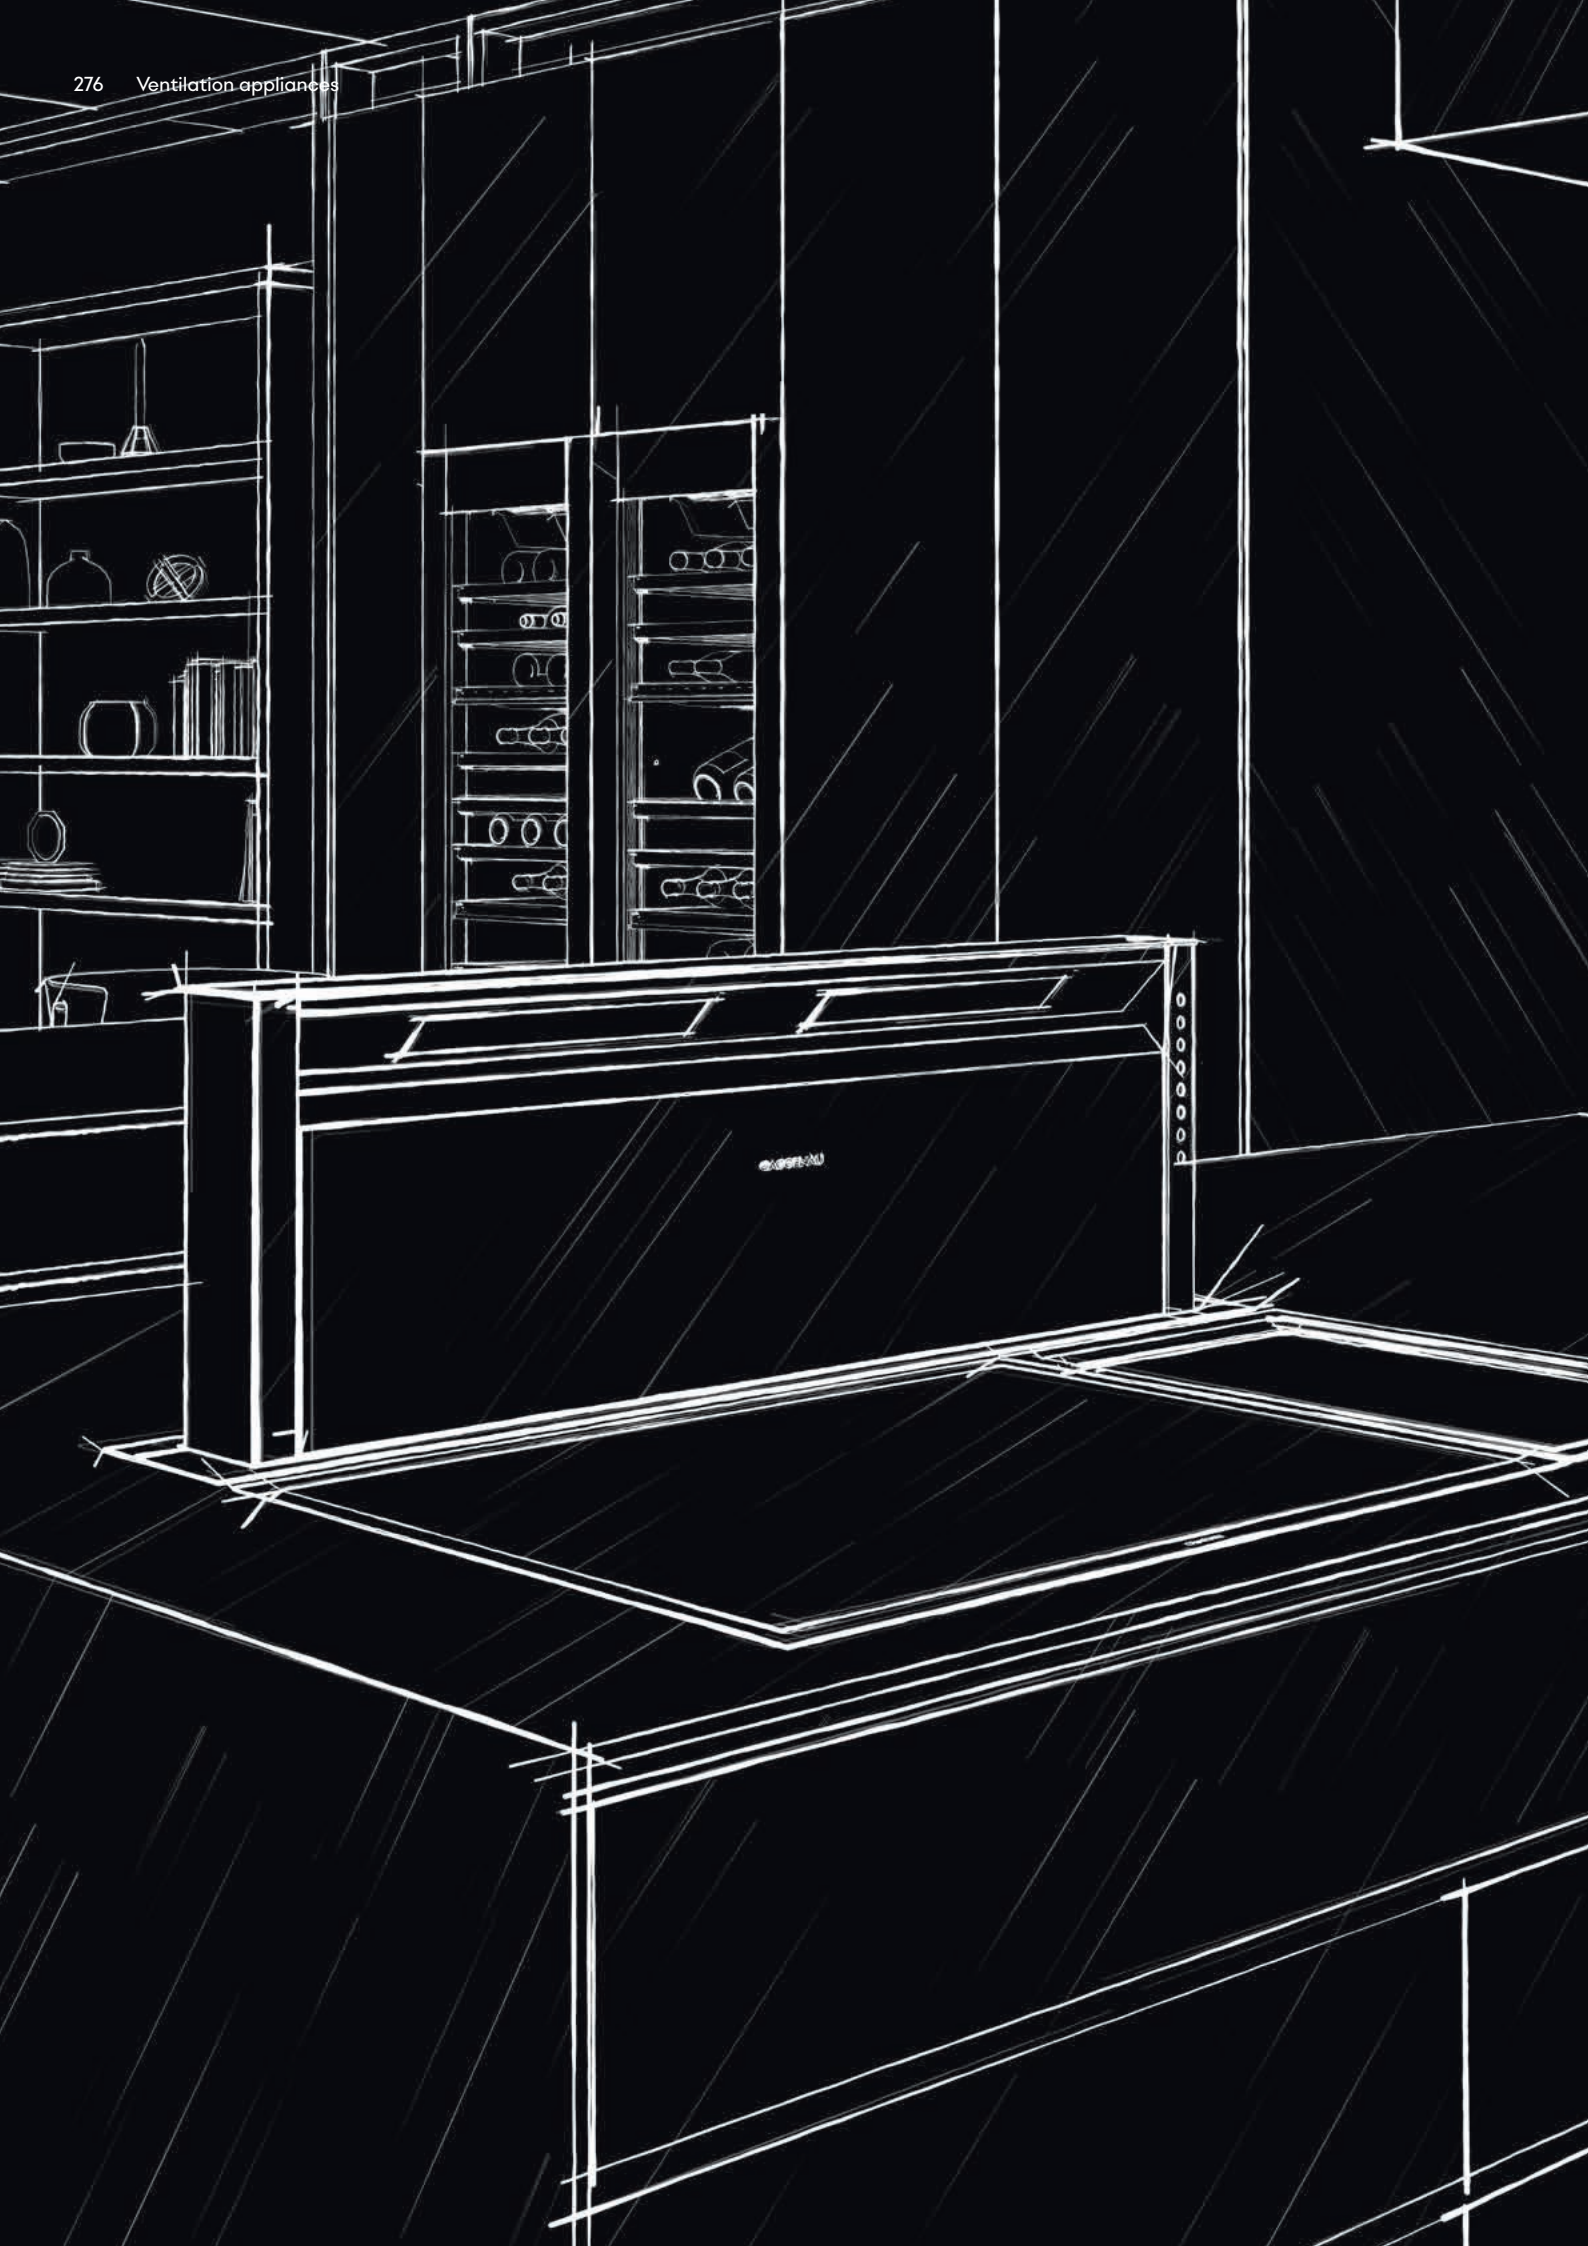

# VENTILATION APPLIANCES

Overview	278
General planning notes	280
Ceiling ventilation	282
Table ventilation	286
Downdraft ventilation	304
Wall-mounted hoods	316
Island hood	320
Flat kitchen hoods	322
Canopy hoods	324
Remote fan units	326
Accessories   special accessories	332
Technical specifications	342

## Overview

### Ceiling ventilation

#### 400 series



AC 402 181



AC 482 181  
AC 472 181



AR 400 142



AR 401 142



AR 403 122

#### 200 series



Integrated  
AC 250 121

### Table ventilation

#### 400 series



AL 400 192  
AL 400 122




AR 400 142



AR 401 142



AR 403 122



AR 413 122



AR 410 110 only with  
AL 400 122

#### 200 series



AL 200 180  
AL 200 190

### Downdraft ventilation

#### 400 and 200 series



VL 414 115



VL 200 120




AR 400 142



AR 401 142



AR 403 122



AR 413 122



AR 410 110



CKV 410 010  
CKV 410 000



**Wall-mounted hood**

**400 series**



AW 442 120



AR 400 142



AR 401 142



AR 400 143

**200 series**



AW 240 191

**Island hood**


**200 series**



AI 240 191

**Flat kitchen hoods**

**200 series**



AF 210 162  
AF 210 192

**Canopy hoods**

**200 series**



AC 200 161  
AC 200 191

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## General planning notes

The aim of good ventilation system planning is to extract or filter the cooking vapours as quickly and as silent as possible.

To help you plan and install your cooking ventilation system correctly, here are a few important notes from our ventilation experts.

### The cooking appliances

The choice of cooktop is the decisive influencing factor. Every cooktop are not compatible with every ventilation appliances. The recommended Cooktop Ventilation Combinations are available in the first pages from M&D in the Vario cooktops and Cooktops chapters. In addition, if special Vario cooking appliances are to be installed, which can be expected to produce a higher amount of cooking vapours such as a Teppan Yaki, wok or electric grill, we recommend to install them, if possible, in the centre of the cooktop configuration and not at the edge. More over the cooktop(s) should not be wider than the hood.

### The type of ventilation system

Every type of ventilation system has particular planning characteristics.

- For all the ventilation appliances installed above the cooktops, the minimum distance between the worktop and the lower edge of the respective ventilation appliance is specified in the planning instructions of the M&D and should be respected. The extraction capacity reduces as the distance increases.
- For ceiling ventilation appliances, the maximum distance between the cooktop and the ventilation appliance is 120 cm. In this case the maximum width of cooktops combination is 100 cm. Adding a frame or a fume collector, the maximum width of cooktops combination is 130 cm.
- The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited. Please consider to consult an HVAC (Heating and ventilation air conditioning) specialist.
- The maximum distance between two downdraft ventilation should not be more than 80 cm (except for the CX482 due to the full surface induction). Cooktops with a width of 60 cm and 80 cm (except the CX482), Vario cooktops like Vario electric grill or Vario gas wok should be placed between two downdraft ventilation.

### The operation mode

All Gaggenau ventilation systems can be operated both in exhaust air mode and air recirculation mode.

- In recirculation, please note that the Vario electric grill is not recommended. The very hot cooking performances of the grill generate fumes and vapours when meats or vegetables are placed on. Due to the high temperature of the grill, the particles of fumes are thinner than these generated by another cooking appliances. None of our current odour filters are able to catch and to filter these grill fumes particles. Please be aware that for EU countries, the table ventilation AL 400 122 is only recommended in air recirculation due to legislation EU 66/2014.
- In air extraction mode, the extraction performance depends on the fan output, and also significantly on the duct system. See the ducting paragraph.

### The fans

Gaggenau ventilation systems are equipped with particularly powerful fans (200 series), or they can be combined with correspondingly powerful remote fan units 400 series for exhaust air or air recirculation mode. These fans are designed to minimise the pressure drop of the installation.

Thanks to the variety of remote fan units 400 series, the modular system allows for installation in the cabinet, plinth, cellar, ceiling and in outdoor areas.

### The ducting and accessory

To ensure the most effective catch of the vapours and fume, the installation between the ventilation appliance and the extraction exhaust should be as short and as straight as possible. This will ensure good extraction and acoustic performances.


















In order to facilitate the planning, for all Gaggenau ventilation appliances, a recommended maximum ducting length is defined. This information is found under the name Lmax.

For installation with a ducting equivalence longer than Lmax please reconsider to change the ducting system to a straighter and shorter one.

For ventilation 400 series appliances, an additional blower in serie could be also a solution.

To define the best ventilation solution, please contact your sales representative to get advice from the Ventilation Service Gaggenau.

As every bend or accessory originate a pressure drop in the ducting system, to estimate the global performance of the installation, each component has to be summed based on the following equivalence.

		Ducting equivalence		
Gaggenau flat duct	AD 857 015			0.5 m
Gaggenau flat duct	AD 857 010		AD 854 010 	1 m
	AD 752 010			
Gaggenau bend	AD 857 030		AD 854 030 	3 m
	AD 857 031		AD 854 031 	
	AD 857 042		AD 854 032 	
Gaggenau wall outlet	AD 750 054		AD 850 050 	11 m
One way flap	00264765 (order as spare part)			3 m
Remote fan unit	AR 401 142			7 m
Remote fan unit	AR 400 142		AR 400 143 	0 m
	AR 403 122			

### Further information


Please observe the local applicable building regulations when configuring ventilation solutions.

**Example AL 200 180**

The equivalent ducting length to ensure good performance is Lmax 28 m.

Extraction Installation	Ducting equivalence
1.5 m Straight ducting	1.5 m
2 Bends	2 x 3 m
1 Wall outlet	11 m
<b>TOTAL</b>	<b>18.5 m</b>

This installation is equivalent to 18.5 m less than the max length allowable 28 m. The installation is validated.

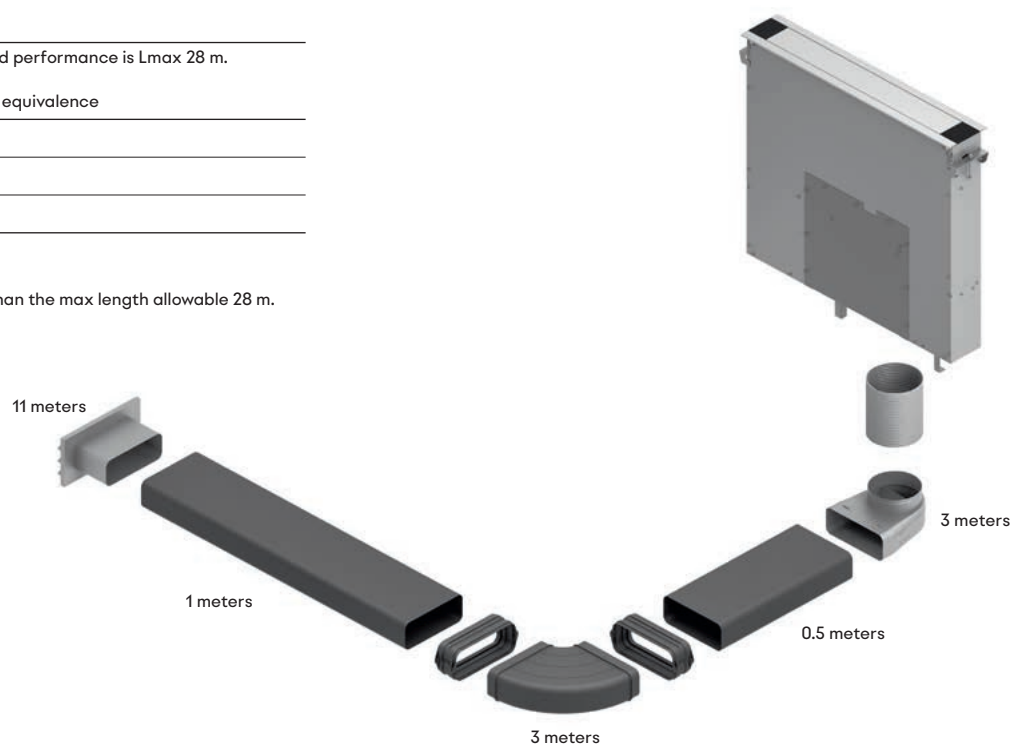

**Lmax Ventilation plan tool**

This calculation is also possible via the Lmax Ventilation extraction plan tool on Gaggenau.com.

This user-friendly and intuitive tool simplifies the technical evaluation of your ventilation extraction plan, ensuring its viability for your project.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario ceiling ventilation 400 series**  
**AC 402**

**AC 402 181**

Stainless steel.

Filter module.

Air extraction / Air recirculation.

Motorless.



**In combination with remote fan units**

AR 400 142

AR 401 142

AR 403 122

**Installation accessories**

**AA 010 811**

Stainless steel.

**AA 012 811**

White.

Air recirculation module inclusive 1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.

For air recirculation.

**AD 854 048**

Air collector box DN 150 flat duct.

Metal zinc plated with plastic.

2 x DN 150 flat duct air intake.

1 x DN 150 flat duct air outlet.

**Special accessories**

(order as spare parts)

**Part No. 11033934**

1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.

For air recirculation module

AA 200 812/816 and

AA 010 811/AA 012 811.

**Part No. 17000977**

1 regenerable activated charcoal filter with highly efficient odour reduction.

Extended change interval of the activated charcoal filter: regenerable up to 30 times.

Regenerable in the oven at 200°C.

For air recirculation module

AA 200 812/816 and

AA 010 811/AA 012 811.

**Installation accessories for air ducting you will find at the pages 336-341.**

**Highlights**

- Discreet integration into the architecture of the kitchen.
- Flexible by dimension, performance and ventilation mode.
- Room ventilation.
- Modular ceiling ventilation which can be configured individually by separate components such as filter module, control modules and light module.
- Motorless, can be combined with Gaggenau BLDC remote fan units.
- Highly efficient patented rim extraction.
- Planned and easy to clean underside with covered filters.

**Output**

Noise level depends on the built-in situation.

Power levels depend on the remote fan unit.

Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

**Features**

Rim extraction filter, dishwasher-safe.

Installation frame for thread rods (threaded rods included in delivery).

Connecting pipe DN 150 round.

**Consumption data**

Consumption data is referred to a configuration with the remote fan unit AR 400 142.

Energy efficiency class B at a range of energy efficiency classes from A+++ to D.

Energy consumption 60.6 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class E.

Grease filter efficiency class B.

Sound level min. 50 dB / max. 65 dB normal mode.

**Planning notes**

L<sub>max</sub>, the equivalent ducting length to ensure good performance is depending on the configuration.

For optimum extraction performance, the maximum distance between the cooktop and the ventilation appliance is 120 cm. The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited.

Please consider to consult an HVAC (Heating and ventilation air conditioning) specialist.

For air recirculation an external air recirculation module is required.

Max. 3 filter modules to be connected to remote fan unit AR 400 142.

When installing remote fan unit within the ceiling or furniture block it must remain accessible through the ceiling cutout or another maintenance access.

When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the hood's power supply line needs a suitable safety switch.



**Vario ceiling ventilation 400 series**  
**AC 482**

**AC 482 181**

Stainless steel.

Control module with light.

**Highlights**

- Control module of ceiling ventilation with light.
- Individual integration of light elements into the configuration of the ceiling ventilation.

**Output**

Power levels depend on the remote fan unit.

Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction.

**Features**

7-key infrared remote control, backup keys for operation also on the control module.

3 electronically controlled power levels and 1 intensive mode.

Interval ventilation, 6 min.

Run-on function, 6 min.

Grease filter saturation indicator.

**Planning notes**

Connection to the respective appliances via network cable.

When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Fixing at the filter module.

**Connection**

Total connected load 15 W.

Connecting cable 1.75 m, pluggable.



**Vario ceiling ventilation 400 series**  
**AC 472**


**AC 472 181**  
Stainless steel.  
Light module.  
For completing control module with light.

- Highlights**
- Light module of ceiling ventilation.
  - Individual integration of light elements into the configuration of the ceiling ventilation.

**Features**  
Connection to the respective appliances via network cable.


**Planning notes**  
Fixing at the filter module.

**Connection**  
Total connected load 4 W.  
Connecting cable 1.75 m, pluggable.  
Network cable 2 m.

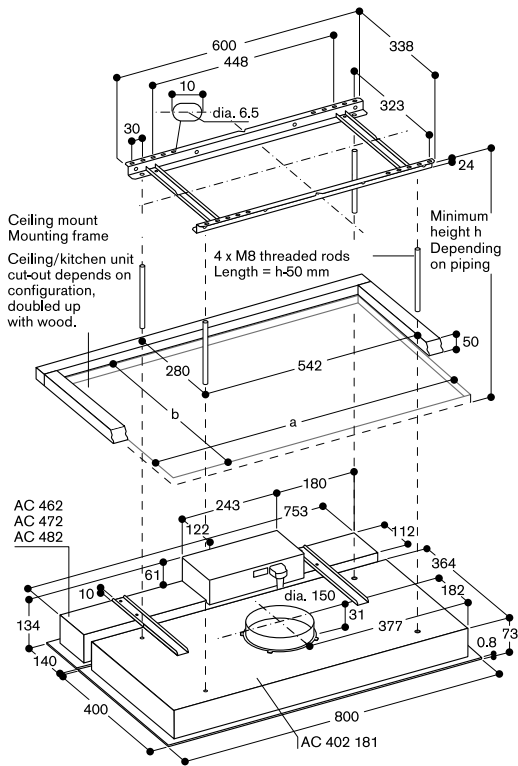


For multiple configurations:  
Ceiling deflection around cut-out: max. + 3 mm.  
Support is required in the middle to prevent deflection upwards when fastening the modules.  
The required threaded rods, nuts and ceiling bolts are supplied as standard.

**AC 402 with air recirculation module**

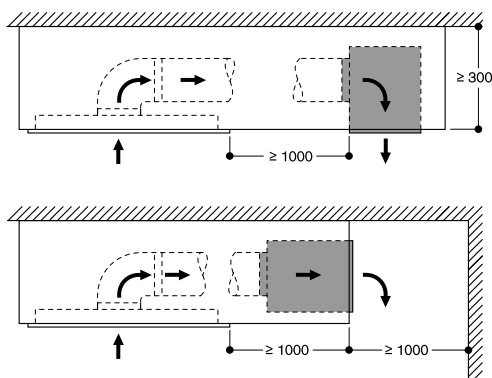


**Recommended configurations for ceiling ventilation 400 series**

FL1-CL




FL1-CL-L1




FL2-CL-L1




F2-CL




F3-CL-L1



FL4-CL-L1



F4-CL-L2

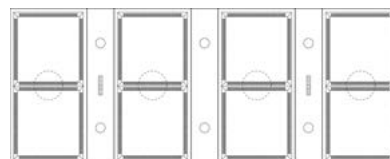


To define the best ventilation solution, please contact your sales representative to get advice from the Ventilation Service Gaggenau.



### Ceiling ventilation 200 series AC 250

**AC 250 121**  
Gaggenau Light Bronze.  
Width 120 cm.  
Air extraction / Air recirculation.



#### Included in the price

1 Remote control.

#### Necessary Installation accessories

**AA 010 811**  
Stainless steel.

**AA 012 811**  
White.

Air recirculation module inclusive  
1 activated charcoal filter with highly  
efficient odour reduction and allergen  
deactivation.  
For air recirculation.

#### Special accessories (order as spare parts)

**Part No. 11033934**  
1 activated charcoal filter with highly  
efficient odour reduction and allergen  
deactivation.

For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

**Part No. 17000977**  
1 regenerable activated charcoal  
filter with highly efficient odour  
reduction.

Extended change intervall of the  
activated charcoal filter: regenerable  
up to 30 times.

Regenerable in the oven at 200°C.  
For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

#### Installation accessories for air ducting you will find at the pages 336–341.

#### Highlights

- Discreet integration into the architecture of the kitchen.
- Energy-saving, low-noise fan.
- Rim extraction.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Easy and time saving installation directly in the ceiling.
- Easy maintenance of the filters.
- Air extraction / Air recirculation.

#### Output

Performance and noise level,  
output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to  
EN 60704-3.

Air extraction:  
458 / 933 m<sup>3</sup>/h.  
56 / 70 dB (A) re 1 pW.

Air recirculation:  
419 / 637 m<sup>3</sup>/h.  
63 / 72 dB (A) re 1 pW.

#### Features

3 electronically controlled power  
levels and 1 intensive mode.  
Remote control is included in delivery.  
Automatic function with sensor-  
controlled run-on function.  
Interval ventilation, 6 min.  
Grease filter saturation indicator.  
Activated charcoal filter saturation  
indicator.  
Metal grease filter, dishwasher-safe.  
Massive aluminium anodized  
Gaggenau Light Bronze filter cover.  
Fan technology with highly efficient,  
brushless DC motor (BLDC).  
Turnable blower, air outlet on all four  
sides possible.  
Connecting pipe DN150 round.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control  
(with suitable cooktop)  
Remote control and monitoring  
Remote diagnostics

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Consumption data

Energy efficiency class A+ at a range  
of energy efficiency classes from  
A+++ to D.  
Energy consumption 35.2 kWh/year.  
Ventilation efficiency class A.  
Grease filter efficiency class E.  
Sound level min. 41dB / max. 56 dB  
normal mode.

#### Planning notes

The equivalent ducting length to  
ensure good performance is L<sub>max</sub> 23 m.  
Please refer to the "General planning  
notes" for the calculation of the  
equivalent ducting length.

For optimum extraction performance,  
the maximum distance between the  
cooktop and the ventilation appliance  
is 120 cm.

In this case the maximum width of  
cooktops combination is 100 cm.  
Adding a frame or a fume collector,  
the maximum width of cooktops  
combination is 130 cm.

The ceiling ventilation has to be  
handled as a room ventilation when  
distance to cooktop is larger than  
120 cm since the direct capture of  
vapours will be limited.

Please consider to consult an HVAC  
(Heating and ventilation air  
conditioning) specialist.

A suitable load-bearing substructure  
is required for securing the hood.  
Never fit the appliance directly onto  
plasterboard or similar lightweight  
construction materials.

Recommended minimum gap between  
appliance and external filter module:  
100 cm.

For air recirculation an external air  
recirculation module is required.  
Clearance above gas appliances  
min. 65 cm (more than total load gas  
12 kW min. 70 cm).

Clearance above electric appliances  
min. 65 cm.


Air recirculation is not recommended  
in combination with Vario electric grill.  
Please ensure when installing the  
exhaust air ducting that no sharp  
bends are caused and that the  
cross-section of the ducting is not  
constricted in any way.

When installing a ventilation hood  
with air extraction mode and a  
chimneyvented fireplace, the power  
supply line of the ventilation  
appliance needs a suitable safety  
switch.

Appliance weight: approx. 37 kg.


#### Connection

Total connected load 250 W.  
Connecting cable 1.3 m with plug.

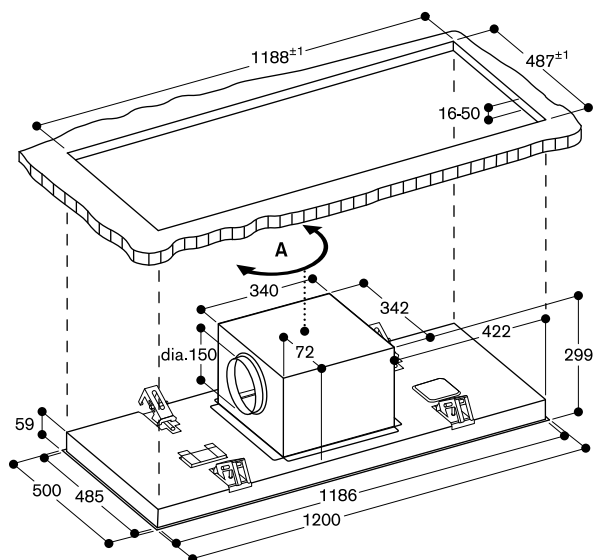


A: The ventilator outlet can be turned in all four directions.

AC 250 with air recirculation module

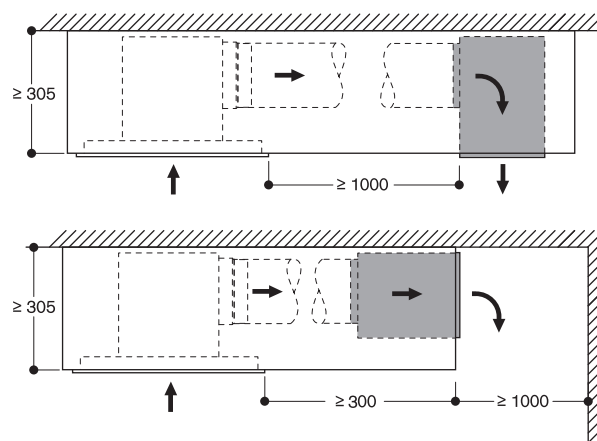


Planning examples as a cooktop ventilation up to max. 120 cm distance to the cooktop


AC 250 in a dry construction  
Extraction toward the top in the attic

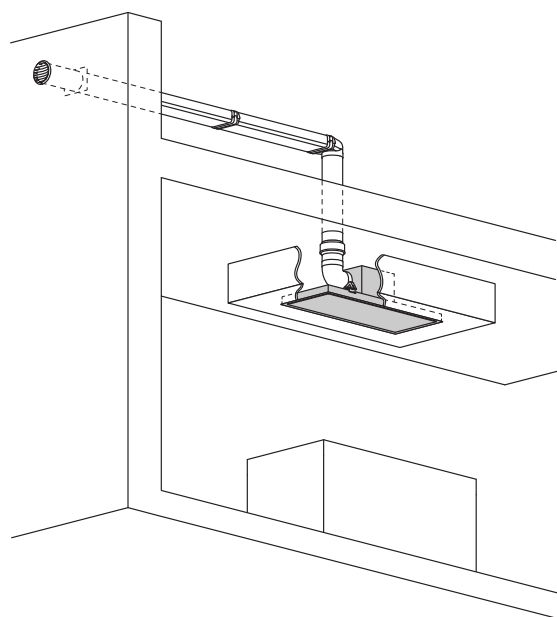


AC 250 in the suspended ceiling  
Extraction directly toward an external wall

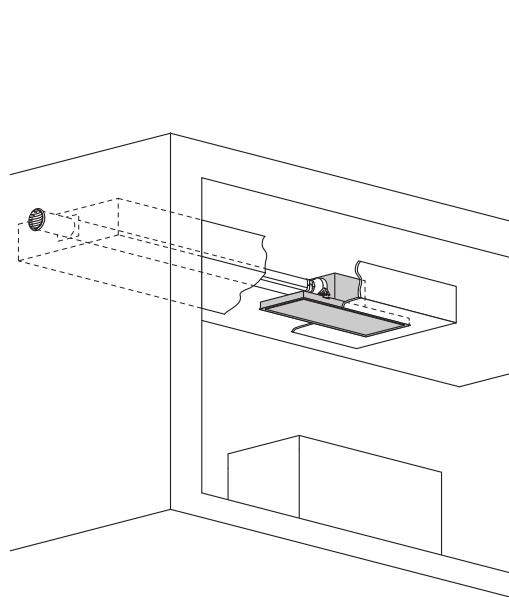

AC 250 in a dry construction with fume collector  
Extraction thru a suspended ceiling

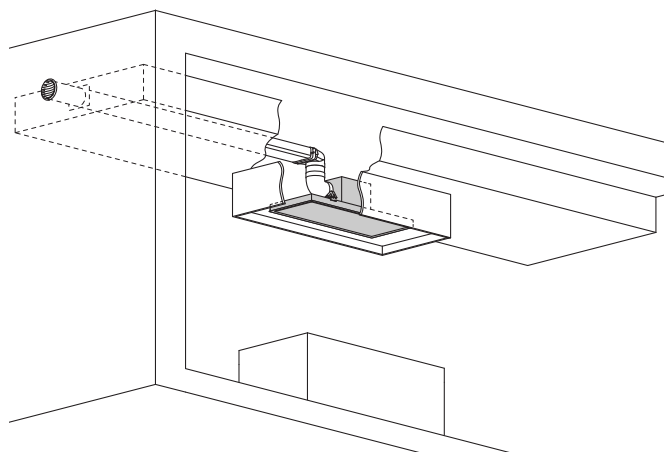

Dry construction integration with fume collector

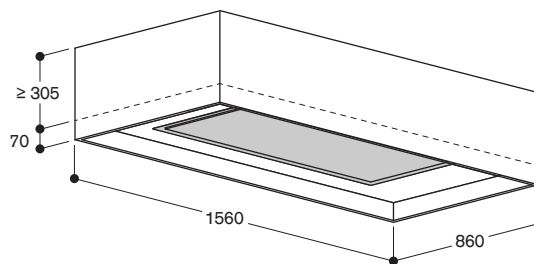

All measurements in mm.



### Table ventilation 400 series AL 400

#### AL 400 122

Stainless steel.  
Width 120 cm.  
Air extraction / Air recirculation.  
Motorless.

#### AL 400 192

Stainless steel.  
Width 90 cm.  
Air extraction /  
Air recirculation.  
Motorless.



### In combination with remote fan units

AR 400 142 Air extraction  
AR 401 142  
AR 403 122  
AR 413 122 Air recirculation  
AR 410 110 (only with AL 400 122)

### Necessary installation accessories Depending on the connection option (front, back, or bottom) one of the following accessories must be ordered.

#### AD 754 049

Connecting piece for AL 400  
(front or back side).  
Metal zinc coated.  
DN 150 round.

#### AD 854 050

Connecting piece for AL 400  
(bottom side).  
Metal zinc coated.  
DN 150 flat.

### Installation accessories

#### AA 409 401

Furniture support for table ventilation  
AL 400 90 cm.

#### AA 409 431

Furniture support for table ventilation  
AL 400 120 cm.

#### AD 704 050

Air collector box for AL 400.  
Metal zinc coated.  
DN 150 flat.

### Installation accessories for air ducting you will find at the pages 336–341.

### Highlights

- Extendable table ventilation, when not in use can be completely lowered into the worktop.
- Can be combined perfectly with all Vario cooktops 400 series.
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Motorless, can be combined with Gaggenau BLDC remote fan units.

### Output

Power levels depend on the remote fan unit.  
Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

### Features

3 electronically controlled power levels and 1 intensive mode.  
Interval ventilation, 6 min.  
Run-on function, 6 min.  
Grease filter saturation indicator.  
2 large-scale metal grease filters included, easy to remove and dishwasher-safe.  
Grease drip trays, easy to remove and dishwasher-safe.  
Neutral white surface LED light (3600 K), continuously dimmable.  
Lamp output 2 x 10 W.  
Illuminance 400 lx.  
Flexible connection options to the remote fan unit: at the bottom, at the front or at the back.  
In all the options, it is possible to have space for drawers in front of the table ventilation.

### Consumption data

AL 400 192: Consumption data is referred to a configuration with the remote fan unit AR 400 142.  
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 45.5 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class C.  
Grease filter efficiency class B.  
Sound level min. 45 dB / max. 61 dB normal mode.

AL 400 122: Recommended only in recirculation mode for EU countries, the consumption data is not mandatory in this mode.

### Planning notes

The equivalent ducting length to ensure good performance is  $L_{max}$  19 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

AL 400 192: Combinable with all cooktops Vario 400 series, 400 series and 200 series. Maximum cooktops width: 90 cm.

AL 400 122: Combinable with all cooktops Vario 400 series and 400 series. Maximum cooktops width: 120 cm.

It is recommended to use two remote fan units so that sufficient vapour captation will be ensured.  
For EU countries due to legislation EU 66/2014 only air recirculation is recommended.

Depending on the type of installation, the corresponding accessories must be ordered separately.

Air recirculation is not recommended in combination with Vario electric grill. Operation of Vario cooking appliances only possible without appliance cover.

Max. output of cooktops 18 kW.

The table ventilation must have its own worktop cut-out.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
The remaining surface of the worktop (min. 50 mm) between the cut-outs must be reinforced with a support. It is recommended to use furniture support AA 409 401/431.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Depending on the type of installation, ovens can be combined with the table ventilation.


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

The control unit should be accessible and be secured to a panel of the cabinet that avoids any risk of flooding.

Please read additional planning notes on page 288–293.



### Connection

Total connected load 65 W  
Connecting cable 1.7 m with plug.  
Network cable 1.2 m.

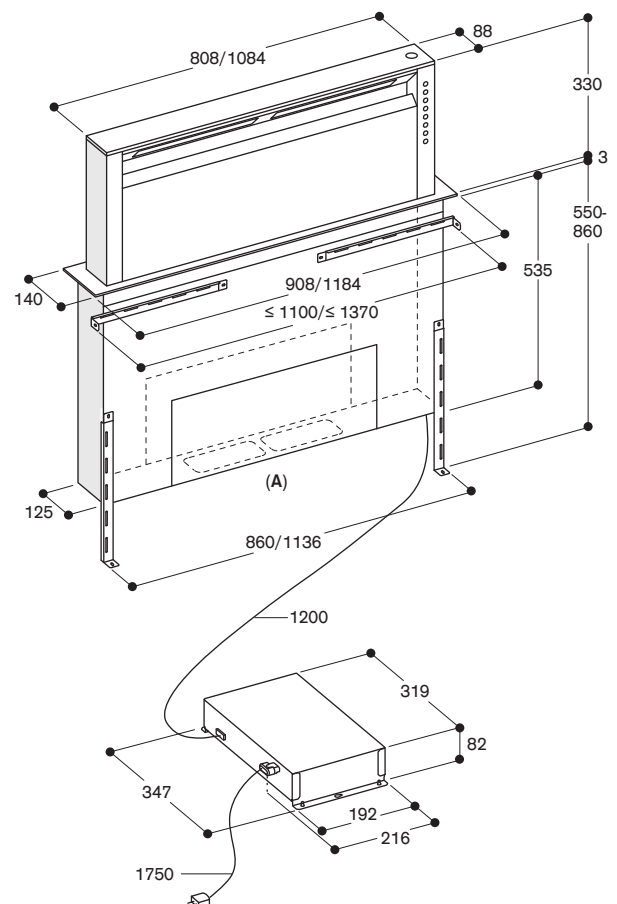


A: Flexible connection of the hood at the front, the back, or at the bottom



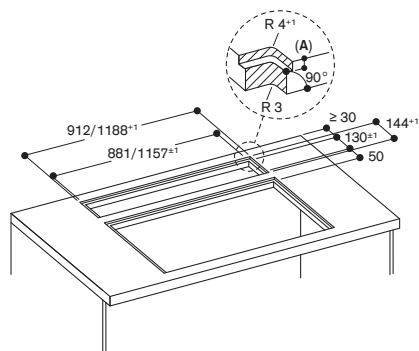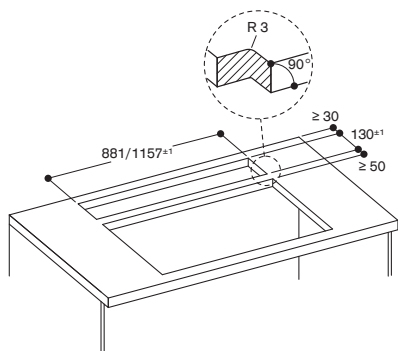


A: 3.5<sup>±0.5</sup> mm


View from above

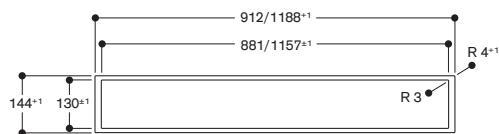

Longitudinal section




Cross section






A: 3.5<sup>±0.5</sup> mm  
B: Fill with silicone

A: 3.5<sup>±0.5</sup> mm  
B: Fill with silicone


AD 754 049

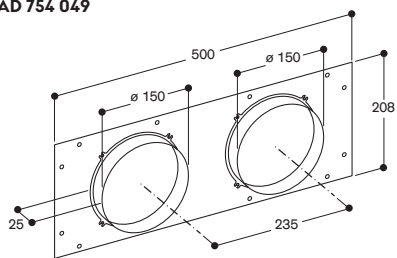


AD 704 050

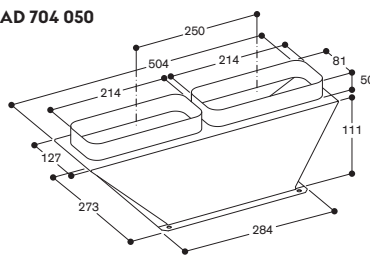

AD 854 050

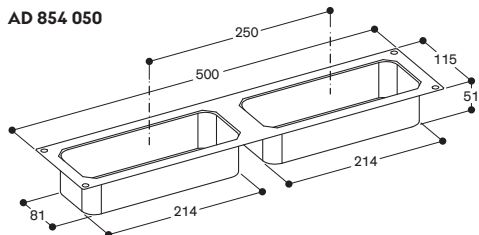

AA 409 401/431 furniture support

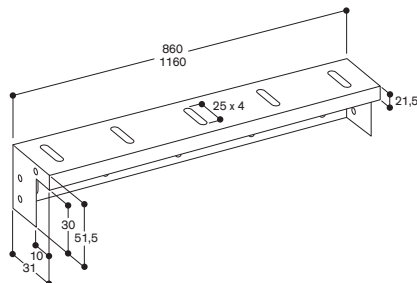

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances


Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Recommended configurations for table ventilation 400 series

### Good to know — for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- The ducting can essentially be connected to the front, the back or straight down. The respective connecting pieces are available for this purpose.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adequate adhesive tape or using the adequate connecting piece.
- Plastic ducts can be used for installation behind a gas appliance. The maximum permitted performance of the cooktops is 18 kW.
- For the AL 400 122 it is recommended to use two remote fan units, with this we can ensure a sufficient vapour captation. For EU countries, the AL 400 122 is only recommended in air recirculation due to legislation EU 66/2014.
- Vario cooktops with intensive vapour formation like Vario Teppan Yaki or Vario electric grill should be placed central in front of the ventilation appliance.
- In case of Vario electric grill air recirculation is not recommended.
- The control unit should be accessible and be secured to a panel of the cabinet that avoids any risk of flooding.
- Depending on the type of installation, the corresponding accessories must be ordered separately.

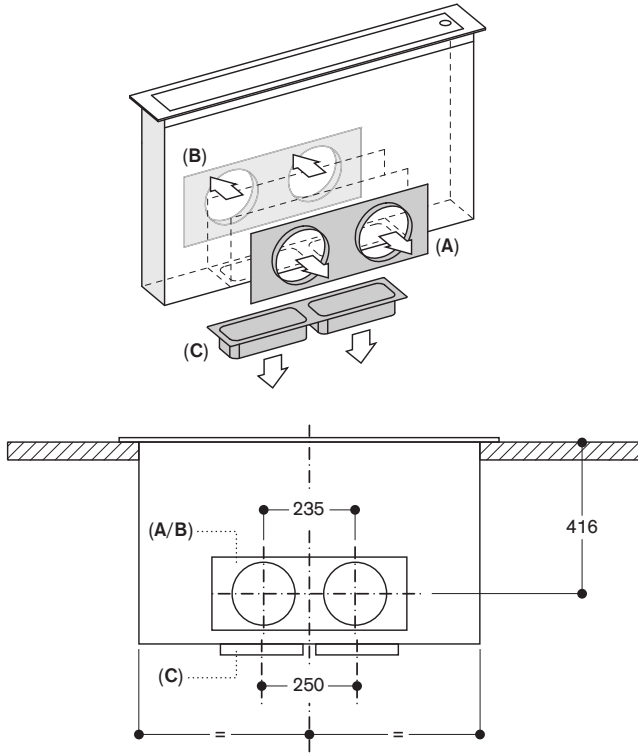

- A: Connection at the front with AD 754 049  
 B: Connection at the back with AD 754 049  
 C: Connection at the bottom with AD 854 050

**Planning example**

AL 400 90 cm with AR 413 122 (air recirculation) remote fan unit



**Good to know**

- The air collector box can be screwed directly on the remote fan unit.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).

**List of components**

- 1 x AL 400 192
- 1 x AR 413 122 (remote fan unit air recirculation)
- 1 x AD 854 050 (connecting piece to the bottom)
- 2 x AD 858 010 (flat duct flex pipe)
- 1 x AD 704 050 (air collector flat duct)

Order as set (appliances and accessories): **SET1AL4105**

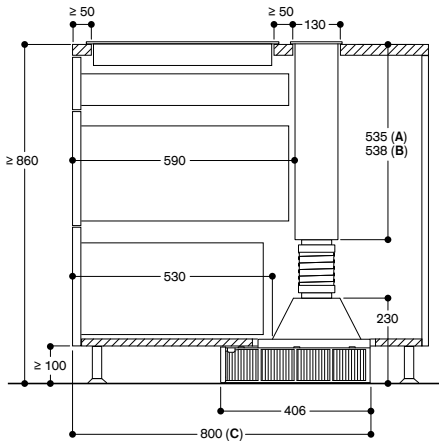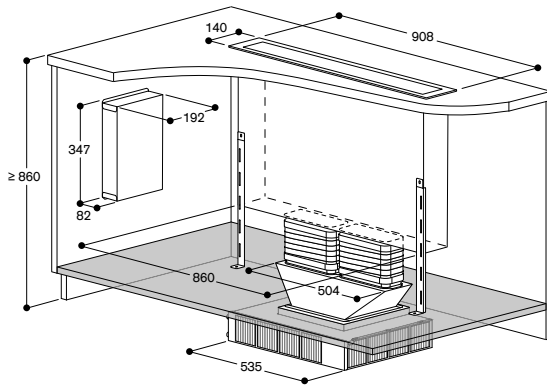

A: Surface mounting  
 B: Flush mounting  
 C: 750 mm with a worktop at min. height 920 mm

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

**Planning example**

AL 400 90 cm with AR 413 122 (air recirculation) or AR 403 122 (air extraction) remote fan unit




**Good to know**

- The remote fan unit can be connected to the front or the back
- The air collector box can be screwed directly on the remote fan unit.
- Recirculation: For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).
- Extraction: in the example exhaust is towards to the left, it is also possible to the right, please be aware that the measures will be different.
- Please note, this installation is also possible with Gaggenau metal ducts.

**List of components**

- 1 x AL 400 192
- 1 x AR 413 122 (for recirculation) or 1 x AR 403 122 (for extraction)
- 1 x AD 754 049 (connecting piece round duct to front/back)
- 2 x AD 857 042 (flat duct adapter round 90°)
- 1 x AD 858 010 (flat duct flex pipe)
- 1 x AD 704 050 (air collector flat duct)
- 1 x AD 990 091 (adhesive tape aluminium)

Order as set for recirculation mode (appliances and accessories): **SET1AL4107**

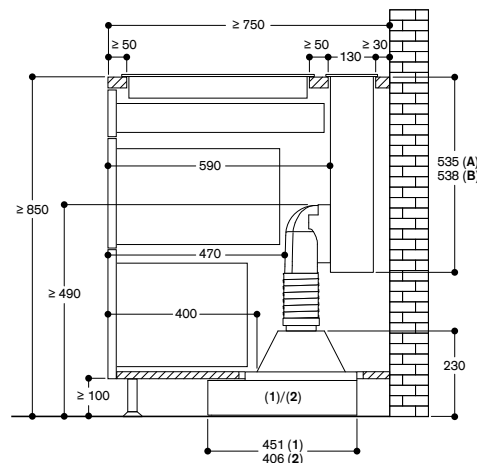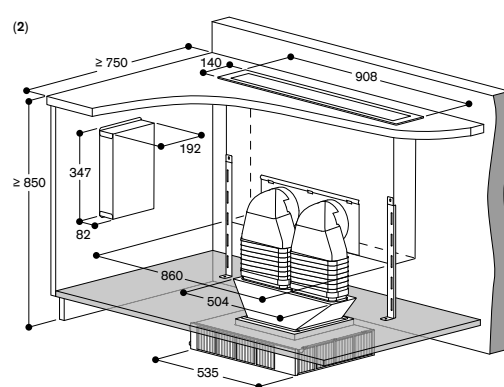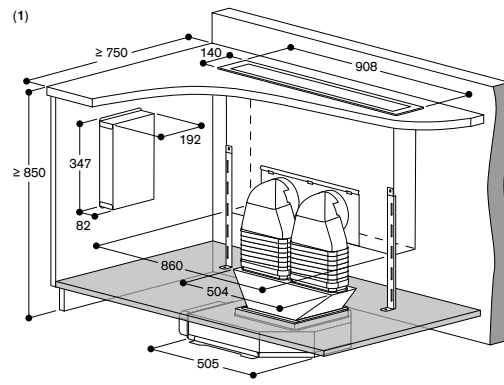

A: Surface mounting  
 B: Flush mounting

Planning with remote fan unit  
 1: AR 403 122

2: AR 413 122

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

All measurements in mm.

**Planning example**


**AL 400 90 cm with AR 400 142 (air extraction) –  
Cellar installation**

**Good to know**

- Please note, these installations are also possible with Gaggenau metal ducts.
- Depending on the distance between the AL 400 and the remote fan unit you may need more flat and round ducts.

**List of components**

- 1 x AL 400 192
- 1 x AR 400 142 (remote fan unit)
- 1 x AD 854 050 (connecting piece to the bottom)
- 2 x AD 857 010 (flat duct)
- 2 x AD 857 040 (flat duct connecting piece)
- 2 x AD 857 041 (flat duct adapter round)
- 1 x or more AD 752 010 (round duct)
- 1 x AD 751 010 (round duct flex pipe)
- 1 x AD 990 091 (adhesive tape)


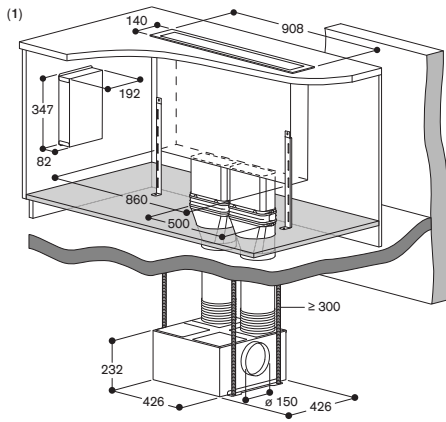


**Planning example**

**AL 400 90 cm with AR 401 142 (air extraction) –  
Cellar installation with outside remote fan unit**

**List of components**

- 1 x AL 400 192
- 1 x AR 401 142 (remote fan unit)
- 1 x AD 854 050 (connecting piece to the bottom)
- 2 x AD 857 010 (flat duct)
- 2 x AD 857 040 (flat duct connecting piece)
- 1 x or more AD 752 010 (round duct)
- 2 x AD 857 042 (flat duct adapter round 90°)
- 2 x or more AD 857 040 (flat duct connecting piece)
- 1 x or more AD 857 010 (flat duct)
- 1 x AD 704 050 (air collector flat duct)
- 1 x AD 702 052 (telescopic wall duct)
- 1 x AD 990 091 (adhesive tape)

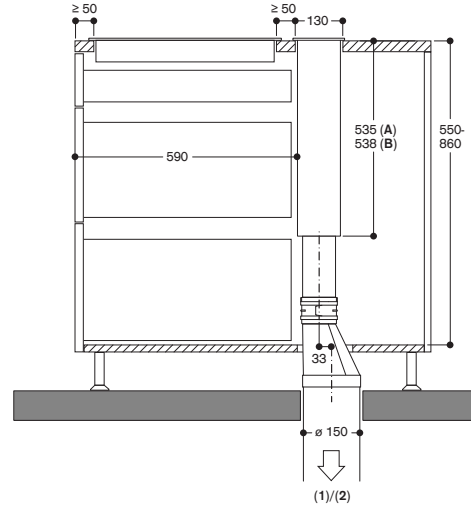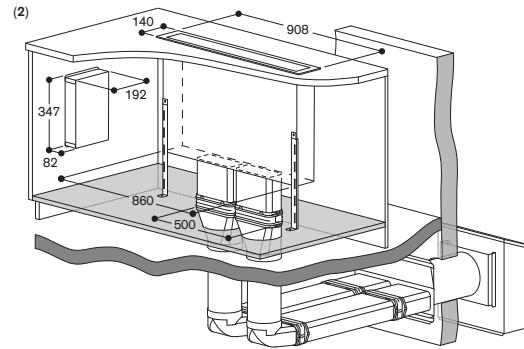

A: Surface mounting  
B: Flush mounting

Extraction mode with remote fan unit  
1: AR 400 142  
2: AR 401 142

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------

**Planning example**

**AL 400 120 cm with AR 410 110 (air recirculation)**



**Good to know**

- The remote fan units can be connected to the front or the back.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 800 cm<sup>2</sup> – 400 cm<sup>2</sup> for each remote fan unit).
- Please note, this installation is also possible with Gaggenau metal ducts.

**List of components**

- 1 x AL 400 122
- 2 x AR 410 110 (remote fan unit)
- 1 x AD 754 049 (connecting piece round duct to front/back)
- 2 x AD 857 042 (flat duct adapter round 90°)
- 2 x AD 858 010 (flat duct flex pipe)
- 1 x AD 990 091 (adhesive tape)

Order as set (appliances and accessories): SET2AL4301

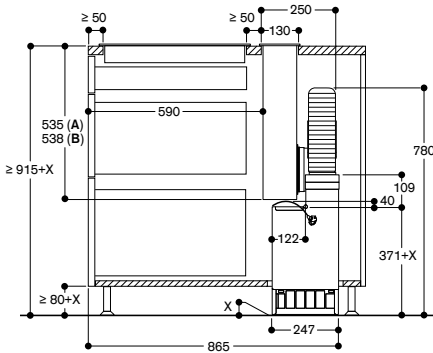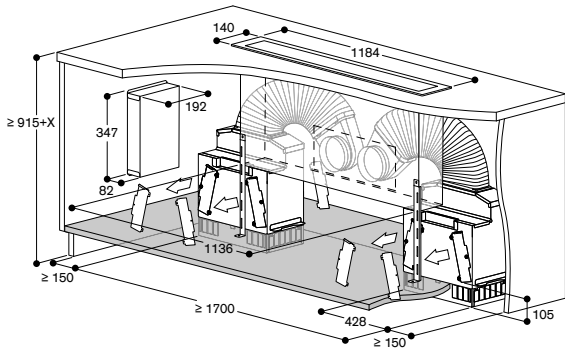

A: Surface mounting  
B: Flush mounting

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )



**Planning example**

**AL 400 120 cm with AR 413 122 (air recirculation) remote fan unit**

**List of components**

- 1 x AL 400 122
- 2 x AR 413 122 (remote fan unit)
- 1 x AD 754 049 (connecting piece round duct to front/back)
- 2 x AD 857 042 (flat duct adapter round 90°)
- 1 x AD 858 010 (flat duct flex pipe)
- 2 x AD 857 041 (flat duct adapter round)
- 1 x AD 990 091 (adhesive tape)

Order as set (appliances and accessories): SET2AL4107

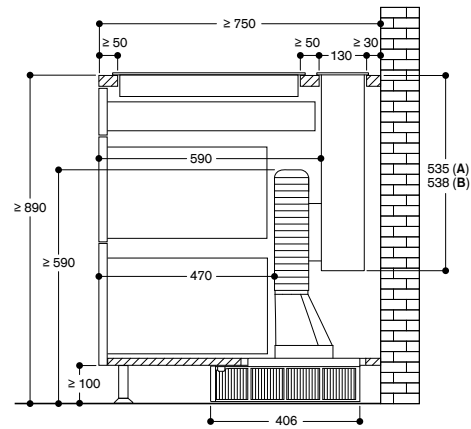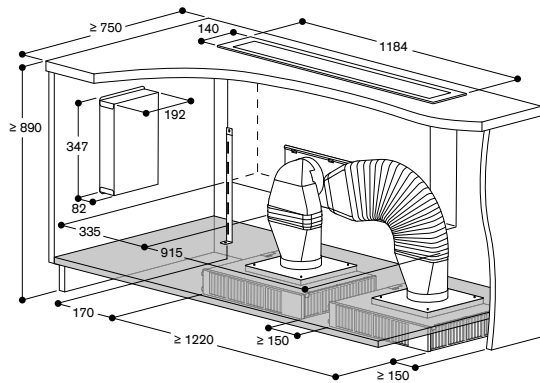

A: Surface mounting  
B: Flush mounting

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

**Planning example**


**AL 400 120 cm with AR 400 142 (air extraction) –  
Cellar installation – Metal**

**Good to know**

- These installations in extraction with 2 remote fan units are not recommended for EU countries due to legislation EU 66/2014.
- Depending on the distance between the AL 400 and the remote fan units you may need more flat and round ducts.

**List of components**

- 1 x AL 400 122
- 2 x AR 400 142 (remote fan unit)
- 1 x AD 854 050 (connecting piece to the bottom)
- 2 x AD 854 010 (flat duct, metal)
- 2 x AD 854 041 (flat duct adapter round, metal)
- 2 x or more AD 751 010 (aluflex pipe round)
- 1 x AD 990 091 (adhesive tape)


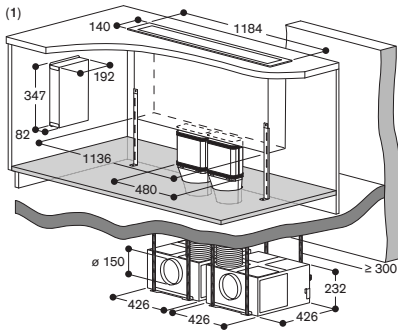


**Planning example**

**AL 400 120 cm with AR 401 142 (air extraction) –  
Cellar installation with outside wall remote fan unit – Metal**

**List of components**

- 1 x AL 400 122
- 2 x AR 401 142 (remote fan unit)
- 1 x AD 854 050 (connecting piece to the bottom)
- 2 x AD 854 010 (flat duct, metal)
- 2 x AD 854 041 (flat duct adapter round, metal)
- 2 x or more AD 751 010 (aluflex pipe round)
- 2 x AD 854 032 (flat duct adapter round 90°, metal)
- 2 x or more AD 854 010 (flat duct, metal)
- 2 x AD 854 041 (flat duct adapter round, metal)
- 1 x AD 751 010 (aluflex pipe round)
- 2 x AD 704 040 (pipe adapter DN200/150 round, metal)
- 2 x AD 702 052 (telescopic wall duct)
- 1 x AD 990 091 (adhesive tape)

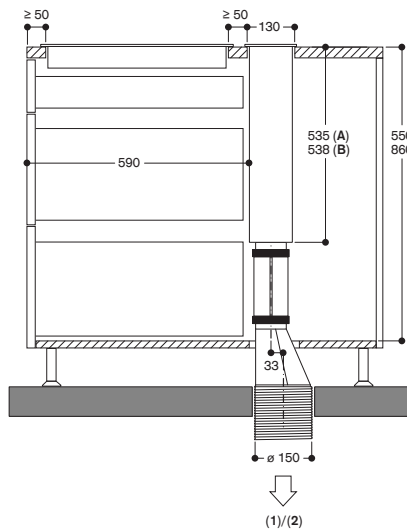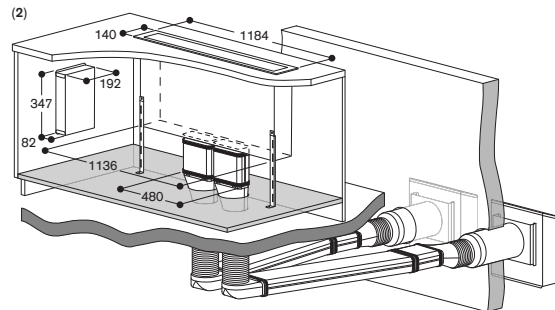

A: Surface mounting  
B: Flush mounting

Extraction mode with remote fan unit  
1: AR 400 142  
2: AR 401 142



### Table ventilation 200 series AL 200

**AL 200 180**  
Gaggenau Black.  
Width 80 cm.  
Air extraction / Air recirculation.



#### Necessary Installation accessories

**AA 200 880**  
Air recirculation module including activated charcoal filters with highly efficient odour reduction and allergen deactivation.

**AA 200 882**  
Regenerable air recirculation module including activated charcoal filters with highly efficient odour reduction. Regenerable in the oven at 200°C. Extended change interval of the activated charcoal filter: regenerable up to 30 times.

**AA 200 900**  
Kit for surface mounted installation AL 200.  
Including 2 trims, each 5 mm width. Gaggenau Black.

**AA 200 910**  
Installation kit for fan unit at a distance (3m maximum).

**VA 200 080**  
Installation kit for installation in a single worktop cut-out.

#### Special accessories (order as spare parts):

**Part No. 17005381**  
Activated charcoal filters with highly efficient odour reduction and allergen deactivation.

#### Installation accessories for air ducting you will find at the pages 336-341.

#### Highlights

- Extendable table ventilation, when not in use can be completely lowered into the worktop.
- Perfect cooking and ventilation combination with frameless induction cooktops 80 cm wide for flush mounting in a single cut-out.
- Transparent ventilation screen for discreet integration in the kitchen space.
- Ambient lighting thru the glass edges.
- Guided Air technology ensures high vapour catch rate across the whole cooktop.

#### Output

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Air extraction:  
501 / 775 m<sup>3</sup>/h.  
62 / 70 dB (A) re 1 pW.  
Air recirculation:  
447 / 562 m<sup>3</sup>/h.  
65 / 70 dB(A) re 1 pW.

#### Features

White ambient lighting thru the glass edges, which can be changed to any color via the Home Connect App. Automatic function with sensor-controlled run-on function. 3 electronically controlled power levels and 1 intensive mode. Grease filter saturation indicator. Activated charcoal filter saturation indicator. 2 large-scale metal grease filters included, easy to remove, dishwasher-safe. Overflow capacity 170 ml in grease filter. Additional capacity 600 ml in the remote fan unit. Activated charcoal filter easily removeable from above for air recirculation system. Gaggenau Black anodized aluminium frame. 1 user interface to set the power levels and 1 user interface to control the Guided Air technology. Fan technology with highly efficient, brushless DC motor (BLDC). Flexible installation of the fan unit at the front (for a compact wall solution), at the back (without loss of drawer space), or at a distance from the appliance.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop)  
Remote control and monitoring  
Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 36.9 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 39 dB / max. 62 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 28 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

Compatible with frameless cooktops 400 series (CX 482) or 200 series (CI 282 / CI 283), in a single worktop cut-out, for flush mounting. For installation in a single worktop cut-out the installation accessory VA 200 080 must be placed between the appliances. This includes a connection strip and furniture supports that ensure cabinet stability. Compatible with induction cooktops 400 series (CX 482, VI 482) or 200 series (CI 282 / CI 283), in 2 separate cut-outs, for surface mounted installation. For surface mounted installation the accessory AA 200 900 is required. Please refer to the cooktop installation details regarding air ducting.

The table ventilation can be installed in the cabinet or between two (e.g. for an island installation deeper than 100 cm). Width of the cabinets 90 cm, 100 cm or 120 cm. No upper cabinets should be installed above the table ventilation to maintain optimum performance. The following distance should be observed:

- 65 cm from the table ventilation to open shelves
- 50 cm left and right of the table ventilation to the wall or neighbouring tall cabinets.
- 5 cm from the table ventilation frame to the wall.
- 2 cm from the Guided Air suction area to a cabinet wall.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. Worktop thickness recommended for flush installation in a single cut-out: minimum 16 mm - maximum 45 mm. The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Whatever installation situation, the fan unit should always be accessible. To install the fan unit at a distance, the installation kit AA 200 910 is required (with spare covers for closing air outlets). Maximum distance between the table ventilation and the fan unit 3 m.

In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.

In air extraction mode, always ensure adequate fresh air in the room if the appliance is being operated at the same time as a chimney-vented fireplace.


For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>. For air recirculation an air recirculation module is required.

Please read additional planning notes on page 296-297.


#### Connection

Total connected load 300 W.  
Connecting cable 1.3 m, with plug.  
Power consumption standby/  
display off 0.4 W.



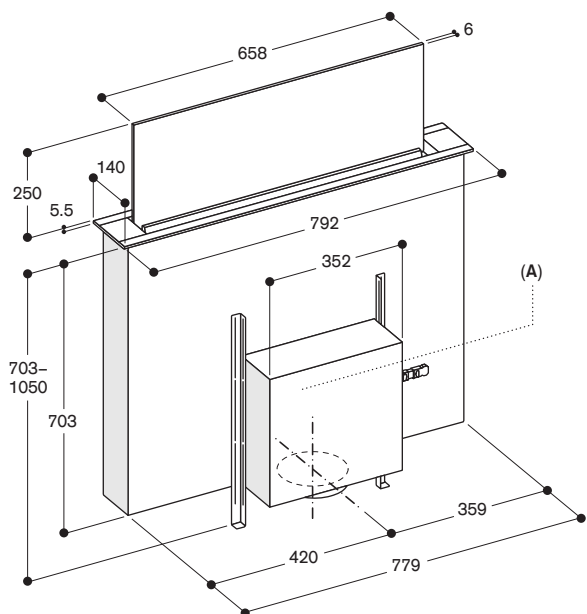

AL 200 180 with AA 200 910

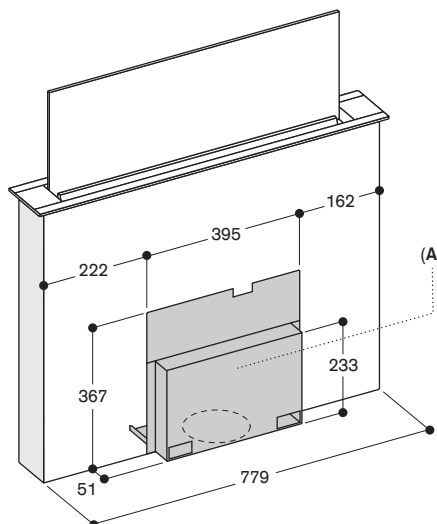


A: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required - max. distance 3 m)

A: Access to the complete cover must be ensured even after installation  
Cover can be installed on the front or the rear from the appliance


Fan unit must always be accessible

In recirculation: Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Planning example – Fan unit at the back

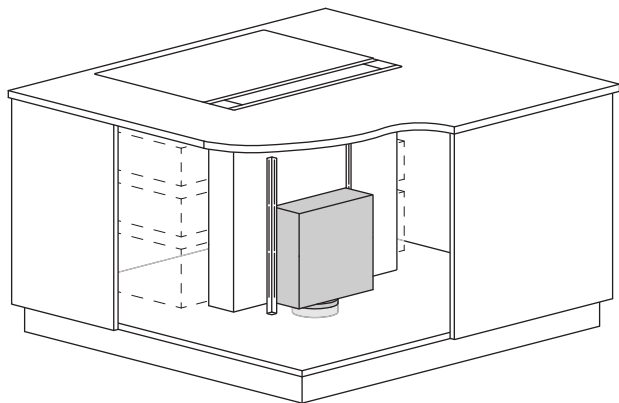

Planning example – Fan unit at a distance with AA 200 910

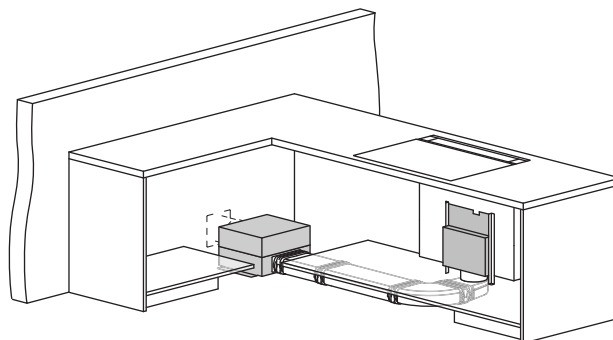

Planning example – Fan unit at the front

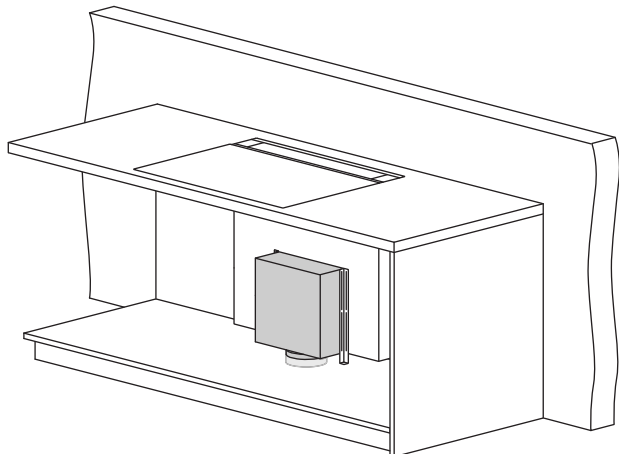

All measurements in mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops



Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine


Accessories | Energy Label |  
Gaggenau Home Connect

## Combination with frameless induction cooktop in a single cut-out Flush installation

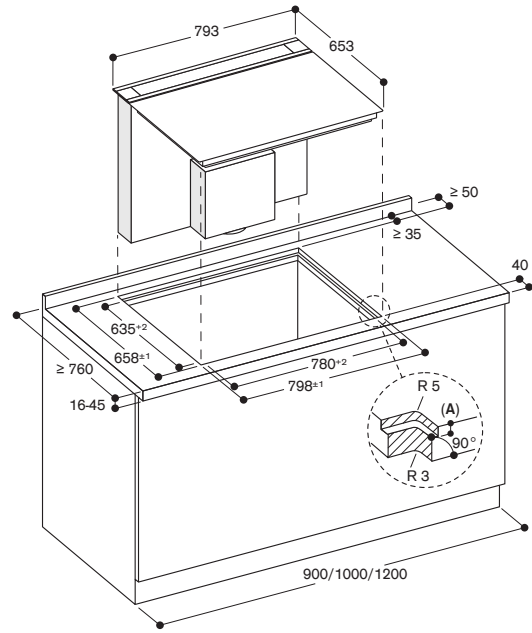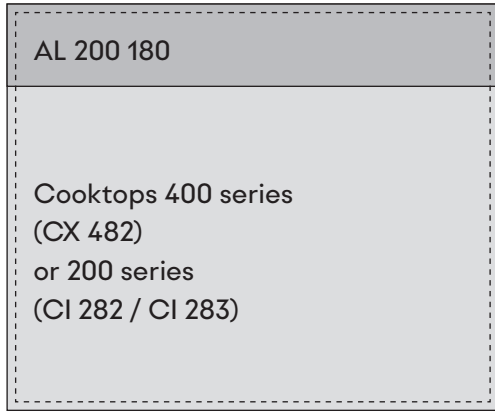


A: 6.5<sup>±0.5</sup> mm

Side view

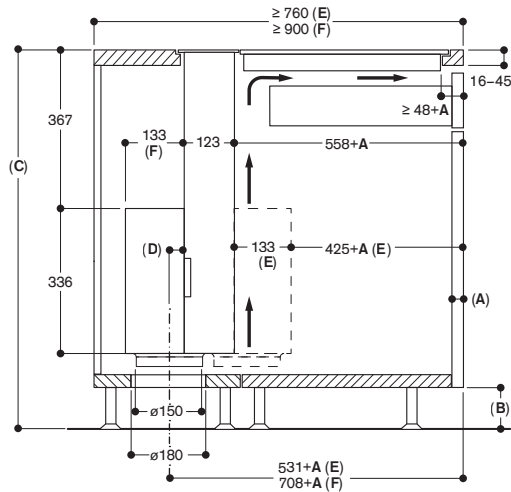


View from above

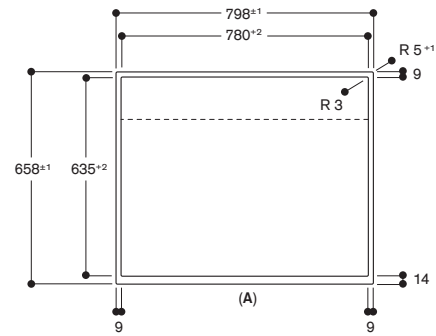

A: Front


- A: Front thickness
- B: ≥ 60 mm for air recirculation  
≥ 100 mm for air extraction with ducting in the plinth
- C: ≥ 850 mm for air extraction with ducting in the plinth
- D: ≥ 20 mm from the Guided Air suction area to cabinet wall
- E: Motor at the front
- F: Motor at the back
- Fresh air supply needed for cooktop  
Please refer to related cooktop installation notes

Cross section

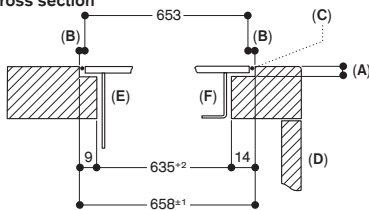

- A: 6.5<sup>±0.5</sup> mm
- B: 2.5 mm
- C: Fill with silicone
- D: Front
- E: Table ventilation
- F: Induction cooktop

Longitudinal section

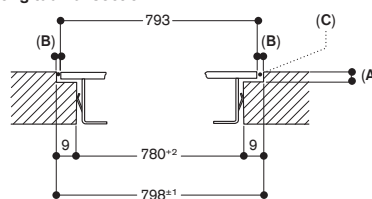


- A: 6.5<sup>±0.5</sup> mm
- B: 2.5 mm
- C: Fill with silicone

### Combination with frameless induction cooktop in 2 separate cut-outs Flush installation

AL 200 180

Cooktops 400 series  
(CX 482, VI 482)  
or 200 series  
(CI 282 / CI 283)

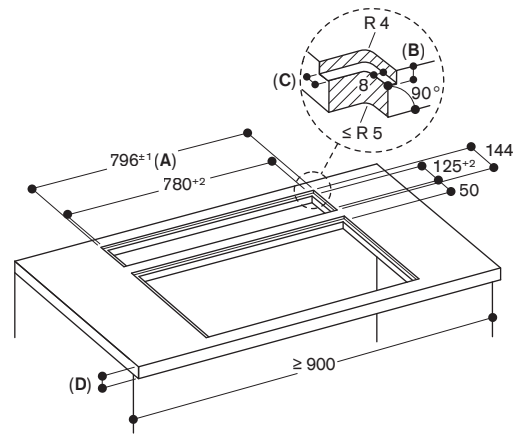


A: Incl. 2 mm silicone joint all around  
B: 5.5 mm  
C: 9.5 mm  
D: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm

### Combination with induction cooktop in 2 separate cut-outs Surface installation


AL 200 180

Cooktops 400 series  
(CX 482, VI 482)  
or 200 series  
(CI 282 / CI 283)

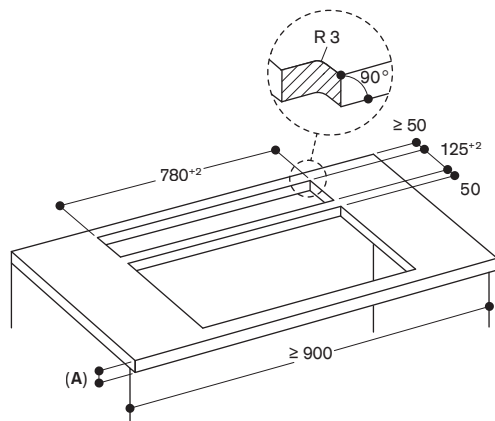


A: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm

#### Side view

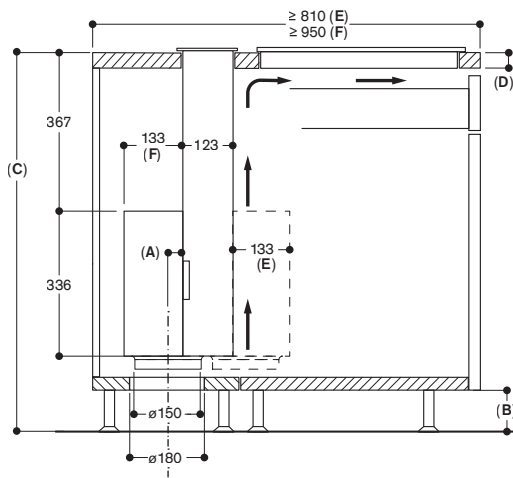

A:  $\geq 20$  mm from the Guided Air suction area to cabinet wall  
B:  $\geq 60$  mm for air recirculation  
 $\geq 100$  mm for air extraction with ducting in the plinth  
C:  $\geq 850$  mm for air extraction with ducting in the plinth  
D: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm  
E: Motor at the front  
F: Motor at the back  
→ Fresh air supply needed for cooktop  
Please refer to related cooktop installation notes

#### View from above

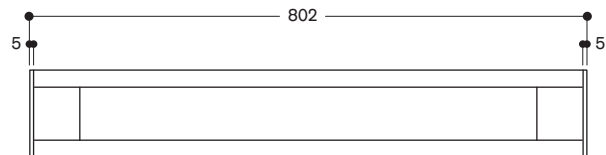

All measurements in mm.



### Table ventilation 200 series AL 200

**AL 200 190**  
Gaggenau Black.  
Width 90 cm.  
Air extraction / Air recirculation.



#### Necessary Installation accessories

**AA 200 890**  
Air recirculation module including activated charcoal filters with highly efficient odour reduction and allergen deactivation.

**AA 200 892**  
Regenerable air recirculation module including activated charcoal filters with highly efficient odour reduction. Regenerable in the oven at 200 °C. Extended change interval of the activated charcoal filter: regenerable up to 30 times.

**AA 200 900**  
Kit for surface mounted installation AL 200.  
Including 2 trims, each 5 mm width. Gaggenau Black.

**AA 200 910**  
Installation kit for fan unit at a distance (3m maximum).

**VA 200 090**  
Installation kit for installation in a single worktop cut-out.

#### Special accessories (order as spare parts):

**Part No. 17005381**  
Activated charcoal filters with highly efficient odour reduction and allergen deactivation.

#### Installation accessories for air ducting you will find at the pages 336–341.

#### Highlights

- Extendable table ventilation, when not in use can be completely lowered into the worktop.
- Perfect cooking and ventilation combination with frameless induction cooktops 90 cm wide for flush mounting in a single cut-out.
- Transparent ventilation screen for discreet integration in the kitchen space.
- Ambient lighting thru the glass edges.
- Guided Air technology ensures high vapour catch rate across the whole cooktop.

#### Output

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Air extraction:  
519 / 833 m<sup>3</sup>/h.  
62 / 71 dB (A) re 1 pW.  
Air recirculation:  
472 / 620 m<sup>3</sup>/h.  
65 / 71 dB(A) re 1 pW.

#### Features

White ambient lighting thru the glass edges, which can be changed to any color via the Home Connect App. Automatic function with sensor-controlled run-on function. 3 electronically controlled power levels and 1 intensive mode. Grease filter saturation indicator. Activated charcoal filter saturation indicator. 2 large-scale metal grease filters included, easy to remove, dishwasher-safe. Overflow capacity 170 ml in grease filter. Additional capacity 600 ml in the remote fan unit. Activated charcoal filter easily removeable from above for air recirculation system. Gaggenau Black anodized aluminium frame. 1 user interface to set the power levels and 1 user interface to control the Guided Air technology. Fan technology with highly efficient, brushless DC motor (BLDC). Flexible installation of the fan unit at the front (for a compact wall solution), at the back (without loss of drawer space), or at a distance from the appliance.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop)  
Remote control and monitoring  
Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 37.8 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class C.  
Sound level min. 41 dB / max. 62 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 28 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

Compatible with frameless cooktops 400 series (CX 492, VI 492) or 200 series (CI 292), in a single worktop cut-out, for flush mounting. For installation in a single worktop cut-out the installation accessory VA 200 090 must be placed between the appliances. This includes a connection strip and furniture supports that ensure cabinet stability. Compatible with induction cooktops 400 series (CX 492, VI 492) or 200 series (CI 292), in 2 separate worktop cut-outs, for surface mounted installation. For surface mounted installation the accessory AA 200 900 is required. Please refer to the cooktop installation details regarding air ducting.

The table ventilation can be installed in the cabinet or between two (e.g. for an island installation deeper than 100 cm).

Width of the cabinets 90 cm, 100 cm or 120 cm.

No upper cabinets should be installed above the table ventilation to maintain optimum performance.

The following distance should be observed:

- 65 cm from the table ventilation to open shelves
- 50 cm left and right of the table ventilation to the wall or neighbouring tall cabinets.
- 5 cm from the table ventilation frame to the wall.
- 2 cm from the Guided Air suction area to a cabinet wall.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Worktop thickness recommended for flush installation in a single cut-out: minimum 16 mm (with CX 492), 30 mm (with VI 492) - maximum 45mm. The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Whatever installation situation, the fan unit should always be accessible. To install the fan unit at a distance, the installation kit AA 200 910 is required (with spare covers for closing air outlets). Maximum distance between the table ventilation and the fan unit 3 m.

In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.


In air extraction mode, always ensure adequate fresh air in the room if the appliance is being operated at the same time as a chimney-vented fireplace.

For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>. For air recirculation an air recirculation module is required.


Please read additional planning notes on page 300–303.

#### Connection

Total connected load 300 W.  
Connecting cable 1.3 m, with plug.  
Power consumption standby/display off 0.4 W.

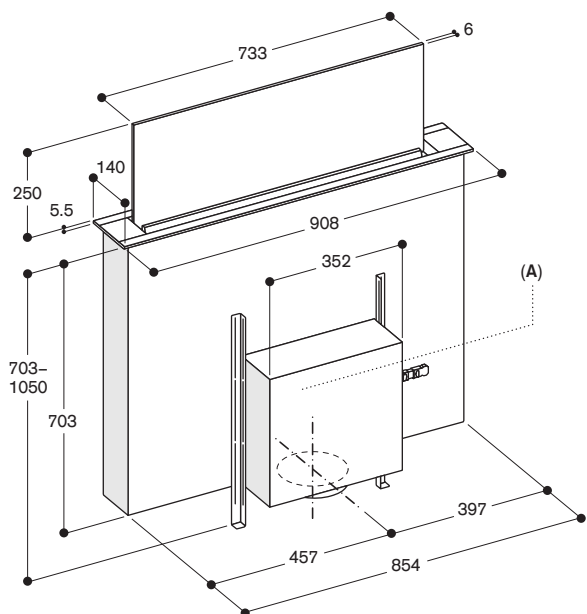

AL 200 190 with AA 200 910

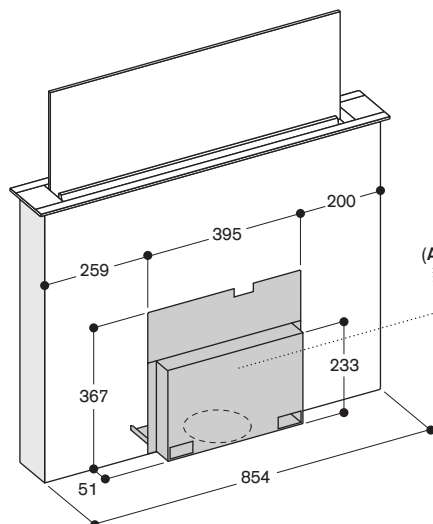


A: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required - max. distance 3 m)


A: Access to the complete cover must be ensured even after installation  
Cover can be installed on the front or the rear from the appliance

Fan unit must always be accessible


In recirculation: Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

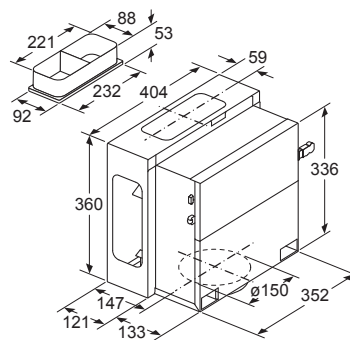


Planning example – Fan unit at the back

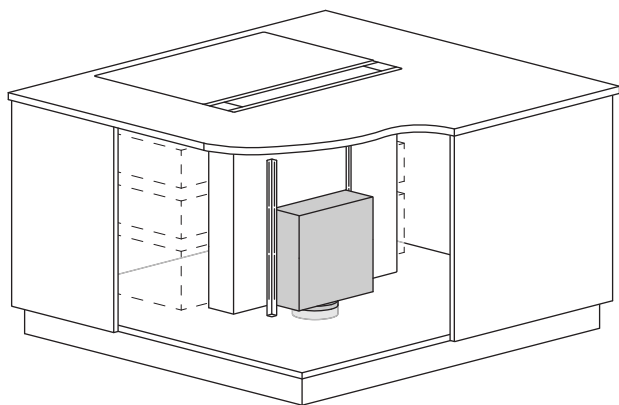

Planning example – Fan unit at the front


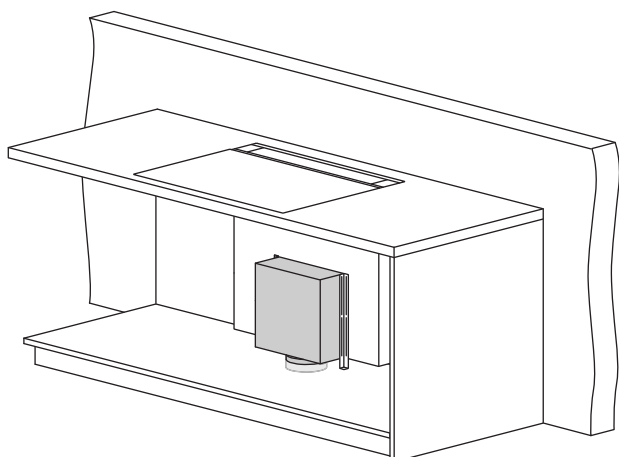


Planning example – Fan unit at a distance with AA 200 910

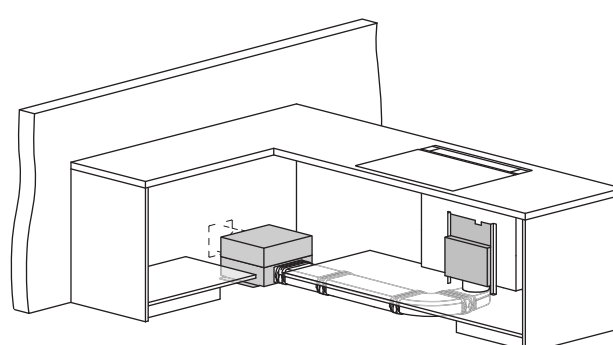


All measurements in mm.

## Combination with frameless induction cooktop in a single cut-out Flush installation

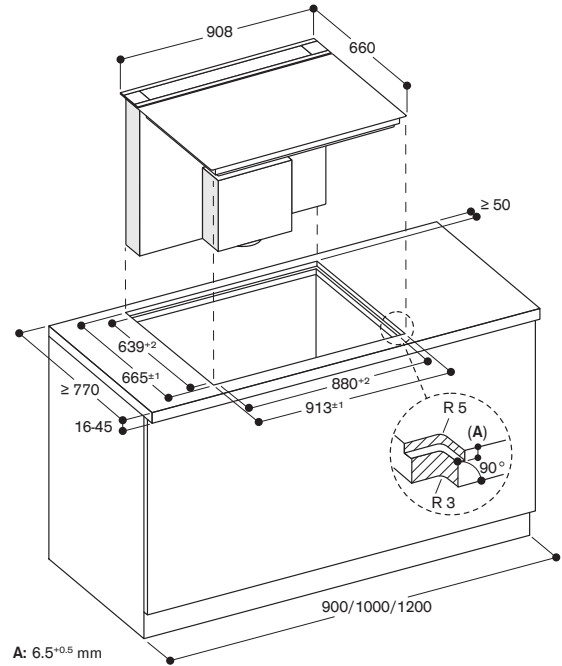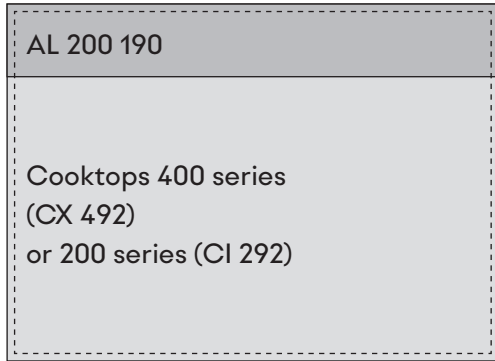


Side view

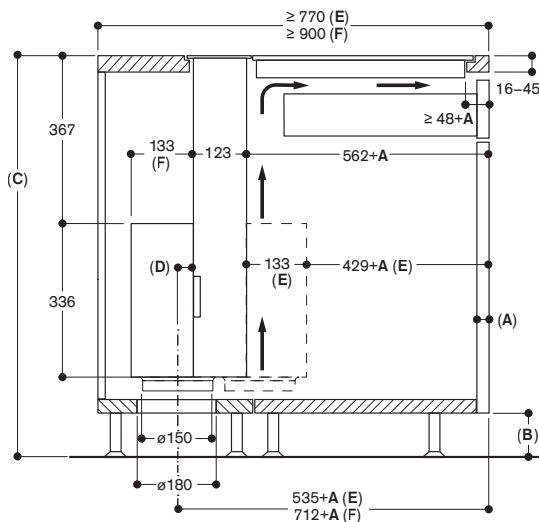


- A: Front thickness
  - B: ≥ 60 mm for air recirculation  
≥ 100 mm for air extraction with ducting in the plinth
  - C: ≥ 850 mm for air extraction with ducting in the plinth
  - D: ≥ 20 mm from the Guided Air suction area to cabinet wall
  - E: Motor at the front
  - F: Motor at the back
  - Fresh air supply needed for cooktop
- Please refer to related cooktop installation notes

View from above

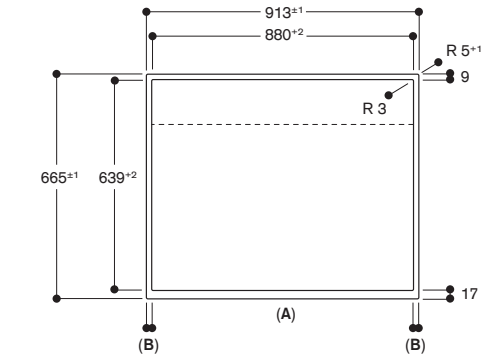


- A: Front
- B: 16.5 mm

Cross section

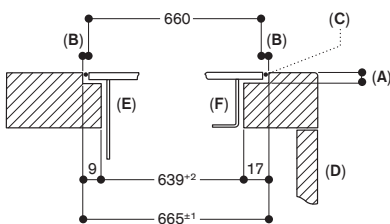



- A: 6.5<sup>+0.5</sup> mm
- B: 2.5 mm
- C: Fill with silicone
- D: Front
- E: Table ventilation
- F: Induction cooktop

Longitudinal section

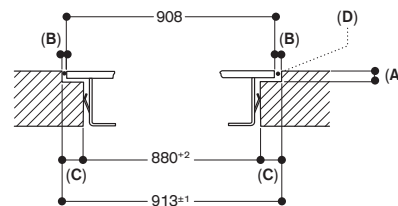


- A: 6.5<sup>+0.5</sup> mm
- B: 2.5 mm
- C: 16.5 mm
- D: Fill with silicone

## Combination with frameless induction cooktop in a single cut-out Flush installation

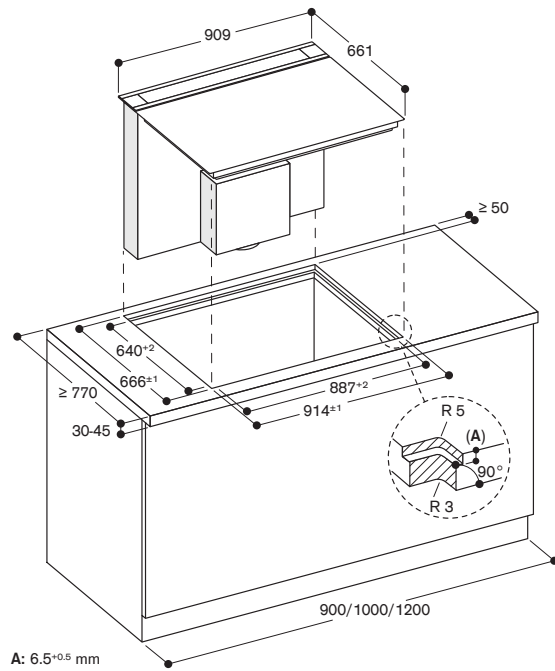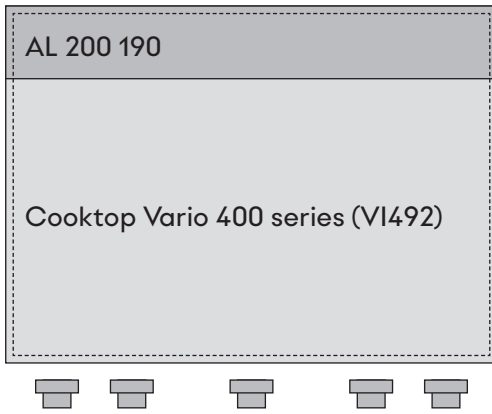


Side view

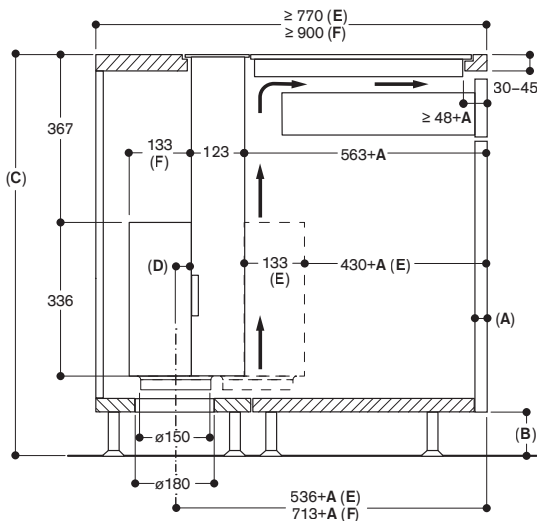


- A: Front thickness
- B: ≥ 60 mm for air recirculation  
≥ 100 mm for air extraction with ducting in the plinth
- C: ≥ 850 mm for air extraction with ducting in the plinth
- D: ≥ 20 mm from the Guided Air suction area to cabinet wall
- E: Motor at the front
- F: Motor at the back
- Fresh air supply needed for cooktop  
Please refer to related cooktop installation notes

View from above

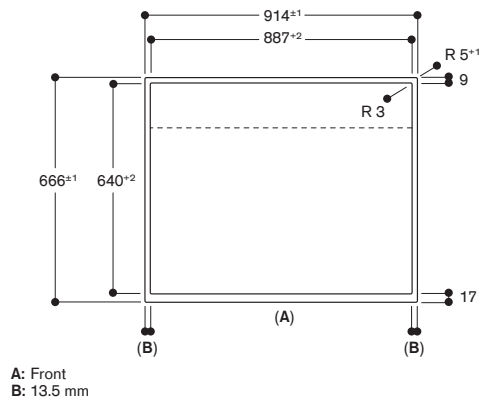


Cross section

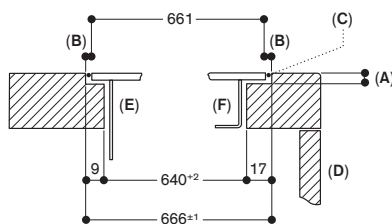

- A: 6.5<sup>±0.5</sup> mm
- B: 2.5 mm
- C: Fill with silicone
- D: Front
- E: Table ventilation
- F: Induction cooktop

Longitudinal section

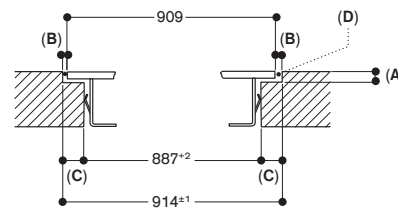


- A: 6.5<sup>±0.5</sup> mm
- B: 2.5 mm
- C: 13.5 mm
- D: Fill with silicone

### Combination with frameless induction cooktops in 2 separate cut-outs

#### Flush installation

AL 200 190

Cooktops 400 series  
(CX 492, VI 492)  
or 200 series (CI 292)

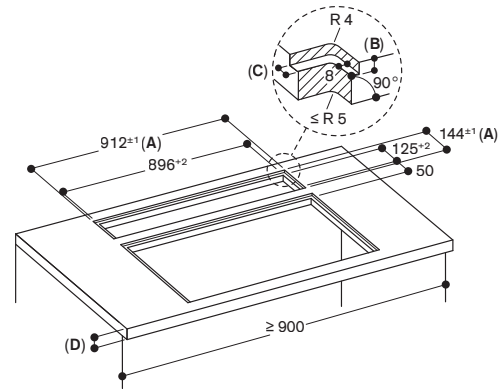


A: Incl. 2 mm silicone joint all around  
B: 5.5 mm  
C: 9.5 mm  
D: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm

### Combination with induction cooktop in 2 separate cut-outs

#### Surface installation


AL 200 190

Cooktops 400 series  
(CX 492, VI 492)  
or 200 series (CI 292)

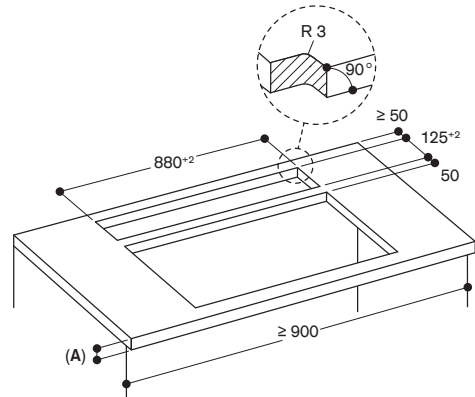


A: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm

Side view

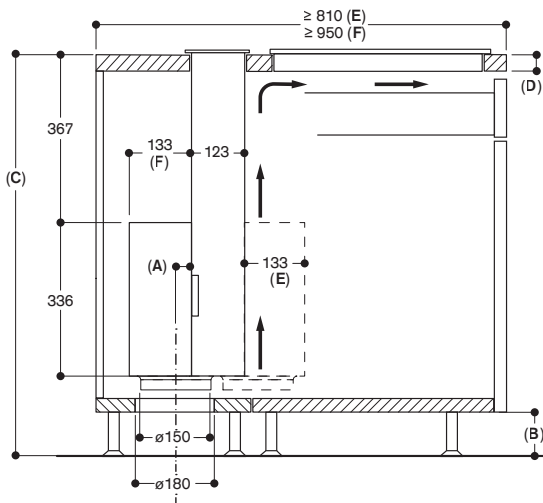

A:  $\geq 20$  mm from the Guided Air suction area to cabinet wall  
B:  $\geq 60$  mm for air recirculation  
 $\geq 100$  mm for air extraction with ducting in the plinth  
C:  $\geq 850$  mm for air extraction with ducting in the plinth  
D: Min. worktop thickness - refer to related cooktop installation notes  
Max. worktop thickness 45 mm  
E: Motor at the front  
F: Motor at the back  
— Fresh air supply needed for cooktop  
Please refer to related cooktop installation notes


View from above

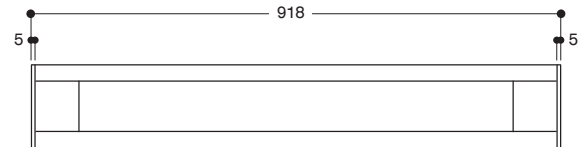



## Combinations with AL 200 ventilation

### AL 200 180

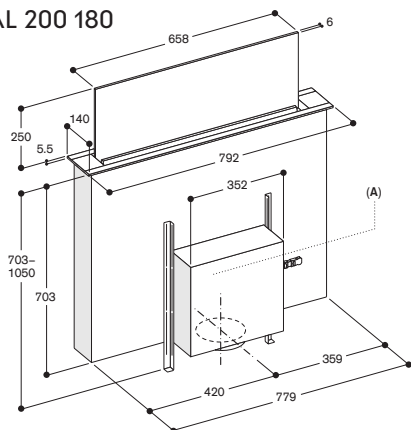


A: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required - max. distance 3 m)

Fan unit must always be accessible

In recirculation: Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

### AL 200 190

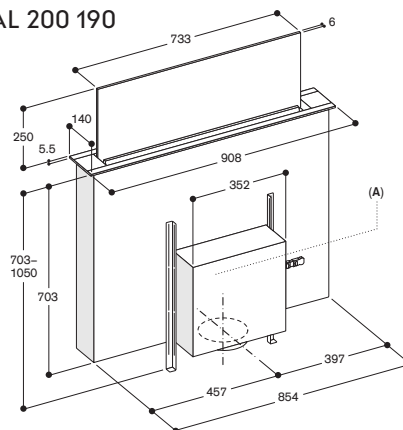


A: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required - max. distance 3 m)

Fan unit must always be accessible

In recirculation: Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

## Flush installation

Combination with frameless induction cooktops in a single cut-out




For cut-out dimensions, see page 296

### Installation accessory

Installation kit VA 200 080

Combination with frameless induction cooktops in 2 separate cut-outs




For cut-out dimensions, see page 297

### Installation accessory

—

## Surface installation

Combination with induction cooktop in 2 separate cut-outs




For cut-out dimensions, see page 297

### Installation accessory

Installation kit AA 200 900

## Flush installation

Combination with frameless induction cooktops in a single cut-out

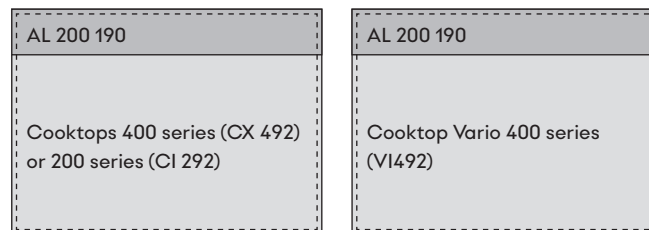

For cut-out dimensions, see page 300

### Installation accessory


Installation kit VA 200 090

For cut-out dimensions, see page 301

### Installation accessory

Installation kit VA 200 090

Combination with frameless induction cooktops in 2 separate cut-outs




For cut-out dimensions, see page 302

### Installation accessory

—

## Surface installation

Combination with induction cooktop in 2 separate cut-outs



For cut-out dimensions, see page 302

### Installation accessory

Installation kit AA 200 900



### Vario downdraft ventilation 400 series VL 414

#### VL 414 115

Stainless steel.  
Width 15.5 cm.  
Air extraction / Air recirculation.  
Motorless.  
Knob needs to be ordered separately.



#### Necessary Installation accessories

##### CKV 410 010

Stainless steel knob 400 series  
for VL 414.  
Electronic control.  
Set of 1 knob.

##### CKV 410 000

Black knob 400 series for VL 414.  
Electronic control.  
Set of 1 knob.

#### In combination with remote fan units

AR 400 142 Air extraction  
AR 401 142  
AR 403 122  
AR 413 122 Air recirculation  
AR 410 110

#### Installation accessories

##### AD 410 040

Flexibel connecting piece.  
DN 150 flat.

##### AD 851 041

Connecting piece for extension with  
flat duct DN 150 for extra deep  
worktop.

##### VA 420 004

Connection strip for combination with  
other Vario appliances of the  
400 series for flush mounting.

##### VA 420 010

Connection strip for combination with  
other Vario appliances of the  
400 series for surface mounting.

#### Special accessories

##### AA 414 010

Ventilation moulding for VL 414 next to  
gas appliance.

**Installation accessories for air ducting  
you will find at the pages 336–341.**

#### Highlights

- Highly efficient, low noise ventilation system especially with remote fan unit AR 410 110.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Minimal planning and easy installation.
- Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation.
- Precision crafted 3mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined perfectly with other Vario appliances of the 400 series.

#### Output

Power levels depend on the remote fan unit.

Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

#### Features

Control knob with illuminated ring.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic sensor controlled or manual run on function.  
Large-scale metal grease filter with high grease absorption.  
Removable, dishwasher-safe grease filter unit.  
Grease filter and activated charcoal filter saturation indicator.  
Airflow-optimised interior for efficient air circulation.  
Interval ventilation, 6 min.  
Enamelled ventilation grille, dishwasher-safe.  
Air exhaust bend included in delivery.  
Overflow 250 ml capacity.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop).  
Remote control and monitoring  
Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.  
Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.  
Energy consumption 40.4 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 57 dB / max. 71 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is Lmax 26 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

For each VL one remote fan unit is recommended.

Maximum cooktop(s) width between two VL: 80 cm except with the CX 482. Vario cooktops like Vario electric grill and Vario gas wok should be placed between 2 VL.

Air recirculation is not recommended in combination with Vario electric grill. For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>.

If operated next to gas appliances, the ventilation moulding AA 414 010 is recommended to ensure maximum performance of the cooktop.

Appliance can be snapped into the worktop from above.

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 306–309.


#### Connection

Total connected load 10 W.  
Connecting cable 1.75 m, pluggable.  
Connecting cables 0.3 m and 1 m for control knobs.  
Plan a LAN cable.

Installation of the downdraft ventilation;  
surface mounting

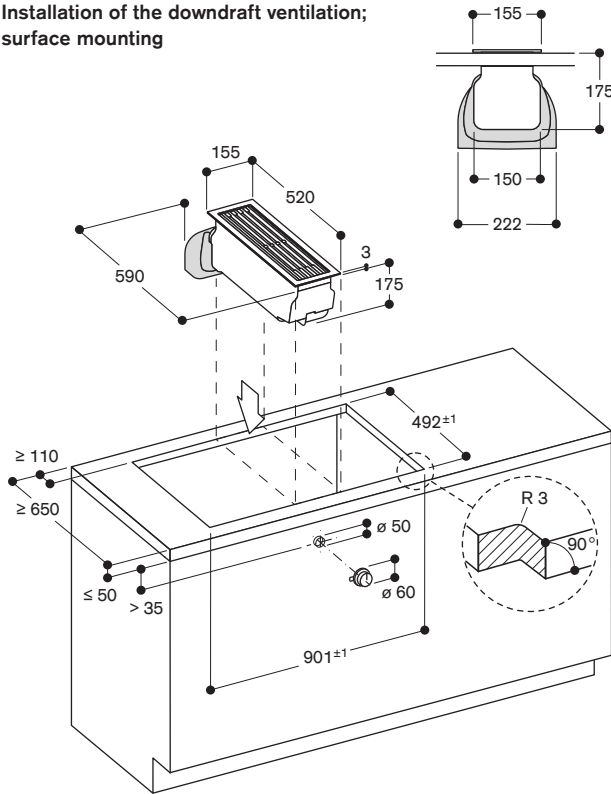


Installation of the downdraft ventilation;  
flush mounting

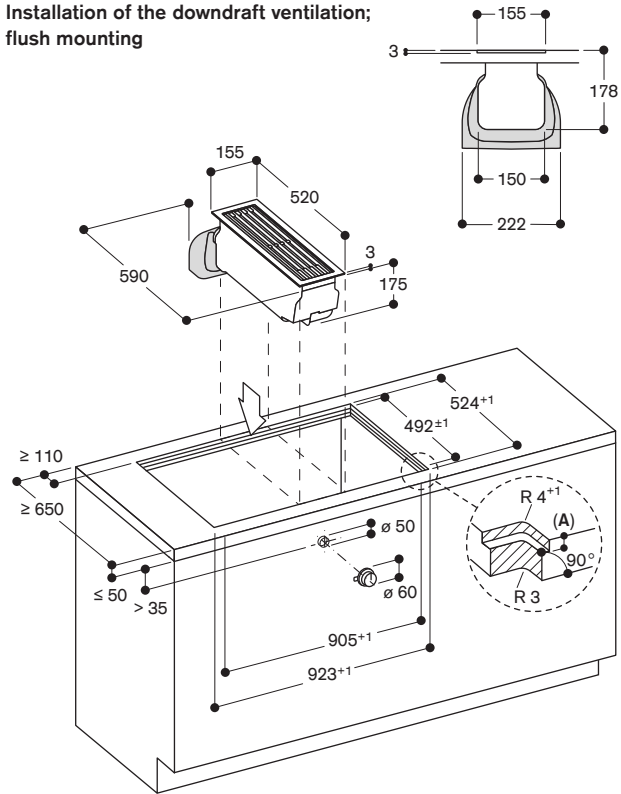


A: 3.5<sup>-0.5</sup> in combination with at least one framed appliance  
6.5<sup>+0.5</sup> in combination with at least one frameless induction cooktop

Installation of the control knob

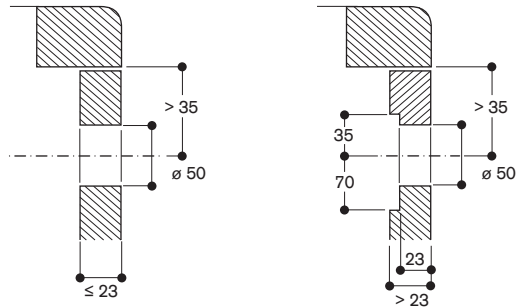


Installation of the control knob

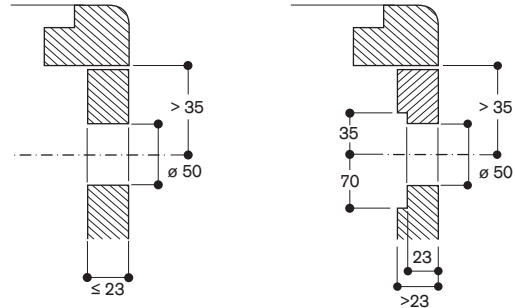


Installation accessories

AD 410 040 : Flexibel connecting piece, DN 150 flat



AD 851 041: Connecting piece VL for extension with  
flat duct DN150 for extra deep worktop



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine


Accessories | Energy Label |  
Gaggenau Home Connect

## Recommended configurations for the Vario downdraft ventilation 400 series

### Good to know — for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adequate adhesive tape or using the adequate connecting piece.
- Vario cooktops like Vario electric grill or Vario gas wok should be placed between 2 VL.
- In case of Vario electric grill air recirculation is not recommended.
- With the Vario downdraft ventilation, the ducting can be connected straight down (1) or to the rear using additional connecting pieces (2) and (3). These are available as special accessories, see below.

For the total overall dimensions in the furniture, please also take into account the individual dimensions and position of the ducts and the remote fan unit. The remote fan unit can be turned in all directions, depending on the desired direction for the exhaust air or filter removal.

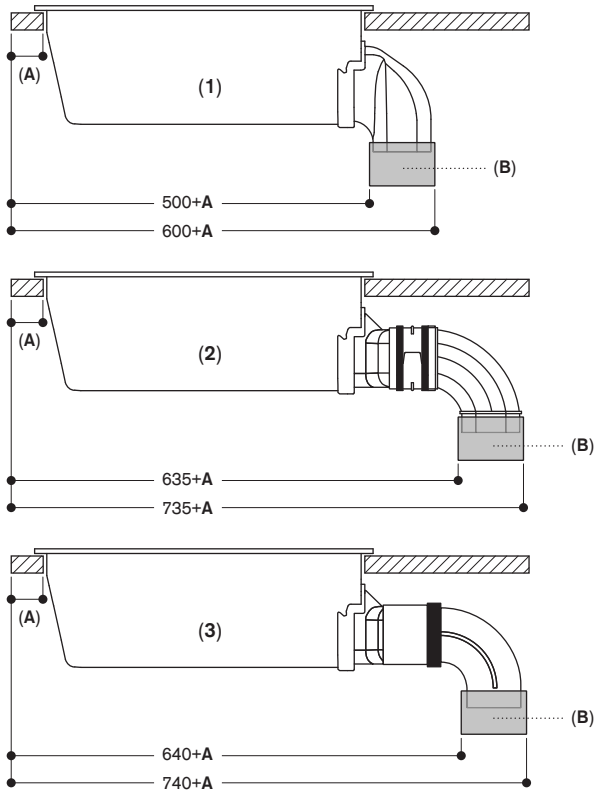

- 1: Direct installation  
 2: Installation with extension for extra deep worktop and plastic ducting:  
 – AD 851 041 (Connecting piece for extension)  
 – AD 857 040 (Flat duct connecting piece, plastic)  
 – AD 857 030 (Flat duct bend 90° vertical, plastic)  
 3: Installation with extension for extra deep worktop and metal ducting:  
 – AD 851 041 (Connecting piece for extension)  
 – AD 854 000 (Flat duct connecting piece, metal)  
 – AD 854 030 (Flat duct bend 90° vertical, metal)

A:  $\geq 50\text{mm}$

B: Connecting piece

**Planning example (air recirculation) – Direct installation**

**VL414 with AR 410 110 remote fan unit**

**Good to know**

- Wall installation, worktop depth 65 cm
- Allow accessibility to the charcoal filters in the lower cabinet for their replacement. Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).

**List of components**

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 410 040 (flexibel connecting piece)

Order as set (appliances and accessories):

**SET1VL4711 with Stainless steel knob**

**SET1VL4721 with Black knob**

**Planning example (air recirculation) – Direct installation**

**VL414 with AR 413 122 remote fan unit**

**Good to know**

- Wall or island installation.
- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).





**List of components**

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 413 122 (remote fan unit air recirculation)
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 857 015 (flat duct 50 cm)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape)

Order as set (appliances and accessories):

**SET1VL4712 with Stainless steel knob**

**SET1VL4722 with Black knob**

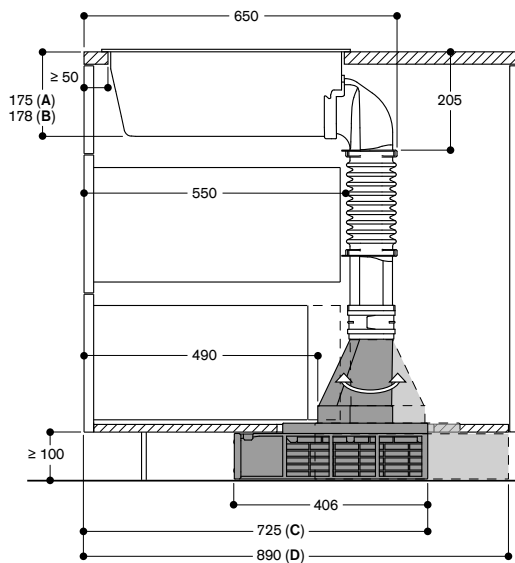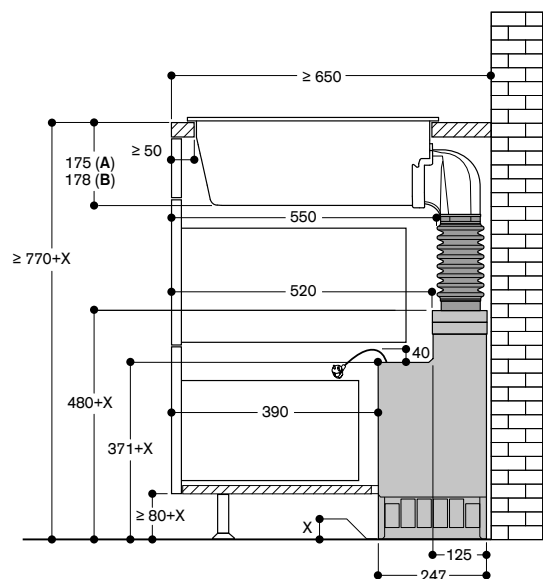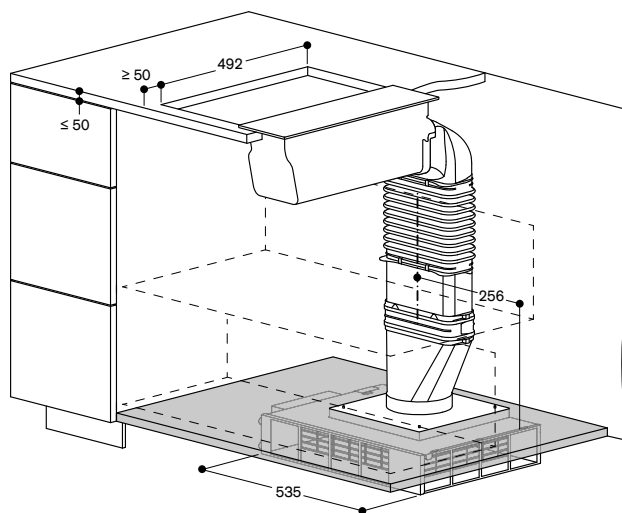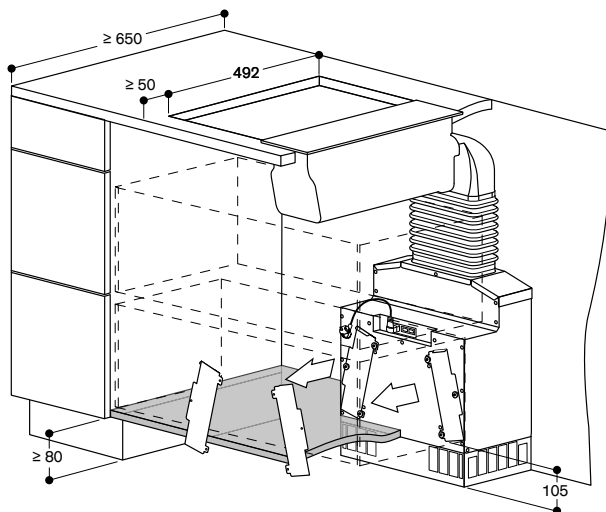

A: Surface mounting  
B: Flush mounting (only VL 414)

A: Surface mounting  
B: Flush mounting (only VL 414)  
C: Filter access from the front  
Connecting piece flat/round towards the front  
D: Filter access from the back  
Connecting piece flat/round towards the back

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

All measurements in mm.


## Recommended configurations for the Vario downdraft ventilation 400 series

### Planning example (air extraction) – Direct installation VL414 with extraction remote fan unit – Cellar installation

Combination with AR 403 122 / AR 400 142 / AR 401 142

#### List of components

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 857 015 (flat duct 50 cm)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 041 (flat duct adapter round)
- 1 x AR 403 122 or AR 400 142 or AR 401 142 (remote fan unit air extraction)

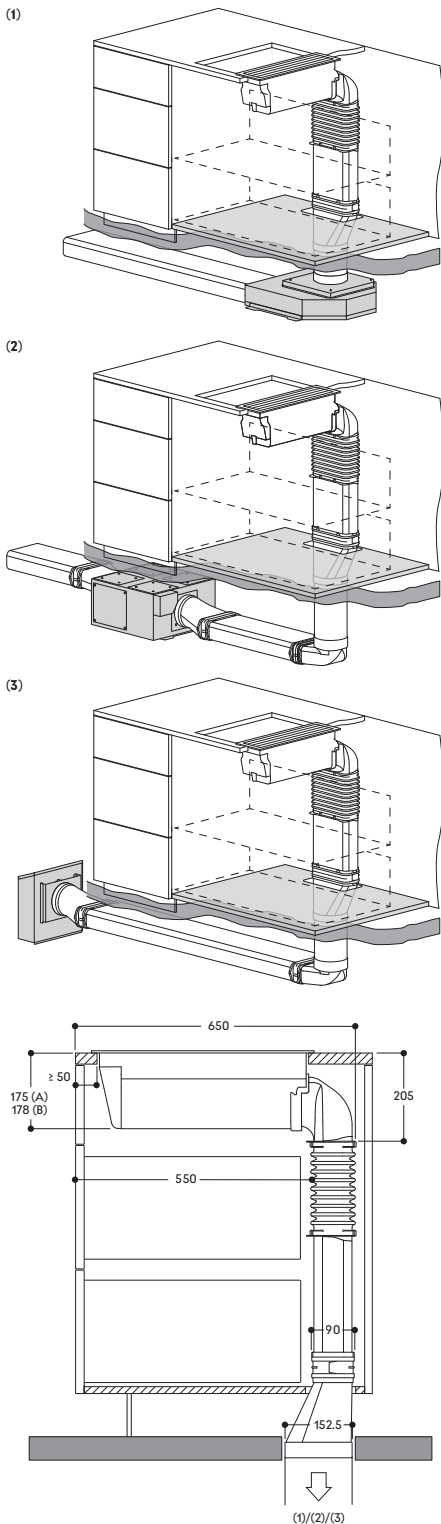


### Planning example (air extraction) – Direct installation – Metal VL 414 with AR 403 122 remote fan unit

Island installation, connection from the right side. Connection also possible to the left side, please be aware that the measures will be different.

#### List of components

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 403 122 (remote fan unit air extraction)
- 1 x AD 858 010 (flat duct flex pipe, metal, DN 150)
- 1 x AD 854 041 (flat duct adapter round, metal, DN 150 flat/round)
- 1 x AD 990 091 (adhesive tape for sealing the ducts, aluminum)

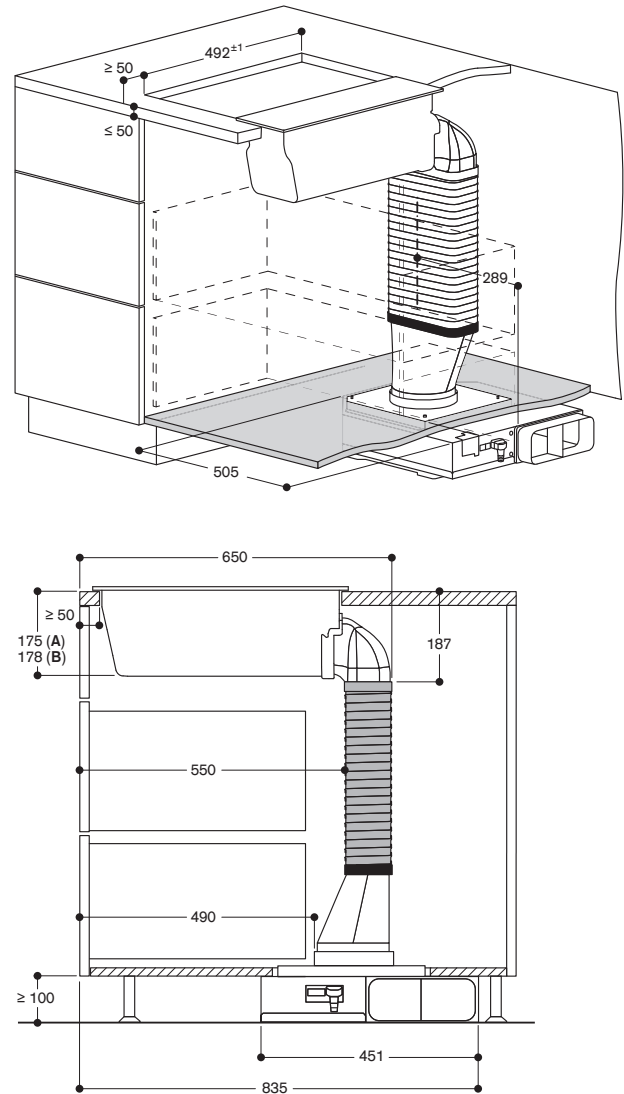

A: Surface mounting  
B: Flush mounting (only VL414)



**Planning example (air extraction) – Direct installation**

**VL 414 with AR 403 122 remote fan unit**

Island installation, connection to the right or the left side.

**List of components**

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 403 122 (remote fan unit air extraction)
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 857 015 (flat duct 50 cm)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape)

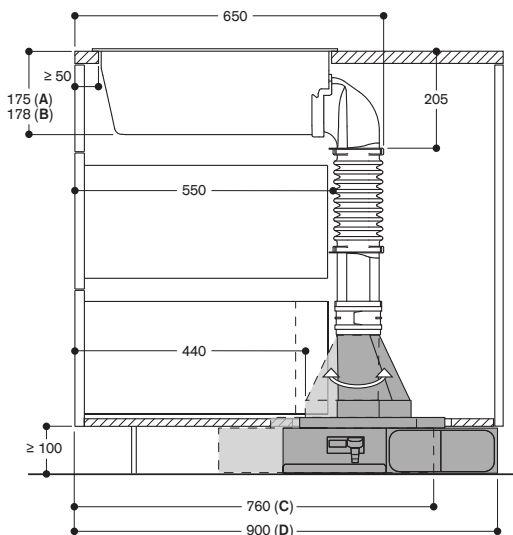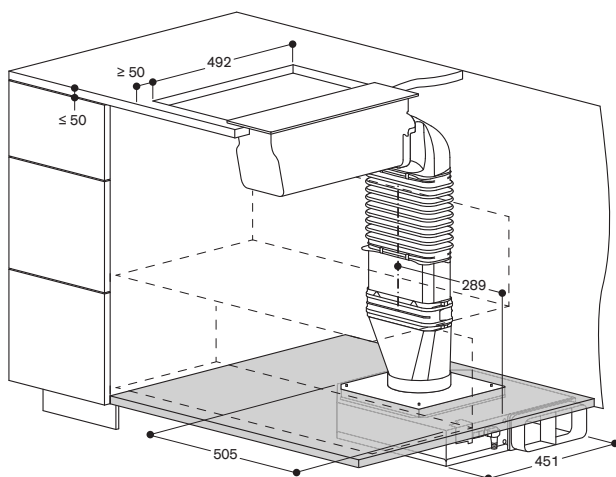

- A: Surface mounting
- B: Flush mounting (only VL414)
- C: Exhaust to the left. Connecting piece flat/round towards the front
- D: Exhaust to the right. Connecting piece flat/round towards the back

**Planning example (air recirculation) – with extension**

**VL 414 with AR 410 110 remote fan unit**

**Good to know**

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement. Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).
- Please note, this installation is also possible with Gaggenau plastic ducts



**List of components – Metal**

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connection piece for extension)
- 1 x AD 854 000 (flat duct connecting piece, metal)
- 1 x AD 854 030 (flat duct bend 90° vertical, metal)
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 990 091 (adhesive tape for sealing the ducts, aluminium)

Order as set (appliances and accessories):

**SET3VL4511 with Stainless steel knob**

**SET3VL4521 with Black knob**

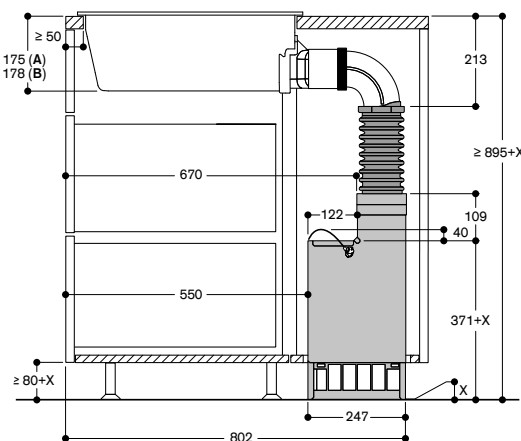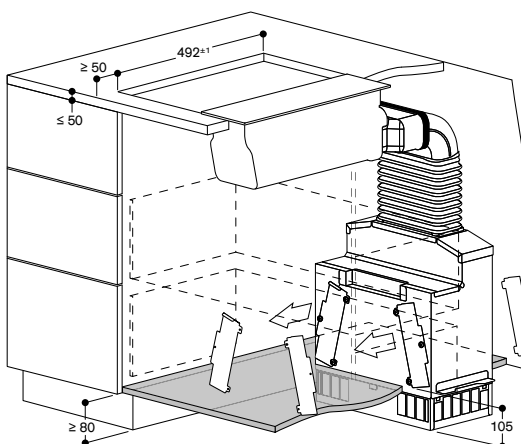

- A: Surface mounting
- B: Flush mounting (only VL 414)

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

**List of components – Plastic**

- 1 x VL 414 115 Vario downdraft ventilation
- 1 x CKV 410 010 Stainless steel knob or 1 x CKV 410 000 Black knob
- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connection piece for extension)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 030 (flat duct bend 90° vertical)
- 1 x AD 410 040 (flat flexible connecting piece)

Order as set (appliances and accessories):

**SET2VL4711 with Stainless steel knob**

**SET2VL4721 with Black knob**

All measurements in mm.



### Vario downdraft ventilation 200 series VL 200

#### VL 200 120

Black aluminium control panel.  
Width 15 cm.  
Air extraction / Air recirculation.  
Motorless.



#### In combination with remote fan units

AR 400 142 Air extraction  
AR 401 142  
AR 403 122  
AR 413 122 Air recirculation  
AR 410 110

#### Installation accessories

##### AD 410 040

Flexibel connecting piece for VL 200.  
DN 150 flat.

##### AD 851 041

Connecting piece VL 200 for  
extension with flat duct DN 150 for  
extra deep worktop.

##### VV 200 010

Stainless steel connection strip for  
combination with other Vario  
appliances of the 200 series.

##### VV 200 020

Black connection strip for combination  
with other Vario appliances of the  
200 series.

#### Special accessories

##### LS 041 001

Ventilation moulding for VL 200 next  
to gas appliance.  
Stainless steel.

#### Installation accessories for air ducting you will find at the pages 336–341.

#### Highlights

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity.
- Highly efficient ventilation system at the cooktop integrated in the worktop.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Minimal planning and easy installation.
- Low-noise system with the motor AR 410 110.
- Air extraction or air recirculation system.

#### Output

Power levels depend on the remote fan unit.  
Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

#### Features

Control knobs with illuminated ring.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic sensor-controlled performance adjustment of the ventilation system.  
Automatic sensor controlled or manual run on function.  
Large-scale metal grease filter with high grease absorption.  
Removable, dishwasher-safe grease filter unit.  
Grease filter and activated charcoal filter saturation indicator.  
Airflow-optimised interior for efficient air circulation.  
Interval ventilation, 6 min.  
Enamelled ventilation grille, dishwasher-safe.  
Air exhaust bend included in delivery.  
Overflow 250 ml capacity.

#### Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.  
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 48.3 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class -.  
Grease filter efficiency class B.  
Sound level min. 56 dB / max. 71 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 26 m.  
Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

For each VL one remote fan unit is recommended.  
Maximum cooktop width between 2 VL: 80 cm.  
Vario cooktops like Vario electric grill and Vario gas wok should be placed between 2 VL.  
If installed next to gas appliances, the ventilation moulding LS 041 001 is recommended to ensure maximum performance of the cooktop.  
When having installed the ventilation moulding LS 041 001 the wok pan WP 400 001 can not be used.

Air recirculation is not recommended in combination with Vario electric grill.  
For optimum performance in air recirculation we recommend an outflow surface area of at least 400 cm<sup>2</sup>.

When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Please read additional planning notes on page 312–315.

#### Connection


Connecting cable 1.7 m between VL and remote fan unit.




Installation of the downdraft ventilation; surface mounting

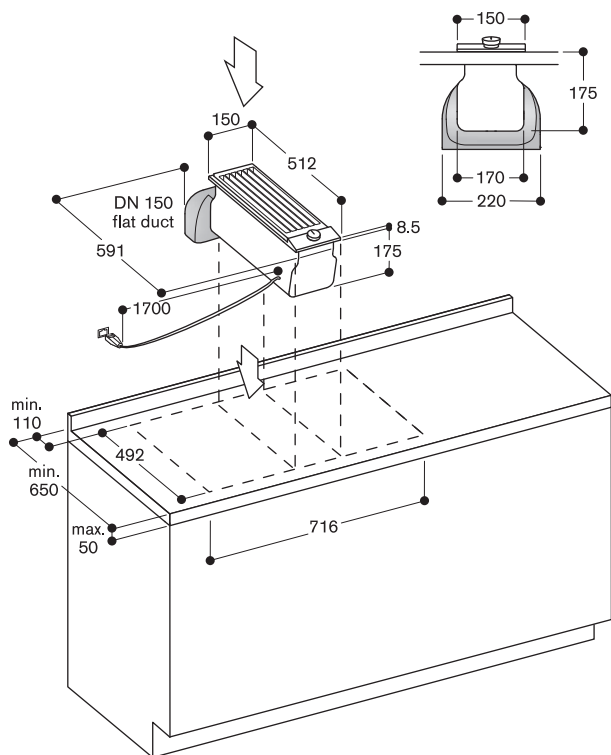

AD 410 040: Flexibel connecting piece for VL, DN 150 flat

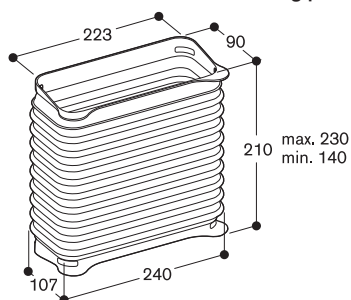

AD 851 041: Connecting piece VL for extension with flat duct DN 150 for extra deep worktop



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances


Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Planning examples with the downdraft ventilation 200 series

### Good to know — for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adequate adhesive tape or using the adequate connecting piece.
- Maximum distance between the Vario downdraft ventilation and the remote fan unit: Cable length in between 1.7 m
- Vario cooktops like Vario electric grill or Vario gas wok should be placed between 2 VL.
- In case of Vario electric grill air recirculation is not recommended.
- With the Vario downdraft ventilation, the ducting can be connected straight down (1) or to the rear using additional connecting pieces (2) and (3). These are available as special accessories, see below. For the total overall dimensions in the furniture, please also take into account the individual dimensions and position of the ducts and the remote fan unit. The remote fan unit can be turned in all directions, depending on the desired direction for the exhaust air or filter removal.

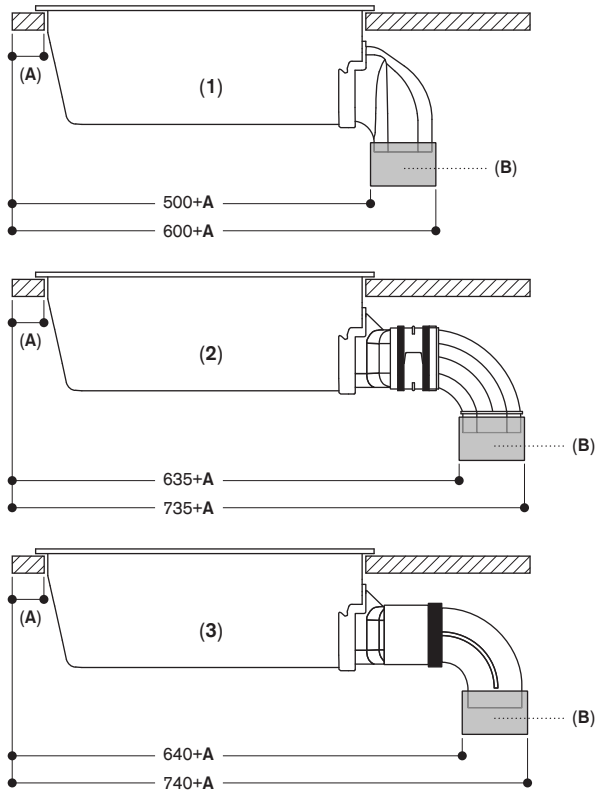

- 1: Direct installation
- 2: Installation with extension for extra deep worktop and plastic ducting:
  - AD 851 041 (Connecting piece for extension)
  - AD 857 040 (Flat duct connecting piece, plastic)
  - AD 857 030 (Flat duct bend 90° vertical, plastic)
- 3: Installation with extension for extra deep worktop and metal ducting:
  - AD 851 041 (Connecting piece for extension)
  - AD 854 000 (Flat duct connecting piece, metal)
  - AD 854 030 (Flat duct bend 90° vertical, metal)

A:  $\geq 50\text{mm}$

B: Connecting piece

**Planning example 1 (air recirculation)**

**VL 200 with AR 410 110 remote fan unit**

Wall installation, worktop depth 65 cm, access to the filters for replacement from the front.



**Good to know**

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).

**List of components**

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 410 040 (flexibel connecting piece)

Order as set (appliances and accessories): **SET1VL2301**

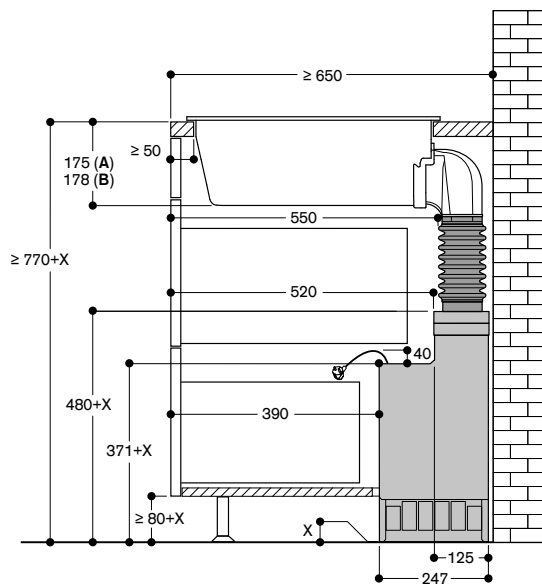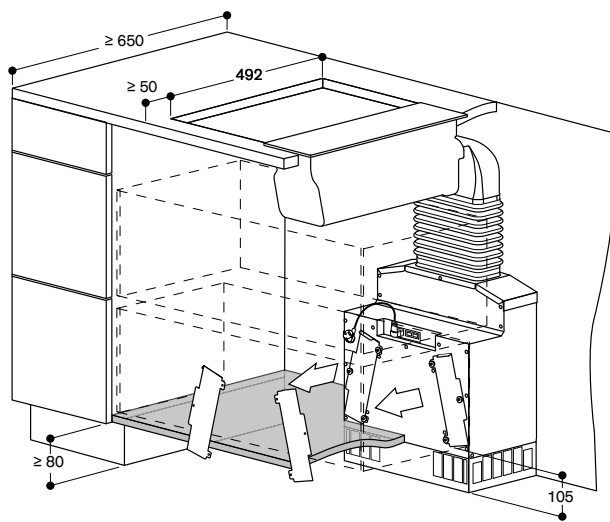

A: Surface mounting  
B: Flush mounting (only VL 414)

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

## Planning examples with the downdraft ventilation 200 series

### Planning example 2 (air recirculation)

VL 200 with AR 413 122 remote fan unit

#### Good to know

- Wall or island installation.
- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).

#### List of components

- 1 x AR 413 122 (remote fan unit air recirculation)
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 857 015 (flat duct 50 cm)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape)





Order as set (appliances and accessories): **SET1VL2101**

### Planning example 3 (air extraction)

VL 200 with AR 403 122 remote fan unit

#### List of accessories

- 1 x AR 403 122 (remote fan unit air extraction)
- 1 x AD 410 040 (flat flexible connecting piece)
- 1 x AD 857 015 (flat duct 50 cm)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape)

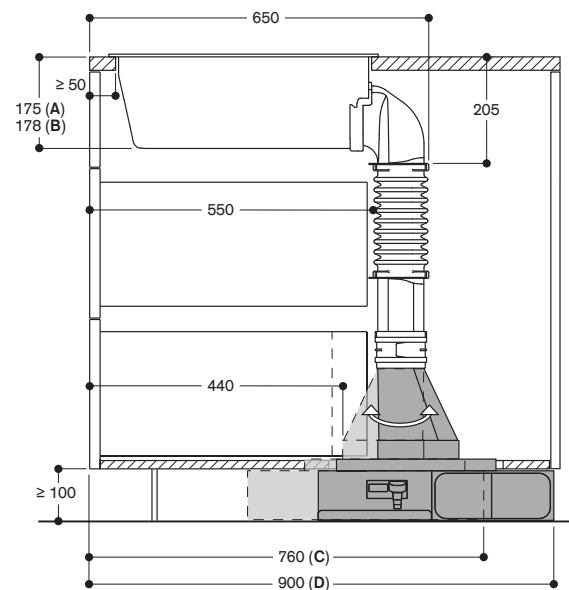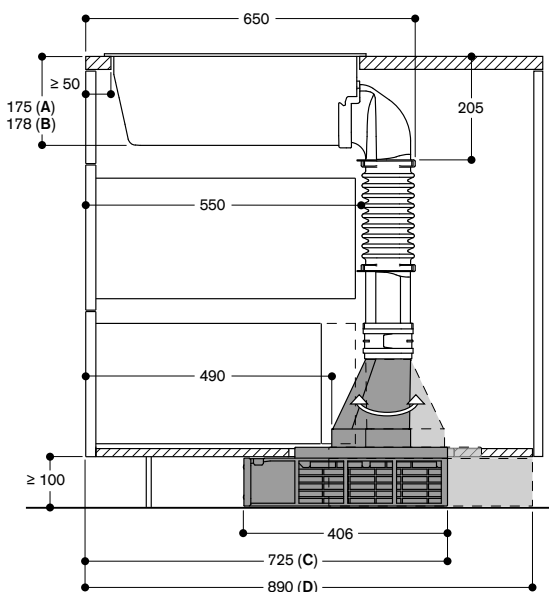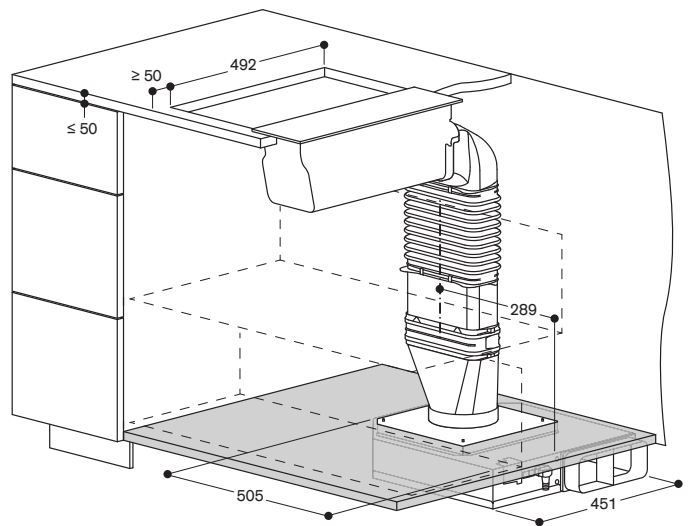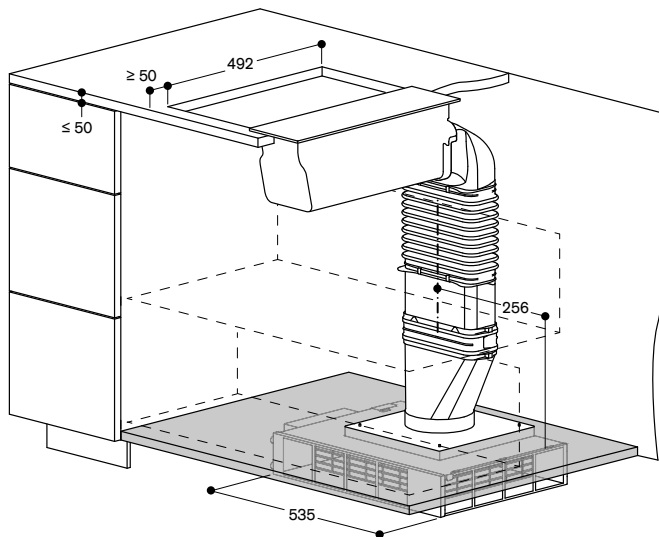

- A: Surface mounting
- B: Flush mounting (only VL 414)
- C: Filter access from the front  
Connecting piece flat/round towards the front
- D: Filter access from the back  
Connecting piece flat/round towards the back

- A: Surface mounting
- B: Flush mounting (only VL414)
- C: Exhaust to the left. Connecting piece flat/round towards the front
- D: Exhaust to the right. Connecting piece flat/round towards the back

Not recommended for non-thermally insulated floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

**Planning example 4 (air recirculation) – Metal**

**VL 200 with AR 410 110 remote fan unit**

Island installation, access to the filter for replacement from the front or the back.



**Good to know**

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 400 cm<sup>2</sup>).
- Please note, this installation is also possible with Gaggenau plastic ducts

**List of components**

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connection piece for extension with flat duct for extra deep worktop)
- 1 x AD 854 000 (flat duct bend connecting piece, metal, DN 150 flat)
- 1 x AD 854 030 (flat duct bend 90° vertical, metal, DN 150 flat)
- 1 x AD 410 040 (flexibel connecting piece, DN 150 flat)
- 1 x AD 990 091 (adhesive tape for sealing the ducts, aluminium)

Order as set (appliances and accessories): **SET1VL2303**

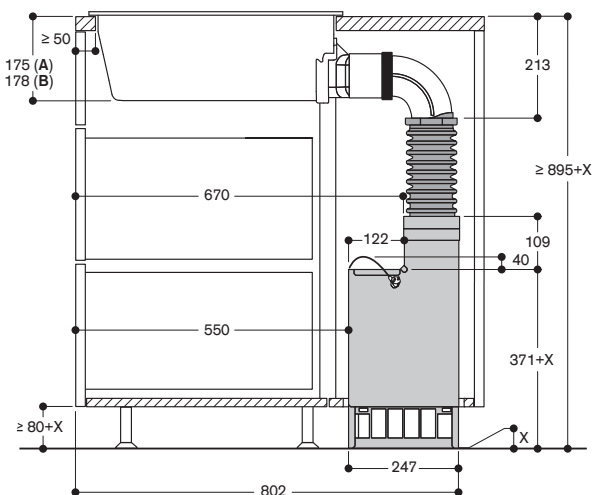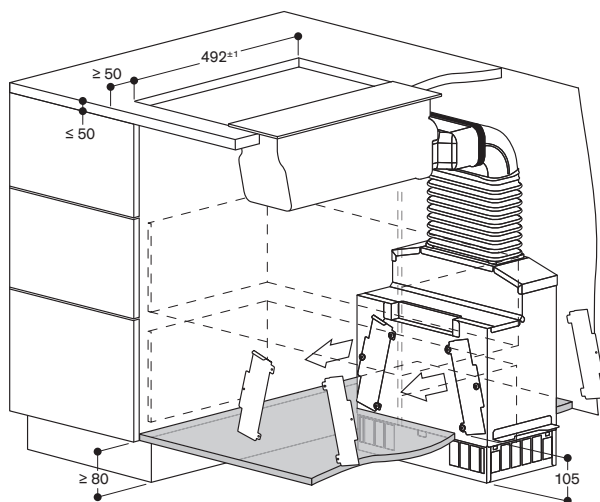

A: Surface mounting  
B: Flush mounting (only VL 414)

Not recommended for non-thermally insulated floor (U ≥ 0.5 W/m<sup>2</sup>K)

**List of components – Plastic**

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connection piece for extension)
- 1 x AD 857 040 (flat duct connecting piece)
- 1 x AD 857 030 (flat duct bend 90° vertical, metal)
- 1 x AD 410 040 (flat flexible connecting piece)

Order as set (appliances and accessories): **SET2VL2701**



**Planning example 5 (air extraction) – Metal**

**VL 200 with AR 403 122 remote fan unit**

Island installation, connection from the right side.

**List of accessories**

- 1 x AR 403 122 (remote fan unit air extraction)
- 1 x AD 858 010 (flat duct flex pipe, metal, DN 150)
- 1 x AD 854 041 (flat duct adapter round, metal, DN 150 flat/round)
- 1 x AD 990 091 (adhesive tape for sealing the ducts, aluminium)

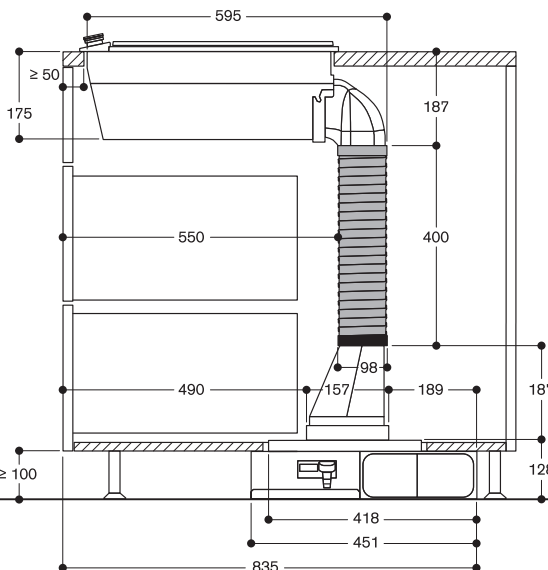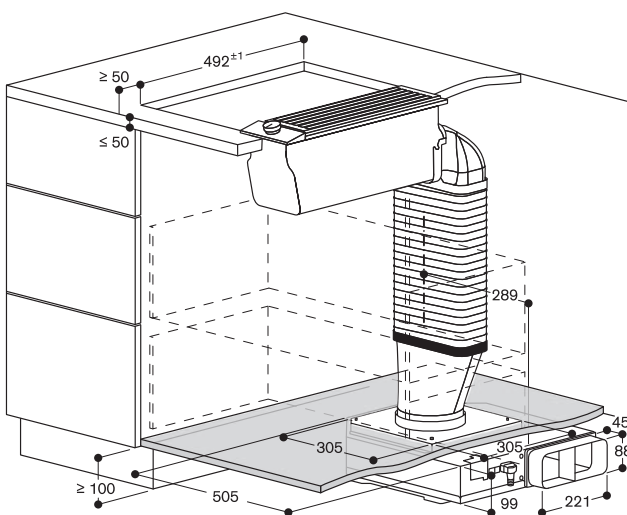



### Wall-mounted hood 400 series

#### AW 442

#### AW 442 120

Stainless steel.  
Width 120 cm.  
Air extraction / Air recirculation.  
Motorless.  
Chimney needs to be ordered separately.



#### In combination with remote fan units

AR 400 143 Air extraction  
AR 400 142  
AR 401 142

#### Necessary Installation accessories

##### AD 442 012

Stainless steel chimney for air extraction.  
Length: 620 mm.

##### AD 442 022

Stainless steel chimney for air extraction.  
Length: 860 mm.

##### AD 442 112

Stainless steel chimney for air recirculation.  
Length: 620 mm.

##### AD 442 122

Stainless steel chimney for air recirculation.  
Length: 860 mm.

##### AA 442 810

Air recirculation module inclusive 2 activated charcoal filters with highly efficient odour reduction.  
For air recirculation.

#### Special accessories

(order as spare parts):

##### Part No. 11049036

2 activated charcoal filters with highly efficient odour reduction. For air recirculation module AA 442 810.

**Installation accessories for air ducting you will find at the pages 336–341.**

#### Highlights

- Professional technology hood combined with classic Gaggenau design.
- Highly efficient extraction of cooking vapours due to large vapour collection area.
- Motorless, can be combined with Gaggenau BLDC remote fan units.
- Angled baffle filter with high grease absorption.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop.
- Air extraction or air recirculation system.
- Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals.

#### Output

Power levels depend on the remote fan unit.  
Refer to the "Technical specifications" of the hood for the matching remote fan units for air recirculation or air extraction mode.

#### Features

3 electronically controlled power levels and 1 intensive mode.  
Automatic function with sensor-controlled run-on function.  
Grease filter saturation indicator.  
Baffle filter, dishwasher-safe.  
Neutral white surface LED light (3500 K), continuously dimmable.  
Lamp output 4 x 10 W.  
Illuminance 1010 lx.  
Easy mounting system for simple installation and alignment.

#### Consumption data

Consumption data is referred to a configuration AW 442 120 with the remote fan unit AR 400 143.  
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 48.1 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class B.  
Grease filter efficiency class B  
Sound level min. 47 dB / max. 64 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 26 m.  
Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

The two-part chimney must be ordered as an installation accessory.  
Connection to the respective appliances via network cable.  
Two chimney lengths are available depending on the height of the room.  
The AR 400 143 remote fan unit is ideal for space-saving installation for assembly in the AW 442.  
Clearance above gas appliances min. 70 cm.  
Clearance above electric appliances min. 60 cm.

Air recirculation module with 2 activated charcoal filters is installed in the inner chimney. Special air recirculation chimneys are available for this.

When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection

Total connected load 40 W  
Connecting cable 1.8 m, pluggable.





### Wall-mounted hood 200 series AW 240

#### AW 240 191

Stainless steel with glass control panel  
Gaggenau Anthracite.  
Width 90 cm.

Air extraction / Air recirculation.  
Delivery with mounting kit and chimney.



#### Necessary Installation accessories

##### AA 200 812

Air recirculation module inclusive  
1 activated charcoal filter with highly  
efficient odour reduction and allergen  
deactivation.  
For air recirculation.

#### Special accessories

(order as spare parts):

##### Part No. 11033934

1 activated charcoal filter with highly  
efficient odour reduction and allergen  
deactivation.

For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

##### Part No. 17000977

1 regenerable activated charcoal  
filter with highly efficient odour  
reduction.

Extended change interval of the  
activated charcoal filter: regenerable  
up to 30 times.

Regenerable in the oven at 200°C.

For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

**Installation accessories for air ducting  
you will find at the pages 336-341.**

#### Highlights

- Stainless steel hood with glass cover fitting to oven 200 series.
- Highly efficient vapour collection by recessed filters.
- Energy-saving, low-noise fan.
- Perforated sheet metal filter with high grease absorption.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Dimmable, neutral white LED light for ideal illumination of the cooktop.
- Air extraction or air recirculation system.

#### Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Air extraction:

618 / 970 m<sup>3</sup>/h.

64 / 73 dB (A) re 1 pW.

Air recirculation:

383 / 476 m<sup>3</sup>/h.

69 / 74 dB (A) re 1 pW.

#### Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Perforated sheet metal filter, dishwasher-safe.

Interval ventilation, 6 min.

Neutral white LED light (3500 K), continuously dimmable.

Light colour in different white tones (2700-5000 K) can be adjusted via Home Connect.

Lamp output 3 x 3 W.

Illuminance 551lx continuously dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised vapour collection area with slightly inward facing filters.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop)

Remote control and monitoring

Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 44.5 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 44 dB / max. 64 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 26 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

The package includes the two-part chimney with the dimensions from 572 mm to 874 mm.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 55 cm.

The air recirculation module with activated charcoal filter can be installed on the inner chimney.


When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection

Total connected load 269 W.


Connecting cable 1.3 m with plug.



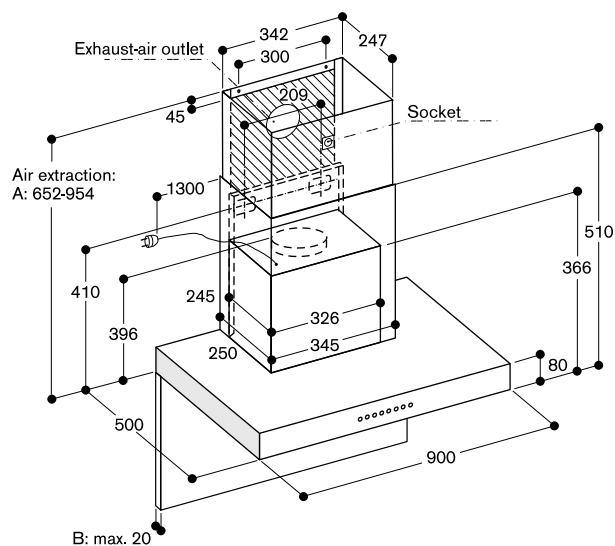

A: Suitable for ceiling heights from 2.25 m to 2.55 m;  
 Specifications refer to the distance of 1.60 m from the floor  
 to the lower edge of the hood.  
 B: Note the maximum thickness of the back panel.

**AW 240 with AA 200 812**

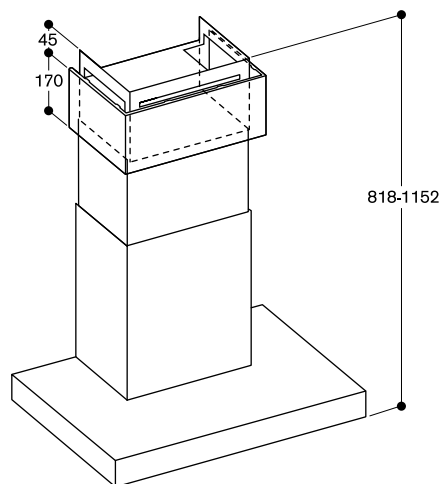

\* Suitable for ceiling heights from 2.45 m to 2.75 m;  
 Specifications refer to the distance of 1.60 m from the floor  
 to the lower edge of the hood.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Island hood 200 series AI 240

#### AI 240 191

Stainless steel with glass control panel  
Gaggenau Anthracite.  
Width 90 cm.

Air extraction / Air recirculation.  
Delivery with mounting kit and chimney.



#### Necessary Installation accessories

##### AA 200 816

Air recirculation module inclusive  
1 activated charcoal filter with with  
highly efficient odour reduction and  
allergen deactivation.  
For air recirculation.

#### Installation accessories

##### AD 200 326

Stainless steel chimney extension-  
Length: 1100 mm.

##### AD 223 346

Extension for mounting kit 500 mm.

#### Special accessories

(order as spare parts):

##### Part No. 11033934

2 activated charcoal filter with highly  
efficient odour reduction and allergen  
deactivation.

For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

##### Part No. 17000977

1 regenerable activated charcoal  
filter with highly efficient odour  
reduction.  
Extended change intervall of the  
activated charcoal filter: regenerable  
up to 30 times.  
Regenerable in the oven at 200°C.  
For air recirculation module  
AA 200 812/816 and  
AA 010 811/AA 012 811.

Installation accessories for air ducting  
you will find at the pages 336-341.

#### Highlights

- Stainless steel hood with glass cover fitting to oven 200 series.
- Highly efficient vapour collection by recessed filters.
- Energy-saving, low-noise fan.
- Perforated sheet metal filter with high grease absorption.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Dimmable, neutral white LED light for ideal illumination of the cooktop.
- Air extraction or air recirculation system.

#### Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.  
Sound power level according to EN 60704-3.

Air extraction:  
641 / 988 m<sup>3</sup>/h.  
64 / 72 dB (A) re 1 pW.  
Air recirculation:  
448 / 530 m<sup>3</sup>/h.  
69 / 72 dB (A) re 1 pW.

#### Features

3 electronically controlled power levels and 1 intensive mode.  
Automatic function with sensor-controlled run-on function.  
Grease filter saturation indicator.  
Activated charcoal filter saturation indicator.  
Perforated sheet metal filter, dishwasher-safe.  
Interval ventilation, 6 min.  
Neutral white LED light (3500 K), continuously dimmable.  
Light colour in different white tones (2700-5000 K) can be adjusted via Home Connect.  
Lamp output 4 x 3 W.  
Illuminance 650 lx continuously dimmable.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Airflow-optimised vapour collection area with slightly inward facing filters.  
The package includes an one-way flap.  
Easy mounting system for simple installation and alignment.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop)  
Remote control and monitoring  
Remote diagnostics

Please read additional information on Gaggenau Home Connect on page 459.

#### Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.  
Energy consumption 48.8 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class A.  
Grease filter efficiency class B.  
Sound level min. 43 dB / max. 64 dB normal mode.

#### Planning notes


The equivalent ducting length to ensure good performance is L<sub>max</sub> 23 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

The package includes the mounting kit and the two-part chimney with the dimensions from 664 mm to 844 mm. Individual planning solutions can be implemented using the special accessory chimney extension AD 200 326 in combination with extension for mounting kit AD 223 346. Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm). Clearance above electric appliances min. 55 cm.

The air recirculation module with activated charcoal filter can be installed on the inner chimney. When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


#### Connection

Total connected load 272 W.  
Connecting cable 1.3 m with plug.

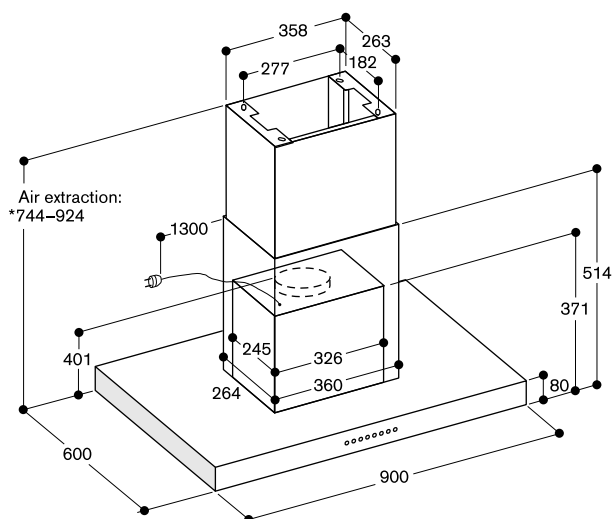


\* Suitable for ceiling heights from 2.34 m to 2.52 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

AI 240 with AA 200 816

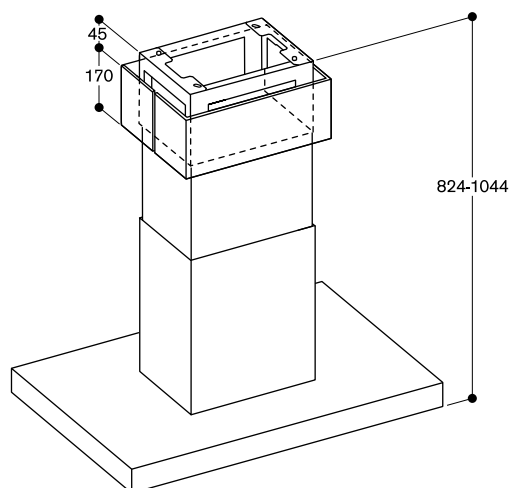

\* Suitable for ceiling heights from 2.42 m to 2.64 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

AI 240 with AD 200 326 and AD 223 346

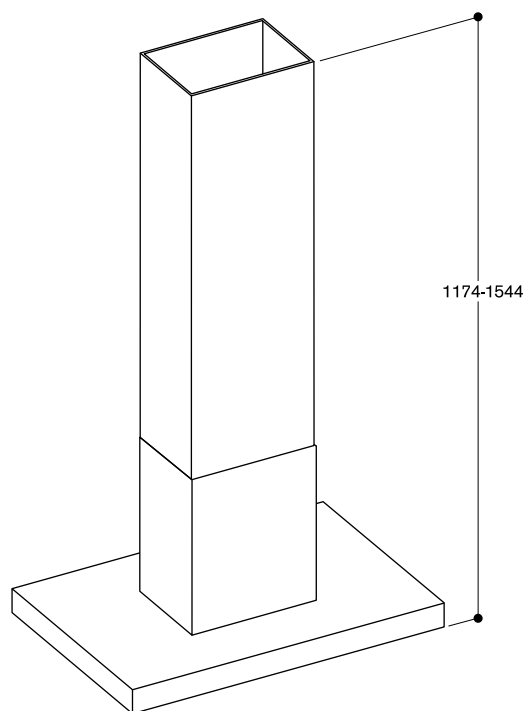

\* Suitable for ceiling heights from 2.78 m to 3.15 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Flat kitchen hood 200 series

#### AF 210

#### AF 210 192

Stainless steel handle bar.

Width 90 cm.

Air extraction / Air recirculation.

#### AF 210 162

Width 60 cm.

Stainless steel handle bar.

Air extraction / Air recirculation.



### Necessary Installation accessories

#### AA 211 812

Patented air recirculation module including 1 activated charcoal filter with highly efficient odour reduction and allergen deactivation. For air recirculation.

### Installation accessories

#### AA 210 460

Lowering frame for 60 cm flat kitchen hood.

#### AA 210 492

Lowering frame for 90 cm flat kitchen hood.

#### AA 210 491

Assembly kit for 90 cm upper cabinet. Can be combined with the 90 cm wide flat kitchen hood 200 series in combination with a 90 cm upper cabinet.

For left/right assembly in upper cabinets.

For assembly in the upper cabinet.

If the lowering frame AA 210 492 is used, the assembly kit is not needed.

### Special accessories

(order as spare parts):

#### Part No. 11034172

1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.

For air recirculation module

AA 211 812.

Installation accessories for air ducting you will find at the pages 336-341.

### Highlights

- Unobtrusive visor hood design thanks to integrated glass sheet in the steam screen.
- Especially quiet operation thanks to integrated sound insulation.
- Steam screen extends by touching the handle bar.
- Especially high air Output.
- Energy-saving, low-noise fan.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours.
- Dimmable, neutral white LED light for ideal illumination of the cooktop.
- The patented lowering frame allows the visor hood to disappear completely into the upper cabinet.
- Air extraction or air recirculation system.
- Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals.

### Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Appliance width 90cm

Air extraction:

517 / 965 m<sup>3</sup>/h

57 / 71dB(A) re 1 pW

Air recirculation:

506 / 876 m<sup>3</sup>/h

62 / 69 dB(A) re 1 pW

Appliance width 60cm

Air extraction:

515 / 953 m<sup>3</sup>/h

57 / 71dB(A) re 1 pW

Air recirculation

497 / 885 m<sup>3</sup>/h

62 / 69 dB(A) re 1 pW

### Features

Controls at front.

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Stainless steel grease filter, dishwasher-safe.

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 3 x 1.5W / 2 x 1.5W.

Illuminance 355 lx / 294 lx.

Light can be switched on separately.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

The fan is activated when the steam screen is extended.

Patented technology for extension of the steam screen.

Extendable steam screen 198 mm.

Airflow-optimised interior for efficient air circulation and ease of cleaning.

Patented easy mounting system for simple installation.

The package includes an one-way flap.

### Consumption data

Consumption data is referred to AF 210 192 / 162.

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 41.4 / 40.3 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 41/42 dB /

max. 57 dB normal mode.

### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 23 m. Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

For air recirculation an external air recirculation module is required. Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the activated charcoal filter.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

To be installed in an upper cabinet without base.

The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.

The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).




Clearance above electric appliances min. 43 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


### Connection

Total connected load 266/264 W

Connecting cable 1.8 m, pluggable.

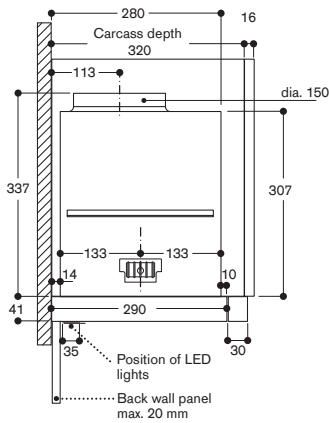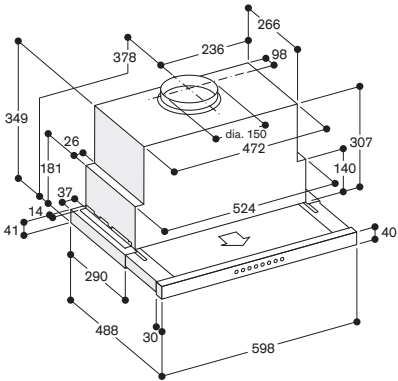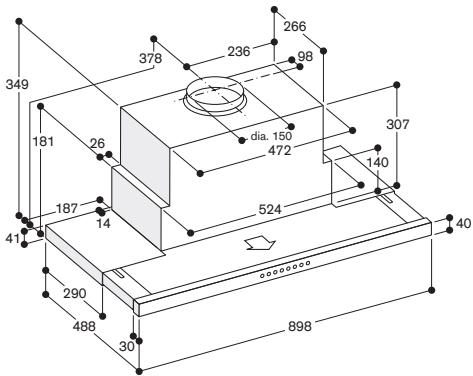


Upper cabinet for AF 210

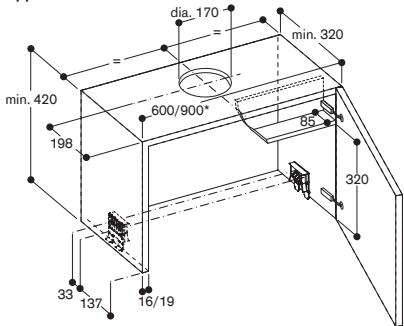


\* for upper cabinets measuring 90 cm, the AA 210 491 installation set is required in addition

Upper cabinet for AF210 with assembly kit AA 210 491

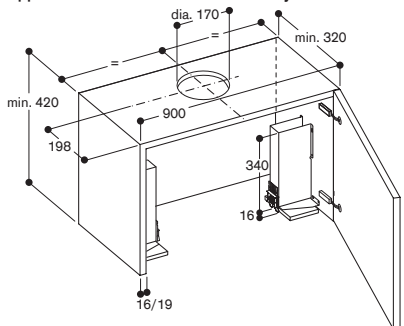


View of upper cabinet from above with AA 211 812

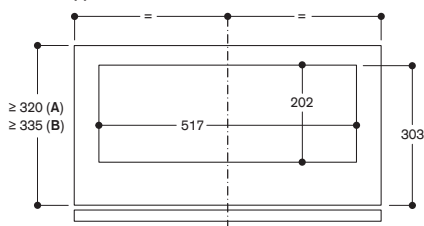


A: Appliance only  
B: Appliance with lowering frame


Cross-section of upper cabinet for AF210 with AA 211 812

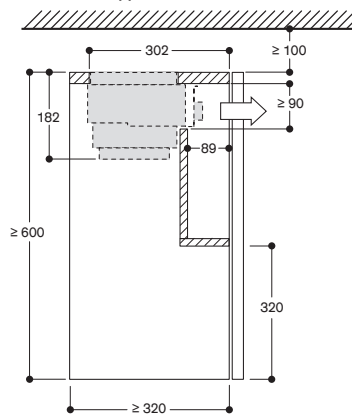

Cross-section of upper cabinet for AF210 with AA 211 812 and AA 210 492/460 lowering frame

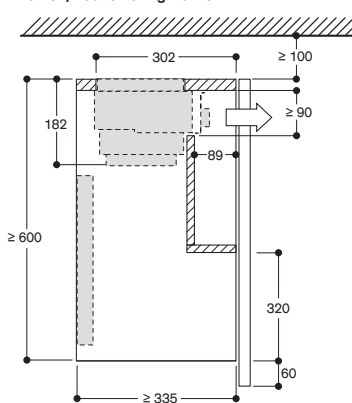

Upper cabinet for AF 210 with lowering frame

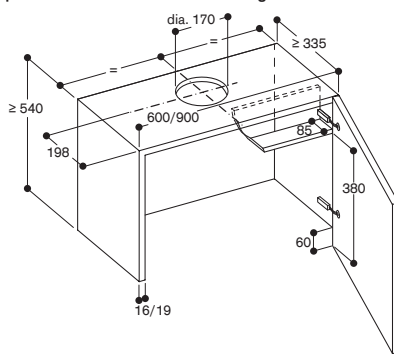



### Canopy extractor 200 series AC 200

#### AC 200 191

Stainless steel and glass.  
Width 86 cm.  
Air extraction / Air recirculation.

#### AC 200 161

Stainless steel and glass.  
Width 52 cm.  
Air extraction / Air recirculation.



#### Necessary Installation accessories

##### AA 211 812

Patented air recirculation module including 1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.  
For air recirculation.

#### Special accessories

##### Part No. 11034172

1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.  
For air recirculation module  
AA 211 812.

#### Installation accessories for air ducting you will find at the pages 336–341.

#### Highlights

- Can be integrated invisibly in upper cabinet.
- Energy-saving, low-noise fan.
- Rim extraction with flat and easy-to-clean glass cover.
- Dimmable, neutral white LED light for ideal illumination of the cooktop.
- Air extraction or air recirculation system.
- Energy efficiency class A++.

#### Output

Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.

Appliance width 86 cm

Air extraction:  
610 / 800 m<sup>3</sup>/h.  
64 / 70 dB (A) re 1 pW.  
Air recirculation:  
540 / 790 m<sup>3</sup>/h.  
72 / 77 dB (A) re 1 pW.

Appliance width 52 cm

Air extraction:  
540 / 730 m<sup>3</sup>/h.  
64 / 70 dB (A) re 1 pW.  
Air recirculation:  
530 / 690 m<sup>3</sup>/h.  
72 / 77 dB (A) re 1 pW.

#### Features

3 electronically controlled power levels and 1 intensive mode.  
Interval ventilation, 6 min.  
Run-on function, 6 min.  
Grease filter saturation indicator.  
Metal grease filter, dishwasher-safe.  
Glas filter cover.  
Neutral white LED light (4000 K), dimmable.  
Lamp output 2 x 1W.  
Illuminance 266 lx.  
Fan technology with highly efficient, brushless DC motor (BLDC).

#### Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.  
Energy consumption  
31.4/29.6 kWh/year.  
Ventilation efficiency class A.  
Illumination efficiency class A.  
Grease filter efficiency class D.  
Sound level min. 41/44 dB /  
max. 64/67 dB normal mode.

#### Planning notes

The equivalent ducting length to ensure good performance is L<sub>max</sub> 19 m.  
Please refer to the "General planning notes" for the calculation of the equivalent ducting length.


Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the filter drawer. The door of the upper cabinet must be fully open in order to change the activated charcoal filter.  
Can be integrated invisibly in upper cabinet.

Vario cooktops with intensive production of vapours like VR/VP should be placed in the middle beneath the hood (in this case air recirculation is not recommended).  
Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).  
Clearance above electric appliances min. 50 cm.


When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection


Total connected load 172W  
Connecting cable 1.0 m with plug.

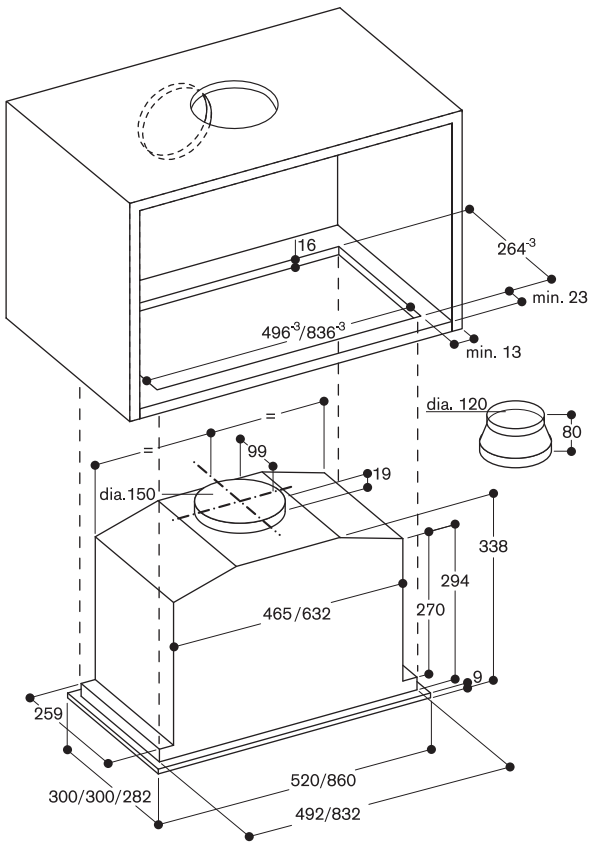

View of upper cabinet from above with AC 200 and AA 211 812

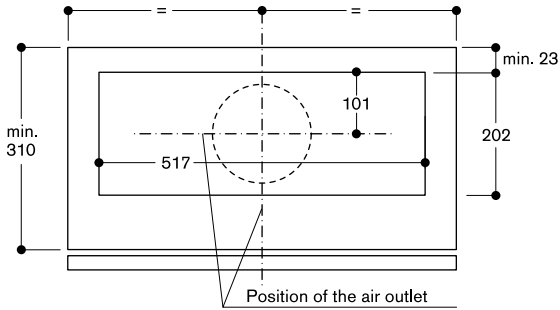

Cross-section of upper cabinet with AC 200 and AA 211 812

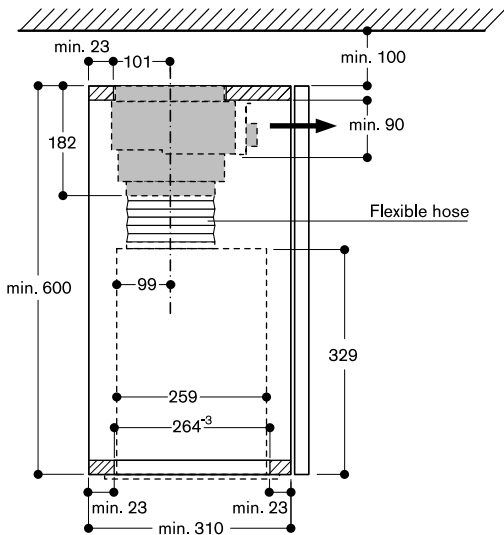



**Remote fan unit**  
**AR 400**

**AR 400 142**

Metal housing.  
Max. air output 830 m<sup>3</sup>/h.  
Air extraction.  
Inside installation.

**Installation accessories for air ducting**  
**you will find at the pages 336–341.**

**Highlights**

- Powerful remote fan unit to combine with motorless appliances.
- Efficient BLDC technology.

**Output**

Air output according to EN 61591.  
max. 830 m<sup>3</sup>/h.  
Sound power depending on built-in situation.  
Power levels depend on the motorless appliances.

**Features**


3 electronically controlled power levels and one intensive mode.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Steel housing, zinc-plated.  
Pipe connection pieces on intake side: 1 x DN 150 round, 4 x DN 150 round.  
Pipe connection pieces on output side: 1x DN 150 round.  
Spare cover for closing air intake.  
Retaining bracket for installation on the ceiling or side of a cupboard enclosed.

**Planning notes**

Remote fan unit in combination with motorless appliances.  
Connection to the respective appliances via network cable.  
Installation in the plinth with cut-out for the air ducting in the furniture base.  
Installation in a separate room allows for a reduced noise level in the kitchen.  
When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

**Connection**

Total connected load 240 W.  
Connecting cable 1.8 m, pluggable.  
Network cable 5 m.

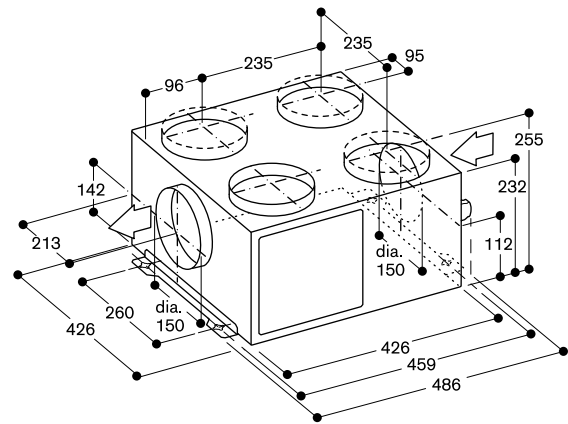





Remote fan unit  
AR 400

#### AR 400 143

Metal housing.  
Max. air output 1005 m<sup>3</sup>/h.  
Air extraction / Air recirculation.  
Installation in the chimney of  
AW 442.

Installation accessories for air ducting  
you will find at the pages 336-341.

#### Highlights

- Powerful remote fan unit to combine with motorless appliances.
- Efficient BLDC technology.
- Compact and space-saving due to the installation in the duct cover of AW 442 wall hood.

#### Output

Air output according to EN 61591.  
max. 1005 m<sup>3</sup>/h.  
Sound power depending on built-in situation.  
Power levels depend on the motorless appliances.

#### Features


3 electronically controlled power levels and one intensive mode.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Including sound insulation to minimise the noise level.  
Steel housing, zinc-plated.  
Pipe connection pieces on output side: 1x DN 150 round.

#### Planning notes

Remote fan unit in combination with the motorless AW 442.  
Connection to the respective appliances via network cable.  
Installation in the chimney of AW 442.  
When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection

Total connected load 230 W.  
Connecting and network cable included in delivery.





#### Remote fan unit AR 401

##### AR 401 142

Stainless steel.  
Max. air output 1050 m<sup>3</sup>/h.  
Air extraction.  
Outside wall mounting.

#### Installation accessories

##### AD 702 052

Telescopic wall-duct.  
Connection piece DN 200 round.

Installation accessories for air ducting  
you will find at the pages 336–341.

#### Highlights

- Powerful remote fan unit to combine with motorless appliances.
- Efficient BLDC technology.

#### Output

Air output according to EN 61591.  
max. 1050 m<sup>3</sup>/h.  
Sound power depending on built-in situation.  
Power levels depend on the motorless appliances.

#### Features


3 electronically controlled power levels and one intensive mode.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Including sound insulation to minimise the noise level.  
Stainless steel housing.  
Pipe connection pieces on intake side: 1x DN 200 round.  
Retaining bracket for installation on an outside wall enclosed.


#### Planning notes

Remote fan unit in combination with motorless appliances.  
Connection to the respective appliances via network cable.  
Installation in an exterior area allows for a reduced noise level in the kitchen.  
Installation on an outside wall.  
Control box must be installed indoors.  
Acceptable temperature range for installation of the control box: -25 to 60 °C.  
Distance for free air space from ground (or other object) to center of the pipe: min 60 cm.  
When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection

Total connected load 180 W.  
Connecting cable 1.8 m, pluggable.  
Network cable 5 m.

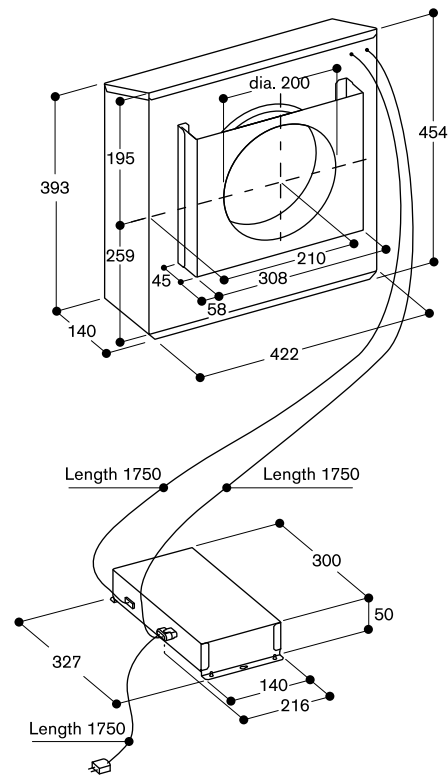



#### Remote fan unit

**AR 403**

#### AR 403 122

Metal housing.  
Max. air output 875 m<sup>3</sup>/h.  
Air extraction.  
Plinth installation.

Installation accessories for air ducting  
you will find at the pages 336–341.

#### Highlights

- Powerful remote fan unit to combine with motorless appliances.
- Efficient BLDC technology.
- Compact and space-saving installation in a 10 cm high plinth.

#### Output

Air output according to EN 61591.  
max. 875 m<sup>3</sup>/h.  
Sound power and sound pressure depending on built-in situation.  
Power levels depend on the motorless appliances.

#### Features


3 electronically controlled power levels and 1 intensive mode.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Steel housing, zinc-plated.  
Pipe connection pieces on intake side: 1 x DN150 round.  
Pipe connection pieces on output side: 1 x DN150 flat duct.  
Retaining bracket for installation on the ceiling or side of a cupboard enclosed.

#### Planning notes


Remote fan unit in combination with motorless appliances.  
Connection to the respective appliances via network cable.  
Installation in the plinth with cut-out for the air ducting in the furniture base.  
When installing a ventilation hood with air extraction mode and a chimneyvented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection

Total connected load 180 W.  
Connecting cable 1.8 m, pluggable.  
Network cable 2 m.

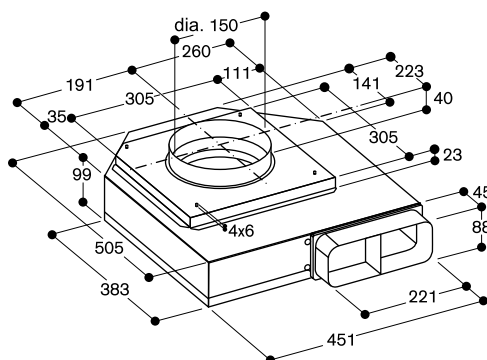

All measurements in mm.



**Remote fan unit**

**AR 413**

**AR 413 122**

Metal housing.  
Max. air output 900 m<sup>3</sup>/h.  
Air recirculation.  
Plinth installation.

**Installation accessories**

**AA 010 410**

Air exhaust grille air recirculation.  
Stainless steel-coloured, 90 cm,  
including installation fittings, height  
adjustable.

**Special accessories**

**(order as spare parts):**

**Part No. 11058748**

2 activated charcoal filters with highly  
efficient odour reduction and allergen  
deactivation.

**Installation accessories for air ducting  
you will find at the pages 336–341.**

**Highlights**

- Powerful remote fan unit to combine with motorless appliances.
- Efficient BLDC technology.
- Compact and space-saving installation in a 10 cm high plinth.

**Output**

Air output according to EN 61591.  
max. 900 m<sup>3</sup>/h.  
Sound power depending on built-in  
situation.  
Power levels depend on the motorless  
appliances.

**Features**


3 electronically controlled power  
levels and 1 intensive mode.  
Fan technology with highly efficient,  
brushless DC motor (BLDC).  
Steel housing, zinc-plated.  
Pipe connection pieces on intake side:  
1 x DN150 round.  
Retaining bracket for installation on  
the ceiling or side of a cupboard  
enclosed.  
2 activated charcoal filters enclosed  
ex factory.  
Highly efficient odour reduction for  
cooking applications with complex  
odour molecules (e.g. fish and  
seafood).  
Filter replacement interval:  
1 year depending on cooking  
frequency.

**Planning notes**


Remote fan unit in combination with  
motorless appliances.  
Connection to the respective  
appliances via network cable.  
Installation in the plinth with cut-out  
for the air ducting in the furniture  
base.  
Filter replacement interval: 1-1.5 years  
depending on cooking frequency.  
It must be possible to remove the  
plinth to replace the filter.  
Recommended minimum gap between  
filter openings and cupboard wall if  
there is no ventilation grille directly in  
front: 15 cm.  
For optimum performance in air  
recirculation we recommend an  
outflow surface area of at least  
400 cm<sup>2</sup>.

**Connection**

Total connected load 180 W.  
Connecting cable 1.8 m, pluggable.  
Network cable 2 m.

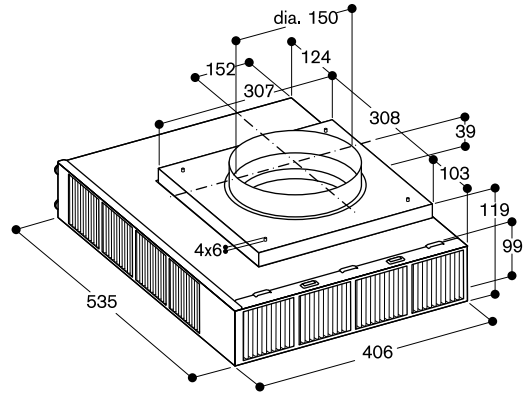

**View from above**

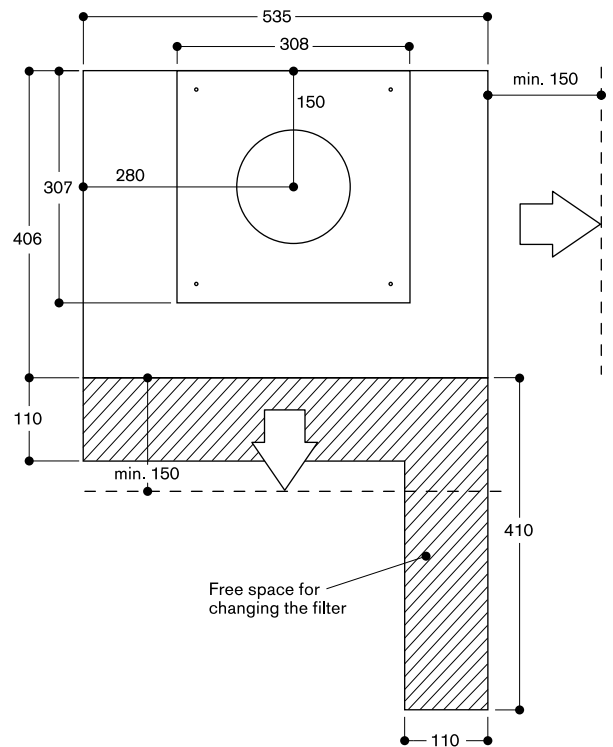



#### Remote fan unit

##### AR 410

#### AR 410 110

Metal housing.

Max. air output 675 m<sup>3</sup>/h.

Air recirculation.

Installation in the cupboard.

#### Special accessories

##### AA 010 410

Air exhaust grille air recirculation  
Stainless steel-coloured, 90 cm,  
including installation fittings, height  
adjustable.

#### Special accessories

##### (order as spare parts):

##### Part No. 11058753

2 activated charcoal filters with highly  
efficient odour reduction and allergen  
deactivation.

##### Part No. 11028160

2 regenerable activated charcoal  
filters with highly efficient odour  
reduction.

Extended change interval of the  
activated charcoal filter: regenerable  
up to 30 times.

Regenerable in the oven at 200 °C.

For air recirculation.

**Installation accessories for air ducting  
you will find at the pages 336–341.**

#### Highlights

- Powerful remote fan unit to combine with Vario downdraft ventilation and table ventilation AL 400 122.
- Efficient BLDC technology.
- Particularly quiet due to patented noise insulation.
- Compact, space-saving installation in the cabinet for Vario downdraft ventilation.

#### Output

Air output according to EN 61591.

max. 675 m<sup>3</sup>/h.

Sound power depending on built-in  
situation.

Power levels depend on the motorless  
appliances.

#### Features

3 electronically controlled power  
levels and 1 intensive mode.

Fan technology with highly efficient,  
brushless DC motor (BLDC).

Including sound insulation to minimise  
the noise level.

Steel housing, zinc-plated.

Pipe connection piece on intake side:  
1 x DN150 flat duct.

Retaining bracket for installation at  
the furniture base enclosed.

2 activated charcoal filters enclosed  
ex factory.

Highly efficient odour reduction for  
cooking applications with complex  
odour molecules (e.g. fish and  
seafood).

Filter replacement interval: 1 year  
depending on cooking frequency.

2 regenerable activated charcoal  
filters in option.

#### Planning notes

Remote fan unit to combine with Vario  
downdraft ventilation and table  
ventilation 400 series AL 400 122.

Connection to the respective  
appliances via network cable.

Installation in a cupboard possible  
with a cut-out in the furniture base or  
behind the cupboard positioned on  
the floor.

To replace the filter the remote fan  
unit must be accessible.

The activated charcoal filter  
exchange is possible from both sides.


For optimum performance in air  
recirculation we recommend an  
outflow surface area of at least  
400 cm<sup>2</sup>.

#### Connection


Total connected load 180 W.

Connecting cable 1.8 m, pluggable.

Network cable 2 m.

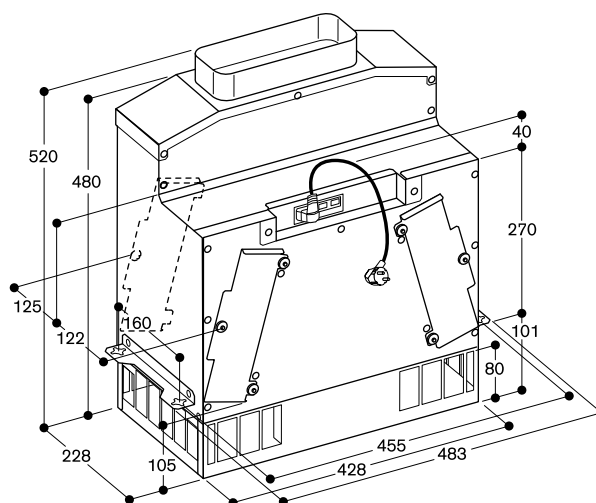


#### Filter exchange

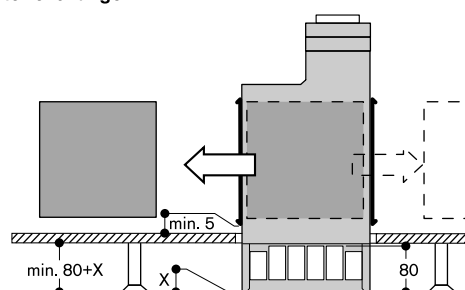

## Accessories and special accessories for ventilation appliances

### AA 442 810

Air recirculation module inclusive 2 activated charcoal filters with highly efficient odour reduction.  
For air recirculation.  
Can be combined with island and wall-mounted hood AW 442.  
Highly efficient odour reduction for cooking applications with complex odour molecules (e.g. fish and seafood).  
Extended change interval for the activated charcoal filter (approx. 1-1.5 years depending on cooking frequency).  
For installation on the inner chimney.  
Consisting of filter bracket, 2 activated charcoal filters, flexible hose and 2 hose clamps.

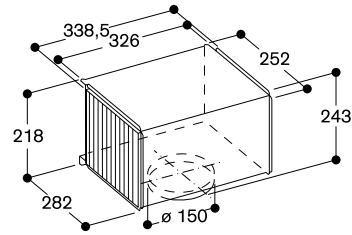

### AA 200 812



Combinable with wall mounted hood AW 240.

### AA 200 816

Combinable with island hood AI 240.

Air recirculation module inclusive 1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.


Highly efficient odour reduction for cooking applications with complex odour molecules (e.g. fish and seafood).  
The filter retains an extremely high amount of airborne pollen and deactivates allergens, which are retained by the filter.  
Extended change interval for the activated charcoal filter.  
For installation on the external chimney.  
Includes design panel, wall fastening (AA 200 812), activated charcoal filter, flexible hose and 2 hose clamps.



### AA 211 812

Patented air recirculation module including 1 activated charcoal filter with highly efficient odour reduction and allergen deactivation.

For air recirculation.  
Can be combined with flat kitchen hood series 200/canopy extractor 200 series.  
Highly efficient odour reduction for cooking applications with complex odour molecules (e.g. fish and seafood).  
The filter retains an extremely high amount of airborne pollen and deactivates allergens, which are retained by the filter.  
Extended change interval for the activated charcoal filter.  
For assembly in the upper cabinet.  
Connecting pipe DN 150 round.  
Consisting of filter housing with design panel, activated charcoal filter, flexible hose and 2 hose clamps.

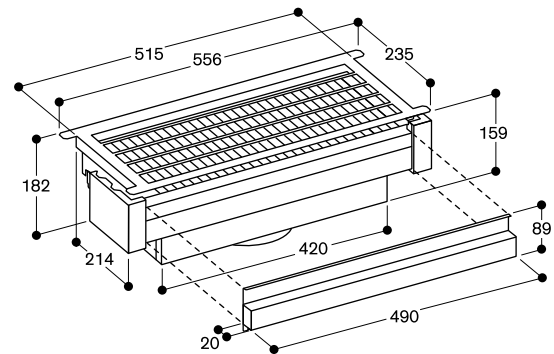


Removable filter panel

**AA 010 811**  
Stainless steel.

**AA 012 811**  
White.

For air recirculation.  
Can be combined with ceiling ventilation AC 250 and AC 402.  
Highly efficient odour reduction for cooking applications with complex odour molecules (e.g. fish and seafood).  
The filter retains an extremely high amount of airborne pollen and deactivates allergens, which are retained by the filter.  
Connecting pipe DN 150 round  
Pipe connection at the front, side or top.  
Recommended minimum gap between filter openings and wall: 100 cm.

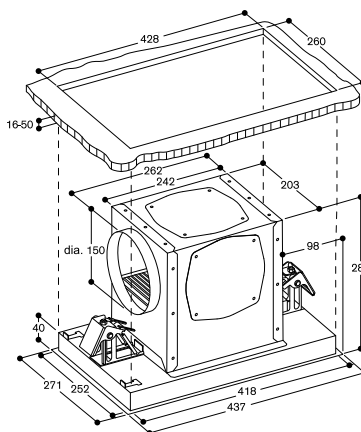

**AA 200 880**  
Combinable with the table ventilation AL 200 180.

**AA 200 890**  
Combinable with the table ventilation AL 200 190.

Recirculation module including activated charcoals filters with highly efficient odour reduction and allergen deactivation.  
Easily removal from the top of the table ventilation  
Highly efficient odour reduction for cooking applications with complex odour molecules (e.g. fish and seafood).  
The filter retains an extremely high amount of airborne pollen and deactivates allergens, which are retained by the filter.



**AA 200 882**  
Combinable with the table ventilation AL 200 180.

**AA 200 892**  
Combinable with the table ventilation AL 200 190.

Regenerable air recirculation module including activated charcoal filters.  
Easily removal from the top of the table ventilation for regenerating.  
Regenerable in the oven at 200°C.  
Extended change interval of the activated charcoal filter: regenerable up to 30 times.





**AA 414 010**  
Ventilation moulding for VL 414 next to gas appliance.

**LS 041 001**  
Ventilation moulding for VL 200 next to gas appliance.



**Extension for mounting kit for island hood AI 240**

**AD 223 346**  
For a chimney height of 1100-1500 mm.  
Appliance height is dependent on the structure (cabinet height).



\* height-adjustable in 10 mm increments

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Accessories and special accessories for ventilation appliances


### AA 210 492

Lowering frame for 90 cm flat kitchen hood.

### AA 210 460

Lowering frame for 60 cm flat kitchen hood.


Can be combined with flat kitchen hood series 200.  
The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet. For assembly directly on the kitchen wall or reinforced upper cabinet. For assembly in the upper cabinet. The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm. In combination with a back wall panel >5 mm the lowering frame needs to be lined and the cavity depths must be adapted accordingly.

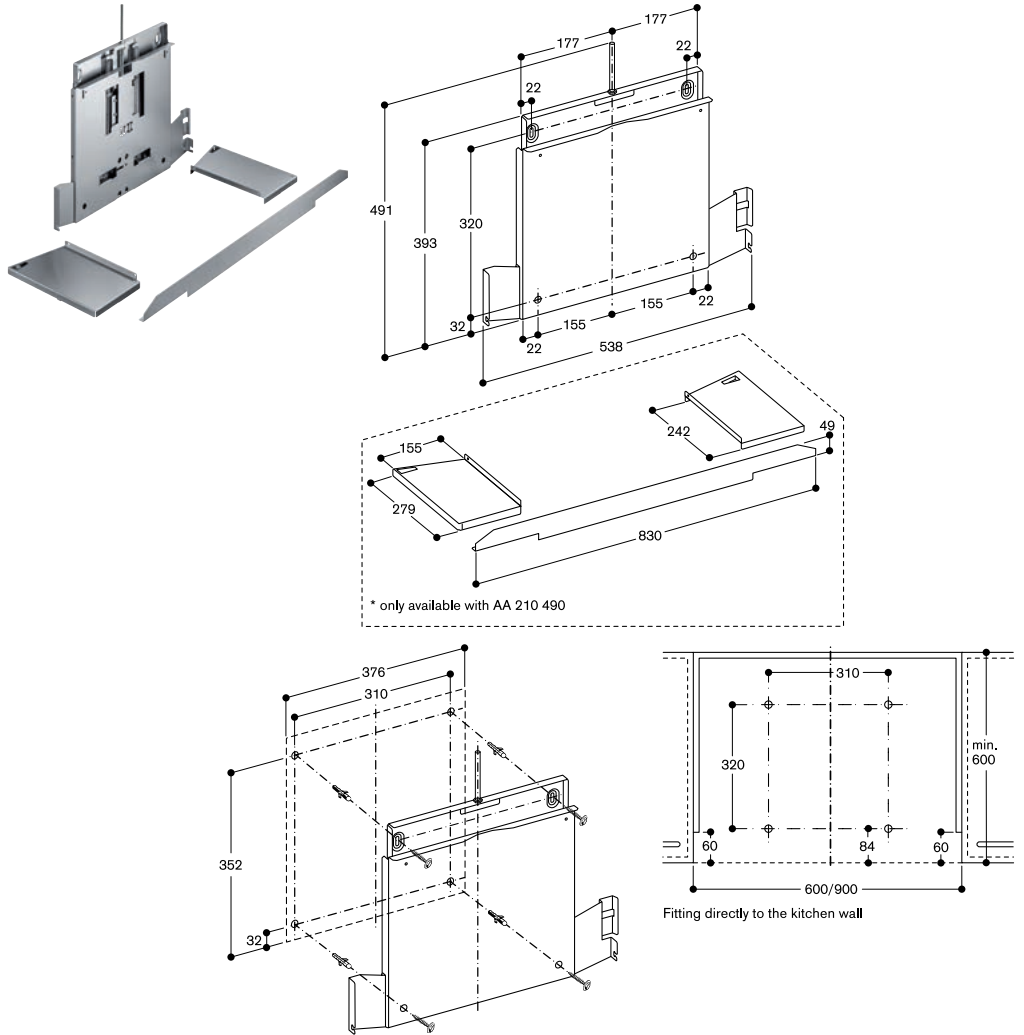

### AA 210 491

Assembly kit for 90 cm upper cabinet.

Can be combined with the 90 cm wide flat kitchen hoods 200 series. Flat kitchen hood of 200 series. For left/right assembly in upper cabinets. For assembly in the upper cabinet. If the lowering frame AA 210 492 is used, the assembly kit is not needed.

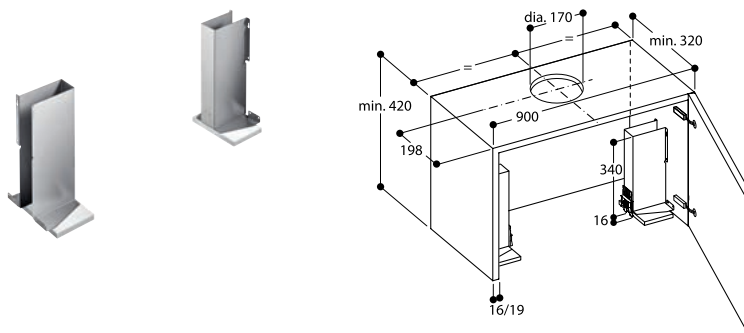

### AA 200 900


Kit for surface mounted installation AL 200.

Including 2 trims, each 5 mm wide. For the 80 cm and 90 cm variant. Gaggenau Black.




AL 200 in combination with induction cooktop in 2 separate cut-outs

View from above

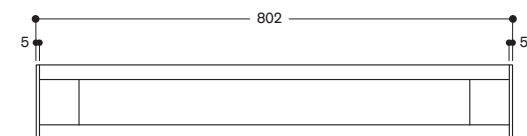

AL 200 in combination with induction cooktop in 2 separate cut-outs



View from above

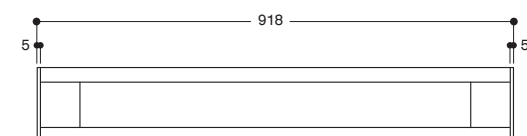



**AA 200 910**

Installation kit for fan unit at a distance (3m maximum).  
Combinable with the table ventilation AL 200.

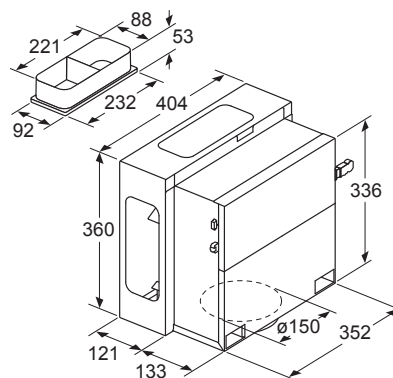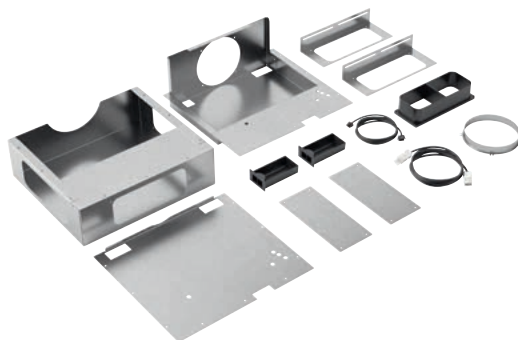



**VA 200 080**

Combinable with the table ventilation AL 200 180.

**VA 200 090**

Combinable with the table ventilation AL 200 190.


Installation kit for installation in a single worktop cut-out.  
Consists of a connection strip and furniture supports that ensure cabinet stability.  
Adjustable for cabinet widths from 90 cm, 100 cm, 120 cm.

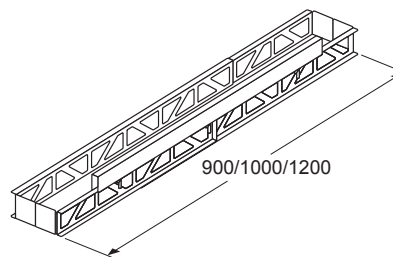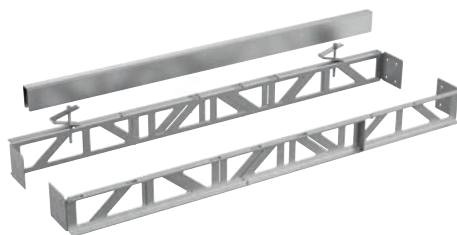

**AA 409 401**

Furniture support for table ventilation AL 400.  
90 cm.


Can be combined with table ventilation AL 400.  
Recommended as bearer for the worktop, instead of a cabinet frame.

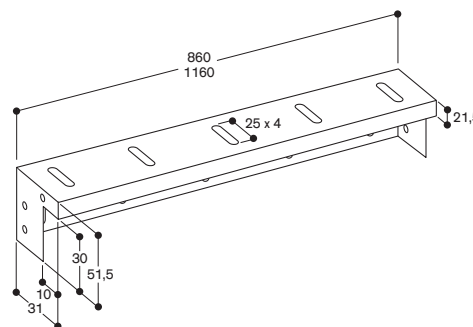

**AA 409 431**


Furniture support for table ventilation AL 400.  
120 cm.

Can be combined with table ventilation AL 400.  
Recommended as bearer for the worktop, instead of a cabinet frame.

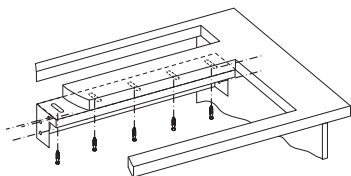


**AA 010 410**

Air exhaust grille air recirculation.  
Stainless steel-coloured, 90 cm, including installation fittings, height adjustable.



**AA 010 410 air exhaust grille**

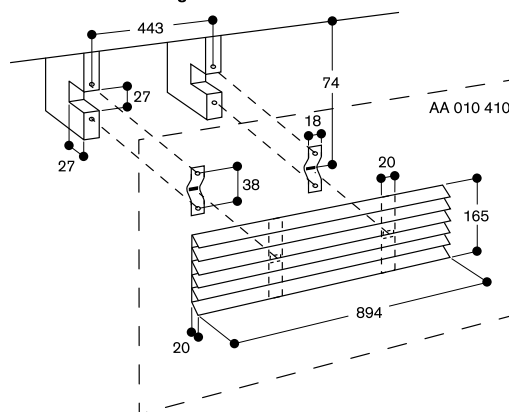

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Installation accessories for air ducting

### Excellent performance thanks to optimal ducting and installation.

Intelligently selecting and installing the duct system not only has a very positive effect on the output of the ventilation system; it also minimises the noise generated. It is therefore decisive for the efficiency of the entire ventilation system.

### The duct type.

In Gaggenau's accessories catalogue, customers can select the type of duct appropriate to their needs, whether aluflex pipe, round duct or a flat duct system. Depending on the duct type, they can choose from the nominal sizes DN 150 and DN 200. For maximum output with minimal noise, the diameter should always be as large as possible. For straight ducting, the use of plastic or metal ducts with smooth, level inner surfaces is recommended. These enable a laminar flow of air during extraction, without air turbulence. For sections that are not straight and for bends, aluflex pipe are preferred because they make it possible to avoid hard edges.

Where space limitations are a concern, the first choice is the Gaggenau flat duct system. The remarkable design with special conducting fins in the bends and junction pieces allow for a very low height and large nominal size, thus ensuring very efficient air circulation. This also applies in situations where there are many bends. We strongly discourage the use of other flat ducts due to the high output losses in duct bends, duct corners and junction pieces.

Spiral and corrugated ducts should definitely not be used. In addition to displaying the worst flow conditions, these types also tend to flutter and thus generate noise.

### The duct diameter.

A good guideline here is: The duct diameter should be as large and constant as possible, while the ducting should be as short and straight as possible. The wall outlet must correspond to the duct diameter.

### The building regulations.

Please observe the local applicable building regulation when configuring ventilation solutions.

The plastic flat duct complies with the Needle Flame Test (according to IEC 60695-11-5), the V2 flammability class (according to UL94) and the B1 and B2 building material class (DIN 4102-1) depending on the parts.

The metal ducts are non-combustible and suitable for all combinations in countries with increased fire protection requirements.


#### AD 857 015

Flat duct.  
Plastic, low flammability.  
DN 150 flat.  
Length 500 mm.




#### AD 857 010

Flat duct.  
Plastic, low flammability.  
DN 150 flat.  
Length 1000 mm.



#### AD 854 010

Flat duct.  
Metal.  
DN 150 flat.  
Length 1000 mm.




#### Features

Sealing is pre-assembled on each side.

#### Planning notes

Suitable for flat duct bends.  
To connect 2 flat ducts, a flat duct connecting piece is required.  
If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.




#### AD 857 040

Flat duct connecting piece.  
Plastic, low flammability.  
DN 150 flat.  
Connector sleeve to connect other plastic flat ducts together.



#### Features

Integrated sealings for full airtightness without necessity for any adhesive tape.  
Easy-to-connect via time saving click mechanism.




#### AD 854 040

Flat duct connecting piece.  
Metal.  
DN 150 flat.  
To connect 2 flat ducts.




#### Planning notes

Suitable for flat duct and flat duct flex.



#### AD 857 030

Flat duct bend 90° vertical.  
Plastic, low flammability.  
DN 150 flat.




#### AD 854 030

Flat duct bend 90° vertical  
Metal  
DN 150 flat




#### Planning notes

Suitable for flat duct and flat duct flex.



**AD 857 031**


Flat duct bend 90° horizontal.  
Plastic, low flammability.  
DN 150 flat.



**AD 854 031**

Flat duct bend 90° horizontal.  
Metal.  
DN 150 flat.


**Planning notes**  
Suitable for flat duct and flat duct flex.



**AD 854 000**

Flat duct bend connecting piece.  
Metal.  
DN 150 flat.  
To connect 2 flat duct bends.


**Planning notes**  
If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.



**AD 858 010**

Flat duct flex pipe.  
Metal.  
DN 150 flat.  
Length 1000 mm.


**Planning notes**  
Suitable for flat duct bends.  
Flat duct flex pipe can be shortened.  
Useful for bends (<90°) or for parallel offsetting.  
If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.

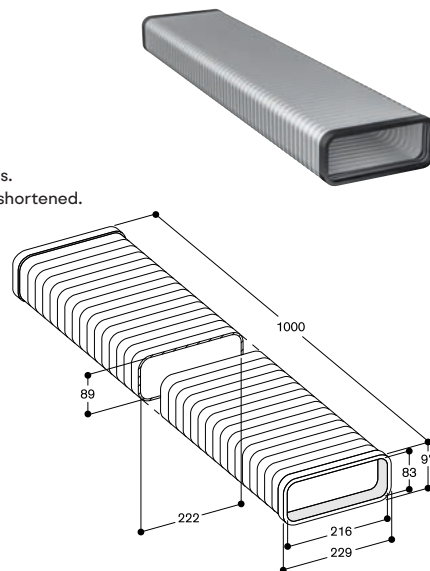

**AD 857 042**

Flat duct adapter round 90°.  
Plastic, low flammability.  
DN 150 flat / round.  
Transition from flat duct to round duct.


**Planning notes**  
Suitable for flat duct and flat duct flex.  
Suitable for round duct (with pipe connector), and aluflex pipe.

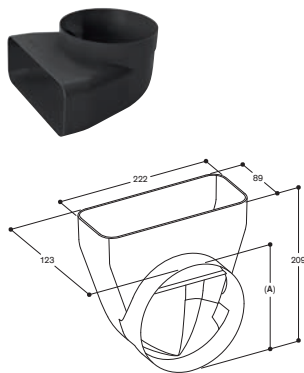

**AD 854 032**

Flat duct adapter round 90°.  
Metal.  
DN 150 flat/round.  
Transition from flat duct to round duct.

**Planning notes**  
Suitable for flat duct and flat duct flex.  
Suitable for round duct and aluflex pipe.

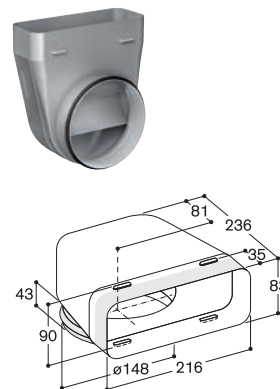

## Installation accessories for air ducting


### AD 857 041

Flat duct adapter round.  
Plastic, low flammability.  
DN 150 flat / round.  
Transition from flat duct to round duct.



#### Planning notes

Suitable for flat duct and flat duct flex.  
Suitable for round duct (with pipe connector), and aluflex pipe.




### AD 854 041

Flat duct adapter round.  
Metal.  
DN 150 flat/round.  
Transition from flat duct to round duct.




#### Planning notes

Suitable for flat duct and flat duct flex.  
Suitable for round duct and aluflex pipe.



### AD 990 091

Adhesive tape for duct components.  
Aluminium.  
Width 50 mm.  
10 m/roll.




#### Planning notes

Suitable for all connections of plastic and metal ducts.



### AD 410 040

Flexibel connecting piece for VL 200 and VL 414.  
DN 150 flat.



### AD 851 041

Connecting piece VL 200 and VL 414 for extension with flat duct DN 150 for extra deep worktop.





### AD 754 049

Connecting piece for AL 400.  
Metal zinc coated.  
DN 150 round.

#### Planning notes

Fitting AL 400, front or back side.  
2 x DN 150 round duct air intake.

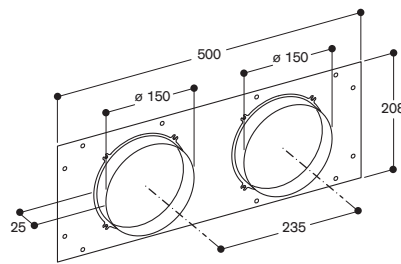


### AD 854 050

Connecting piece for AL 400.  
Metal zinc coated.  
DN 150 flat.

#### Planning notes

Fitting AL 400, bottom side.  
2 x DN 150 flat duct air intake.

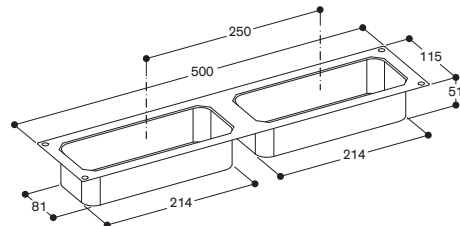


**AD 704 050**

Air collector box for AL 400.  
Metal zinc coated.  
DN 150 flat.

**Planning notes**

1 x Air collector box.  
2 x DN 150 flat duct air intake.  
To connect AL 400 to the remote fan unit AR 403 / AR 413 bottom side.  
1 x DN 200 round duct air outlet.  
To connect AL 400 to the remote fan unit AR 401 (in combination with the air collector).  
1 x DN 200 round duct air intake.  
To connect AL 400 to the remote fan unit AR 403 in the cellar (in combination with the air collector and the DN 200 air outlet).

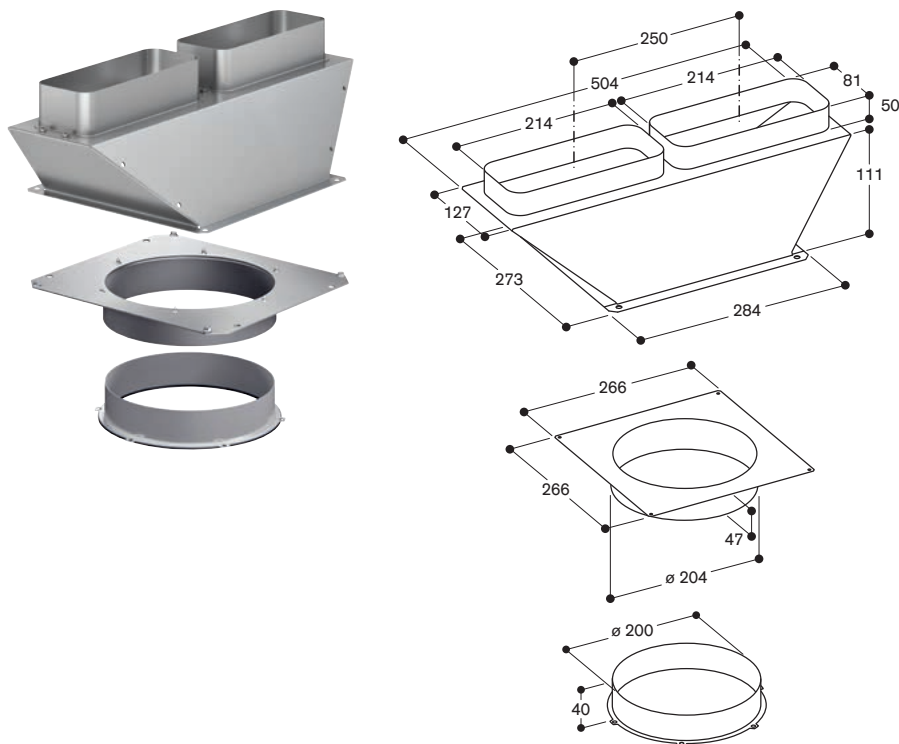


**AD 854 048**

Air collector box DN 150 flat duct.

**Planning notes**

For connecting two filter modules AC 402, integrate a controle module with or without light in between:  
2 x DN 150 flat duct air intake.  
1 x DN 150 flat duct air outlet.

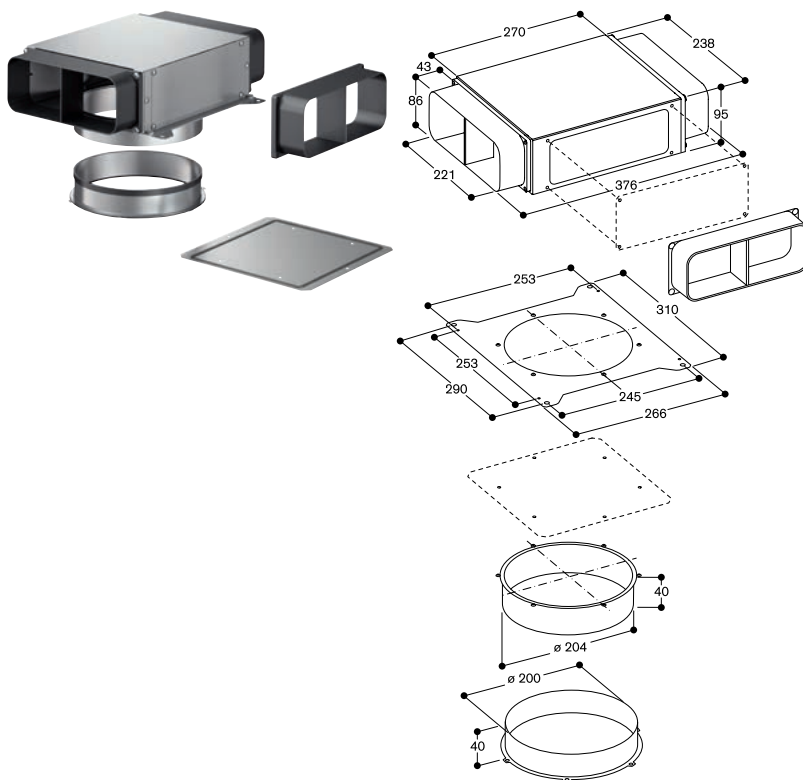

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances


Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Installation accessories for air ducting

### AD 751 010

Aluflex pipe.  
Aluminium.  
DN 150 round.

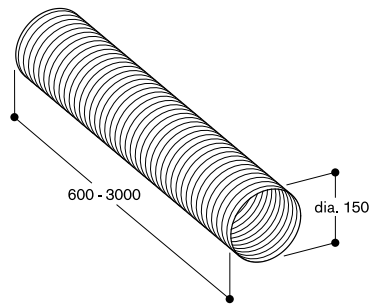


#### Planning notes

Recommended only for routing ducting through air paths which are not in a straight line or for round wall and floor apertures. 2 hose clamps enclosed. For combination with all adapters, press the pipe wall flat at the ends. 2 aluflex pipes must be connected with a pipe connection piece for aluflex pipes.


### AD 752 010

Round duct.  
Plastic, low flammability.  
DN 150 round.

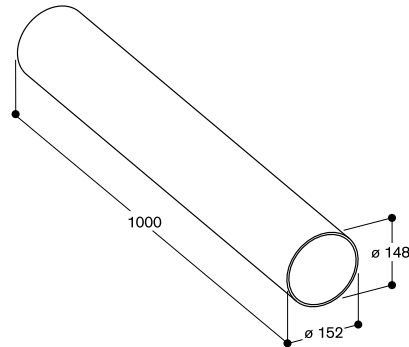

### AD 754 090

Pipe connector.  
Plastic.  
DN 150 round.




#### Planning notes

Connection of plastic round duct to remote fan unit.

### AD 704 040

Pipe adapter DN 200/150 round.  
Metal zinc plated.  
DN 200 round.  
Reduce DN 200 connection to DN 150 connection.



#### Planning notes

Can be combined with telescopic wall-duct DN 200 and pipe connector DN 150.

### Part No. 00264765 (Order as spare part)

One-way flap for insertion in the exhaust air outlet of the hood.  
DN 150 round.



**AD 850 050**

Wall outlet.  
Stainless steel.  
DN 150 flat.





Little loss of airflow due to large stainless steel outlet louvers.  
Compact dimensions by flat structure.  
Connecting piece flat duct DN 150.

**Features**

Weatherproof stainless steel louvers.  
Integrated one-way flap.

**Planning notes**

Direct connection of flat duct DN 150 without pipe connector.



**AD 702 052**

Telescopic wall-duct.  
Stainless steel.  
DN 200 round.




**Features**

Connecting piece DN 200 round.  
Integrated one-way flap.


**Planning notes**

For use with remote fan unit AR 401.



**AD 750 054**

Wall outlet with telescopic duct (350-500 mm).  
Stainless steel/plastic.  
DN 150 round.





Optimal temperature insulation.  
Hermetically sealed by an optimized built-in heat retention system. Flat stainless steel cover with minimal effect to the aesthetics of the building exterior facade.

**Features**

Weatherproof stainless steel louvers.  
3-times insulating Backflow system.  
Magnetic opening and closing.  
Defined opening pressure (65 Pa) prevents rattling.  
Full opening even at low flow rates.

**Planning notes**

Conform to blower-door test.  
For connection of round pipe DN 150 or flat pipe DN 150.  
Wall breakthrough  $\varnothing$  155 mm.



EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Ceiling ventilation 400 series



Appliance type	Ceiling ventilation	Ceiling ventilation	Ceiling ventilation
Stainless steel	Filter module AC 402 181	Control module AC 482 181	Light module AC 472 181
Air extraction / air recirculation	•/•		
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 403 122		
Compatible with (air recirculation):	AR 400 142 and AA 010 811 or AA 012 811		
<b>Dimensions</b>			
Width of overall frame	(cm) 80	80	80
Depth of overall frame	(cm) 40	14	14
Height	(cm) 10.5	13.5	13.5
Net weight	(kg) 8	9.5	9.5
<b>Consumption data according to EU regulation 65 / 2014</b>			
Energy efficiency class			
Energy consumption	kWh/year	60.6 <sup>3</sup>	
Ventilation efficiency class	A* <sup>3</sup>		
Illumination efficiency class	E* <sup>3</sup>		
Grease filter efficiency class	B* <sup>3</sup>		
Sound level min. / max. normal mode	dB(A)	50/65 <sup>3</sup>	
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive</b>	<b>Airflow per remote fan unit with one filter module<sup>2</sup></b>		
Air extraction with AR 400 142 for inside installation	(m <sup>3</sup> /h) at 5 Pa	300/460/570/720	—
Air extraction with AR 401 142 for outside installation	(m <sup>3</sup> /h) at 5 Pa	340/510/640/750	—
Air extraction with AR 403 122 for inside installation	(m <sup>3</sup> /h) at 5 Pa	370/490/640/780	—
Air recirculation with AR 400 142 and AA 010 811 or AA 012 811	(m <sup>3</sup> /h) at 0 Pa	260/400/500/570	—
<b>Features</b>			
Infrared remote control	•		
Power levels	3 plus intensive		
Run-on function	•/6 min.		
Interval ventilation	•/6 min.		
Grease filter saturation indicator	—/•		
Grease filter art	Rim extraction		
Grease filter units	2		
Art of lighting	LED		LED
Connecting cable length	(m)	1.75	1.75
Network cable length	2		
Cooktop-based ventilation control	—		
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—		
<b>Minimum clearance above cooking position</b>			
For gas appliances with total connected load gas of less / more than 12 kW	(cm)	70/70	70/70
For electric appliances	(cm)	70	70
<b>Connection</b>			
Total connected load	(W)	depending on fan unit	
Radio frequency interference-suppressed	• • •		

• Standard. — Not available. <sup>1</sup> Special accessory. <sup>2</sup> For configurations with more than one filter module per fan unit up to 70 m<sup>3</sup>/h can be added. <sup>3</sup> Values refers to the configuration AC 402 181 (1x), AC 482 181 (1x), with the remote fan unit AR 400 142. \* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.



## Ceiling ventilation 200 series




<b>Appliance type</b>	<b>Ceiling ventilation</b>	
Gaggenau Light Bronze	AC 250 121	
Air extraction / air recirculation	•/Air recirculation module as accessory	
<b>Dimensions</b>		
Width of overall frame	(cm)	120
Depth of overall frame	(cm)	50
Height	(cm)	30
Net weight	(kg)	37
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year	35.2
Ventilation efficiency class	A*	
Illumination efficiency class	—	
Grease filter efficiency class	E*	
Sound level min. / max. normal mode	dB(A)	41/56
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) at 5 Pa	265/331/458/933
Air recirculation	(m <sup>3</sup> /h) at 0 Pa	197/313/419/637
Max. back pressure at 0 m <sup>3</sup> /h	(Pa)	416
<b>Sound power level (EN 60704-3) max/Int</b>		
Air extraction mode	(dB(A) re 1 pW)	56/70
Air recirculation mode	(dB(A) re 1 pW)	63/72
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length L <sub>max</sub> <sup>3</sup>	(m)	23
<b>Features</b>		
Remote control	•	
Power levels	3 plus intensive	
Run-on function	•/integrated	
Interval ventilation	•/6 min.	
Grease filter saturation indicator	•	
Activated charcoal filter saturation indicator	•	
Grease filter art	Cartridge-type filter	
Grease filter units	2	
Art of lighting	—	
Lamp output	(W)	—
Illuminance	(lx)	—
Lighting colour	(Kelvin)	—
Colour range (adjustable with Home Connect)	(Kelvin)	—
Exhaust air connection piece	(ø mm)	150
Exhaust air connection piece, top / side / rear / front	— / • / • / •	
Connecting cable length	(m)	1.3
Cooktop-based ventilation control	• <sup>1</sup>	
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	•	
<b>Accessories</b>		
Air recirculation module White	AA 010 811	
Air recirculation module Stainless steel	AA 012 811	
Regenerable activated charcoal filter (order as spare parts)	Part No. 17000977	
Activated charcoal filter (order as spare parts)	Part No. 11033934	
<b>Minimum clearance above cooking position</b>		
For gas appliances with total connected load gas of less / more than 12 kW	(cm)	65/70
For electric appliances	(cm)	65
<b>Connection</b>		
Total connected load	(W)	250
Radio frequency interference-suppressed	•	

• Standard. — Not available. <sup>1</sup> Via Home Connect; in combination with suitable cooktop. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Table ventilations 400 series



Appliance type	Table ventilation	Table ventilation
Stainless steel	AL 400 122	AL 400 192
Air extraction / air recirculation	•/•	•/•
Compatible with (air extraction):	2x AR 400 142 / 2x AR 401 142 / 2x AR 403 122	AR 400 142 / AR 401 142 / AR 403 122
For EU countries, the AL 400 122 is only recommended in air recirculation due to legislation EU 66/2014.		
Compatible with (air recirculation):	2x AR 413 122 / 2x AR 410 110	AR 413 122
<b>Dimensions</b>		
Height of overall frame	(cm) 0.3	0.3
Surface mounting / flush mounting	•/•	•/•
Extending height	(cm) 33	33
Width on worktop	(cm) 118.4	90.8
Width in lower cabinet	(cm) 113.6	86
Depth on worktop	(cm) 14	14
Height in lower cabinet	(cm) 55-86	55-86
Net weight	(kg) 46	38
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year	45.5 <sup>2</sup>
Ventilation efficiency class		A* <sup>2</sup>
Illumination efficiency class		C* <sup>2</sup>
Grease filter efficiency class		B* <sup>2</sup>
Sound level min. / max. normal mode	dB(A)	45/61 <sup>2</sup>
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive</b>		
	<b>with 2 remote fan units</b>	<b>with 1 remote fan unit</b>
Air extraction with AR 400 142 for inside installation	(m <sup>3</sup> /h) at 5 Pa 540/820/1020/1140	310/485/600/765
Air extraction with AR 401 142 for outside wall mounting	(m <sup>3</sup> /h) at 5 Pa 550/800/1000/1200	295/450/560/660
Air extraction with AR 403 122 for plinth installation	(m <sup>3</sup> /h) at 5 Pa 560/750/980/1240	340/460/600/750
Air recirculation with AR 413 122 for plinth installation	(m <sup>3</sup> /h) at 0 Pa 610/845/1080/1375	310/425/555/715
Air recirculation with AR 410 110 for cupboard installation	(m <sup>3</sup> /h) at 0 Pa 740/890/1015/1210	
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length Lmax <sup>3</sup>	(m) 19	19
<b>Features</b>		
Power levels	3 plus intensive	3 plus intensive
Automatic function	—	—
Run-on function	(min) •/6 min.	•/6 min.
Interval ventilation	(min) •/6 min.	•/6 min.
Grease filter saturation indicator	•	•
Grease filter art	Cartridge-type filter	Cartridge-type filter
Grease filter units	3	2
Grease drain channel	•	•
Art of lighting	LED	LED
Lamp output	(W) 2 x 10	2 x 10
Illuminance	(lx) 400	400
Lighting colour	(Kelvin) 3600	3600
Air connection bottom / front / back side	•/•/•	•/•/•
Air connection piece DN 150 round duct (front/back side)	AD 754 049 <sup>1</sup>	AD 754 049 <sup>1</sup>
Air connection piece DN 150 flat duct (bottom side)	AD 854 050 <sup>1</sup>	AD 854 050 <sup>1</sup>
Connecting cable length	(m) 1.75	1.75
Cooktop-based ventilation control	—	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—	—
<b>Connection</b>		
Total connected load	(W) depending on fan unit	depending on fan unit
Radio frequency interference-suppressed	•	•

• Standard. — Not available. <sup>1</sup> Necessary installation accessory. <sup>2</sup> Values refers to the configuration AL 400 with the remote fan unit AR 400 142. <sup>3</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length. \* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Table ventilation 200 series





Appliance type	Island hood	Island hood
Gaggenau Black	AL 200 180	AL 200 190
Air extraction / air recirculation	•/Air recirculation module as accessory	•/Air recirculation module as accessory
<b>Dimensions with chimney</b>		
Width	(cm) 80	90
Surface mounting / flush mounting	with AA 200 900 /•	with AA 200 900 /•
Extending height	(cm) 25	25
Width in worktop	(cm) 79.2	85.4
Depth in worktop	(cm) 14	14
Width in lower cabinet	(cm) 77.9	85.4
Height in lower cabinet surface	(cm) 70.3	70.3
Net weight	(kg) 37	43
<b>Consumption data according to EU regulation 65/2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 36.9	37.8
Ventilation efficiency class	A*	A*
Illumination efficiency class	—	—
Grease filter efficiency class	B*	C*
Sound level min. / max. normal mode	dB(A) 39/62	41/62
<b>Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) at 5 Pa 223/378/501/775	229/389/519/833
Air recirculation	(m <sup>3</sup> /h) at 0 Pa 170/362/447/562	172/367/472/620
Max. back pressure at 0 m <sup>3</sup> /h	(Pa)	
<b>Sound power level (EN 60704-3) max/ Int</b>		
Air extraction mode	(dB(A) re 1 pW) 62/70	62/71
Air recirculation mode	(dB(A) re 1 pW) 65/70	65/71
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length L <sub>max</sub> <sup>3</sup>	(m) 28	28
<b>Features</b>		
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	(min) •/ integrated	•/ integrated
Interval ventilation	(min) —	—
Grease filter saturation indicator	•	•
Activated charcoal filter saturation indicator	•	•
Grease filter art	Cartridge-type filter	Cartridge-type filter
Grease filter units	2	2
Grease drain channel	•	•
Ambient lighting	•	•
Exhaust air connection piece	(ø mm) 150	150
Exhaust air connection, bottom / side / rear / front	• / — / — / —	• / — / — / —
Fan output	(W) 300	300
Connecting cable length	(m) 1.3	1.3
Cooktop-based ventilation control	• <sup>1</sup>	• <sup>1</sup>
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	•	•
<b>Accessories</b>		
Kit for surface mounted installation	AA 200 900	AA 200 900
Installation kit for fan unit at a distance	AA 200 910	AA 200 910
Installation kit for installation in a single worktop cut out	VA 200 080	VA 200 090
Air recirculation module	AA 200 880	AA 200 890
Activated charcoal filter (order as spare parts)	Part No. 17005381	Part No. 17005381
Regenerable air recirculation module	AA 200 882	AA 200 892
<b>Connection</b>		
Total connected load	(W) 300	300
Radio frequency interference-suppressed	•	•

• Standard. — Not available. <sup>1</sup> Via Home Connect; in combination with suitable cooktop. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Downdraft ventilation 400 series and Downdraft ventilation 200 series



Appliance type	Downdraft	Downdraft
Stainless steel	VL 414 115	
Respective knob (Stainless steel / Black) <sup>5</sup>	CKV 410 010 / CKV 410 000	—
Gaggenau Black		VL 200 120
Air extraction / air recirculation	•/•	•/•
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 403 122	AR 403 122 / AR 400 142 / AR 401 142
Compatible with (air recirculation):	AR 413 122 / AR 410 110	AR 413 122 / AR 410 110
<b>Dimensions</b>		
Height of overall frame	(cm) 0.3	—
Surface mounting / flush mounting	•/•	•/—
Width on worktop	(cm) 15.5	15
Depth on worktop	(cm) 52	51.2
Height in lower cabinet surface mounting / flush mounting	(cm) 17.5/17.8	17.5/—
Net weight	(kg) 7	7
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 40.4 <sup>1</sup>	48.3 <sup>2</sup>
Ventilation efficiency class	A*	A*
Illumination efficiency class	—	—
Grease filter efficiency class	B*	B*
Sound level min. / max. normal mode	dB(A) 57/71 <sup>1</sup>	56/71 <sup>1</sup>
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive 1 x VL 414</b>		
Air extraction with AR 400 142 for inside installation	(m <sup>3</sup> /h) at 5 Pa 280/430/540/640	280/440/545/645
Air extraction with AR 401 142 for outside wall mounting	(m <sup>3</sup> /h) at 5 Pa 300/455/570/660	305/460/575/660
Air extraction with AR 403 122 for plinth installation	(m <sup>3</sup> /h) at 5 Pa 320/420/550/690	320/430/555/690
Air recirculation with AR 413 122 for plinth installation	(m <sup>3</sup> /h) at 0 Pa 290/390/520/660	305/410/530/665
Air recirculation with AR 410 110 for cupboard installation	(m <sup>3</sup> /h) at 0 Pa 350/415/490/590	360/435/500/595
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length Lmax <sup>5</sup>	(m) 26	26
<b>Features</b>		
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	•	•
Interval ventilation	(min) • / 6 min.	• / 6 min.
Grease filter saturation indicator	•	•
Activated charcoal filter saturation indicator	•	•
Grease filter art	Metal grease filter	Metal grease filter
Grease filter units	1	1
Grease drain channel	•	•
Exhaust air connection bottom / side / back	—/—/•	—/—/•
Flexibel connecting piece DN 150 flat	AD 410 040 <sup>2</sup>	AD 410 040 <sup>2</sup>
Connecting piece for extension with flat duct DN150	AD 851 041 <sup>2</sup>	AD 851 041 <sup>2</sup>
Connecting cable length	(m) 1.75	1.7
Cooktop-based ventilation control	• <sup>3</sup>	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	• <sup>4</sup>	—
<b>Connection</b>		
Total connected load	(W) depending on fan unit	depending on fan unit
Radio frequency interference-suppressed	•	•


• Standard — Not available <sup>1</sup> Values refers to the configuration VL 414 / VL 200 with the remote fan unit AR 403 122. <sup>2</sup> Installation accessory <sup>3</sup> Via Home Connect; in combination with suitable cooktop <sup>4</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

<sup>5</sup> The knob must be ordered separately. <sup>6</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Wall-mounted hoods 400 series



<b>Appliance type</b>	<b>Wall-mounted hoods</b>
Stainless steel	AW 442 120
Air extraction / air recirculation	•/•
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 400 143
Compatible with (air recirculation):	AR 400 143 and AA 442 810
<b>Dimensions with chimney</b>	
Width	(cm) 120
Depth	(cm) 55
Height, air extraction / air recirculation, min.-max.	(cm) 72-150
Net weight, min.-max.	(kg) 32
Weight air extraction duct, min.-max.	(kg) 7-11
<b>Consumption data according to EU regulation 65 / 2014</b>	
Energy efficiency class	
Energy consumption	kWh/year 48.1 <sup>1</sup>
Ventilation efficiency class	A* <sup>1</sup>
Illumination efficiency class	B* <sup>1</sup>
Grease filter efficiency class	B* <sup>1</sup>
Sound level min. / max. normal mode	dB(A) 47/64 <sup>1</sup>
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive</b>	
Air extraction with AR 400 142 for inside installation	(m <sup>3</sup> /h) at 5 Pa 315/490/615/755
Air extraction with AR 400 143 for chimney of AI / AW 442	(m <sup>3</sup> /h) at 5 Pa 325/505/615/885
Air extraction with AR 401 142 for outside wall mounting	(m <sup>3</sup> /h) at 5 Pa 320/485/615/720
Air recirculation with AR 400 143 for chimney of AI / AW 442	(m <sup>3</sup> /h) at 0 Pa 290/455/565/775
<b>Air extraction ducting recommendation</b>	
Equivalent ducting length L <sub>max</sub> <sup>2</sup>	(m) 26
<b>Features</b>	
Power levels	3 plus intensive
Automatic function	•
Run-on function	(min) •/integrated
Interval ventilation	(min) —
Grease filter saturation indicator	•
Grease filter art	Baffle filter
Grease filter units	4
Grease drain channel	•
Art of lighting	LED
Lamp output	(W) 3 x 10
Illuminance	(lx) 940
Lighting colour	(Kelvin) 3500
Exhaust air connection piece	(ø mm) 150
Exhaust air connection piece, top / side / rear / front S = specially produced	•/S/S/S
Connecting cable length	(m) 1.75
Cooktop-based ventilation control	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—
<b>Minimum clearance above cooking position</b>	
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 70
For electric appliances	(cm) 60
<b>Accessories</b>	
Air recirculation module	AA 442 810
Chimney for air extraction, length 620 mm	AD 442 012
Chimney for air extraction, length 860 mm	AD 442 022
Chimney for air recirculation, length 620 mm	AD 442 112
Chimney for air recirculation, length 860 mm	AD 442 122
Activated charcoal filter (order as spare parts)	Part No. 11049036
<b>Connection</b>	
Total connected load	(W) depending on fan unit
Radio frequency interference-suppressed	•

• Standard. — Not available. <sup>1</sup> Values refers to the configuration AW 442 with the remote fan unit AR 400 143. <sup>2</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length. \* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Wall-mounted hoods 200 series and Island hoods 200 series




Appliance type	Wall-mounted hoods	Island hood
Stainless steel	AW 240 191	AI 240 191
Glass front in Gaggenau Anthracite		
Air extraction / air recirculation	•/Air recirculation module as accessory	•/Air recirculation module as accessory
<b>Dimensions with chimney</b>		
Width	(cm) 90	90
Depth	(cm) 50	60
Height, air extraction / air recirculation, min.–max.	(cm) 65–95/82–115	74–92/82–104
Net weight	(kg) 21	32
Weight air extraction duct		
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 44,5	48,8
Ventilation efficiency class	A*	A*
Illumination efficiency class	A*	A*
Grease filter efficiency class	B*	B*
Sound level min. / max. normal mode	dB(A) 44/64	43/64
<b>Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) at 5 Pa 275/422/618/970	291/441/641/988
Air recirculation	(m <sup>3</sup> /h) at 0 Pa 185/321/383/476	195/362/448/530
Max. back pressure at 0 m <sup>3</sup> /h	(Pa) 459	436
<b>Sound power level (EN 60704–3) max / Int</b>		
Air extraction mode	(dB(A) re 1 pW) 64/73	64/72
Air recirculation mode	(dB(A) re 1 pW) 69/74	69/72
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length L <sub>max</sub> <sup>3</sup>	(m) 26	23
<b>Features</b>		
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	(min) •/ integrated	•/ integrated
Interval ventilation	(min) •/ 6 min.	•/ 6 min.
Grease filter saturation indicator	•	•
Activated charcoal filter saturation indicator	•	•
Grease filter art	Cartridge—type filter	Cartridge—type filter
Grease filter units	3	3
Grease drain channel	—	—
Art of lighting	LED	LED
Lamp output	(W) 3 x 3	4 x 3
Illuminance	(lx) 551	650
Lighting colour	(Kelvin) 3500	3500
Colour range (adjustable with Home Connect)	(Kelvin) 2700–5000	2700–5000
Exhaust air connection piece	(ø mm) 150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	• / S / S / S	• / S / S / S
Fan output	(W) 260	260
Connecting cable length	(m) 1.3	1.3
Cooktop-based ventilation control	• <sup>1</sup>	• <sup>1</sup>
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	•	•
<b>Minimum clearance above cooking position</b>		
For gas appliances with total connected load gas of less/ more than 12 kW	(cm) 65/70	65/70
For electric appliances	(cm) 55	55
<b>Accessories</b>		
Air recirculation module	AA 200 812	AA 200 816
Regenerable activated charcoal filter (order as spare parts)	Part No. 1700097	Part No. 1700097
Activated charcoal filter (order as spare parts)	Part No. 11033934	Part No. 11033934
Chimney extension	—	AD 200 326
Extension for mounting kit	—	AD 223 346
Chimney for air extraction	•	•
<b>Connection</b>		
Total connected load	(W) 269	272
Radio frequency interference-suppressed	•	•

• Standard. — Not available. <sup>1</sup> Via Home Connect; in combination with suitable cooktop. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. <sup>3</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Flat kitchen hoods 200 series



Appliance type	Flat kitchen hood	Flat kitchen hood
Stainless steel-coloured	AF 210 192	AF 210 162
Air extraction / air recirculation	•/Air recirculation module as accessory	•/Air recirculation module as accessory
<b>Dimensions</b>		
Width	(cm) 90	60
Depth	(cm) 32	32
Depth when steam screen extended	(cm) 48.8	48.8
Height	(cm) 37.8	37.8
Net weight	(kg) 17	15
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 41.4	40.3
Ventilation efficiency class	A*	A*
Illumination efficiency class	A*	A*
Grease filter efficiency class	B*	B*
Sound level min. / max. normal mode	dB(A) 42/57	41/57
<b>Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) at 5 Pa 272/384/517/965	271/386/515/953
Air recirculation	(m <sup>3</sup> /h) at 0 Pa 267/372/506/876	266/364/497/885
Max. back pressure at 0 m <sup>3</sup> /h	(Pa) 434	455
<b>Sound power level (EN 60704-3) max / Int</b>		
Air extraction mode	(dB(A) re 1 pW) 57/71	57/71
Air recirculation mode	(dB(A) re 1 pW) 62/69	62/69
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length L <sub>max</sub> <sup>1</sup>	(m) 23	23
<b>Features</b>		
Glass screen	•	•
Arrangement of controls	Buttons at front	Buttons at front
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	(min) • / integrated	• / integrated
Interval ventilation	(min) —	—
Grease filter saturation indicator	•	•
Grease filter art	Stainless steel grease filter	Stainless steel grease filter
Grease filter units	1	1
Grease drain channel	—	—
Art of lighting	LED	LED
Lamp output	(W) 3 x 3	2 x 3
Illuminance	(lx) 355	294
Lighting colour	(Kelvin) 3500	3500
Exhaust air connection piece	(ø mm) 150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	•/—/—/—	•/—/—/—
Fans	(No.) 1	1
Fan output	(W) 260	260
Connecting cable length	(m) 1.75	1.75
Cooktop-based ventilation control	—	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—	—
<b>Minimum clearance above cooking position</b>		
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	65/70
For electric appliances	(cm) 43	43
<b>Accessories</b>		
Lowering frame	AA 210 492	AA 210 460
Assembly kit for 90 cm upper cabinet	AA 210 491	
Air recirculation module	AA 211 812	AA 211 812
Activated charcoal filter (order as spare parts)	Part No. 11034172	Part No. 11034172
<b>Connection</b>		
Total connected load	(W) 266	264
Radio frequency interference-suppressed	•	•

• Standard. — Not available. <sup>1</sup>Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.

## Canopy extractors 200 series



Appliance type	Canopy extractor	Canopy extractor
Stainless steel-coloured	AC 200 191	AC 200 161
Air extraction / air recirculation	•/Air recirculation module as accessory	•/Air recirculation module as accessory
<b>Dimensions</b>		
Width	(cm) 86	52
Depth	(cm) 28.2	30
Height	(cm) 36 (housing)	36 (housing)
Net weight	(kg) 9.8	8.3
<b>Consumption data according to EU regulation 65 / 2014</b>		
Energy efficiency class		
Energy consumption	kWh/year 31.4 kWh	29.6 kWh
Ventilation efficiency class	A*	A*
Illumination efficiency class	A*	A*
Grease filter efficiency class	D*	D*
Sound level min. / max. normal mode	dB(A) 41/64	44/64
<b>Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive</b>		
Air extraction	(m <sup>3</sup> /h) at 5 Pa 210/380/610/800	210/365/540/730
Air recirculation	(m <sup>3</sup> /h) at 0 Pa 200/360/540/790	200/360/530/690
Max. back pressure at 0 m <sup>3</sup> /h	(Pa) 560	560
<b>Air extraction ducting recommendation</b>		
Equivalent ducting length L <sub>max</sub> <sup>1</sup>	19	19
<b>Sound power level (EN 60704-3) max / Int</b>		
Air extraction mode	(dB(A) re 1 pW) 64/70	64/70
Air recirculation mode	(dB(A) re 1 pW) 72/77	72/77
<b>Features</b>		
Infrared remote control	AA 200 510	AA 200 510
Power levels	3 plus intensive	3 plus intensive
Automatic function	—	—
Run-on function	•/6 min.	•/6 min.
Interval ventilation	•/6 min.	•/6 min.
Grease filter saturation indicator	•	•
Grease filter art	Cartridges	Cartridges
Grease filter units	2	1
Grease drain channel	—	—
Art of lighting	LED	LED
Lamp output	(W) 2 x 1	2 x 1
Illuminance	(lx) 266	244
Lighting colour	(Kelvin) 4000	4000
Exhaust air connection piece	(ø mm) 150/120	150/120
Exhaust air connection piece, top / side / rear / front S = specially produced	•/—/—/—	•/—/—/—
Fans	(No.) 1	1
Fan output	(W) 170	170
Connecting cable length	(m) 1	1
Cooktop-based ventilation control	—	—
Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi.	—	—
<b>Minimum clearance above cooking position</b>		
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	65/70
For electric appliances	(cm) 65	65
<b>Accessories</b>		
Air recirculation module	AA 211 812	AA 211 812
Activated charcoal filter (order as spare parts)	Part No. 11034172	Part No. 11034172
<b>Connection</b>		
Total connected load	(W) 172	172
Radio frequency interference-suppressed	•	•

• Standard. — Not available. <sup>1</sup> Please refer to the "General planning notes" for the calculation of the equivalent ducting length.

\* Ventilation, Illumination, Grease filter efficiency: at a range of classes from A to G.



## Remote fan units 400 series



Appliance type	Inside	Inside	Outside wall	Plinth	Plinth	Inside
Stainless steel			AR 401 142			
Metal zinc plated	AR 400 142	AR 400 143		AR 403 122	AR 413 122	AR 410 110
Air extraction / air recirculation	•/—	•/—	•/—	•/—	—/•	—/•
<b>Dimensions</b>						
Width	(cm) 42.6	33.3	42.2	45.1	40.6	42.8
Depth	(cm) 42.6	24	45.3	50.5	53.5	22.8
Height	(cm) 23.2	23.2	14	9.5	9.9	52
Net weight	(kg) 14	5	14	9	9	12
<b>Installation possibility</b>						
Slanted roof (not Eternit)			•			
Outside wall			•			
Inside wall	•			•	•	•
Bottom cupboard	•			•	•	•
Chimney hood AI / AW 442		•				
Attic	•			•		
Cellar	•			•		
<b>Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive</b>						
Air extraction (up to)	(m <sup>3</sup> /h) at 0 Pa 880	1065	1200	965		
Air recirculation (up to)	(m <sup>3</sup> /h) at 0 Pa				900	675
Max. back pressure at 0 m <sup>3</sup> /h	(Pa) 500	480	640	770	610	380
<b>Features</b>						
Power levels	3 plus intensive	3 plus intensive	3 plus intensive	3 plus intensive	3 plus intensive	3 plus intensive
Fan technology	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Fans	(No) 1	1	1	1	1	1
Fan output	(W) 240	230	180	180	180	170
Sound insulation	•	•	•	—	—	•
Retaining bracket	•	—	•	•	•	•
Pipe connection piece intake side	(ø mm) 5 x 150		1 x 200	1 x 150	1 x 150	1 x 150 flat
Pipe connection piece output side	(ø mm) 1 x 150	1 x 150		1 x 150 flat		
Spare cover for closing air intake	•	—	—	—	—	—
Activated charcoal filter (order as spare parts)	—	—	—	—	Part No. 11058748	Part No. 11058753
Regenerable activated charcoal filter (order as spare parts)	—	—	—	—	—	Part No. 11028160
Connecting cable length	(m) 1.75	—	1.75	1.75	1.75	1.75
Network cable length	(m) 5	—	5	2	2	2
<b>Ratings in combination with extraction element</b>						
Radio frequency interference-suppressed	•	•	•	•	•	•

• Standard. — Not available.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series


Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect

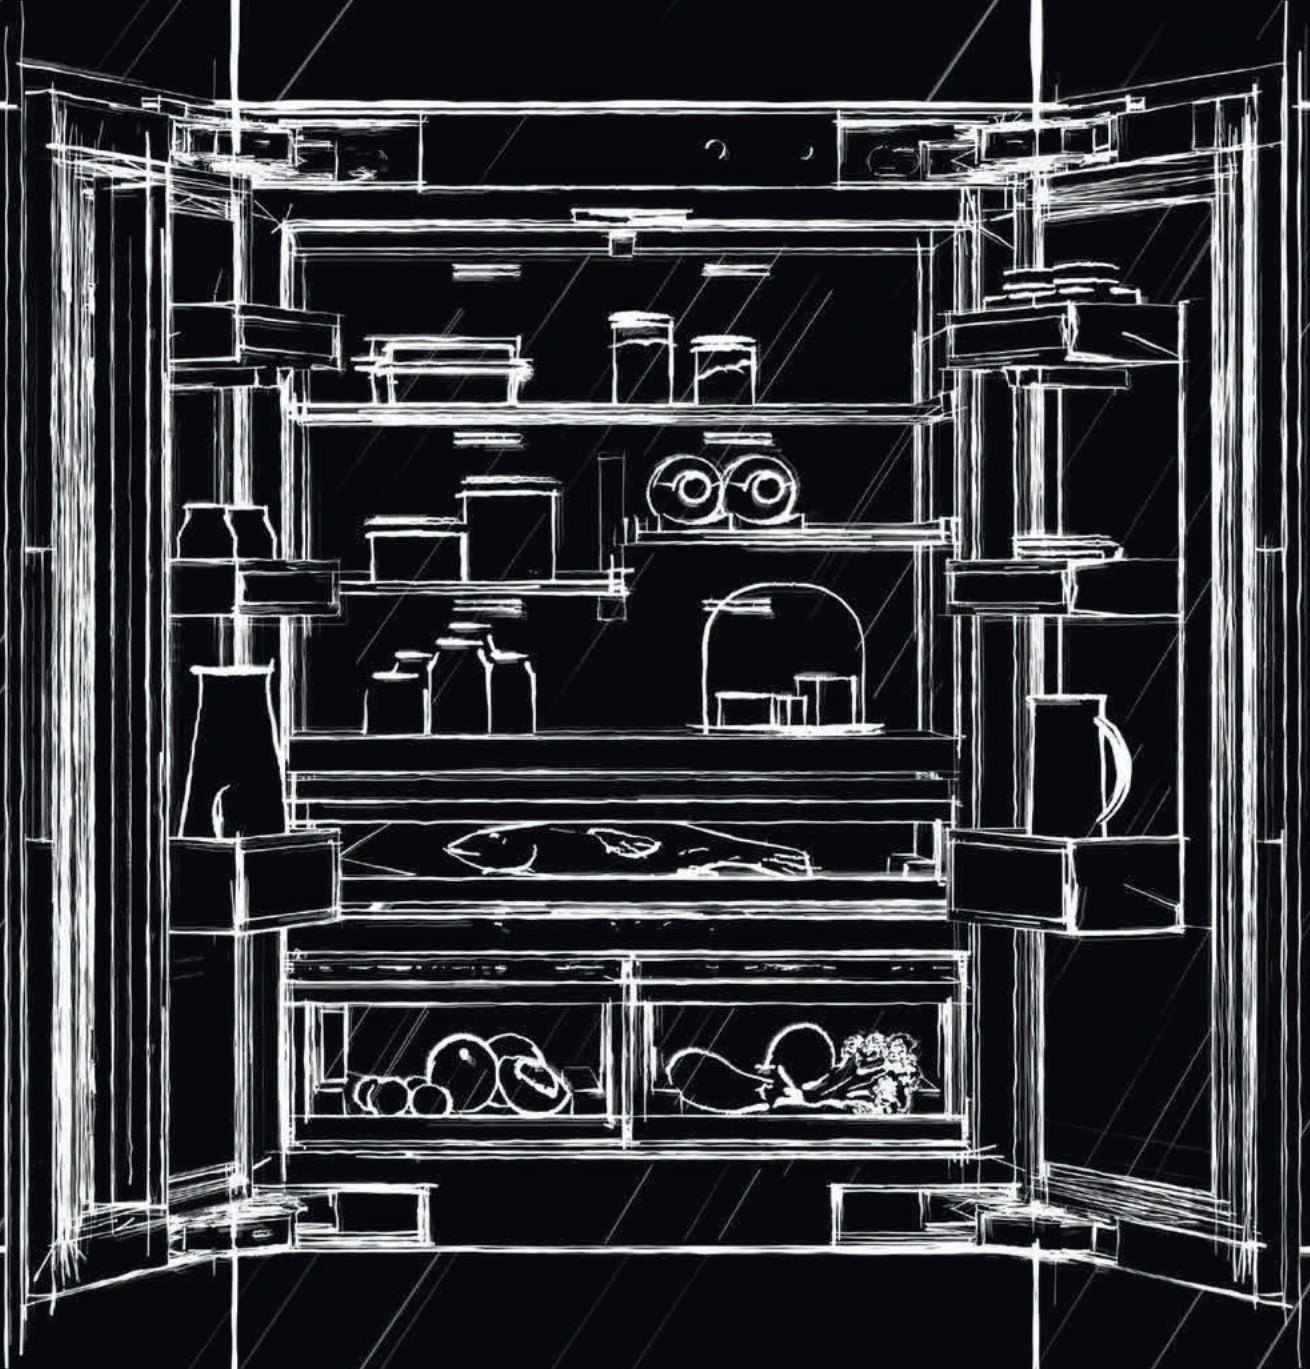


# COOLING APPLIANCES

Overview	354
Vario cooling Expressive series	358
Planning notes Vario cooling Expressive series	360
Vario cooling 400 series: Cooling, freezing and wine	364
Planning notes Vario cooling 400 series	376
Vario cooling 200 series: Cooling and freezing	384
Cooling appliances 200 series	388
Planning notes Vario cooling and cooling 200 series	397
Wine	398
Accessories   Special accessories	406
Technical specifications	416

## Overview

### Vario cooling Expressive series


#### Niche 213 cm

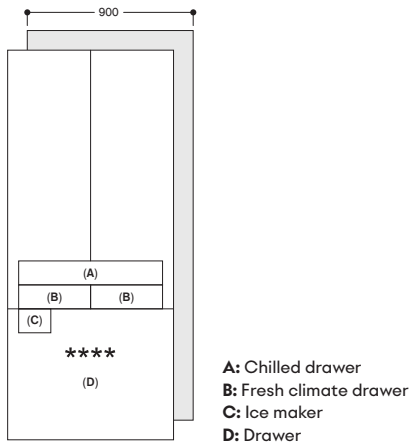

RVY 497

### Vario cooling 400 series

#### Niche 213 cm

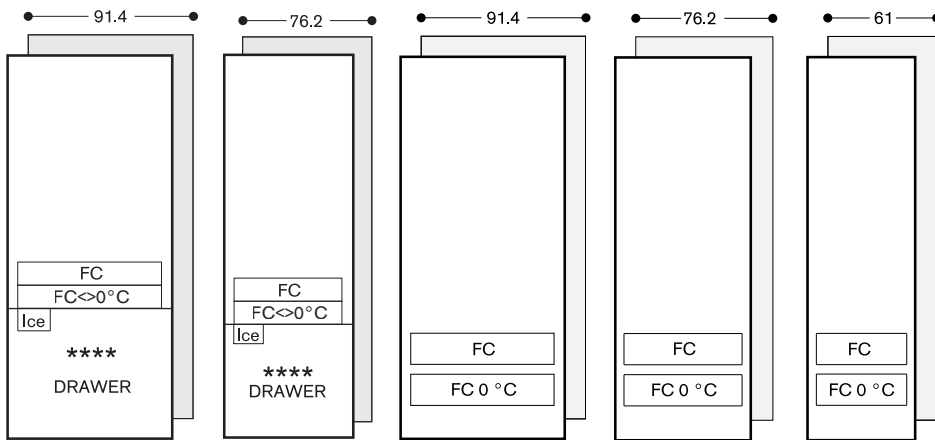


RB 492

RB 472

RC 492

RC 472

RC 462

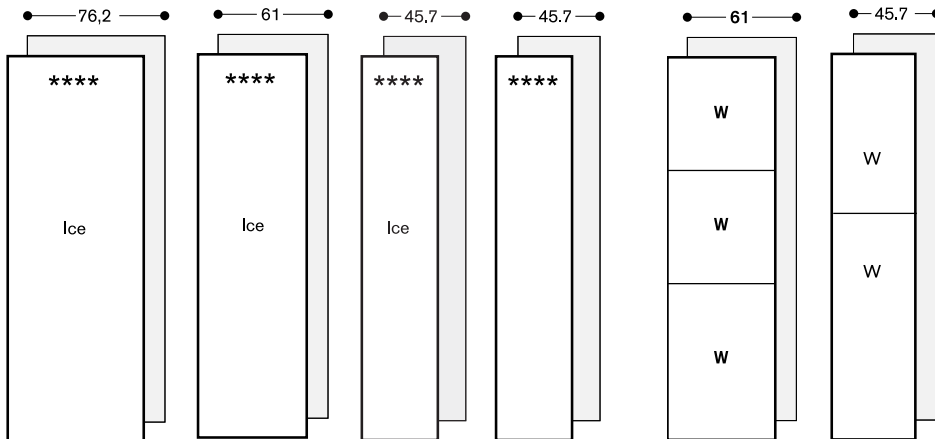

RF 471

RF 461

RF 411


RF 410

RW 466

RW 414

Vario cooling 200 series

Niche 178 cm

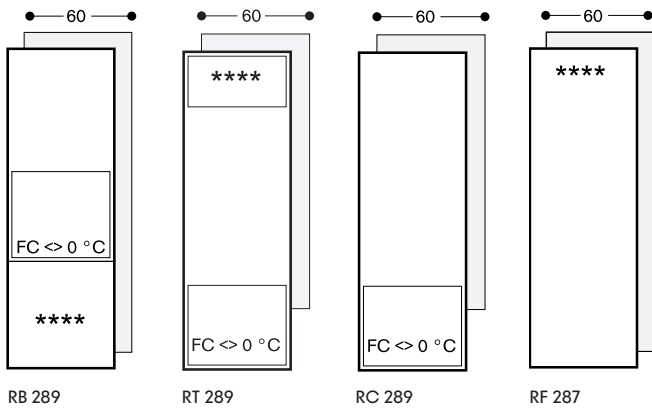

FC: Fresh cooling  
 FC  $\diamond$  0 °C: Fresh cooling close to 0 °C  
 FC 0 °C: Fresh cooling 0 °C  
 W: Wine  
 Ice: Ice maker

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances


Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Overview


### Cooling 200 series

#### Freestanding / Height 183 cm

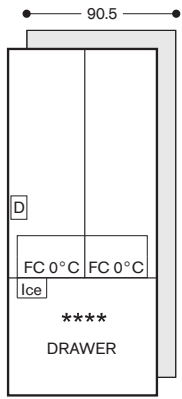


RY 295

#### Niche 178 cm




RB 282



RC 282




RT 282




RF 282

#### Niche 82 cm / Under-counter



RT 202




RC 202




RF 202

**Wine climate cabinet**


**Niche 213 cm**

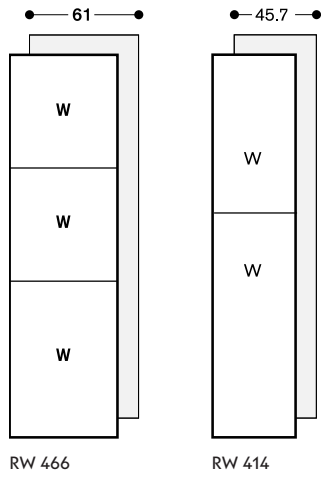


**Niche 178 cm**



**Niche 123 cm**



**Niche 82 cm / Under-counter**



- FC: Fresh cooling
- FC <math>\diamond 0^{\circ}\text{C}</math>: Fresh cooling close to 0 °C
- FC 0 °C: Fresh cooling 0 °C
- W: Wine
- Ice: Ice maker

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Vario fridge-freezer combination Expressive series RVY 497

#### RVY 497 190

Fully integrated.  
Niche width 90 cm,  
Niche height 213.4 cm.  
Cooling compartment with two doors  
and one fully extendable freezing  
drawer.



#### Included in the price

- 1 egg holder with lid.
- 1 ice cube scoop.
- 1 ethylene absorber.
- 2 bottle supports, oak wood.

#### Installation accessories

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1.131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 425 910

Handle bar, stainless steel, short.  
For RVY 497, RB 492 and RW 222,  
with 2 mounts, length 810 mm, height  
49 mm, drilling distance between the  
mounts 787 mm.

##### RA 460 030

Connecting element for vertically  
split fronts (for fridge-freezer  
combination).

##### RYA 423 141

Side trims, 3 mm. 2 pieces.

##### RYA 421 922

Door panels, dark brushed stainless  
steel, with handles.  
For RVY 497, panel thickness 19 mm.

##### RYA 428 922

Door panels, dark brushed stainless  
steel, handleless.  
For RVY 497, panel thickness 19 mm.

##### RYA 426 000

Dark toned hinges.  
Set of 4.  
For RVY.

##### RYA 460 000

Accessory for side-by-side installation.  
For RVY 497.

##### RYA 460 020

Accessory for side-by-side  
installation, backward compatible.  
Required if a RVY 497 is installed  
side-by-side with a RY, RB, RC, RF or  
RW of the Vario cooling 400 series.

##### RYA 460 900

Accessory for replacement  
side-by-side installation in unmodified  
niche.

Required if a RVY 497 (89.4 cm wide) is  
installed side-by-side into a niche  
which was formerly housing a  
combination including a RY 492,  
RB 492 or RC 492 (90.8 cm wide).

##### RYA 460 910

Accessory for replacement in single  
unmodified niche.  
Required if a RVY 497 (89.4 cm wide) is  
replacing a RY 492, RB 492 or  
RC 492 (90.8 cm wide).

#### Special accessories

##### RA 430 100

Storage container with transparent  
lid, anthracite.

##### RA 450 012

Activated charcoal water filter.  
For RVY, RB and RF.

##### RYA 438 040

Solid oak wood bottle support with  
magnetic connector.

##### RYA 450 220

Activated charcoal air filter.

#### Spare part no. 17007000

Ethylene absorber.  
Refill kit.  
For placement in a fresh climate  
drawer.

#### Spare part no. 17006999

Ethylene absorber.  
Starter kit.  
For placement in a fresh climate  
drawer.

#### Highlights

- Dark brushed stainless steel interior, refined with solid anthracite aluminium elements.
- Warm white and glare-free LED light concept for optimal food presentation in all compartments.
- Opening assist for door enabling seamless integration without handles.
- Flat dark brushed stainless steel inner door.
- Flexible positioning of shelves and door racks through hidden rail system.
- Solid anthracite aluminium door racks.
- Professional freshness system with 2 fresh climate drawers and 1 chilled drawer.
- Integrated ice maker with fixed water connection.
- Spacious, fully extendable freezer compartment including 2 additional interior drawers.
- Full touch TFT display.
- Total volume: 576 litres.

#### Handling

Opening assist for door.  
Cushioned door closing system.  
Light and display response to drawer interaction.  
Automatic brightness adjustment based on ambient illumination.  
Easy accessible full touch TFT display.  
Clear text display.  
Animated quick guides to assist appliance maintenance.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Constant air purification by 2 activated charcoal air filters.  
Rest mode certified by Star-K.  
Open-door and malfunction alarm.

#### Selected digital services (Gaggenau Home Connect)

Storage management with cameras.  
Personalisation function for saving custom programmes.  
Remote control and monitoring.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Cooling

Professional freshness system.  
No-Frost technology with fast cooling.  
Temperature adjustable from +2°C to +8°C.  
3 aluminium-framed safety glass shelves, individually adjustable in height.  
1 integrated safety glass shelf.  
Optimal food presentation with warm white and glare-free, hidden LED light bars (3000 K).  
Flexible positioning of door racks through hidden rail system.  
6 door racks, thereof 4 height adjustable.  
Total volume of all refrigerator compartments: 379 litres.

#### Fresh climate drawer

2 fresh climate drawers with humidity control.  
Temperature adjustable from -1°C to +2°C.  
Ideal storage conditions for different foods through dedicated programmes (e.g. Fruit, Vegetables, Meat).  
Individual adjustment of temperature and humidity.

Extended food preservation with ethylene absorber.  
Indirect illumination, transparent front.  
Fully extendable, with cushioned closing system.

#### Chilled drawer

Temperature dependent on cooling compartment (always 2K to 3K lower).  
Indirect illumination, transparent front.  
Fully extendable, with cushioned closing system.

#### Freezing

No-frost technology with fast freezing at -30°C.  
4-star freezer compartment.  
Temperature adjustable from -24°C to -16°C.  
Freezer burn protection.  
Oxidation protection.  
Freezing capacity 14 kg/24 h.  
Storage time after malfunction 19 h.  
Spacious, fully extendable freezer compartment with synchronously running pull-out rails.  
2 extendable interior drawers.  
Warm-white, glare-free LED lighting (3000 K) within freezer compartment.  
Total volume of freezer compartment: 197 litres.

#### Ice maker

Integrated in the freezer compartment, with fixed water connection (inlet).  
Can be switched off.  
Particle filter for water inlet, integrated in ventilation grille area.  
Saturation indicator for filter via full touch TFT display.  
Ice cube production approx. 3 kg/24 h.  
Removable ice storage container with approx. 3 kg capacity.  
Integrated, easy accessible ice cube scoop.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 285 kWh/year.  
Noise level 39 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight:  
Each door 64 kg.  
Drawer 14 kg.  
When rest mode is active, the appliance can only be opened using a handle.  
Shut-off valve for water connection must be planned next to the appliance and always be accessible.  
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Please read additional planning notes on page 360-363.


#### Connection

Total connected load 0.200 kW.  
Connecting cable 3.0 m, pluggable.  
Water inlet.  
Supply hose 2.8 m with 3/4" connection.  
Water pressure 2 to 8 bar.

#### Special accessories

(order as spare part):  
Part No. 11057720  
Extension for water inlet, 2 m with 3/4" connection.



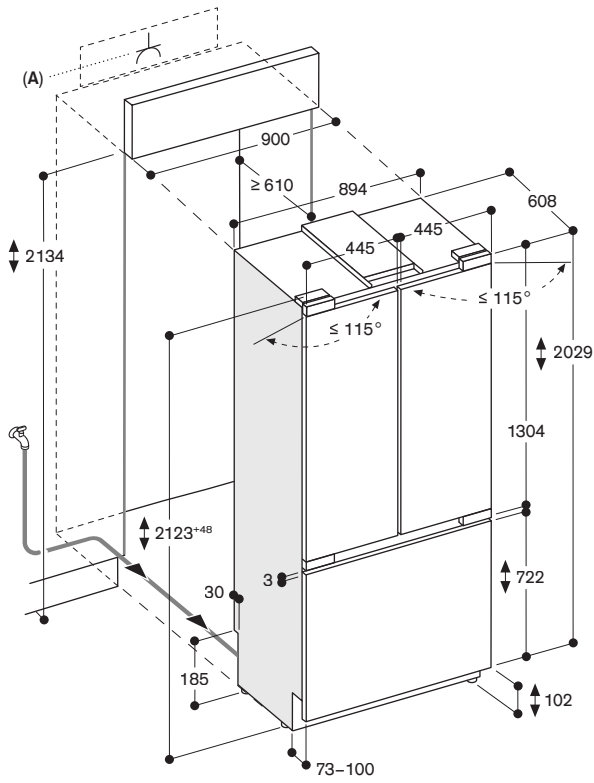

A: Socket

The maximum door panel dimensions are based on a clearance of 3 mm

The height of the plinth can be reduced to 50 mm

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Additional planning notes for Vario cooling Expressive series

The side walls of the adjacent cabinetry have to be dimensionally stable, as the cooling appliances are secured in the niche with only an anti-tilt bracket on the top back and on the bottom at the side.

The cooling appliances can be installed handle to handle as a side-by-side combination. In this case the side-by-side installation kit RVA 460 000 is required. If the cooling appliances are joined together hinge to hinge an additional stable side wall must be foreseen. If restrictions in use are accepted, (a simultaneous opening of the doors is not possible) the appliances can be joined directly, using the side-by-side installation kit RVA 460 000.

When installing an appliance of the Vario cooling Expressive series handleless next to a GO4/GM4/GS4/GC4 from the oven Expressive series a minimum lateral distance of 30 mm is required, if the door of the cooling appliance opens towards the GO4/GM4/GS4/GC4.

Please also consider information in chapter "Location".

For the same installation next to a BOP/BMP/BSP from the ovens 200 series, a distance of 40 mm is required.


### Door opening angle

To ensure correct kitchen planning it is essential to take into account the opening angle of the appliance's door plus the door panel and handle. Collisions with kitchen furniture (worktops, handles of adjacent cabinetry, etc.) or parts of the room (walls, protrusions, etc.) need to be avoided.

The necessary space for the hinge movement and the resulting clearances, depending on the door opening angle, to adjacent cabinetry and its handle are shown in the following drawing. The clearances are based on a door panel thickness of 19 mm.


In case of a potential collision, the following options are available to solve the situation:

- Limit the door opening angle to 90° (standard 115°). A pin to limit the opening is enclosed with the appliance
- Fit a spacer between the appliance and the cabinetry that it would collide with
- Rearrange surrounding cabinetry or appliance

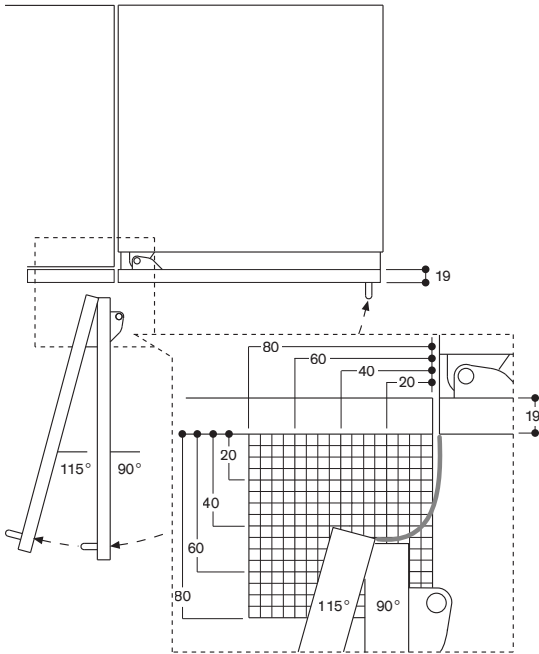

The clearances to adjacent cabinetry and handles can be determined for different door opening angles based on the door panel thickness. Here the clearances are based on a door panel thickness of 19 mm.

### Wall clearance fridge-freezer combination

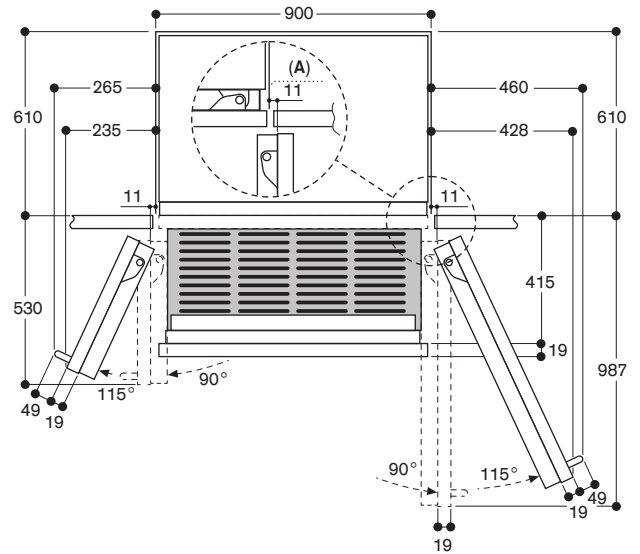

A: Recess

The clearances are based on a door panel thickness of 19 mm and a Gaggenau handle with a height of 49 mm

## Installation niche

Unlike conventional built-in appliances, the appliances of the Vario cooling Expressive series stand on the floor. Therefore the installation niche is a space in a line of kitchen units.


### Installation niche

The specified dimensions of the installation niche must be ensured to guarantee a proper installation of the appliance and a seamless integration into the kitchen design. It is particularly important that the installation niche is square. The side walls must be smooth, not uneven and without protrusions. Use the appropriate tools, e.g. spirit level, diagonal measurements, etc. to determine whether the installation niche is square.

The side walls and the crown of the installation niche must be at least 16 mm thick.

The anti-tip bracket must be installed at the standard installation height of 2134 mm. If the niche exceeds this height, the anti-tip bracket must be installed at the highest point of the niche and the appliance then raised to match the niche height.

### Installation niche for an individual appliance

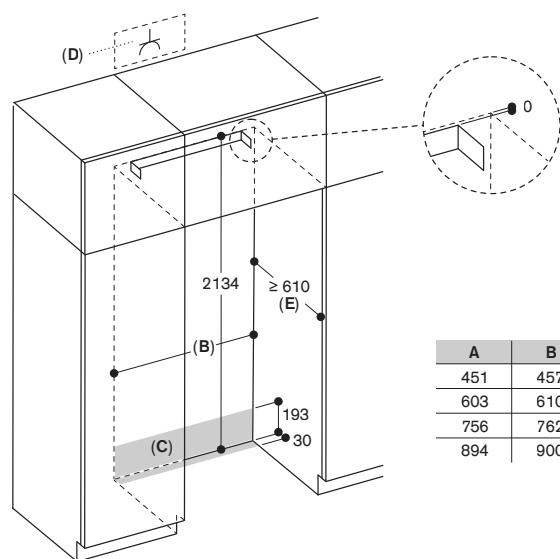

A: Appliance width  
 B: Width of installation niche  
 C: Area for guiding water supply hose  
 D: Socket  
 E: Depth of installation niche, depending on kitchen design

### Installation niche for a side-by-side solution

The appliances of the Vario cooling Expressive series offer options for side-by-side combinations to create an individual kitchen design.

The required width of the installation niche is the sum of the widths of the single appliances. Height and depth of the installation niche correspond to the specifications of the single appliances.

It is important to comply with the specified dimensions to ensure enough space for the electrical and water connection. For precise dimensions, please refer to the details given for the single appliances.

### Location

The appliance should be installed in a dry and well-ventilated room. The location of the appliance should not be subject to direct sunlight or be near a heat source, such as a cooker, a radiator, etc.

If an installation next to a heat source is unavoidable the following minimum distances to that source need to be considered:

- 3 cm to electric or gas cookers
- 3 cm to electric or gas ovens
- 30 cm to an oil-fired or solid-fuel cooker

### Surface

To ensure that the appliance is installed securely and functions properly, the floor must be level and even. Moreover, it must consist of a hard, rigid material and not give way, due to the heavy weight of a fully loaded appliance. The following table shows the resulting weight of an appliance when installed with a door panel having the max. permitted weight and being fully loaded.

### Maximum load weight

Model	Description	Max. load weight
RVY497	Fridge-freezer combination 89.4 cm, 3 doors	583.6 kg

In case of doubt, consult an architect, structural engineer or construction expert. If required the floor must be reinforced.

To ensure the proper functionality of the ice maker the appliance must be upright.

### Neighbouring cabinetry

The appliance is securely positioned into its niche by screwing it firmly to the adjacent and top cabinetry.

It must be ensured that all cabinetry onto which the appliance is fastened, is firmly connected to the floor or the wall.

The thickness of the skirting board can be max. 19 mm.


### Plinth area

#### Important!

Poor ventilation damages the appliance!

It is not permitted to cover the air inlets and the exhaust air outlets of the appliance in the plinth area.

Based on the standard installation height the plinth height is 102 mm (the distance between the floor and the bottom edge of the door panel installed on the appliance) to ensure a proper operation of the appliance. Take this into consideration also when adjusting the feet of the appliance.

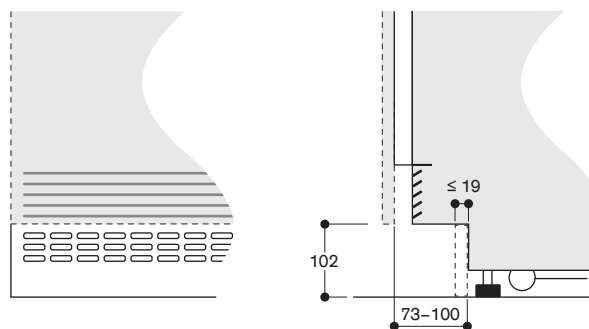

Based on the standard installation height, the height of the plinth is 102 mm

The height of the plinth can be reduced to 50 mm


Maximum skirting board thickness 19 mm

For design reasons, it may be necessary to decrease the plinth height.

It can be reduced to 50 mm. Subsequently the height of the skirting board (C) needs to be reduced as well to match the now lower plinth height, so the additional ventilation openings (B) are not fully covered. Only then, a proper operation of the appliance can be guaranteed.

Example: The height of the plinth is 70 mm. In this particular case the skirting board shall not be higher than 70 mm.

Adhesive connectors on the appliance ensure a secure fixation of the skirting board.

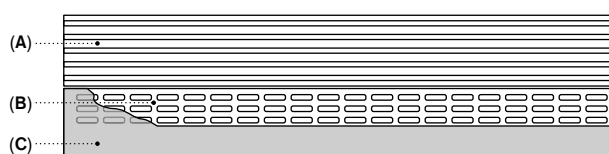

A: Air inlets and exhaust air outlets  
 B: Ventilation openings in skirting board area  
 C: Skirting board

The height of the plinth can be reduced to 50 mm based on the standard installation height  
 The skirting board height needs to be reduced to match the plinth height to allow for the additional ventilation

## Special accessories | Replacement

### Crown

#### Important!

The crown of the installation niche must always have a depth of at least 102 mm (measured from the front edge of the appliance) and be at least 16 mm thick. Only then a secure installation of the appliance in the niche can be guaranteed.

The height of the door panel on the appliance is dependent on:

- The overall height of the appliance
- The distance from the bottom edge of the door panel to the floor
- The appliance type (one-door or multi-door appliances)

This height may vary depending on the installation conditions. For design reasons it may be necessary to lengthen the cabinet door upwards by extending it beyond the top of the appliance.

#### Dimensions of special accessories - door panels

The cabinetry, the height of the plinth, the overall height of the kitchen and other determining dimensions of the kitchen must be considered in order to plan the exact positioning of the door panel, so that the appliance integrates perfectly into the overall kitchen design.

The following drawings show the basic dimensions of the special accessory door panels.


These are designed to fit the following basic specifications:

- Height of the plinth: 102 mm
- Overall height of the installation niche: 2134 mm
- Gaps: 3 mm
- Door panel thickness: 19 mm

#### Important!

The following drawings are not a substitute for detailed designs. Compliance with specified requirements relating to kitchen design is essential.

#### Niche width 900 mm

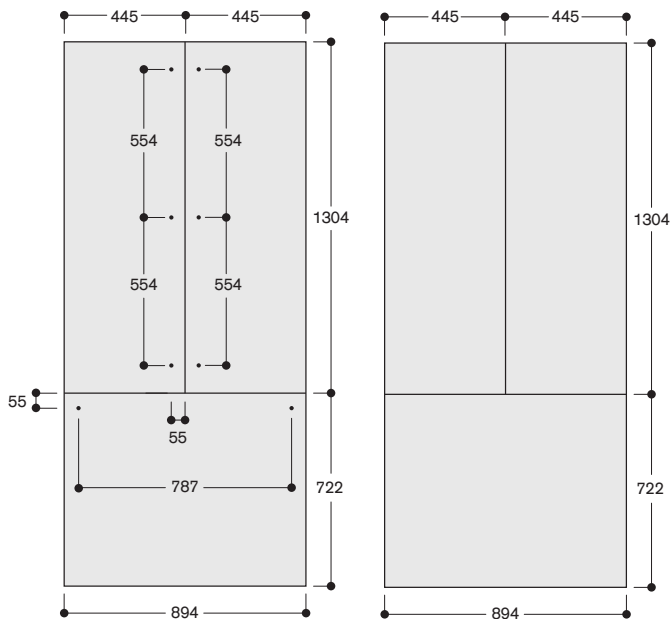

The door panel thickness is 19 mm

The maximum door panel dimensions are based on a clearance of 3 mm, based on a single niche

A custom door panel can exceed the dimensions of the special accessory door panels, as long as all given restrictions in this planning notes are considered correctly. Ensure the maximum panel weights shown in the following table are not exceeded.

#### Maximum permitted door panel weight

Model	Description	Max. panel weight
RVY 497	Fridge-freezer combination 89.4 cm, 3 doors	Each door 64 kg / Drawer 14 kg

#### Replacement of RVY497 into 914 mm niche

If a RVY 497 of the Vario cooling Expressive series is installed into an existing, unmodified 914 mm wide niche (e.g. replacement of an appliance of the Vario cooling 400 series - RY 492) be aware of the following dimensional changes:

- Appliance width 894 mm (compared to 908 mm within Vario cooling 400 series)
- Range of height adjustable feet based on the standard installation height +40 mm / -8 mm (compared to +35 mm / -13 mm within Vario cooling 400 series)

To guarantee the aesthetics of the installation 10 mm wide side trims (RVA 460 910) should be installed on both sides of the appliance to cover the gap between the side walls of the appliance and the adjacent cabinetry.


If a Vario cooling 400 appliance was installed in the niche before, the screwing holes in the crown and side walls (if side trims were used) will become visible, upon removal of the appliance. To ensure perfect aesthetics of the newly installed RVY 497 a suitable solution to cover the screwing holes must be found by the installer/carpenter. Be aware that the new side trims (RVA 460 910) do not cover these holes.

Existing custom door panels can be re-used as well as the special accessory door panels from the Vario cooling 400 series. New door panels need to have the widths displayed in the following drawing.

Be aware that any door panel to fully cover the niche will now protrude from the doors of the RVY 497 due to the difference in width.

This has an influence on the hinge movement and resulting clearances to adjacent cabinetry and handles.

#### Replacement of RVY 497 into 914 mm niche

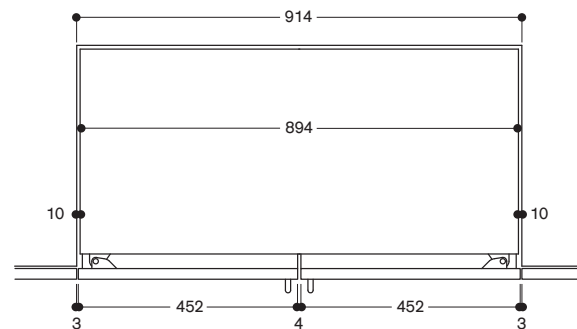

The resulting lateral gaps of 10 mm can be covered with side trims included in the installation accessory RVA 460 910

## Replacement

### Replacement of side-by-side installation incl. RVY 497


In case of a side-by-side installation into an existing, unmodified niche previously designed for two 908 mm wide appliances or one 908 mm wide appliance and any narrower one, the installation accessory RVA 460 900 is required. Different side and center trims to cover the gaps between both appliances and between the appliances' side walls and the adjacent cabinetry are included.

For the narrow 3 mm side trims the installation accessory RVA 423 141 needs to be ordered.

For a correct installation, every appliance must be centered within their niche. For this, the spacers on the appliances' side walls may need to be exchanged before moving the appliance into the niche.

Depending on the niche width (A) and the appliances' widths (B) + (C) the gaps (D) + (E) + (F) have different measurements. See drawing:

### Replacement of side-by-side installation incl. RVY 497

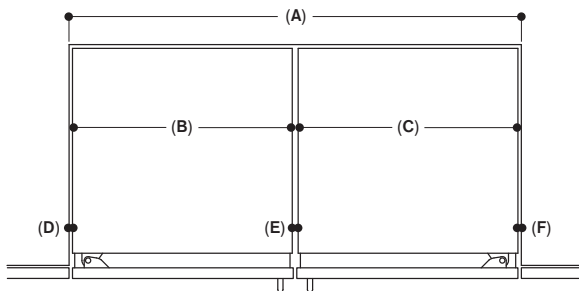

A: Niche width	1828	≤ 1676
B: Appliance 1 width	894	894
C: Appliance 2 width	894	≤ 756
D: Left gap	10	10
E: Center gap	20	13
F: Right gap	10	3

### Replacement of side-by-side installation with Vario Cooling 400 series

If a RVY 497 of the Vario cooling Expressive series must be installed side-by-side with a Vario cooling 400 appliance the installation accessory RVA 460 020 is required.

Beware that neither the overall appliance design nor the appliances' capabilities match and are not intended to do so.

All installation parts used in the initial Vario cooling 400 side-by-side installation need to be removed, including the heater kit. These are not necessary anymore.

Depending on the individual installation situation, additional installation accessories may be necessary.

Side and center trims from the initial installation can be reused. Beware that the colours do not match, nor does the length of the trims fit perfectly, depending on the appliance used on. Side and center trims matching the new appliance's design to cover the gaps between both appliances and between the appliances' side walls and the adjacent cabinetry are included in the installation accessory RVA 460 020.


#### Important!

To join the appliances outside of the niche and adjusting them to the niche height, the feet of the Vario cooling 400 appliance must be raised.

This leads to:

- A visible height difference in the plinth area between both appliances (when the doors are open)
- The Vario Cooling 400 appliance not standing on its rollers, but on its front feet on the ground. To move it into the niche it must be slightly lifted with a hand truck.

### Replacement of side-by-side installation with Vario Cooling 400 series

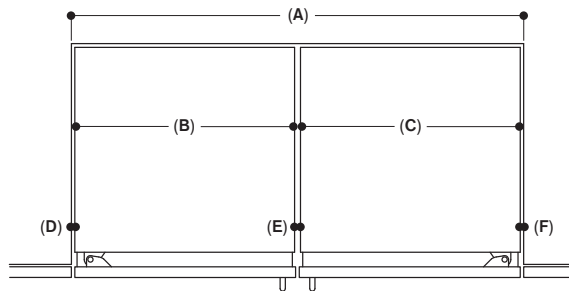

A: Niche width	1828	≤ 1676
B: Vario cooling Expressive appliance width	894	≤ 756
C: Vario Cooling 400 appliances width	≤ 908	≤ 908
D: Left gap	10	3
E: Center gap	13	6
F: Right gap	3	3



### Vario fridge-freezer combination 400 series RB 492/RB 472

#### RB 492 305

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 91.4 cm,  
Niche height 213.4 cm.  
Cooling section with one door and  
one fully extendable freezing drawer.

#### RB 472 305

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 76.2 cm,  
Niche height 213.4 cm.  
Cooling section with one door and  
one fully extendable freezing drawer.



#### Included in the price

- 1 egg holder with lid.
- 1 ice cube scoop.

#### Installation accessories

##### RA 421 712

Stainless steel door panels with  
handles.  
For RB 472, panel thickness 19 mm.

##### RA 421 910

Stainless steel door panels with  
handles.  
For RB 492, panel thickness 19 mm.

##### RA 423 340

Side trims, 2 pieces, for RB.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 425 710

Handle bar, stainless steel, short.  
For RB 472, with 2 mounts,  
length 658 mm, height 49 mm,  
drilling distance between the mounts  
637 mm.

##### RA 425 910

Handle bar, stainless steel, short.  
For RVY 497, RB 492 and RW 222,  
with 2 mounts, length 810 mm,  
height 49 mm, drilling distance  
between the mounts 787 mm.

##### RA 428 712

Stainless steel door panels, handleless.  
For RB 472, panel thickness 19 mm.

##### RA 428 910

Stainless steel door panels, handleless.  
For RB 492, panel thickness 19 mm.

##### RA 460 000

Accessory for side-by-side  
installation. Not required if appliances  
are installed more than 160 mm apart  
from each other. Included in delivery  
for RF and RW.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 030

Connecting element for vertically  
split fronts (for fridge-freezer  
combination).

##### RA 464 713

Ventilation grille stainless steel.  
For RB 472.

##### RA 464 913

Ventilation grille stainless steel.  
For RB 492.

#### Special accessories

##### RA 430 100

Storage container with transparent  
lid, anthracite.

##### RA 450 012

Activated charcoal water filter.  
For RVY, RB and RF.

#### Highlights

- Stainless steel interior with solid  
anthracite aluminium elements.
- Warm white and glare-free LED  
light spots.
- Opening assist for door with two  
options:
  1. Push-to-open function for  
integration into handleless  
furniture front.
  2. Pull-to-open function to facilitate  
opening the door using a handle.
- Flat stainless steel inner door,  
full-length.
- Almost invisible rail system for  
shelves and door racks for flexible  
positioning.
- Solid anthracite aluminium door  
racks.
- 1 fresh cooling drawer close to 0°C  
with manually adjustable  
temperature and 1 fresh cooling  
drawer with manually adjustable  
humidity.
- Integrated ice maker with fixed  
inlet water connection.
- Fully extendable freezer drawer  
with practical divider in anthracite.
- TFT touch display.
- Total volume 555/452 litres.

#### Handling

TFT touch display operation.  
Clear text display.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost  
water evaporation.  
Cushioned door closing system.  
Activated charcoal air filter.  
Rest mode certified by Star-K.  
When rest mode is active, the  
appliance can only be opened using a  
handle.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Cooling

No-Frost technology with fast cooling.  
Temperature adjustable from  
+2°C to +8°C.  
2 safety glass shelves, white glass,  
individually adjustable in height.  
1 integrated shelf.  
4 brilliant LED light spots with warm  
white, glare-free light (3500 K) within  
cooling area and drawers.  
Flat door rail system with fully flexible  
positioning of door racks.  
3 height adjustable door racks,  
1 of which is extra deep.  
Total volume all refrigerator  
compartments 389/316 litres.

#### Fresh cooling close to 0°C

1 fully extendable fresh cooling  
drawer close to 0°C with transparent  
front, illuminated.  
Cushioned closing system.  
Temperature can be adjusted  
manually.  
Ideal for meat, fish and poultry.

#### Fresh cooling

1 fully extendable fresh cooling  
drawer with transparent front,  
illuminated.  
Cushioned closing system.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

#### Freezing

No-Frost technology with fast freezing  
at -30°C.  
Temperature adjustable  
from -24°C to -14°C.  
4-star freezer compartment.  
Freezing capacity 14/14 kg/24 h.  
Storage time after a  
malfunction 13/13 h.  
2 fully extendable drawers, one of  
them inside. Outer drawer with  
synchronously running pull-out rails.  
Interior lighting with 2 LED light spots,  
warm white light.  
Volume 166/136 litres.

#### Ice maker

Integrated in the freezer compartment,  
with fixed inlet water connection.  
Particle filter for water inlet,  
integrated in ventilation grille area.  
Saturation indicator shown in TFT  
touch display.  
Can be switched off.  
Ice cube production approx.  
1.6/1.7 kg/24 h.  
Removable ice storage container with  
approx. 3 kg capacity.

#### Consumption data

Energy efficiency class E at a range of  
energy efficiency classes from A to G.  
Energy consumption  
326/295 kWh/year.  
Noise level 42 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°,  
fixable at 90°.  
Max. door panel weight:  
Door 47/41 kg.  
Drawer 12/10 kg.  
Shut-off valve for water connection  
must be planned next to the  
appliance and always be accessible.  
If the water pressure exceeds  
0.8 MPa (8 bar), connect pressure  
relief valve between water tap and  
hose set.


Please read additional planning notes  
on page 376-383.

#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.  
Water inlet.  
Supply hose 2.0 m with  
3/4" connection.  
Water pressure 2 to 8 bar.

#### Special accessories

(order as spare part):  
Part No. 11057720  
Extension for water inlet, 2 m with 3/4"  
connection.

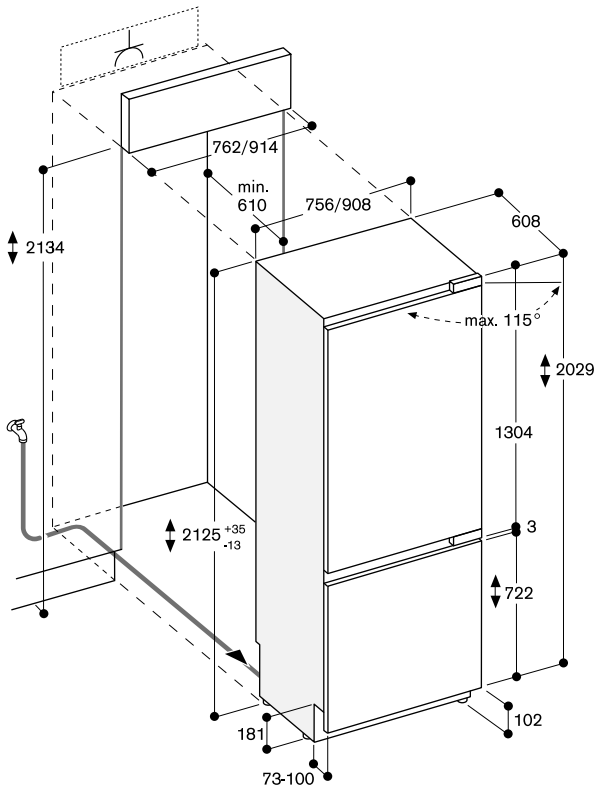

The maximum door panel dimensions are based on a clearance of 3 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



**Vario refrigerator 400 series**  
**RC 492/RC 472/RC 462**

**RC 492 305**

With fresh cooling 0 °C.  
 Fully integrated.  
 Niche width 91.4 cm,  
 Niche height 213.4 cm.

**RC 472 305**

With fresh cooling 0 °C.  
 Fully integrated.  
 Niche width 76.2 cm,  
 Niche height 213.4 cm.

**RC 462 305**

With fresh cooling 0 °C.  
 Fully integrated.  
 Niche width 61 cm,  
 Niche height 213.4 cm.



**Included in the price**

1 egg holder with lid.

**Installation accessories**

**RA 421 610**

Stainless steel door panel with handle.  
 For 61 cm wide appliances, panel  
 thickness 19 mm.

**RA 421 710**

Stainless steel door panel with handle.  
 For 76.2 cm wide appliances, panel  
 thickness 19 mm.

**RA 421 911**

Stainless steel door panel with handle.  
 For 91.4 cm wide appliances, panel  
 thickness 19 mm.

**RA 423 140**

Side trims, long.

**RA 425 110**

Handle bar, stainless steel, long.  
 With 3 mounts, length 1131 mm,  
 height 49 mm, drilling distance  
 between each mount 554 mm.

**RA 428 610**

Stainless steel door panel, handleless.  
 For 61 cm wide appliances, panel  
 thickness 19 mm.

**RA 428 710**

Stainless steel door panel, handleless.  
 For 76.2 cm wide appliances, panel  
 thickness 19 mm.

**RA 428 911**

Stainless steel door panel, handleless  
 For 91.4 cm wide appliances, panel  
 thickness 19 mm.

**RA 460 000**

Accessory for side-by-side  
 installation. Not required if appliances  
 are installed more than 160 mm apart  
 from each other. Included in delivery  
 for RF and RW.

**RA 460 013**

Additional side heating element 230 V.  
 Required if appliances are installed  
 with a distance greater than 16 mm  
 and less than 160 mm next to each  
 other and for all built-in situations in a  
 very humid environment. Not required  
 if appliances are installed more than  
 160 mm apart from each other.

**RA 460 020**

Connecting element for vertically  
 split appliance fronts (for a flush  
 front).

**RA 464 611**

Ventilation grille stainless steel.  
 For 61 cm wide appliances.

**RA 464 711**

Ventilation grille stainless steel.  
 For 76.2 cm wide appliances.

**RA 464 911**

Ventilation grille stainless steel.  
 For 91.4 cm wide appliances.

**Special accessories**

**RA 430 100**

Storage container with transparent  
 lid, anthracite.

**Highlights**

- Stainless steel interior with solid anthracite aluminium elements.
- Warm white and glare-free LED light spots.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
- Flat stainless steel inner door, full-length.
- Almost invisible rail system for shelves and door racks for flexible positioning.
- Solid anthracite aluminium door racks.
- 1 fresh cooling drawer 0 °C with temperature control from -1 °C to +3 °C and 1 fresh cooling drawer with manually adjustable humidity.
- TFT touch display.
- Total volume 579/467/357 litres.

**Handling**

TFT touch display operation.  
 Clear text display.

**Technical features**

Dynamic cold air distribution.  
 Automatic defrosting with defrost water evaporation.  
 Cushioned door closing system.  
 Activated charcoal air filter.  
 Rest mode certified by Star-K.  
 When rest mode is active, the appliance can only be opened using a handle.  
 Open-door and malfunction alarm.

**Selected digital services**

**(Gaggenau Home Connect)**  
 Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

**Cooling**

Fast cooling.  
 Temperature adjustable from +2 °C to +8 °C.  
 3 safety glass shelves, white glass, individually adjustable in height.  
 1 shallow, fully extendable drawer with transparent front.  
 1 integrated shelf.  
 Cushioned closing system.  
 4 brilliant LED light spots with warm white, glare-free light (3500 K) within cooling area and drawers.  
 Flat door rail system with fully flexible positioning of door racks.  
 3 height adjustable door racks, 1 of which is extra deep.  
 Volume 494/398/305 litres.

**Fresh cooling 0 °C**

1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.  
 Cushioned closing system.  
 Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.  
 Ideal for meat, fish and poultry.  
 Volume 85/69/52 litres.

**Fresh cooling**

1 fully extendable fresh cooling drawer with transparent front, illuminated.  
 Cushioned closing system.  
 Humidity can be adjusted manually.  
 Ideal for fruit and vegetables.

**Consumption data**

Energy efficiency class E at a range of energy efficiency classes from A to G.  
 Energy consumption 182/166/150 kWh/year.  
 Noise level 40 dB (A) re 1 pW.

**Planning notes**


Flat hinge.  
 Door hinge right, reversible.  
 Door opening angle of 115°, fixable at 90°.  
 Max. door panel weight 43/29/41 kg.

Please read additional planning notes on page 376–383.

**Connection**

Total connected load 0.300 kW.  
 Connecting cable 3.0 m, pluggable.



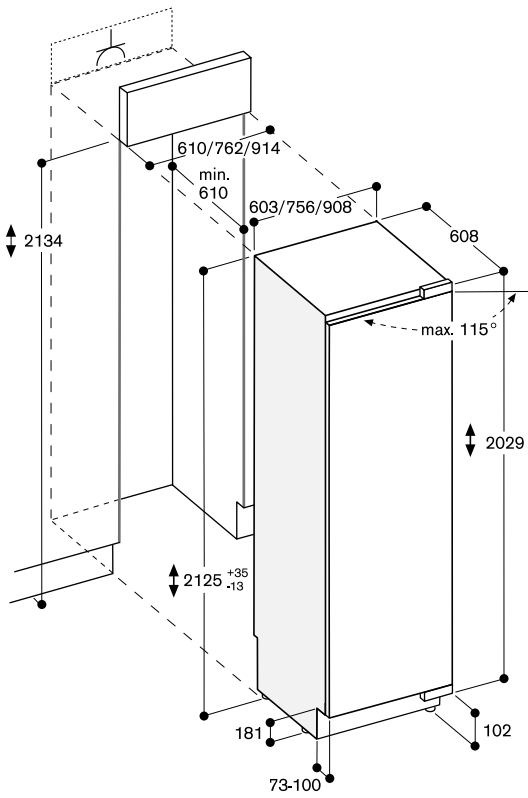

The maximum door panel dimensions are based on a clearance of 3 mm.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



#### Vario freezer 400 series RF 471/RF 461/RF 411

##### RF 471 306

Fully integrated, with ice maker.  
Niche width 76.2 cm,  
Niche height 213.4 cm.

##### RF 461 306

Fully integrated, with ice maker.  
Niche width 61 cm,  
Niche height 213.4 cm.

##### RF 411 306

Fully integrated, with ice maker.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### Included in the price

- 1 ice cube scoop.
- 1 accessory for side-by-side installation.
- 1 ice storage container, small.
- 1 ice storage container, large.

#### Installation accessories

##### RA 421 110

Stainless steel door panel with handle.  
For 45.7 cm wide appliances, panel thickness 19 mm.

##### RA 421 610

Stainless steel door panel with handle.  
For 61 cm wide appliances, panel thickness 19 mm.

##### RA 421 710

Stainless steel door panel with handle.  
For 76.2 cm wide appliances, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 110

Stainless steel door panel, handleless.  
For 45.7 cm wide appliances, panel  
thickness 19 mm.

##### RA 428 610

Stainless steel door panel, handleless.  
For 61 cm wide appliances, panel  
thickness 19 mm.

##### RA 428 710

Stainless steel door panel, handleless.  
For 76.2 cm wide appliances, panel  
thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 113

Ventilation grille stainless steel.  
For 45.7 cm wide appliances with  
integrated water filter.

##### RA 464 616

Ventilation grille stainless steel.  
For 61 cm wide appliances with  
integrated water filter.

##### RA 464 714

Ventilation grille stainless steel.  
For 76.2 cm wide appliances with  
integrated water filter.

#### Special accessories

##### RA 450 012

Activated charcoal water filter.  
For R VY, RB and RF.

#### Highlights

- Stainless steel interior with solid anthracite aluminium elements.
- Warm white and glare-free LED light spots.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
- Material and aesthetics of interior as for RC model
  - Glass shelves.
  - Solid anthracite aluminium door racks.
- Flat stainless steel inner door, full-length.
- Almost invisible rail system for shelves and door racks for flexible positioning.
- Integrated ice maker with fixed inlet water connection.
- TFT touch display.
- Total volume 445/344/240 litres.

#### Handling

TFT touch display operation.  
Clear text display.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system.  
Rest mode certified by Star-K.  
When rest mode is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

#### Freezing

No-Frost technology with fast freezing at -30 °C.  
Temperature adjustable from -24 °C to -14 °C.  
4-star freezer compartment.  
Freezing capacity 23/19/16 kg/24 h.  
Storage time after a malfunction 10/7/6 h.  
4 safety glass shelves, white glass, 3 of which are individually height adjustable.  
2 fully extendable drawers with transparent front.  
Brilliant LED light spots with warm white, glare-free light (3500 K).  
Flat door rail system with fully flexible positioning of door racks.  
4 height-adjustable door racks.  
Ice maker  
Integrated in the freezer compartment, with fixed inlet water connection.  
Particle filter for water inlet, integrated in ventilation grille area.  
Saturation indicator shown in TFT touch display.  
Can be switched off.  
Ice cube production approx. 1.7/1.5/1.4 kg/24 h.  
Removable ice storage container with approx. 4 kg capacity.

#### Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 321/284/246 kWh/year.  
Noise level 42 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, fixable at 90°.  
In case of door opening angle of 90°, the drawers have restricted access and the standard ice storage container cannot be removed.  
A small ice storage container (RA 448 220) is available to ensure access. This change must be done prior to fixing the door.  
Max. door panel weight 29/41/59 kg.  
Shut-off valve for water connection must be planned next to the appliance and always be accessible.  
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.


Please read additional planning notes on page 376–383.

#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.  
Water inlet.  
Supply hose 2.0 m with 3/4" connection.  
Water pressure 2 to 8 bar.

Special accessories  
(order as spare part):  
Part No. 11057720

Extension for water inlet, 2 m with 3/4" connection.

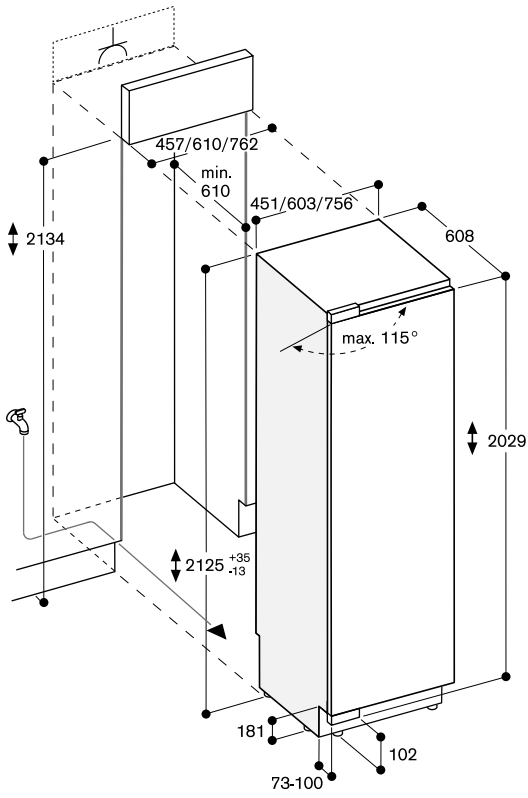

The maximum door panel dimensions are based on a clearance of 3 mm.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Vario freezer 400 series

#### RF 410

#### RF 410 304

Fully integrated.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### Included in the price

1 accessory for side-by-side installation.

#### Installation accessories

##### RA 421 110

Stainless steel door panel with handle.  
For 45.7 cm wide appliances, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 110

Stainless steel door panel, handleless.  
For 45.7 cm wide appliances, panel  
thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 111

Ventilation grille stainless steel.  
For 45.7 cm wide appliances.

#### Highlights

- Stainless steel interior with solid anthracite aluminium elements.
- Warm white and glare-free LED light spots.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
- Material and aesthetics of interior as for RC model
  - Glass shelves.
  - Solid anthracite aluminium door racks.
- Flat stainless steel inner door, full-length.
- Almost invisible rail system for shelves and door racks for flexible positioning.
- TFT touch display.
- Total volume 240 litres.

#### Handling

TFT touch display operation.  
Clear text display.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system.  
Rest mode certified by Star-K.  
When rest mode is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

#### Freezing

No-Frost technology with fast freezing at -30 °C.  
Temperature adjustable from -24 °C to -14 °C.  
4-star freezer compartment.  
Freezing capacity 16 kg/24 h.  
Storage time after a malfunction 6 h.  
4 safety glass shelves, white glass, 4 of which are individually height adjustable.  
2 fully extendable drawers with transparent front.  
Brilliant LED light spots with warm white, glare-free light (3500 K).  
Flat door rail system with fully flexible positioning of door racks.  
4 height-adjustable door racks.

#### Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 246 kWh/year.  
Noise level 42 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, fixable at 90°.  
For an installation with a door opening angle of 90°, the drawers have a restricted access.  
Max. door panel weight 59 kg.

Please read additional planning notes on page 376–383.

#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.

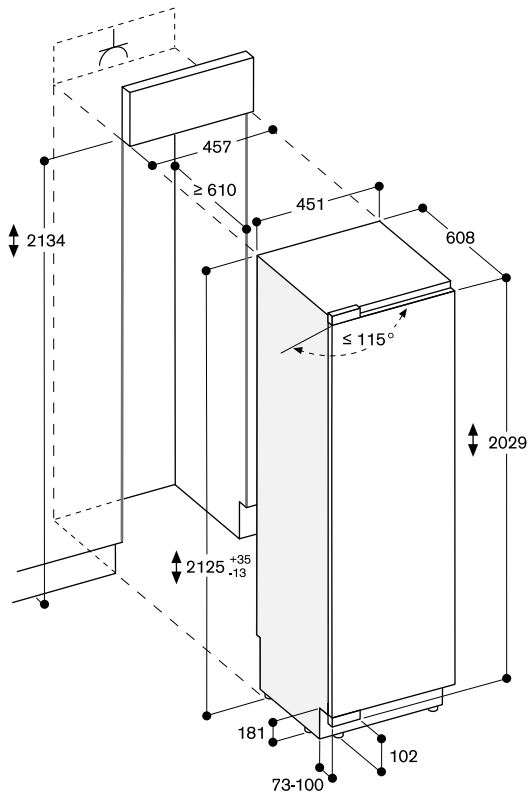

The maximum door panel dimensions are based on a clearance of 3 mm.

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Vario wine climate cabinet 400 series RW 466

#### RW 466 365

Fully integrated, with glass door.  
Niche width 61 cm,  
Niche height 213.4 cm.



#### RW 466 305

Fully integrated, with solid door.  
Niche width 61 cm,  
Niche height 213.4 cm.



#### Included in the price

1 accessory for side-by-side installation.

#### Installation accessories

##### RA 420 010

Door lock for RW 414,  
RW 464 and RW 466.

##### RA 421 610

Stainless steel door panel with handle.  
For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 421 611

Stainless steel door panel frame with handle.

For 61 cm wide appliances,  
left-hinged, panel thickness 19 mm.

##### RA 421 612

Stainless steel door panel frame with handle.

For 61 cm wide appliances,  
right-hinged, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 610

Stainless steel door panel, handleless.  
For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 428 611

Stainless steel door panel frame,  
handleless.

For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 611

Ventilation grille stainless steel.  
For 61 cm wide appliances.

#### Special accessories

##### RA 430 000

Screw hole cover set. 8 pieces.

##### RA 491 661

Fully extendable bottle trays with  
hidden telescopic rails in oak wood  
and solid aluminium in anthracite  
For 61 cm wide appliances.

##### RA 492 660

Removable shelf with oak wood frame.  
Suitable for decanters and open  
bottles.  
For 61 cm wide appliances.

##### RA 493 060

Presenter in oak wood and aluminium  
in anthracite for single bottle display.  
1 piece.

##### RA 498 640

Bottle support in oak wood for  
convenient storage of bottles on the  
division plate.

For 61 cm wide appliances.

#### Highlights

- 3 independently controllable climate zones.
- Consistent temperatures with exact control from +5 °C to +20 °C.
- Humidity control.
- Stainless steel interior.
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite.
- Bottle trays with hidden telescopic rails.
- Warm white and glare-free LED light spots.
- 5 preset lighting scenarios, selectable via TFT display.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front
  2. Pull-to-open function to facilitate opening the door using a handle.
- Low-vibration operation.
- TFT touch display.
- Number of standard wine bottles: 99.

#### Handling

TFT touch display operation.  
Clear text display.  
Lockable door (with door lock  
RA 420 010).

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost  
water evaporation.  
Cushioned door closing system.  
Activated charcoal air filter.  
UV-protection.  
Rest mode certified by Star-K.  
When rest mode is active, the  
appliance can only be opened using a  
handle.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Light scenarios.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Features

Capacity 99 bottles  
(based on 0.75 l standard bottles).  
12 bottle trays,  
— 9 fully extendable trays  
— 3 suitable for storage of Magnum  
bottles.  
Flexible interior configuration possible  
by adding or removing fully  
extendable bottle trays.  
Storage of up to 12 Magnum bottles  
with standard tray configuration  
(12 bottle trays).  
Space for max. 12 bottle trays.  
2 brilliant LED light spots with warm  
white, glare-free light (3500 K) in each  
climate zone.  
5 different lighting scenarios can be  
selected for individual wine  
presentation.  
Total volume 370 litres.

#### Consumption data

Energy efficiency class G/F at a  
range of energy efficiency classes  
from A to G.  
Energy consumption  
155/129 kWh/year.  
Noise level 42 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°,  
fixable at 90°.  
Max. door panel weight 73 kg.  
The mains socket needs to be planned  
outside the built-in niche.  
No transport/operation above  
2000 m sea level.


Please read additional planning notes  
on page 376–383.

#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.

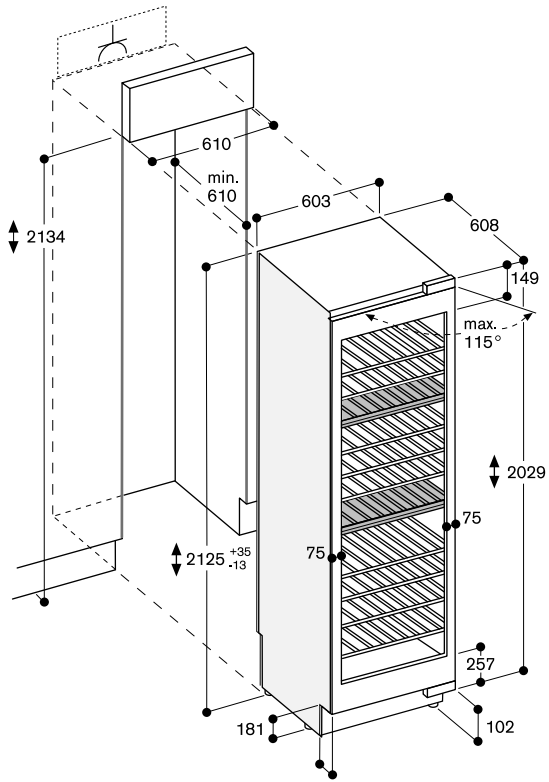


The maximum door panel dimensions are based on a clearance of 3 mm.

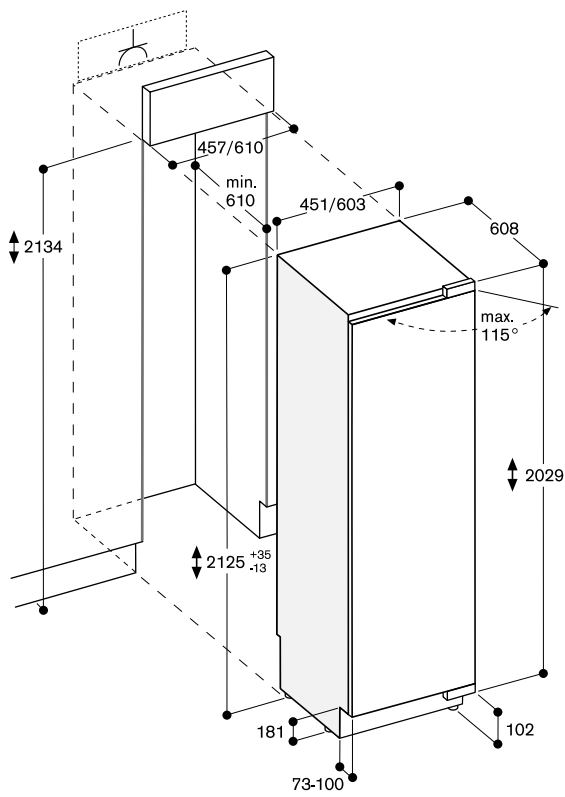

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

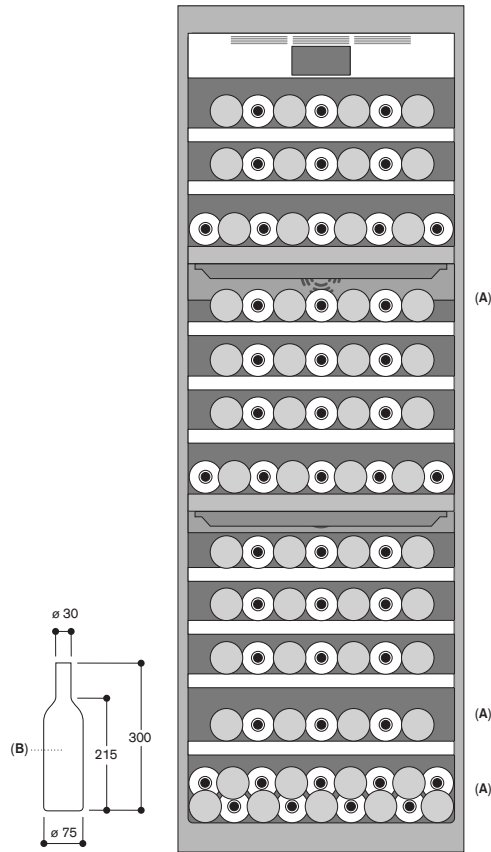

A: Suitable area for storage of magnum bottles in standard tray configuration  
 B: 0.75 litres

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Vario wine climate cabinet 400 series RW 414

#### RW 414 365

Fully integrated, with glass door.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### RW 414 305

Fully integrated, with solid door.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### Included in the price

1 accessory for side-by-side installation.

#### Installation accessories

##### RA 420 010

Door lock for RW 414,  
RW 464 and RW 466.

##### RA 421 110

Stainless steel door panel with handle.  
For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 421 111

Stainless steel door panel frame with handle.  
For 45.7 cm wide appliances,  
left-hinged, panel thickness 19 mm.

##### RA 421 112

Stainless steel door panel frame with handle.  
For 45.7 cm wide appliances,  
right-hinged, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 110

Stainless steel door panel, handleless.  
For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 428 111

Stainless steel door panel frame,  
handleless.  
For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 111

Ventilation grille stainless steel.  
For 45.7 cm wide appliances.

#### Special accessories

##### RA 430 000

Screw hole cover set. 8 pieces.

##### RA 491 161

Fully extendable bottle trays with  
hidden telescopic rails in oak wood  
and solid aluminium in anthracite.  
For 45.7 cm wide appliances.

##### RA 492 160

Removable shelf with oak wood frame.  
Suitable for decanters and open  
bottles.  
For 45.7 cm wide appliances.

##### RA 493 060

Presenter in oak wood and aluminium  
in anthracite for single bottle display.  
1 piece.

##### RA 498 140

Bottle support in oak wood for  
convenient storage of bottles on the  
division plate.  
For 45.7 cm wide appliances.

#### Highlights

- 2 independently controllable climate zones.
- Consistent temperatures with exact control from +5 °C to +20 °C.
- Humidity control.
- Stainless steel interior.
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite.
- Bottle trays with hidden telescopic rails.
- Warm white and glare-free LED light spots.
- 5 preset lighting scenarios, selectable via TFT display.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- Low-vibration operation.
- TFT touch display.
- Number of standard wine bottles: 70.

#### Handling

TFT touch display operation.  
Clear text display.  
Lockable door (with door lock  
RA 420 010).

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system.  
Activated charcoal air filter.  
UV-protection.  
Rest mode certified by Star-K.  
When rest mode is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.  
Light scenarios.

Please read additional information on Gaggenau Home Connect on page 459.

#### Features

Capacity 70 bottles  
(based on 0.75 l standard bottles).  
12 bottle trays,  
— 10 fully extendable trays  
— 3 suitable for storage of Magnum bottles.  
Flexible interior configuration possible by adding or removing fully extendable bottle trays.  
Storage of up to 6 Magnum bottles with standard tray configuration (12 bottle trays).  
Space for max. 13 bottle trays.  
2 brilliant LED light spots with warm white, glare-free light (3500 K) in each climate zone.  
5 different lighting scenarios can be selected for individual wine presentation.  
Total volume 272 litres.

#### Consumption data

Energy efficiency class G/F at a range of energy efficiency classes from A to G.  
Energy consumption  
145/120 kWh/year.  
Noise level 42 dB (A) re 1 pW.

#### Planning notes


Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 76 kg.  
The mains socket needs to be planned outside the built-in niche.  
No transport/operation above 2000 m sea level.

Please read additional planning notes on page 376–383.


#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.



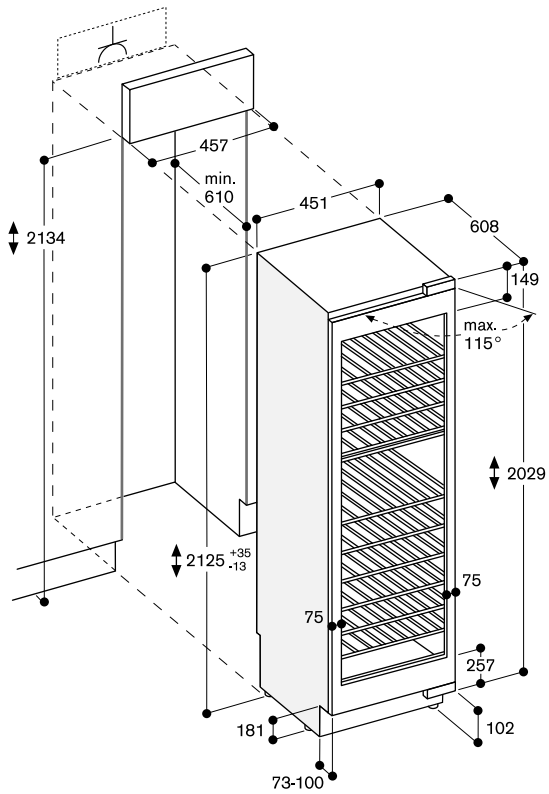


The maximum door panel dimensions are based on a clearance of 3 mm.

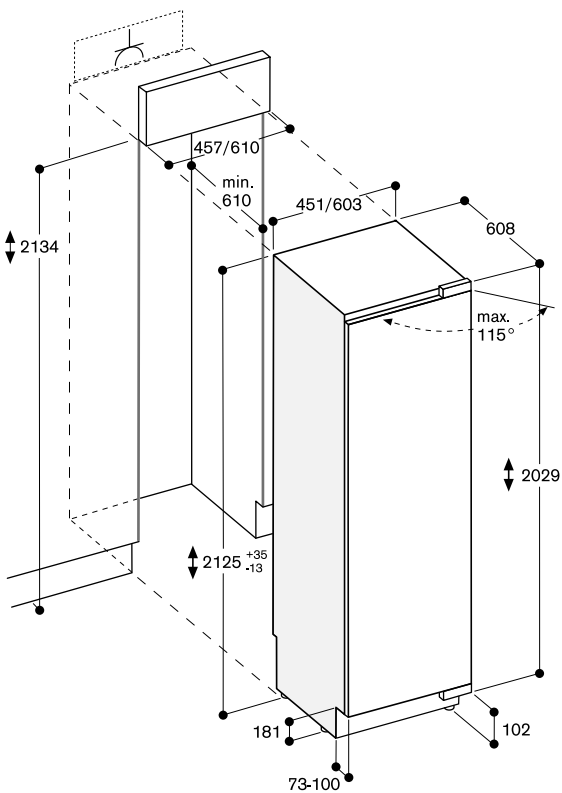

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

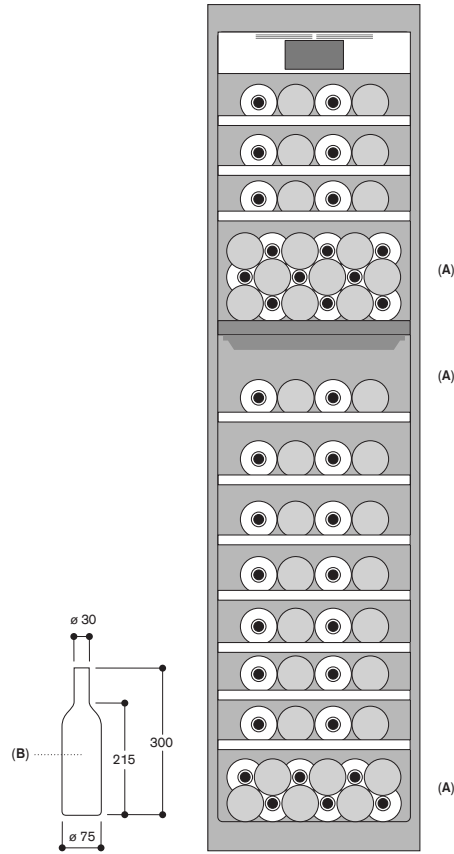

A: Suitable area for storage of magnum bottles in standard tray configuration  
 B: 0.75 litres

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Additional planning notes for Vario cooling 400 series

The side walls of the adjacent cabinetry have to be dimensionally stable, as the Vario cooling appliances are secured in the niche with only an anti-tilt bracket on the top back and on the bottom at the side.

Vario cooling appliances can be installed handle to handle as a side-by-side combination. In this case the side-by-side installation kit RA 460 000 is required. If the distance between the appliances is greater than 16 mm or less than 160 mm or the environment very humid the additional side heating element RA 460 013 needs to be installed between the appliances to avoid condensation.

If the appliances are combined hinge to handle in a very humid environment the additional side heating element RA 460 013 is required as well. It can be omitted if the distance between the appliances is greater than 160 mm. The additional side heating element RA 460 013 does not take up any additional space. It is already included in the niche dimensions.

If the Vario cooling appliances are joined together hinge to hinge an additional stable side wall must be foreseen.

If restrictions in use are accepted (no simultaneous opening of the doors possible) the appliances can be joined together directly, using the side-by-side installation accessory RA 460 000.

When installing a cooling appliance handleless next to a GO4/GM4/GS4/GC4 from the oven Expressive series a minimum lateral distance of 30 mm is required, if the door of the cooling appliance opens towards the GO4/GM4/GS4/GC4. Please also consider information in chapter "Location".

For the same installation next to a BOP/BMP/BSP from the ovens 200 series, a distance of 40 mm is required.


### Door opening angle

To ensure correct kitchen planning it is essential to take into account the opening angle of the appliance door (plus fitted cabinet door and handle). There should be no possibility of collision with other kitchen furnishings (worktops, handles of other cabinetry etc.) or parts of the room (walls, protrusions etc.).

The space needed for the hinge and the consequential distance to the adjacent cabinetry and its handle can, depending on the panel thickness, be seen in the following drawing. The drawing assumes a panel thickness of 19 mm.


If a collision occurs, the following options are available to remedy the situation: Restrict the door opening angle to 90° (standard 115°). Pin to restrict the angle is enclosed with the appliance. Due to limitation in use, it is not recommended to install a freezer (RF 411, RF 461, RF 471) next to a wall which requires a door angle of 90° or any other installation which requires a 90° door angle as drawers can't be pulled out completely or removed. If the restrictions in use are accepted, the ice storage container must be exchanged for the small ice storage container (RA 448 220). This must be done prior fixing the door.

Fit a spacer between the appliance and the cabinetry that it would collide with. Rearrange surrounding cabinetry or appliance.

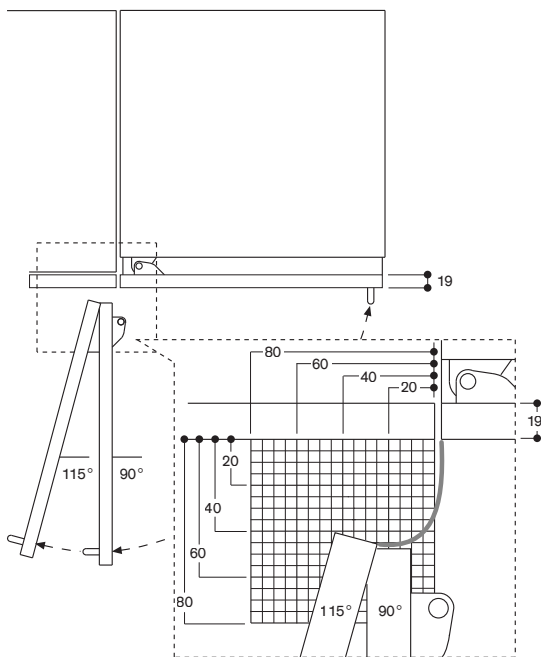


The clearances to adjacent cabinetry and handles can be determined for different door opening angles based on the door panel thickness. Here the clearances are based on a door panel thickness of 19 mm.

### Wall clearance RB 492

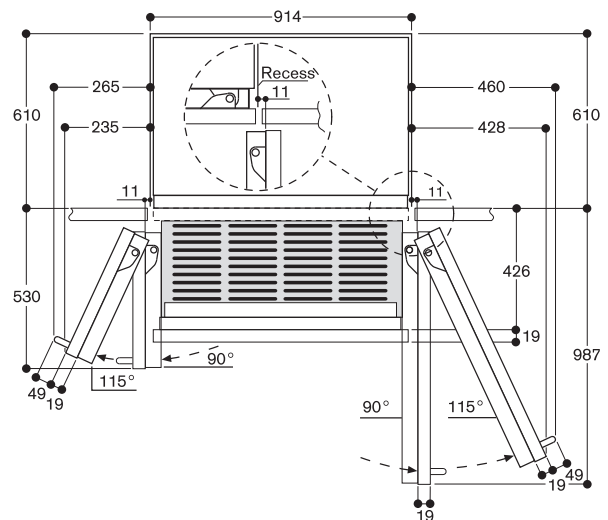

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

### Wall clearance RB 472/RC/RF/RW

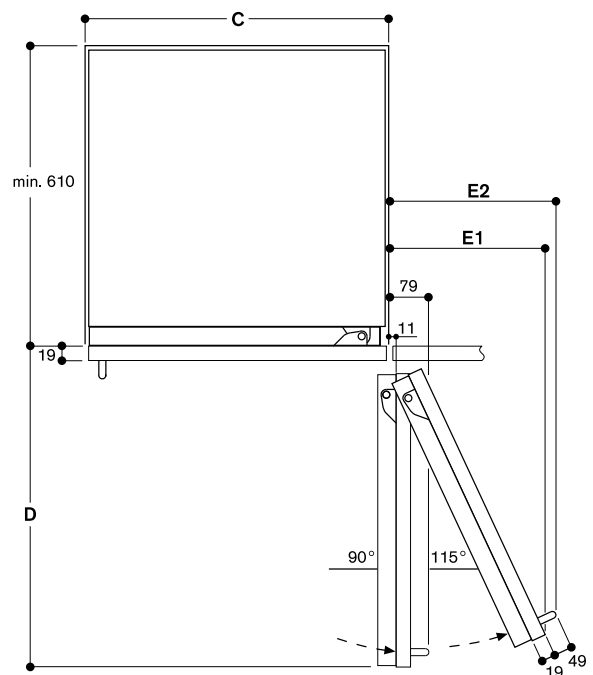

#### Recess width

C	D	E1	E2
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

#### Notes

- The adjustable feet have an adjustment range of +35 mm to -13 mm. The standard height displayed in the pictures is 0 mm.
- For proper ventilation of the appliance, the clearance between the floor and bottom edge of the cabinet front must be at least 100 mm.
- The panel thickness of customised doors can range from between 19 mm and 38 mm (in the picture 19 mm).


## Installation niche

Unlike conventional built-in appliances, Vario cooling appliances stand on the floor. This means that the installation niche is a space in a line of kitchen units.

### Installation niche

The specified dimensions of the installation niche must be observed to guarantee the proper installation of the appliance and the design of the cabinet front. It is particularly important that the installation niche is square. The side walls must be smooth, not have any protrusions or unevenness. Use the appropriate tools, e.g. spirit level, diagonal measurements, etc. to determine whether the installation niche is square. The side walls and the crown of the installation niche must be at least 16 mm thick.

### Installation niche for an individual appliance:

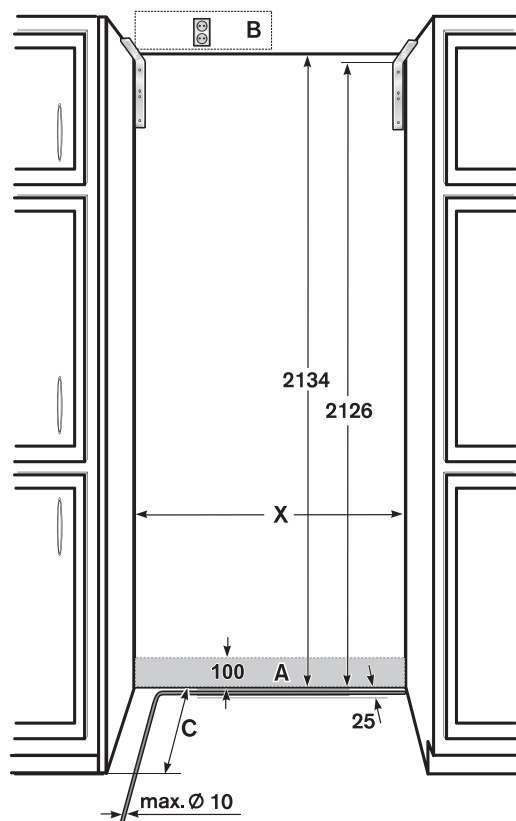

A Area for installation the water connection

B Area for installation the electrical connection must be outside the niche

C Depth of installation niche, depending on kitchen design.

C = 610 mm minimum!

X Width of installation niche, refer to the table below for more details:

Appliance type	Width of the niche X
451 mm	457 mm
603 mm	610 mm
756 mm	762 mm
908 mm	914 mm

### Installation niche for a side-by-side solution

In a side-by-side solution, there are many ways to combine the appliances. The width of the installation niche is calculated from the sum of the widths of the individual appliances. The height and depth of the installation niche correspond to the specifications for the individual appliances. It is important to comply with the dimensions in the area set aside for electric and water connections. For the precise dimensions, please refer to the details given for individual appliances.

### Location

The appliance should be installed in a dry, well ventilated room. The location of the appliance should not be subject to direct sunlight or near a source of heat, such as a cooker, a radiator, etc.

If an installation next to a heat source is unavoidable the following minimum distances to that source need to be considered:

- 3 cm to electric or gas cookers.
- 3 cm to electric or gas ovens.
- 30 cm to an oil-fired or solid-fuel cooker.

The floor of the installation location must not give way; if required, reinforce floor. To ensure that the ice maker functions correctly, the appliance must be upright.

### Surface

To ensure that the appliance is installed securely and functions properly, the surface must be level and even.

The floor must consist of a hard, rigid material.

The floor in the installation area must have the same height as the floor in the rest of the room.

Due to the heavy weight of a fully loaded appliance, the floor beneath must be stable.

If in doubt, consult an architect, structural engineer or construction expert.

### Neighbouring cabinetry

The new appliance is screwed firmly in place with the neighbouring cabinet parts.

Care should be taken to ensure that all cupboards onto which something is fastened, are connected firmly to the floor or the wall.

The thickness of the plinth can be a maximum 19 mm.

## Base area | Crown of the niche

### Base area

#### Important!


Poor ventilation leads to damage to the appliance!  
Under no circumstances is it permitted to cover the air inlets and the exhaust air outlets of the appliance in the lower base area. You must observe the minimum distance of 100 mm between the upper edge of the floor and the bottom edge of the cabinet door of the appliance. Take this into consideration also when adjusting the appliance feet.

In relation to the standard height, the maximum height of the base board is 102 mm. The plinth can be maximum 19 mm thick.

Adhesive connectors are supplied on the front panel of the appliance for fitting the base board.

The air inlets and the exhaust air outlets of the appliance are located above the base board. They must not be covered.

### Base detail

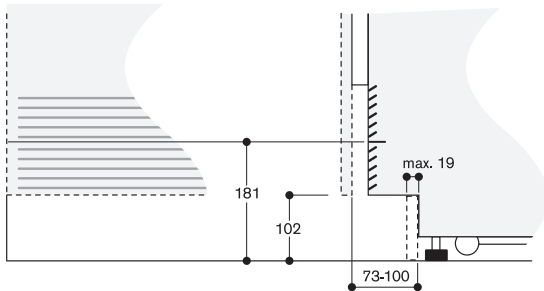

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.


For design reasons, it may be necessary to increase the distance between the upper edge of the floor and the bottom edge of the cabinet door of the appliance, so that it extends beyond the standard dimension of 102 mm. The maximum dimension is 181 mm. If this is the case, air inlets and exhaust air outlets would become visible!

### Crown

The height of the cabinet door on the appliance is dependent on:  
– the overall height of the appliance,  
– the distance from the bottom edge of the cabinet door to the floor,  
– the appliance type (one-door or multi-door appliances).  
The overall height of the appliance is 2.029 mm.

The height can be adjusted within a range of -13 mm to +35 mm. You must observe the minimum distance of 100 mm between the upper edge of the floor and the bottom edge of the cabinet door of the appliance.

This height can vary depending on the conditions at the site. It is possible, e.g. for design reasons, to lengthen the cabinet door upwards by extending it beyond the top of the appliance.

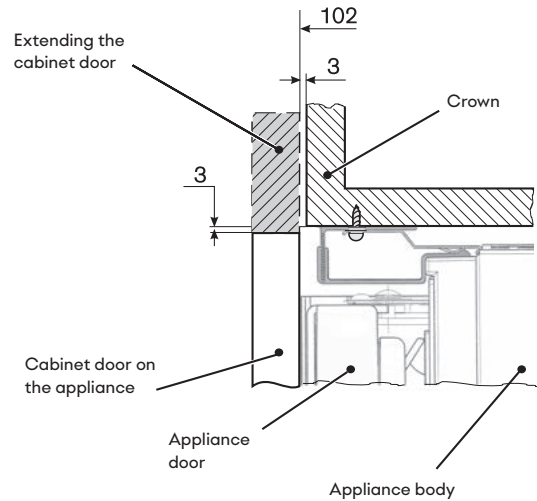

#### Important!

It must be ensured that the crown of the installation niche always has a depth of at least 100 mm (measured from the front edge of the appliance). Only then can the secure installation of the appliance in the installation niche be guaranteed.

## Dimensions of the special accessories - door panels | door panel frames

The cabinetry, the height of the base board, the overall height of the kitchen and other determining dimensions of the kitchen must be taken into account, in order to plan the exact positioning of the cabinet door so that the appliance integrates perfectly into the overall picture of the kitchen.

The following diagrams show the basic dimensions of the special accessories door fronts/door front frames for various appliances.

The dimensions of the doors shown are designed for the following basic specifications:

- Height of the base board: 102 mm
- Overall height of the installation niche: 2.134 mm
- Gap: 3 mm
- Panel thickness: 19 mm


These specifications provide you with a good starting point for a variety of kitchen designs.

When designing a customised cabinet door, please ensure that the back of the cabinet door is visible to a height of 205 mm over the floor when opening the appliance door and adapt to the front design. All diagrams are also valid for doors without handle.

### Important!


The following diagrams are not a substitute for detailed designs. Compliance with specified requirements relating to kitchen design is essential.

### Recess width 45.7 cm

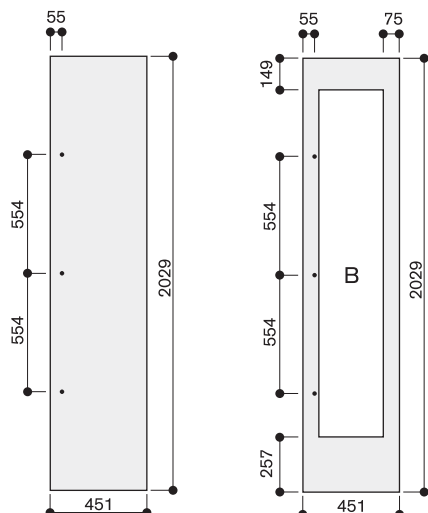


The door panel thickness is 19 mm. The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess. B: Width of the side frame parts of the door panel can be between 65 mm and 82 mm.

### Recess width 91.4 cm

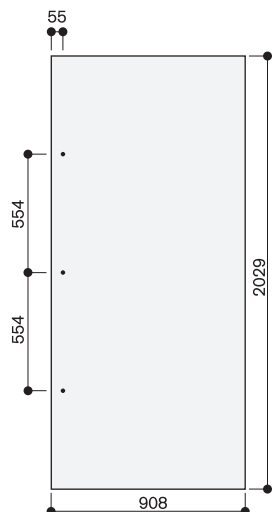


The door panel thickness is 19 mm. The maximum door panel dimensions are based on a clearance of 3mm, based on a single recess.

### Recess width 61 cm

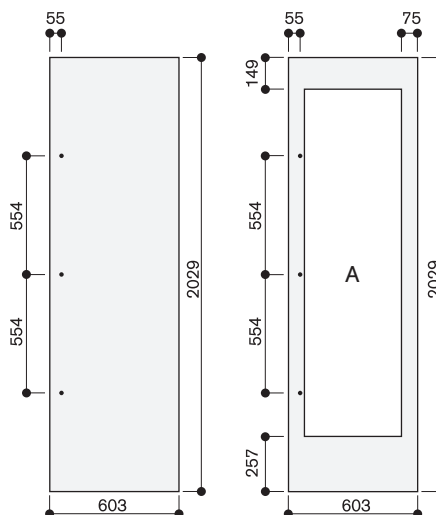


The door panel thickness is 19 mm. The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess. A: Width of the side frame parts of the door panel can be between 65 mm and 82 mm.

### Recess width 76.2 cm

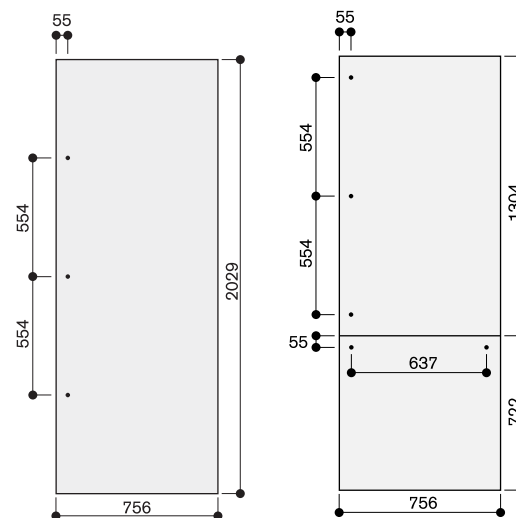

The door panel thickness is 19 mm. The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.


### Recess width 91.4 cm

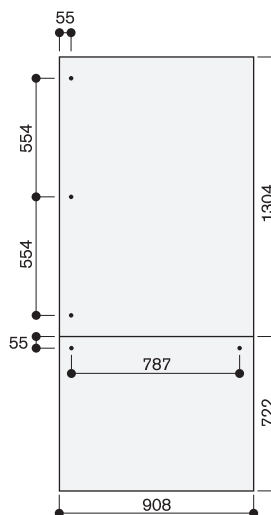


The door panel thickness is 19 mm. The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

All measurements in mm.

## Planning principle for an individual appliance

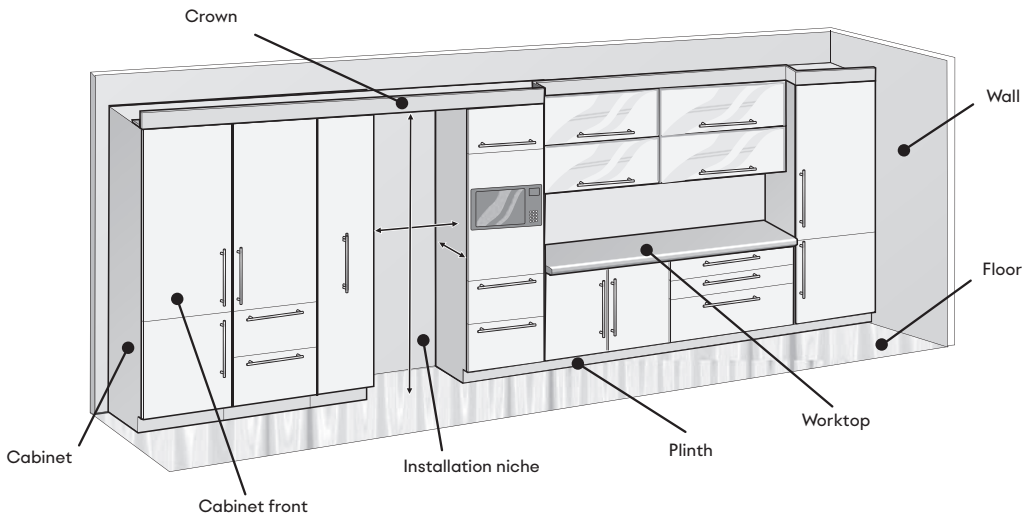

### Vertical cut Installation niche

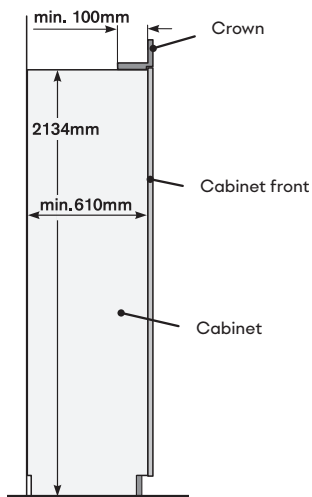

The side walls of the installation niche must be completely even and flat along their entire depth.


**Installation niche for an individual cooling appliance (example: 762 mm wide)**  
 In this example, the installation niche is formed by two tall cupboards (left and right) with an appropriate crown to the niche.

The cabinet door for the appliance comes in an identical design to the other kitchen fronts.


Requirements for the installation niche:

- The side walls of the installation niche must be completely even and flat along their entire depth
- Crown is at least 100 mm deep and made of a solid material (min. 16 mm thick)
- Width of the installation niche: 762 mm
- Depth of the installation niche: min. 610 mm


### Horizontal cut Installation niche

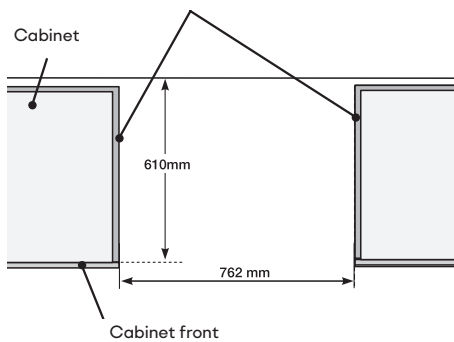

## Planning principle for a side-by-side solution

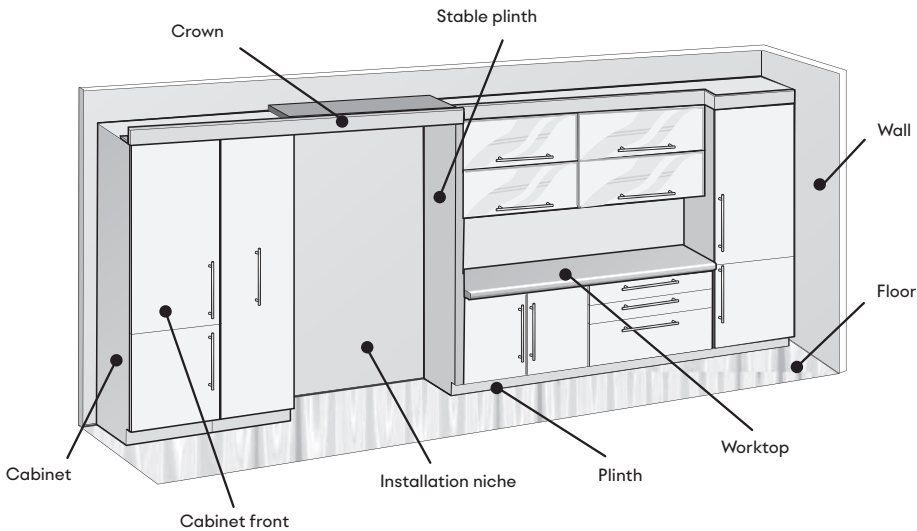

### Vertical cut Installation niche

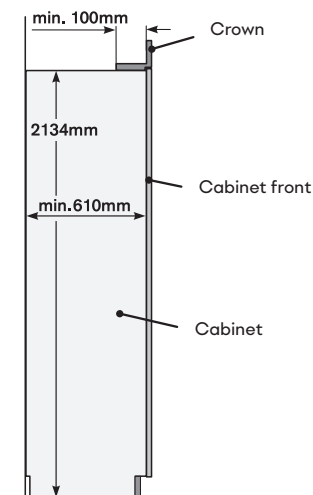

The side walls of the installation niche must be completely even and flat along their entire depth.

### Installation niche for a side-by-side solution

- 610 mm cooling appliance (right)
- 457 mm freezer (left)


In this example, the installation niche is formed by a tall cupboard (left) and a stable plinth (right) together with an appropriate crown for the niche.

The cabinet door for both appliances comes in an identical design to the other kitchen fronts.


#### Requirements for the installation niche:

- The side walls of the installation niche must be completely even and flat along their entire depth
- Crown is at least 100 mm deep and made of a solid material (min. 16 mm thick)
- Width of the installation niche:  
 $610 \text{ mm} + 457 \text{ mm} = 1,067 \text{ mm}$
- Depth of the installation niche: min. 610 mm

### Horizontal cut Installation niche

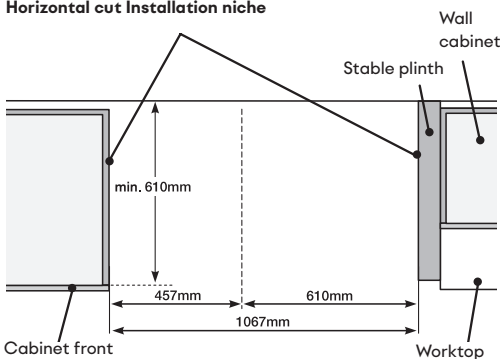

## Planning examples for Vario cooling 400 series

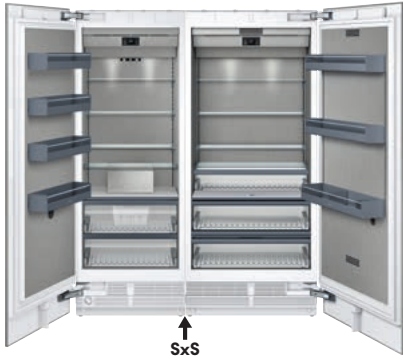

### Side-by-side solution 1

RF 471 / RC 492

**Usability limitations:**

No limitation.

**Installation accessories:**

1x RA 460 000 installation accessories for side-by-side installation (SxS)\*.

**Notes:**

Door hinges on the outside.



### Side-by-side solution 2

RW 414 / RB 472

**Usability limitations:**

No limitation.

**Installation accessories:**

1x RA 460 000 installation accessories for side-by-side installation (SxS)\*.

**Notes:**

Door hinges on the outside. Change door hinge of RW.

If using the stainless steel door panels with a handle (installation accessories), select the correct panel for the intended hinge side of the RW.



### Combination of 3

RF 461 / RW 466 / RC 462

**Usability limitations:**


The doors of RW and RC cannot be opened at the same time, but one after another.

**Installation accessories:**

2x RA 460 000 installation accessories for side-by-side installation (SxS)\*.

**Notes:**

All three appliances must be connected to each other before installation and pushed together into the installation niche.

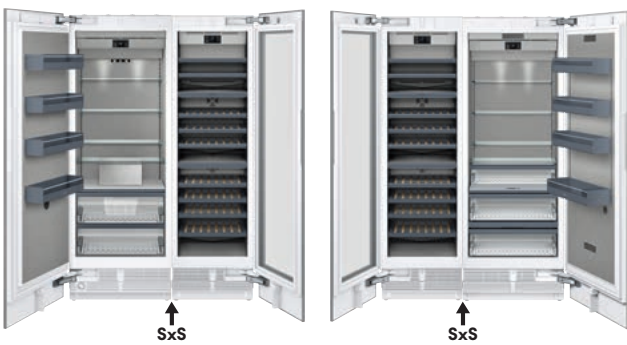

### Maximum distance

RF 471 / RW 466 / RW 466 / RC 472

**Usability limitations:**

No limitation. All doors can be opened fully.

**Installation accessories:**

2x RA 460 000 (SxS)\*.

**Notes:**

Two separate installation niches. Clearance is large enough to open all doors at the same time. Change door hinge of one of the RW 466.

If using the stainless steel door panels with a handle (installation accessories), select the correct panel for the intended hinge side of the RW.





**Distance  $\geq$  160 mm**  
RF 471 / RC 472 / RW 466 / RW 466

**Usability limitations:**

The middle doors cannot be opened at the same time.

**Installation accessories:**

2x RA 460 000 (SxS)\*.

**Notes:**

Two separate installation niches. The clearance between the two installation niches is greater than 160 mm. Change door hinge of RW.

If using the stainless steel door panels with a handle (installation accessories), select the correct panel for the intended hinge side of the RW.



**Distance  $\leq$  160 mm**  
RF 471 / RC 472 / RW 466 / RW 466

**Usability limitations:**

It may be necessary to open the middle doors one after the other, rather than at the same time.

**Installation accessories:**

2x RA 460 000 (SxS)\*, 1x RA 460 013 (HE)\*.

**Notes:**

Two separate installation niches with a stable plinth between them. The clearance between the two installation niches is less than 160 mm. Therefore, an additional side heating element is required. Change door hinge of RW. If using the stainless steel door panels with handle (installation accessories), select the correct panel for the intended hinge side of the RW.



**Combination of 4**  
RF 471 / RW 466 / RW 466 / RC 472

**Usability limitations:**

If the middle doors are open, then neither of the outer doors can be opened.

**Installation accessories:**

3x RA 460 000 installation accessories for side-by-side installation (SxS)\*.

**Notes:**

The appliances in the middle are connected side-by-side. Connecting the others will require additional side-by-side installation accessories. All four appliances must be connected to each other before installation and pushed together into the installation niche.



**Combination of 4 – alternative**  
RF 471 / RW 466 / RW 466 / RC 472

**Usability limitations:**

The middle doors cannot be opened at the same time.

**Installation accessories:**

3x RA 460 000 installation accessories for side-by-side installation (SxS)\*.

**Notes:**

The appliances in the middle are connected hinge to hinge. All four appliances must be connected to each other before installation and pushed together into the installation niche. If using the stainless steel door panels with handle (installation accessories), select the correct panel for the intended hinge side of the RW.

\*SxS Accessory for side-by-side installation. In a very humid environment always use the additional side heating element instead of the accessory for side-by-side installation.

\*HE Additional side heating element. Always required, if the distance between the appliances is greater than 16 mm or less than 160 mm.



**Vario fridge-freezer combination**  
**200 series**  
**RB 289**

**RB 289 300**

With fresh cooling close to 0 °C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



**Included in the price**

- 2 bottle supports, maple wood.
- 2 egg trays.
- 1 ice cube tray.
- 2 ice packs.

**Special accessories**

**RA 430 100**

Storage container with transparent lid, anthracite.

**RA 238 030**

Solid maple bottle support with magnetic connector, oiled.

**RA 260 000**

Heavy duty hinge support for a maximum door weight of 24 kg.

**Highlights**

- Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze.
- Extendable shelves and drawers.
- Warm white and glare-free LED light.
- 4 climate zones incl. 2 fresh cooling drawers close to 0 °C.
- Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles.
- Cushioned door closing system allowing a soft and controlled door closure.
- Easy-glide, fully extendable telescopic pull-out racks and a cushioned closing system allowing soft and controlled drawer closure.
- Solid maple bottle supports with magnetic connector.
- Total volume 223 litres.

**Handling**

Electronic temperature control with digital display.  
Touch keys.

**Technical features**

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.  
Holiday mode.

**Selected digital services**

**(Gaggenau Home Connect)**  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

**Cooling**

Fast cooling.  
Temperature adjustable from +3 °C to +8 °C.  
2 height-adjustable safety glass shelves, partly extendable.  
1 frosted white glass shelf.  
2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.  
A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.  
The bottle supports are also suitable for storing champagne bottles and magnums.  
1 large aluminium door rack for bottles.  
1 aluminium door rack.  
Warm white interior lighting (3500 K) with integrated glare-free LED side lights.  
Volume 101 litres.

**Fresh cooling close to 0 °C**

Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.  
1 fully extendable fresh cooling drawer close to 0 °C, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.  
1 fully extendable fresh cooling drawer close to 0 °C, illuminated.  
Ideal for meat, fish and poultry.  
Volume 55 litres.

**Freezing**

No-frost technology with fast freezing.  
Temperature adjustable from -24 °C to -14 °C.  
4-star freezer compartment.  
Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.  
Defrost assistance.  
Freezing capacity 7 kg/24 h.  
Storage time after a malfunction 8 h.  
3 freezer drawers, 1 of which extra large.  
2 safety glass shelves.  
Volume 67 litres.

**Consumption data**

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 201 kWh/year.  
Noise level 37 dB (A) re 1 pW.


**Planning notes**

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight:  
Upper door 19 kg. Lower door 19 kg.

Please read additional planning notes on page 397.

**Connection**

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

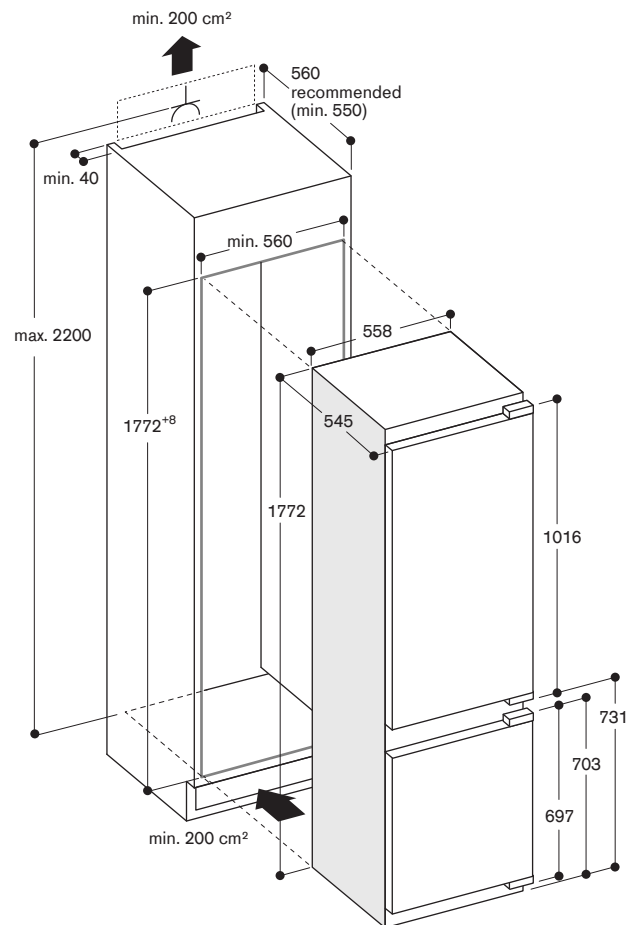



**Vario fridge-freezer combination  
200 series  
RT 289**

**RT 289 370**  
With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



**Included in the price**

- 2 bottle supports, maple wood.
- 2 egg trays.
- 1 ice cube tray.
- 1 heavy duty hinge support.

**Special accessories**

**RA 430 100**  
Storage container with transparent lid, anthracite.

**RA 238 030**  
Solid maple bottle support with magnetic connector, oiled.

**Highlights**

- Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze.
- Opening assist for door:
  1. Push-to-open function for integration into handleless furniture front.
  2. Door opening via voice assistant possible.
- Extendable shelves and drawers.
- 4 climate zones incl. 3 fresh cooling drawers close to 0°C.
- Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles.
- Easy-glide, fully extendable telescopic pull-out racks and a cushioned closing system allowing soft and controlled drawer closure.
- Solid maple bottle supports with magnetic connector.
- Total volume 269 litres.

**Handling**

Electronic temperature control with digital display.  
Touch keys.

**Technical features**

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

**Selected digital services  
(Gaggenau Home Connect)**

Remote control and monitoring.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Cooling**

Fast cooling.  
Temperature adjustable from +3°C to +8°C.  
5 height-adjustable safety glass shelves, partly extendable.  
1 frosted white glass shelf.  
2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.  
A total of 9 bottles (based on a 0.75l bottle) can be stored on one level using 5 bottle supports.  
The bottle supports are also suitable for storing champagne bottles and magnums.  
1 large aluminium door rack for bottles.  
3 aluminium door racks.  
Warm white interior lighting (3500 K) with integrated glare-free LED side lights.  
Volume 171 litres.

**Fresh cooling close to 0°C**

Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.  
1 fully extendable fresh cooling drawer close to 0°C, illuminated. Humidity can be adjusted manually. Ideal for fruit and vegetables.  
2 fully extendable fresh cooling drawers close to 0°C, illuminated. Ideal for meat, fish and poultry.  
Volume 83 litres.

**Freezing**

Storage temperature -18°C and lower.  
4-star freezer compartment.  
Freezing capacity 2.8 kg/24 h.  
Storage time after a malfunction 9.5 h.  
Volume 15 litres.

**Consumption data**

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 184 kWh/year.  
Noise level 36 dB (A) re 1 pW.


**Planning notes**

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 27 kg.

Please read additional planning notes on page 397.

**Connection**

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

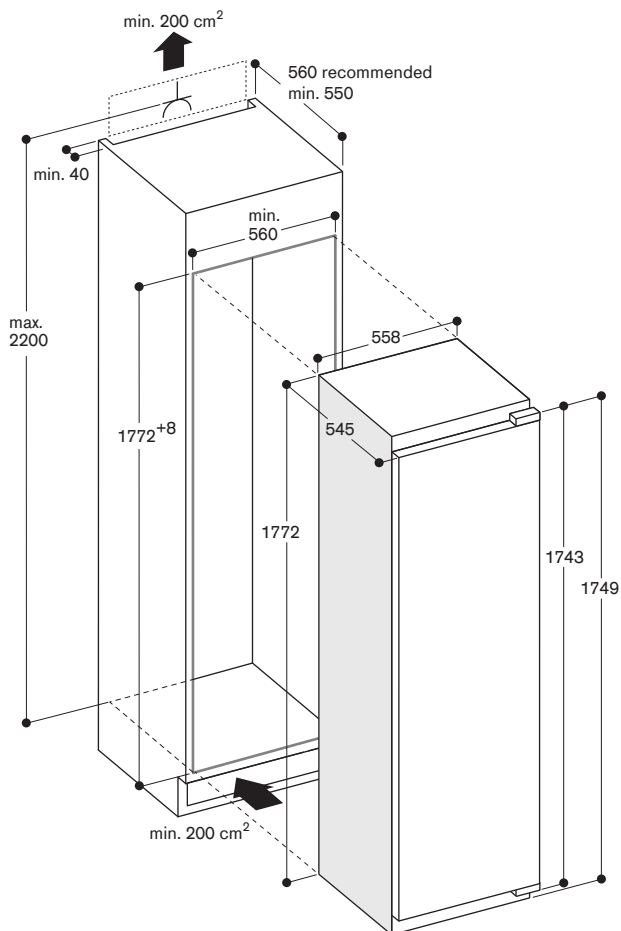

All measurements in mm.



### Vario refrigerator 200 series RC 289

#### RC 289 370

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



#### Included in the price

- 2 bottle supports, maple wood.
- 2 egg trays.
- 1 heavy duty hinge support.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

##### RA 238 030

Solid maple bottle support with magnetic connector, oiled.

#### Highlights

- Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze.
- Opening assist for door:
  1. Push-to-open function for integration into handleless furniture front
  2. Door opening via voice assistant possible.
- Extendable shelves and drawers.
- 3 climate zones incl. 3 fresh cooling drawers close to 0°C.
- Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles.
- Combines with freezer RF 287 (side-by-side integration).
- Cushioned door closing system allowing a soft and controlled door closure.
- Easy-glide, fully extendable telescopic pull-out racks and a cushioned closing system allowing soft and controlled drawer closure.
- Solid maple bottle supports with magnetic connector.
- Total volume 289 litres.

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Technical features

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +3°C to +8°C.  
6 safety glass shelves, height adjustable, partly extendable.  
1 frosted white glass shelf.  
2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.  
A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.  
The bottle supports are also suitable for storing champagne bottles and magnums.  
1 large aluminium door rack for bottles.  
3 aluminium door racks.  
Warm white interior lighting (3500 K) with integrated glare-free LED side lights.  
Volume 206 litres.

#### Fresh cooling close to 0°C

Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.  
1 fully extendable fresh cooling drawer close to 0°C, illuminated. Humidity can be adjusted manually. Ideal for fruit and vegetables.  
2 fully extendable fresh cooling drawers close to 0°C, illuminated. Ideal for meat, fish and poultry.  
Volume 83 litres.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 120 kWh/year.  
Noise level 36 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 27 kg.  
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

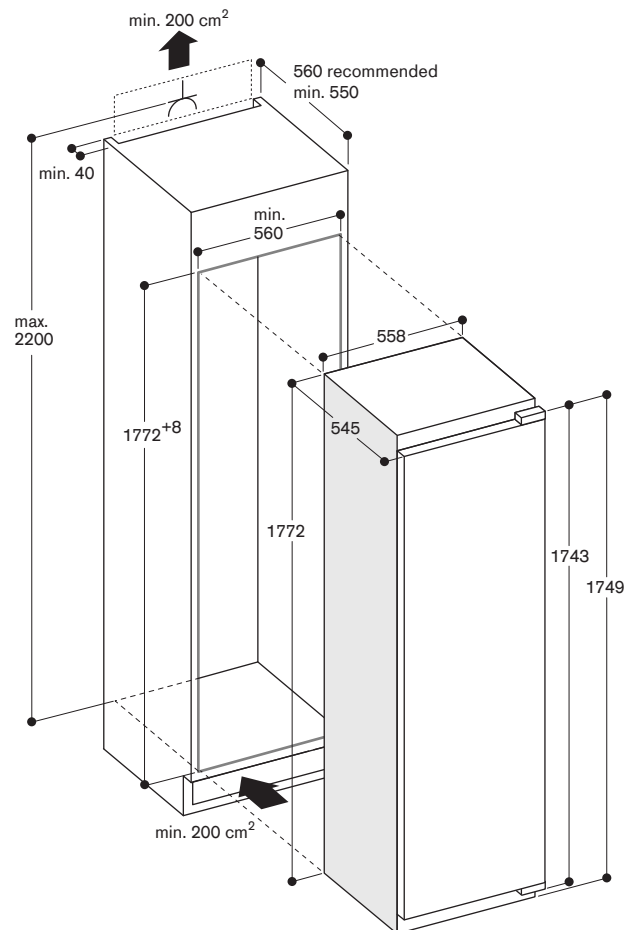



**Vario freezer 200 series**  
**RF 287**

**RF 287 370**

Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



**Included in the price**

- 1 ice cube tray.
- 1 heavy duty hinge support.

**Highlights**

- Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze.
- Opening assist for door:
  1. Push-to-open function for integration into handleless furniture front
  2. Door opening via voice assistant possible.
- Safety glass shelves, set in solid aluminium profiles.
- Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.
- Warm white interior lighting (3500 K) with integrated glare-free LED side lights.
- Direct access through open storage areas.
- Combines with fridge RC 289 (side-by-side integration).
- Combines with wine climate cabinet RW 282 (side-by-side integration).
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 212 litres.

**Handling**

Electronic temperature control with temperature display.  
Touch keys.

**Technical features**

Dynamic cold air distribution.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

**Selected digital services**

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect on page 459.

**Freezing**

No-frost technology with fast freezing.  
Temperature adjustable from -24 °C to -14 °C.  
4-star freezer compartment.  
Freezing capacity 14 kg/24 h.  
Storage time after a malfunction 9 h.  
3 freezer drawers, 1 of which is extra large, removable.  
6 safety glass shelves, 3 of which are set in solid aluminium profiles, removable.

**Consumption data**

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 235 kWh/year.  
Noise level 35 dB (A) re 1 pW.


**Planning notes**

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 27 kg.  
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 397.

**Connection**

Total connected load 0.120 kW.  
Connecting cable 2.3 m with plug.

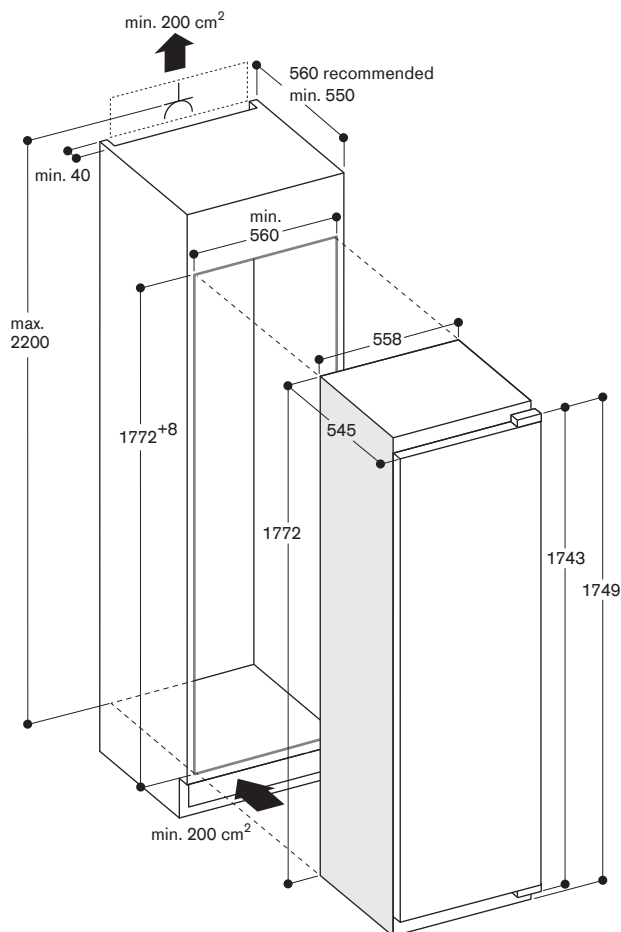

All measurements in mm.



### Freestanding fridge-freezer combination 200 series

**RY 295**

#### RY 295 350

With fresh cooling 0 °C.  
Freestanding.  
Front doors and drawer in anthracite stainless steel.  
Width 91 cm, height 183 cm.



#### Included in the price

- 1 ice cube scoop.
- 1 activated charcoal filter.

#### Special accessories

##### RA 450 012

Activated charcoal water filter.  
For RVY, RB and RF.

#### Highlights

- 3 climate zones incl. fresh cooling 0 °C.
- 2 fresh cooling drawer 0 °C with.
- 5 preset temperature settings between -2 °C and +4 °C.
- 3 symmetrically split glass shelves, height adjustable.
- Integrated ice maker with fixed inlet water connection.
- Internal water dispenser for chilled water.
- 5 preset brightness settings for the lighting.
- Total volume 573 litres.

#### Handling

Electronic temperature control with temperature display.  
Touch keys.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Open-door and malfunction alarm.  
Child lock.  
Rest mode certified by Star-K.  
Holiday mode.  
Dark anthracite coloured top and side panels outside.  
Activated charcoal filter for water filter system with saturation indicator shown in display.  
Air filter.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +2 °C to +8 °C.  
3 split safety glass shelves, all 6 half shelves with manual height adjustment.  
1 integrated shelf.  
2 large door racks for bottles.  
4 door racks, 2 of which are height adjustable.  
1 full width drawer.  
Internal water dispenser with fixed inlet water connection, integrated in left side wall.  
Glare-free LED lighting (5600 K).  
5 preset brightness settings for the lighting, also via Home Connect.  
Interior stainless steel back wall.  
Volume 335 litres.

#### Fresh cooling 0 °C

2 fresh cooling 0 °C drawers.  
5 preset temperature settings between -2 °C and +4 °C combined with humidity setting for fish and meat, fruit, vegetables, beverages, standard.  
Volume 67 litres.

#### Freezing

No-Frost technology with fast freezing.  
Temperature adjustable from -24 °C to -16 °C.  
4-star freezer compartment.  
Freezing capacity 15 kg /24 h.  
Storage time after a malfunction 18.5 h.  
3 fully extendable drawers.  
Volume 171 litres.

#### Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.  
Can be switched off manually.  
Ice cube production approx. 1.5 kg/24 h.  
Removable ice storage container with approx. 3 kg capacity.

#### Consumption data


Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 333 kWh/year.  
Noise level 39 dB (A) re 1 pW.

#### Planning notes


Door opening angle of 118°, fixable at 90°.  
Wall recess of 25 mm necessary.  
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.  
To achieve the declared energy consumption, the attached spacers have to be used. The spacers increase the appliance depth by about 2.5 cm. Without the spacers, the appliance is fully functional but consumes slightly more energy.

#### Connection


Connecting cable 2.4 m with plug.  
Water inlet.  
Supply hose 3.0 m with 3/4 " connection.  
Water pressure 2 to 8 bar.

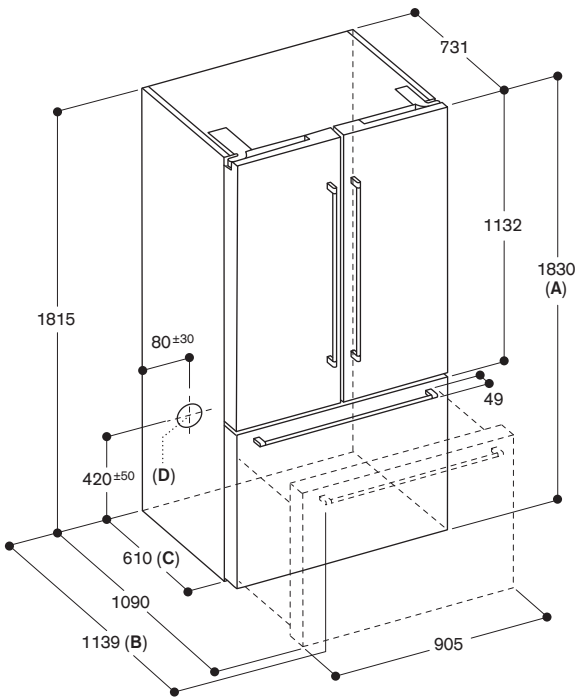


- A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended.
- B: With handle
- C: Add 25 mm for fixed spacers on back
- D: Water connection position

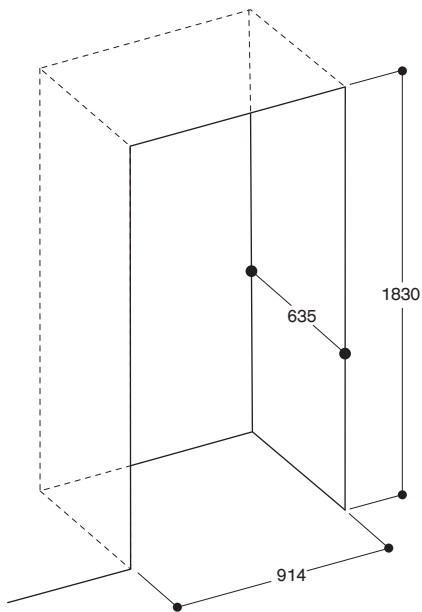


If you install the appliance in a niche, adhere to the shown dimensions

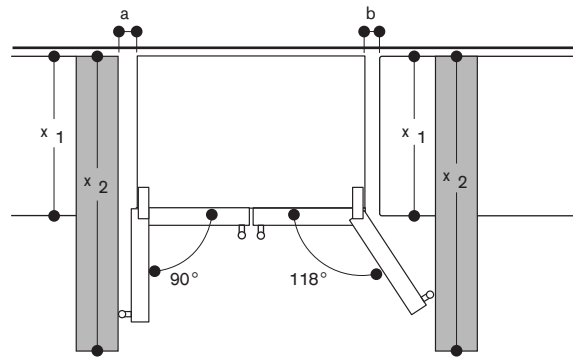

x 1 (unit depth)	a	b
600	0	0
650	0	33
700	45	60
x 2 (wall)	93	266

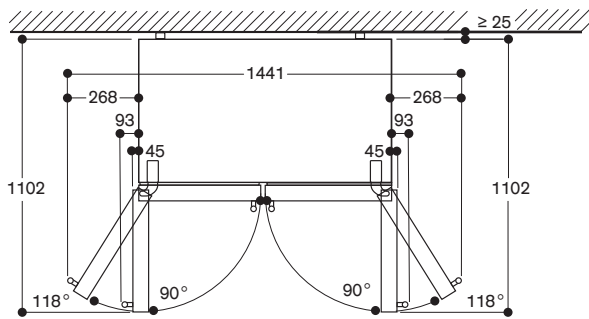

**Minimum Clearances**

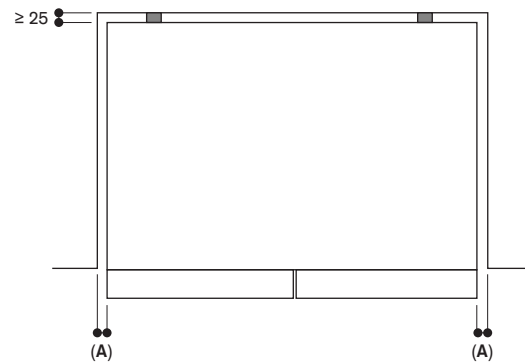

A:  $\geq 3.2$  mm

Leave a clearance of min. 12.7 mm above the appliance. Observe minimum clearances as seen above



### Fridge-freezer combination 200 series RB 282

#### RB 282 306

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



#### Included in the price

- 2 ice packs.
- 3 egg trays.
- 1 wine and champagne rack.
- 1 ice cube tray with lid.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

##### RA 260 000

Heavy duty hinge support for a maximum door weight of 24 kg.

#### Highlights

- 4 climate zones incl. 2 fresh cooling drawers close to 0°C.
- Height adjustable safety glass shelves.
- Door racks with aluminium profiles.
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 223 litres.

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Technical features

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.  
Holiday mode.

#### Selected digital services (Gaggeneau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggeneau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +3°C to +8°C.  
2 safety glass shelves, height adjustable, of which 1 is extendable.  
1 integrated shelf.  
Wine and champagne rack for 4 bottles, can be completely folded.  
1 large aluminium door rack for bottles.  
1 aluminium door rack.  
Bright interior lighting (5800 K) with integrated glare-free LED side light element.  
Volume 101 litres.

#### Fresh cooling close to 0°C

1 fully extendable fresh cooling drawer close to 0°C, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.  
1 fully extendable fresh cooling drawer close to 0°C, illuminated.  
Ideal for meat, fish and poultry.  
Volume 55 litres.

#### Freezing

No-Frost technology with fast freezing.  
Temperature adjustable from -24°C to -16°C.  
4-star freezer compartment.  
Defrost assistance.  
Freezing capacity 7 kg/24 h.  
Storage time after a malfunction 8 h.  
3 freezer drawers, 1 of which extra large.  
2 safety glass shelves.  
Volume: 67 litres.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 201 kWh/year.  
Noise level: 37 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight:  
Upper door 19 kg.  
Lower door 19 kg.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

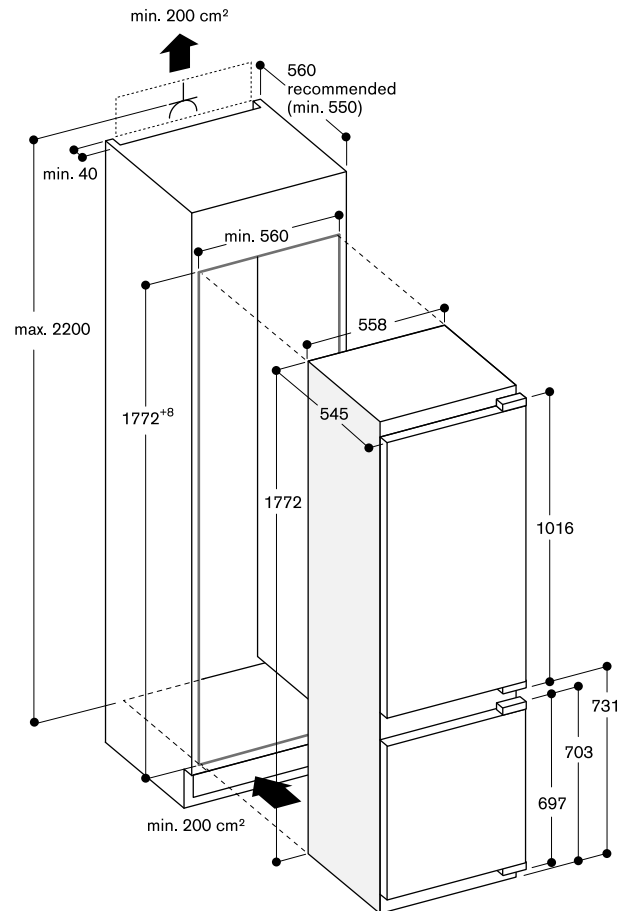





### Fridge-freezer combination 200 series RT 282

#### RT 282 306

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



#### Included in the price

- 3 egg trays.
- 1 wine and champagne rack.
- 1 ice cube tray with lid.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

##### RA 260 000

Heavy duty hinge support for a maximum door weight of 27 kg.

#### Highlights

- 4 climate zones incl. 3 fresh cooling drawers close to 0°C.
- Height adjustable safety glass shelves.
- Door racks with aluminium profiles.
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 269 litres.

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Technical features

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Selected digital services (Gaggenuau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggenuau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +3°C to +8°C.  
5 safety glass shelves, height adjustable, of which 1 is extendable.  
1 integrated shelf.  
Wine and champagne rack for 4 bottles, can be completely folded away.  
1 large aluminium door rack for bottles.  
4 aluminium door racks.  
Bright interior lighting (5800 K) with integrated glare-free LED side light element.  
Volume 171 litres.

#### Fresh cooling close to 0°C

1 fully extendable fresh cooling drawer close to 0°C, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.  
2 fully extendable fresh cooling drawers close to 0°C, illuminated.  
Ideal for meat, fish and poultry.  
Volume 83 litres.

#### Freezing

Storage temperature -18°C and lower.  
4-star freezer compartment.  
Freezing capacity 2.8 kg/24 h.  
Storage time after a malfunction 9.5 h.  
Volume 15 litres.

#### Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 184 kWh/year.  
Noise level: 36 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 22 kg.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

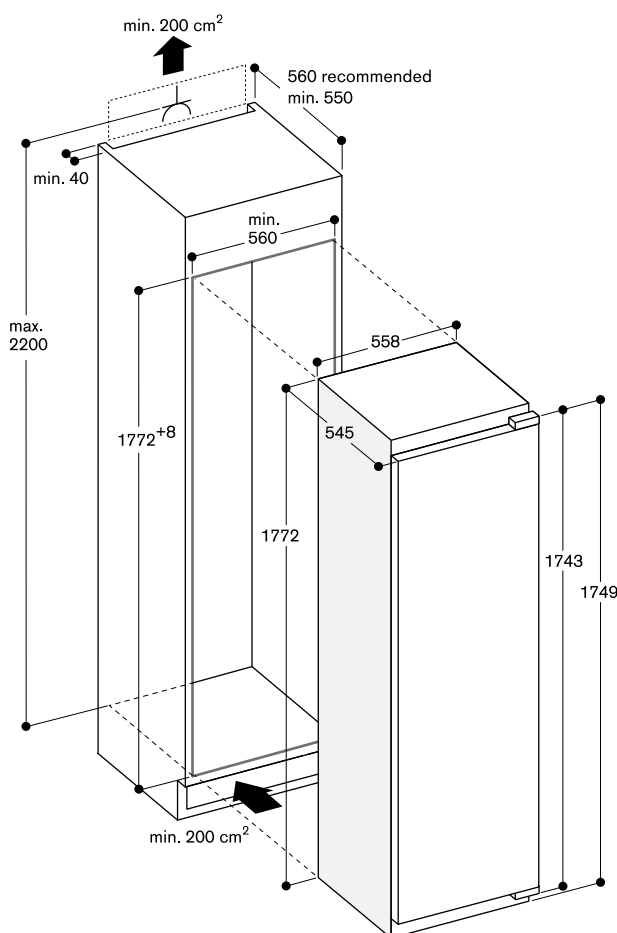

All measurements in mm.



### Refrigerator 200 series

#### RC 282

#### RC 282 306

With fresh cooling close to 0°C.  
Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



#### Included in the price

3 egg trays.  
1 wine and champagne rack.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

##### RA 260 000

Heavy duty hinge support for a maximum door weight of 27 kg.

#### Highlights

- 3 climate zones incl. 3 fresh cooling drawers close to 0°C.
- Height adjustable safety glass shelves.
- Door racks with aluminium profiles.
- Combines with freezer RF 282 (side-by-side integration).
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 289 litres.

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Technical features

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +3°C to +8°C.  
6 safety glass shelves, height adjustable, of which 1 is extendable.  
1 integrated shelf.  
Wine and champagne rack for 4 bottles, can be completely folded.  
1 large aluminium door rack for bottles.  
4 aluminium door racks.  
Bright interior lighting (5800 K) with integrated glare-free LED side light element.  
Volume 206 litres.

#### Fresh cooling close to 0°C

1 fully extendable fresh cooling drawer close to 0°C, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.  
2 fully extendable fresh cooling drawers close to 0°C, illuminated.  
Ideal for meat, fish and poultry.  
Volume 83 litres.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 120 kWh/year.  
Noise level: 36 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 22 kg.  
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

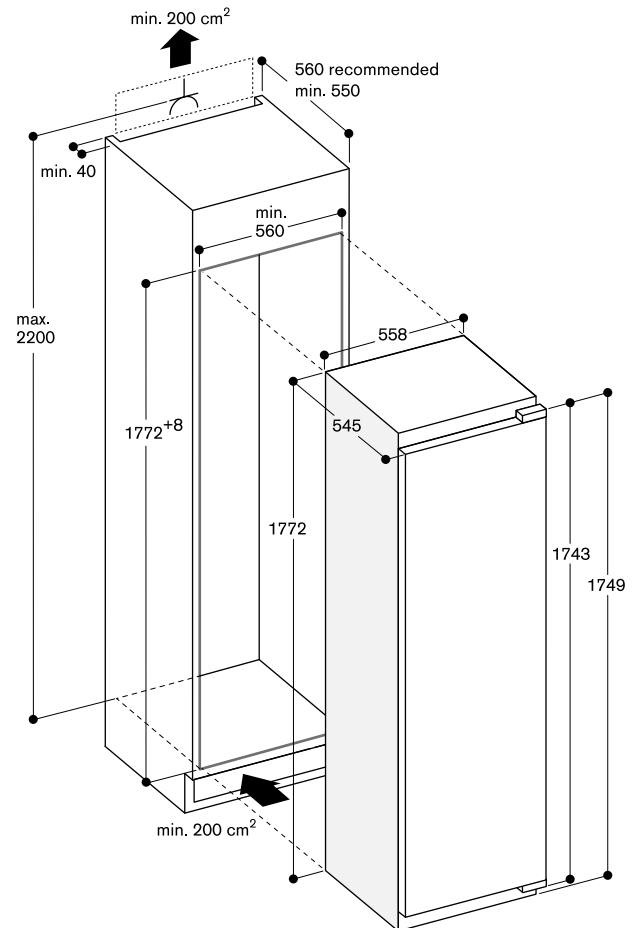



#### Freezer 200 series

##### RF 282

##### RF 282 306

Fully integrated.  
Niche width 56 cm,  
Niche height 177.5 cm.



#### Included in the price

1 ice cube tray.

#### Special accessories

##### RA 260 000

Heavy duty hinge support for a maximum door weight of 27 kg.

#### Highlights

- Flexible interior configuration: all drawers and safety glass shelves can be removed.
- Combines with fridge RC 282 (side-by-side integration).
- Combines with wine climate cabinet RW 282 (side-by-side integration).
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 212 litres.

#### Handling

Electronic temperature control with temperature display.  
Touch keys.

#### Technical features

Dynamic cold air distribution.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

#### Freezing

No-Frost technology with fast freezing.  
Temperature adjustable from -24 °C to -14 °C.  
4-star freezer compartment.  
Freezing capacity 13.8 kg/24 h.  
Storage time after a malfunction 8 h.  
5 freezer drawers, 2 of which extra large.  
4 safety glass shelves between the freezer drawers.  
2 safety glass shelves with transparent front flap.  
All freezer drawers and safety glass shelves can be removed.  
Volume 212 litres.

#### Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 235 kWh/year.  
Noise level: 35 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 22 kg.  
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.120 kW.  
Connecting cable 2.3 m with plug.

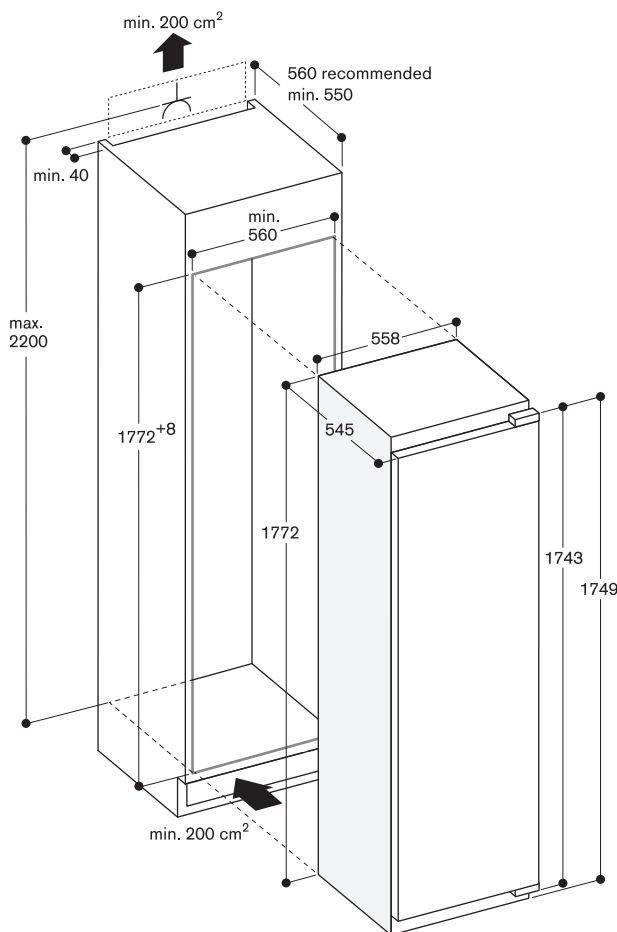

All measurements in mm.



### Fridge-freezer combination 200 series RT 202

#### RT 202 180

Fully integrated, under-counter.  
Niche width 60 cm,  
Niche height 82 cm.



#### Included in the price

- 1 egg tray.
- 1 ice cube tray.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

#### Highlights

- Interior with solid elements in light satin aluminium.
- Height-adjustable safety glass shelf with aluminium profile.
- Warm white and glare-free LED light.
- Drawer with solid aluminium handle, close to 0 °C.
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume 110 litres.

#### Handling

LED electronic with touch control.

#### Technical features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door alarm.  
Holiday mode.  
Rest mode.

#### Selected digital services

##### (Gaggeneau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggeneau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +2 °C to +6 °C.  
1 height-adjustable safety glass shelf with aluminium profile.  
1 drawer with solid aluminium handle, close to 0 °C, ideal for meat, fish and poultry.  
1 bottom compartment with sliding glass lid.  
1 large aluminium door rack for bottles, extra deep.  
1 height-adjustable aluminium door rack.  
1 adjustable door rack, small.  
Warm white interior lighting (3500 K) with integrated glare-free LED side light.  
Total volume of all refrigerator compartments: 93 litres.

#### Freezing

Storage temperature -18 °C and lower.  
4-star freezer compartment.  
Freezing capacity 3 kg/24 h.  
Storage time after a malfunction 9 h.  
Volume 17 litres.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
Energy consumption 119 kWh/year.  
Noise level: 35 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 12 kg.  
Height-adjustable feet.  
The enclosed ventilation grille must be used.  
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0,090 kW.  
Connecting cable 2.3 m with plug.

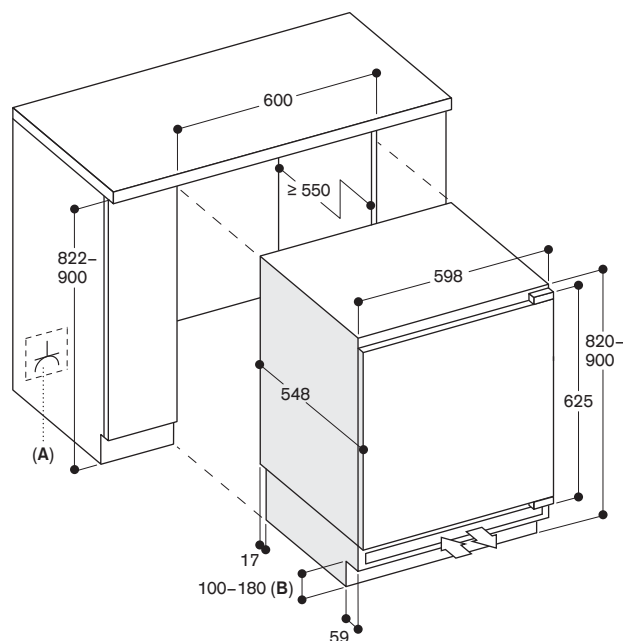

- A:** Socket  
**B:** Base height:  
- 100 mm when niche height is 822 mm  
- 180 mm when niche height is 900 mm



### Refrigerator 200 series RC 202

#### RC 202 180

Fully integrated, under-counter.  
Niche width 60 cm,  
Niche height 82 cm.



#### Included in the price

1 egg tray.

#### Special accessories

##### RA 430 100

Storage container with transparent lid, anthracite.

#### Highlights

- Interior with solid elements in light satin aluminium.
- Height-adjustable safety glass shelves with aluminium profile.
- Warm white and glare-free LED light.
- Drawer with solid aluminium handle, close to 0°C.
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume: 134 litres.

#### Handling

LED electronic with touch control.

#### Technical features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door alarm.  
Holiday mode.  
Rest mode.

#### Selected digital services (Gaggeneau Home Connect)

Remote control and monitoring.

Please read additional information on Gaggeneau Home Connect on page 459.

#### Cooling

Fast cooling.  
Temperature adjustable from +2°C to +6°C.  
2 height-adjustable safety glass shelves with aluminium profile.  
1 drawer with solid aluminium handle, close to 0°C, ideal for meat, fish and poultry.  
1 bottom compartment with sliding glass lid.  
1 large aluminium door rack for bottles, extra deep.  
1 height-adjustable aluminium door rack.  
1 adjustable door rack, small.  
Warm white interior lighting (3500 K) with integrated glare-free LED side light.

#### Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 93 kWh/year.  
Noise level: 35 dB (A) re 1 pW.


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 12 kg.  
Height-adjustable feet.  
The enclosed ventilation grille must be used.  
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 397.

#### Connection

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

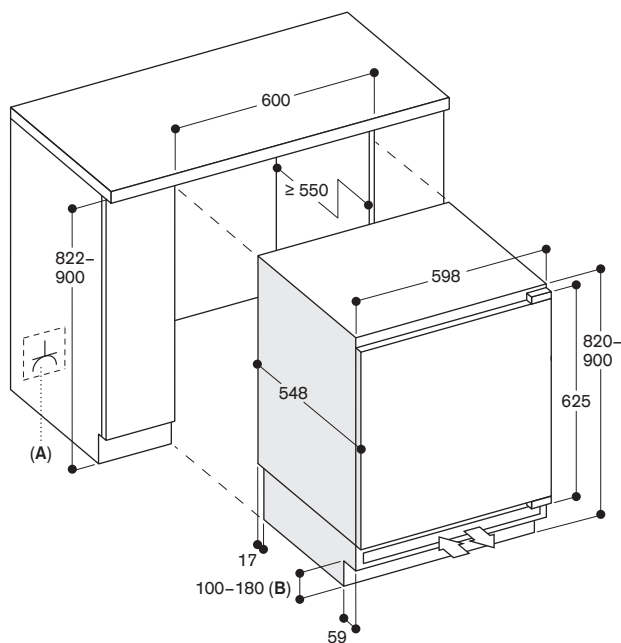

- A:** Socket  
**B:** Base height:  
- 100 mm when niche height is 822 mm  
- 180 mm when niche height is 900 mm



**Freezer 200 series**  
**RF 202**

**RF 202 180**

Fully integrated, under-counter.  
Niche width 60 cm,  
Niche height 82 cm.



**Included in the price**

1 ice cube tray.

**Highlights**

- Interior with solid elements in light satin aluminium.
- Drawers with solid aluminium handles.
- Cushioned door closing system allowing a soft and controlled door closure.
- Total volume: 85 litres.

**Handling**

LED electronic with touch control.

**Technical features**

Automatic defrosting.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.  
Holiday mode.  
Rest mode.

**Selected digital services**

**(Gaggenau Home Connect)**  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

**Freezing**

No-frost technology with fast freezing.  
Temperature adjustable from -24 °C to -18 °C.  
4-star freezer compartment.  
Freezing capacity 8 kg /24 h.  
Storage time after a malfunction 9 h.

**Consumption data**

Energy efficiency class E at a range of energy efficiency classes from A to G.  
Energy consumption 189 kWh/year.  
Noise level: 35 dB (A) re 1 pW.


**Planning notes**

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 19 kg.  
Height-adjustable feet.  
The enclosed ventilation grille must be used.  
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 397.

**Connection**

Total connected load 0.090 kW.  
Connecting cable 2.3 m with plug.

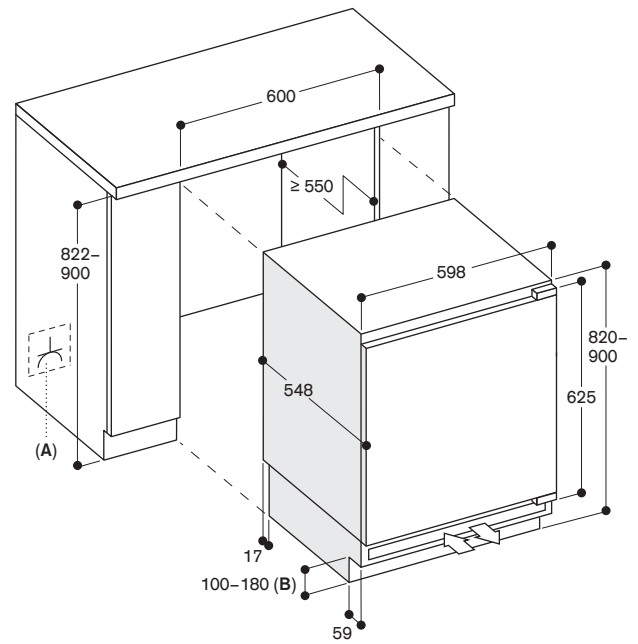

- A:** Socket  
**B:** Base height:  
- 100 mm when niche height is 822 mm  
- 180 mm when niche height is 900 mm

## Additional planning notes for Vario cooling and cooling appliances 200 series

### Location

The appliance should be installed in a dry, well ventilated room. The location of the appliance should not be subject to direct sunlight or near a source of heat, such as an oven, a cooker or a radiator, etc.

If installation next to a heat source is unavoidable, observe the following minimum distances from the heat source:

- 3 cm to electric or gas ovens,
- 3 cm to electric or gas cooker,
- 30 cm to an oil-fired or solid-fuel cooker.

### Side-by-side installation

Vario 200 and 200 series cooling appliances can be installed side-by-side in the following combinations except RT/RC/RF202, in their own kitchen units:

RW + RW

RC + RF (no other appliance next to RC model)


RW + RF (no other appliance next to RW model, except RW)

For all other combinations, a minimum clearance of 160 mm must be observed between appliances.

### Clearance to adjacent furniture depending on the furniture panel thickness and radii

The panel thickness of customer-specific doors can be between 19 mm and 22 mm.

### Recommended gap dimensions for flat hinges

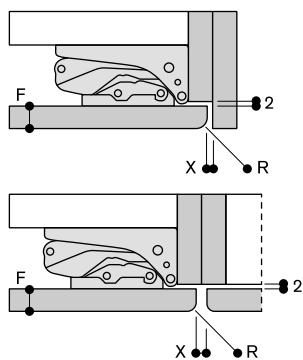

F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

F = Furniture panel thickness

R = Radius

X = Gap dimension

The gap dimensions recommended in the table must be adhered in order to ensure that the appliance door does not collide with anything when it is opened, and to avoid causing damage to furniture panels.

### Door panels

Maximum permissible door panel weight

Recess height	Number of doors	Max. permissible door panel weight
178 cm, Vario 200, 200 series	1	22 kg
178 cm, Vario 200, 200 series	2	19 kg each
178 cm, Vario 200, 200 series + RA 260 000	1	27 kg
178 cm, Vario 200, 200 series + RA 260 000	2	24 kg each
82 cm, 200 series	1	12 kg
178 cm, 123 cm, 200 series wine	1	20 kg
82 cm, 200 series RC/RT/RF	1	12/12/19 kg

If the maximum permissible weight is exceeded, this may damage or impair the function of the hinge.

### Base area

#### Important!

Poor ventilation leads to damage of the appliance!

The appliance air inlet opening in the base area of the fitted kitchen must not be covered under any circumstances.

A cross-section of at least 200 cm<sup>2</sup> must be provided for the air inlet opening.

### Dimensions of the special accessories - door panel frames

The following diagrams show the basic dimensions of the special accessories door front frames for RW 282 and RW 222.

The dimensions of the doors shown are designed for the following basic specifications:


- Panel thickness: 19 mm
- Gap: 3 mm

These specifications provide you with a good starting point for a variety of kitchen designs.


#### Important!

The following diagrams are not a substitute for detailed designs. Compliance with specified requirements relating to kitchen design is essential.

#### Recess height 178 cm

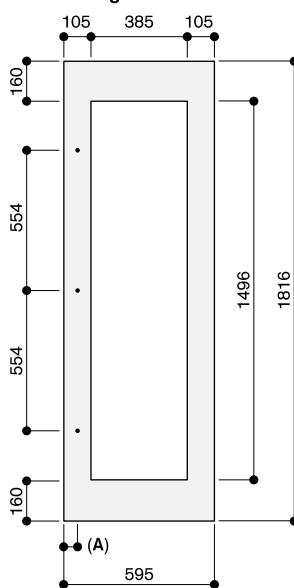

#### Recess height 123 cm


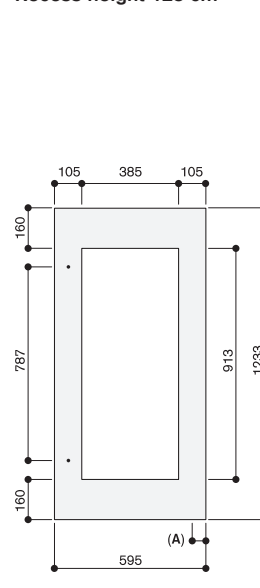


A: 52.5

The door panel thickness is 19 mm.

The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

### Ventilation options

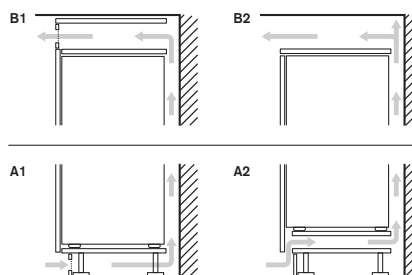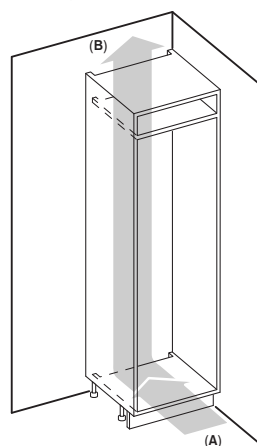

A: Air inlet  $\geq 200$  cm<sup>2</sup>; ventilation options A1 or A2

B: Air outlet  $\geq 200$  cm<sup>2</sup>; ventilation options B1 or B2

All measurements in mm.



### Vario wine climate cabinet 400 series RW 466

#### RW 466 365

Fully integrated, with glass door.  
Niche width 61 cm,  
Niche height 213.4 cm.



#### RW 466 305

Fully integrated, with solid door.  
Niche width 61 cm,  
Niche height 213.4 cm.



#### Included in the price

1 accessory for side-by-side installation.

#### Installation accessories

##### RA 420 010

Door lock for RW 414,  
RW 464 and RW 466.

##### RA 421 610

Stainless steel door panel with handle.  
For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 421 611

Stainless steel door panel frame with handle.  
For 61 cm wide appliances,  
left-hinged, panel thickness 19 mm.

##### RA 421 612

Stainless steel door panel frame with handle.  
For 61 cm wide appliances,  
right-hinged, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 610

Stainless steel door panel, handleless.  
For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 428 611

Stainless steel door panel frame,  
handleless.  
For 61 cm wide appliances,  
panel thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 611

Ventilation grille stainless steel.  
For 61 cm wide appliances.

#### Special accessories

##### RA 430 000

Screw hole cover set. 8 pieces.

##### RA 491 661

Fully extendable bottle trays with  
hidden telescopic rails in oak wood  
and solid aluminium in anthracite  
For 61 cm wide appliances.

##### RA 492 660

Removable shelf with oak wood frame.  
Suitable for decanters and open  
bottles.  
For 61 cm wide appliances.

##### RA 493 060

Presenter in oak wood and aluminium  
in anthracite for single bottle display.  
1 piece.

##### RA 498 640

Bottle support in oak wood for  
convenient storage of bottles on the  
division plate.  
For 61 cm wide appliances.

#### Highlights

- 3 independently controllable climate zones.
- Consistent temperatures with exact control from +5 °C to +20 °C.
- Humidity control.
- Stainless steel interior.
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite.
- Bottle trays with hidden telescopic rails.
- Warm white and glare-free LED light spots.
- 5 preset lighting scenarios, selectable via TFT display.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front
  2. Pull-to-open function to facilitate opening the door using a handle.
- Low-vibration operation.
- TFT touch display.
- Number of standard wine bottles: 99.

#### Handling

TFT touch display operation.  
Clear text display.  
Lockable door (with door lock  
RA 420 010).

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost  
water evaporation.  
Cushioned door closing system.  
Activated charcoal air filter.  
UV-protection.  
Rest mode certified by Star-K.  
When rest mode is active, the  
appliance can only be opened using a  
handle.  
Open-door and malfunction alarm.

#### Selected digital services

**(Gaggenau Home Connect)**  
Remote control and monitoring.  
Light scenarios.

Please read additional information on  
Gaggenau Home Connect on  
page 459.

#### Features

Capacity 99 bottles  
(based on 0.75 l standard bottles).  
12 bottle trays,  
— 9 fully extendable trays  
— 3 suitable for storage of Magnum  
bottles.  
Flexible interior configuration possible  
by adding or removing fully  
extendable bottle trays.  
Storage of up to 12 Magnum bottles  
with standard tray configuration  
(12 bottle trays).  
Space for max. 12 bottle trays.  
2 brilliant LED light spots with warm  
white, glare-free light (3500 K) in each  
climate zone.  
5 different lighting scenarios can be  
selected for individual wine  
presentation.  
Total volume 370 litres.

#### Consumption data

Energy efficiency class G/F at a  
range of energy efficiency classes  
from A to G.  
Energy consumption  
155/129 kWh/year.  
Noise level 42 dB (A) re 1 pW.

#### Planning notes


Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°,  
fixable at 90°.  
Max. door panel weight 73 kg.  
The mains socket needs to be planned  
outside the built-in niche.  
No transport/operation above  
2000 m sea level.

Please read additional planning notes  
on page 376–383.


#### Connection

Total connected load 0.300 kW.  
Connecting cable 3.0 m, pluggable.



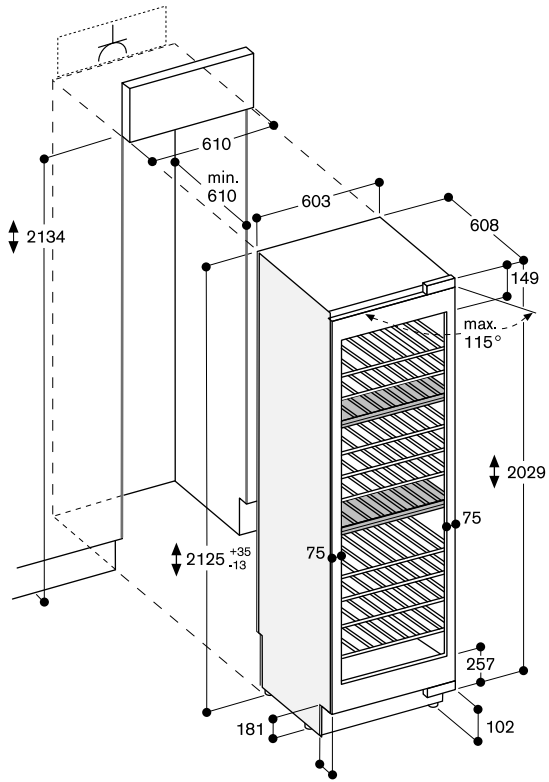


The maximum door panel dimensions are based on a clearance of 3 mm.

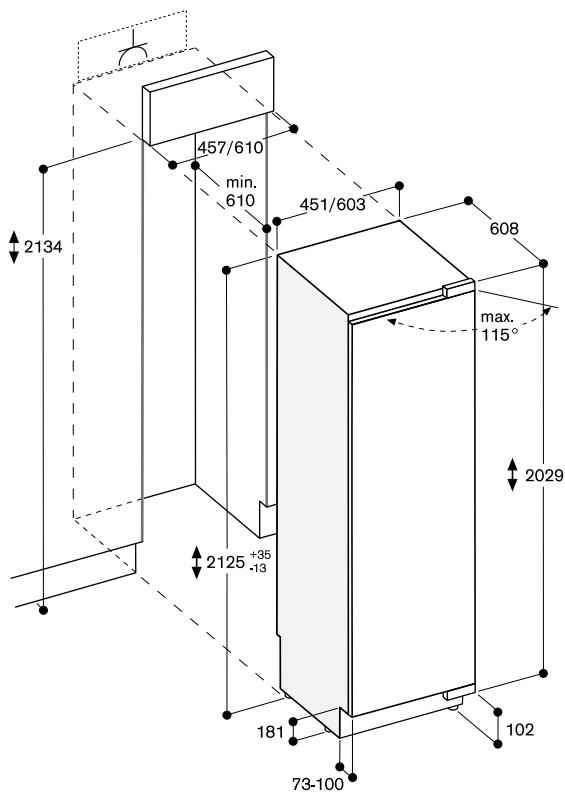

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

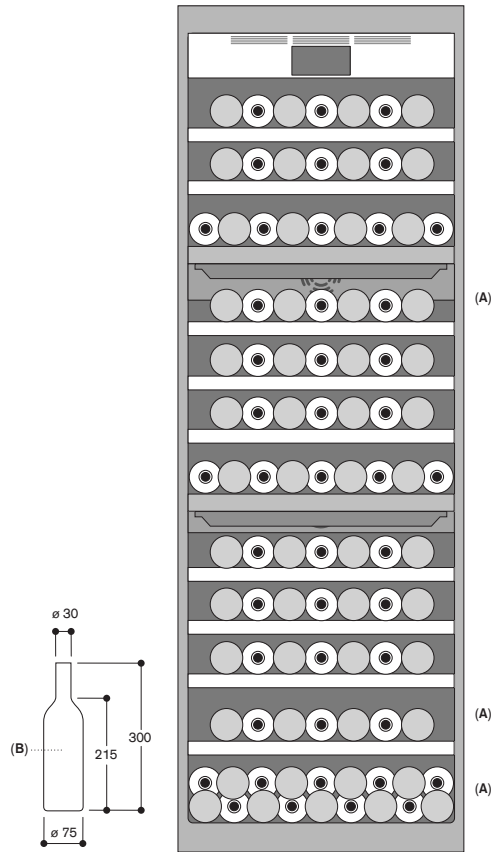

A: Suitable area for storage of magnum bottles in standard tray configuration  
 B: 0.75 litres

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



### Vario wine climate cabinet 400 series RW 414

#### RW 414 365

Fully integrated, with glass door.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### RW 414 305

Fully integrated, with solid door.  
Niche width 45.7 cm,  
Niche height 213.4 cm.



#### Included in the price

1 accessory for side-by-side installation.

#### Installation accessories

##### RA 420 010

Door lock for RW 414,  
RW 464 and RW 466.

##### RA 421 110

Stainless steel door panel with handle.  
For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 421 111

Stainless steel door panel frame with handle.

For 45.7 cm wide appliances,  
left-hinged, panel thickness 19 mm.

##### RA 421 112

Stainless steel door panel frame with handle.

For 45.7 cm wide appliances,  
right-hinged, panel thickness 19 mm.

##### RA 423 140

Side trims, long.

##### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

##### RA 428 110

Stainless steel door panel, handleless.  
For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 428 111

Stainless steel door panel frame,  
handleless.

For 45.7 cm wide appliances,  
panel thickness 19 mm.

##### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.

##### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).

##### RA 464 111

Ventilation grille stainless steel.  
For 45.7 cm wide appliances.

#### Special accessories

##### RA 430 000

Screw hole cover set. 8 pieces.

##### RA 491 161

Fully extendable bottle trays with  
hidden telescopic rails in oak wood  
and solid aluminium in anthracite.  
For 45.7 cm wide appliances.

##### RA 492 160

Removable shelf with oak wood frame.  
Suitable for decanters and open  
bottles.  
For 45.7 cm wide appliances.

##### RA 493 060

Presenter in oak wood and aluminium  
in anthracite for single bottle display.  
1 piece.

##### RA 498 140

Bottle support in oak wood for  
convenient storage of bottles on the  
division plate.

For 45.7 cm wide appliances.

#### Highlights

- 2 independently controllable climate zones.
- Consistent temperatures with exact control from +5 °C to +20 °C.
- Humidity control.
- Stainless steel interior.
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite.
- Bottle trays with hidden telescopic rails.
- Warm white and glare-free LED light spots.
- 5 preset lighting scenarios, selectable via TFT display.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless furniture front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- Low-vibration operation.
- TFT touch display.
- Number of standard wine bottles: 70.

#### Handling

TFT touch display operation.

Clear text display.

Lockable door (with door lock RA 420 010).

#### Technical features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Cushioned door closing system.

Activated charcoal air filter.

UV-protection.

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction alarm.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Light scenarios.

Please read additional information on Gaggenau Home Connect on page 459.

#### Features

Capacity 70 bottles

(based on 0.75 l standard bottles).

12 bottle trays,

— 10 fully extendable trays

— 3 suitable for storage of Magnum bottles.

Flexible interior configuration possible by adding or removing fully extendable bottle trays.

Storage of up to 6 Magnum bottles with standard tray configuration (12 bottle trays).

Space for max. 13 bottle trays.

2 brilliant LED light spots with warm white, glare-free light (3500 K) in each climate zone.

5 different lighting scenarios can be selected for individual wine presentation.

Total volume 272 litres.

#### Consumption data

Energy efficiency class G/F at a range of energy efficiency classes from A to G.

Energy consumption

145/120 kWh/year.

Noise level 42 dB (A) re 1 pW.

#### Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 76 kg.

The mains socket needs to be planned outside the built-in niche.


No transport/operation above 2000 m sea level.

Please read additional planning notes on page 376–383.


#### Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

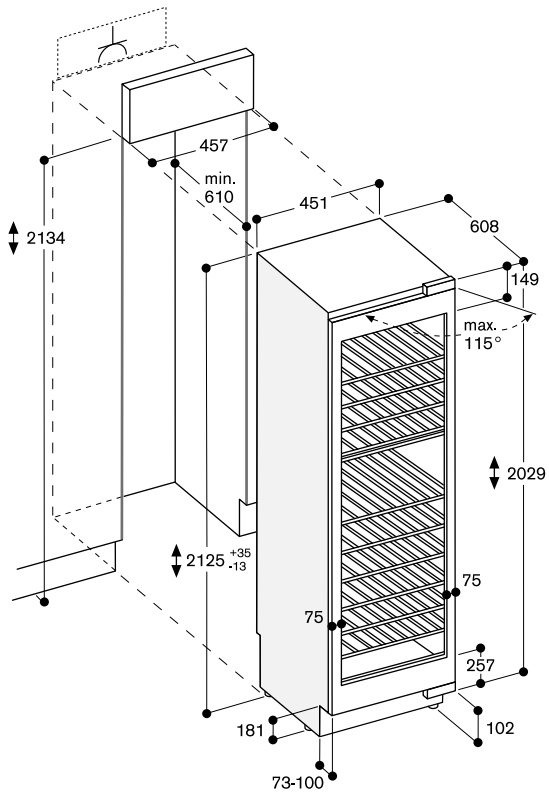


The maximum door panel dimensions are based on a clearance of 3 mm.

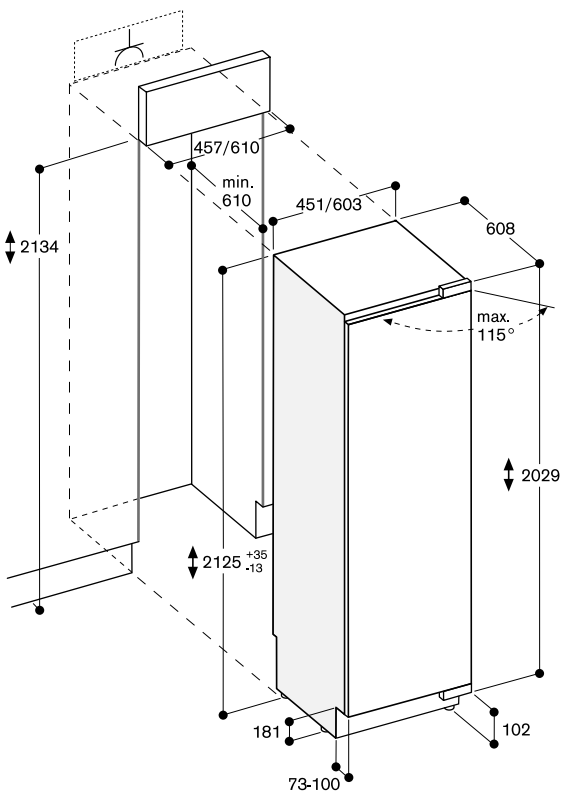

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

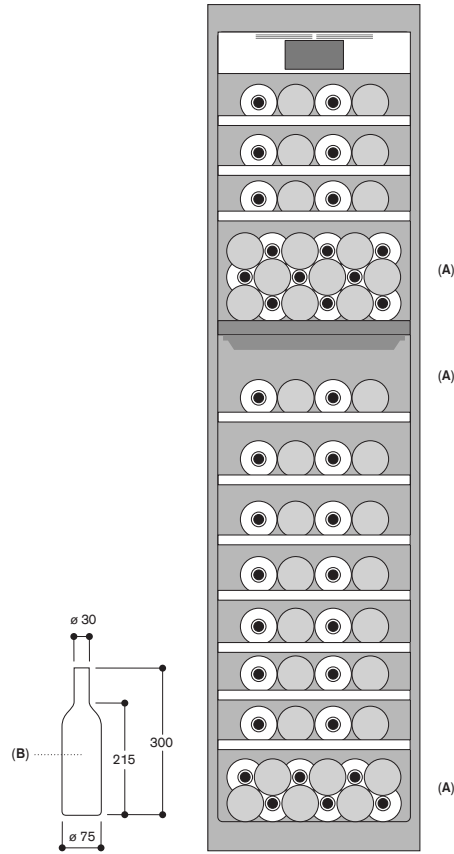

A: Suitable area for storage of magnum bottles in standard tray configuration  
 B: 0.75 litres



**Wine climate cabinet 200 series**  
**RW 282**

**RW 282 263**  
Fully integrated, with glass door.  
Niche width 56 cm,  
Niche height 177.2 cm.



**Installation accessories**  
**RA 221 311**  
Stainless steel door panel with handle for RW 282, panel thickness 19 mm.

**RA 425 110**  
Handle bar, stainless steel, long.  
With 3 mounts, length 1131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.

**Special accessories**  
**RA 050 220**  
Replacement activated charcoal air  
filter.

**Highlights**

- 2 independently controllable climate zones.
- Consistent temperatures with exact control from +5°C to +20°C.
- Humidity control.
- Extendable bottle trays in beech and aluminium.
- Presentation light option.
- Low-vibration operation.
- Combines with freezer RF 287 or RF 282 (side-by-side integration).
- Number of standard wine bottles: 80.

**Handling**

Electronic temperature control with digital display.  
Touch keys.  
Presentation light option in each climate zone, dimmable.  
Interior LED lighting (3000 K) with automatic dimming with opening and closing of door.

**Technical features**

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system integrated in door hinge.  
1 activated charcoal air filter for both climate zones.  
UV-protection.  
Open-door and malfunction alarm.  
Child lock.

**Features**

Capacity 80 bottles  
(based on 0.75 l standard bottles).  
10 bottle trays, 8 of which are extendable.  
Storage of magnum bottles possible.  
LED lighting.  
Total volume 254 litres.

**Consumption data**

Energy efficiency class G at a range of energy efficiency classes from A to G.  
Energy consumption 162 kWh/year.  
Noise level 32 dB (A) re 1 pW.


**Planning notes**

Flat hinge.  
Door hinge right, reversible.  
Height-adjustable feet.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 20 kg.  
Door panel thickness min. 16 mm / max. 22 mm.  
The mains socket needs to be planned outside the built-in niche.  
For a side-by-side installation every appliance must be planned in its own niche.  
The wine climate cabinet can be combined with a second wine climate cabinet or a freezer (RF 287 or RF 282) only. If combining the wine climate cabinet with other cooling appliances (RC, RT, RB), a clearance of min. 150 mm is to be kept between the appliances to avoid condensation.  
No transport/operation above 1500 m sea level.


Please read additional planning notes on page 376-383.

**Connection**

Total connected load 0.130 kW.  
Connecting cable 2.8 m with plug.

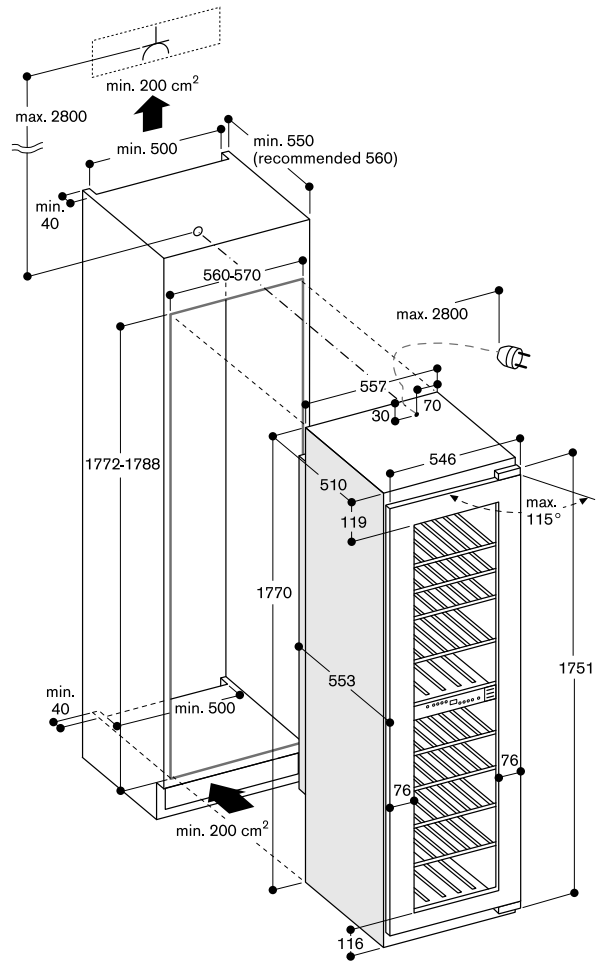

**Bottle storage**

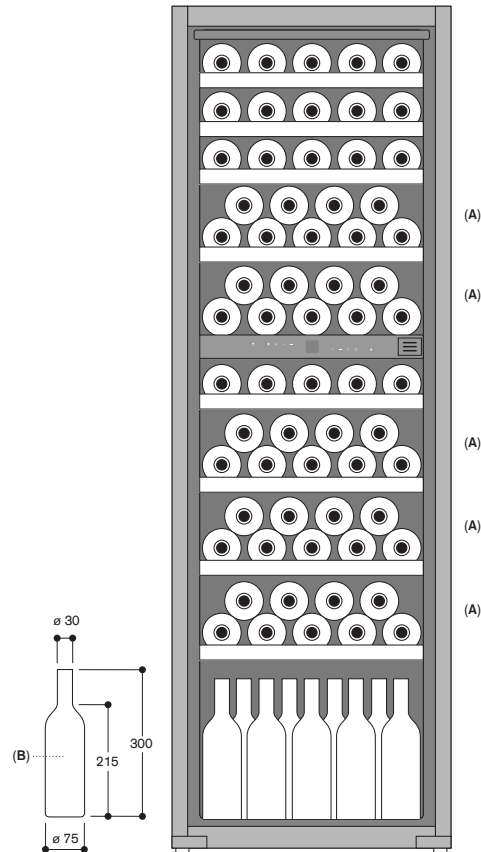

**A:** Suitable area for storage of magnum bottles  
**B:** 0.75 litres



### Wine climate cabinet 200 series RW 222

#### RW 222 263

Fully integrated, with glass door.  
Niche width 56 cm,  
Niche height 123 cm.



#### Installation accessories

##### RA 221 211

Stainless steel door panel with handle.  
For RW 222, panel thickness 19 mm.

##### RA 425 910

Handle bar, stainless steel, short.  
For RVY 497, RB 492 and RW 222,  
with 2 mounts, length 810 mm,  
height 49 mm, drilling distance  
between the mounts 787 mm.

#### Special accessories

##### RA 050 220

Replacement activated charcoal air  
filter.

#### Highlights

- 2 independently controllable climate zones.
- Consistent temperatures with exact control from +5 °C to +20 °C.
- Humidity control.
- Extendable bottle trays in beech and aluminium.
- Presentation light option.
- Low-vibration operation.
- Number of standard wine bottles: 48.

#### Handling

Electronic temperature control with digital display.  
Touch keys.  
Presentation light option in each climate zone, dimmable.  
Interior LED lighting (3000 K) with automatic dimming with opening and closing of door.

#### Technical features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system integrated in door hinge.  
1 activated charcoal air filter for both climate zones.  
UV-protection.  
Open-door and malfunction alarm.  
Child lock.

#### Features

Capacity 48 bottles  
(based on 0.75 l standard bottles).  
6 bottle trays, 4 of which are extendable.  
Storage of magnum bottles possible.  
LED lighting.  
Total volume 159 litres.

#### Consumption data


Energy efficiency class G at a range of energy efficiency classes from A to G.  
Energy consumption 151 kWh/year.  
Noise level 32 dB (A) re 1 pW.

#### Planning notes


Flat hinge.  
Door hinge right, reversible.  
Height-adjustable feet.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 20 kg.  
Door panel thickness min. 16 mm/max. 22 mm.  
The mains socket needs to be planned outside the built-in niche.  
For a side-by-side installation every appliance must be planned in its own niche.  
When combining the wine climate cabinet with cooling appliances other than a second wine climate cabinet, a clearance of min. 150 mm is to be kept between the appliances to avoid condensation.  
No transport/operation above 1500 m sea level.

#### Connection

Total connected load 0.130 kW.  
Connecting cable 2.0 m with plug.

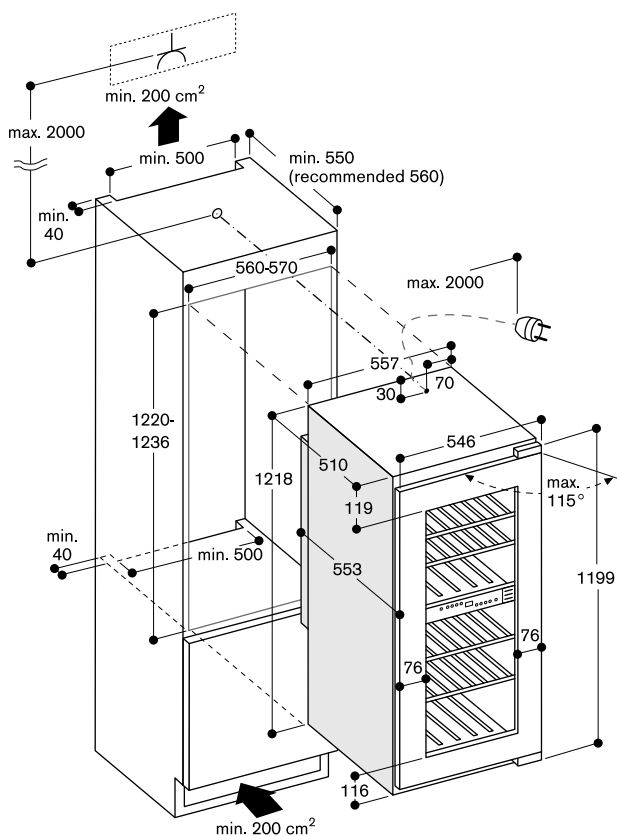

#### Bottle storage

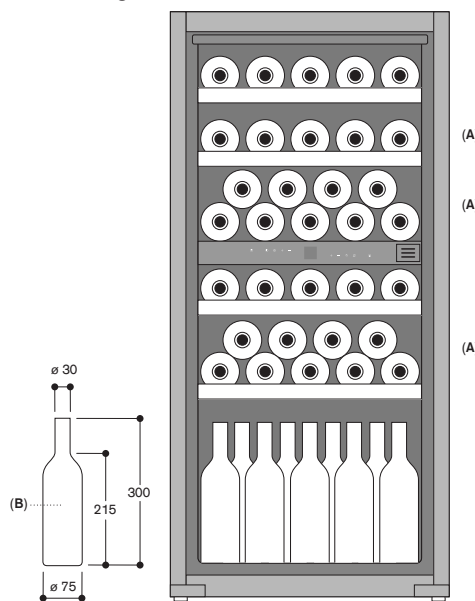

A: Suitable area for storage of magnum bottles  
B: 0.75 litres



**Wine climate cabinet 200 series**  
**RW 404**

**RW 404 264**

Under-counter, stainless steel-framed glass door.  
Niche width 60 cm,  
Niche height 82 cm.



**Special accessories**

**RA 050 220**

Replacement activated charcoal air filter.

**RA 097 600**

Accessory for side-by-side installation of two under-counter wine climate cabinets.

**Highlights**

- 2 independently controllable climate zones.
- Consistent temperatures with exact control from +5°C to +20°C.
- Humidity control.
- Extendable bottle trays in beech and aluminium.
- LED lighting.
- Cushioned door closing system allowing a soft and controlled door closure.
- Lockable door.
- Number of standard wine bottles: 34.
- Side-by-side installation possible with special accessory.

**Handling**

Electronic temperature control with digital display.  
Touch keys.  
Presentation light option in each climate zone, dimmable.  
Interior LED lighting (3000 K) with automatic dimming with opening and closing of door.

**Technical features**

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system integrated in door hinge.  
1 activated charcoal air filter for both climate zones.  
UV-protection.  
Open-door and malfunction alarm.  
Dust filter, dishwasher-safe.

**Features**

Capacity 34 bottles  
(based on 0.75 l standard bottles).  
5 bottle trays, 3 of which are extendable.  
Storage of magnum bottles possible.  
LED lighting.  
Total volume 94 litres.

**Consumption data**


Energy efficiency class G at a range of energy efficiency classes from A to G.  
Energy consumption 138 kWh/year.  
Noise level 34 dB (A) re 1 pW.

**Planning notes**



Flat hinge.  
Door hinge right, reversible.  
Height-adjustable feet.  
Door opening angle of 115°, fixable at 90°.  
For integration next to a side wall a clearance of 150 mm hinge side is necessary.  
The mains socket needs to be planned outside the built-in niche.  
No transport/operation above 1500 m sea level.

**Connection**

Total connected load 0.130 kW.  
Connecting cable 2.0 m with plug.

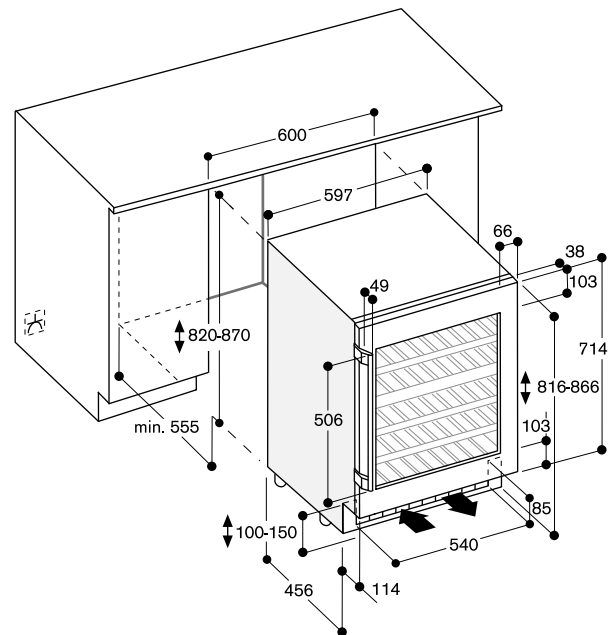

**Bottle storage**



Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------

## Accessories and special accessories for Vario cooling Expressive series

### RA 430 100

Storage container with transparent lid, anthracite.



### RVA 438 040

Solid oak wood bottle support with magnetic connector.



### Spare part no. 17006999

Ethylene absorber. Starter kit.

For placement in a fresh climate drawer.



### Spare part no. 17007000

Ethylene absorber. Refill kit.

For placement in a fresh climate drawer.



### RA 450 012

Activated charcoal water filter. For RVY, RB and RF.




### RVA 450 220

Activated charcoal air filter. 2 pieces.




### RVA 421 922

Door panels, dark brushed stainless steel, with handles. For RVY 497, panel thickness 19 mm.



### RVA 428 922

Door panels, dark brushed stainless steel, handleless. For RVY 497, panel thickness 19 mm.



### RA 425 110

Handle bar, stainless steel, long. With 3 mounts, length 1.131 mm, height 49 mm, drilling distance between each mount 554 mm.



### RA 425 910

Handle bar, stainless steel, short. For RVY 497, RB 492 and RW 222, with 2 mounts, length 810 mm, height 49 mm, drilling distance between the mounts 787 mm.



### RVA 426 000

Dark toned hinges. Set of 4. For RVY.



### RVA 460 000

Accessory for side-by-side installation. For RVY 497.




### RVA 460 020

Accessory for side-by-side installation, backward compatible. Required if a RVY 497 is installed side-by-side with a RY, RB, RC, RF or RW of the Vario cooling 400 series.



### RVA 460 900

Accessory for replacement side-by-side installation in unmodified niche. Required if a RVY 497 (89.4 cm wide) is installed side-by-side into a niche which was formerly housing a combination including a RY 492, RB 492 or RC 492 (90.8 cm wide).



### RVA 460 910

Accessory for replacement in single unmodified niche. Required if a RVY 497 (89.4 cm wide) is replacing a RY 492, RB 492 or RC 492 (90.8 cm wide).



### RA 460 030

Connecting element for vertically split fronts (for fridge-freezer combination).



### RVA 423 141

Side trims, 3mm. 2 pieces.





## Accessories and special accessories for Vario 400, Vario 200 and 200 series cooling appliances

### RA 050 220

Replacement activated charcoal air filter.




### RA 430 100

Storage container with transparent lid, anthracite.



### RA 493 060

Presenter in oak wood and aluminium in anthracite for single bottle display. 1 piece.



### RA 430 000

Screw hole cover set. 8 pieces.




### RA 448 220

Ice storage container, small. For installation with a door opening angle of 90° the delivered ice storage container must be exchanged for the small ice storage container. This must be done prior to fixing the door.



### RA 492 160

Removable shelf with oak wood frame Suitable for decanters and open bottles. For 45.7 cm wide appliances.



### RA 492 660

Removable shelf with oak wood frame Suitable for decanters and open bottles. For 61 cm wide appliances.



### RA 498 140

Bottle support in oak wood for convenient storage of bottles on the division plate. For 45.7 cm wide appliances.



### RA 498 640

Bottle support in oak wood for convenient storage of bottles on the division plate. For 61 cm wide appliances.



### RA 238 030

Solid maple bottle support with magnetic connector, oiled.




### RA 421 110

Stainless steel door panel with handle. For 45.7 cm wide appliances, panel thickness 19 mm.



### RA 428 110

Stainless steel door panel, handleless. For 45.7 cm wide appliances, panel thickness 19 mm.



### RA 421 111

Stainless steel door panel frame with handle. For 45.7 cm wide appliances, left-hinged, panel thickness 19 mm.



### RA 421 112

Stainless steel door panel frame with handle. For 45.7 cm wide appliances, right-hinged, panel thickness 19 mm.



## Accessories and special accessories for Vario 400, Vario 200 and 200 series cooling appliances

### RA 428 111

Stainless steel door panel frame, handleless.  
For 45.7 cm wide appliances, panel thickness 19 mm.




### RA 421 610

Stainless steel door panel with handle.  
For 61 cm wide appliances, panel thickness 19 mm.



### RA 428 610

Stainless steel door panel, handleless.  
For 61 cm wide appliances, panel thickness 19 mm.



### RA 421 611

Stainless steel door panel frame with handle.  
For 61 cm wide appliances, left-hinged, panel thickness 19 mm.



### RA 421 612

Stainless steel door panel frame with handle.  
For 61 cm wide appliances, right-hinged, panel thickness 19 mm.



### RA 428 611

Stainless steel door panel frame, handleless.  
For 61 cm wide appliances, panel thickness 19 mm.




### RA 421 710

Stainless steel door panel with handle.  
For 76.2 cm wide appliances, panel thickness 19 mm.



### RA 428 710

Stainless steel door panel, handleless.  
For 76.2 cm wide appliances, panel thickness 19 mm.

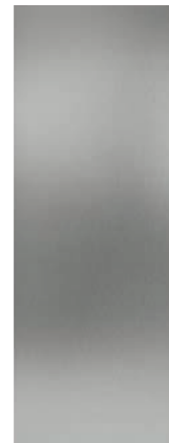

**RA 421 911**

Stainless steel door panel with handle.  
For 91.4 cm wide appliances,  
panel thickness 19 mm.



**RA 428 911**

Stainless steel door panel, handleless.  
For 91.4 cm wide appliances,  
panel thickness 19 mm.




**RA 421 712**

Stainless steel door panel with handle.  
For RB 472, panel thickness 19 mm.



**RA 428 712**

Stainless steel door panels,  
handleless.  
For RB 472, panel thickness 19 mm.

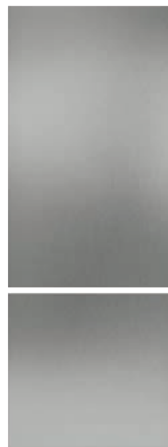


**RA 421 910**

Stainless steel door panels with  
handles.  
For RB 492, panel thickness 19 mm.



**RA 428 910**

Stainless steel door panels,  
handleless.  
For RB 492, panel thickness 19 mm.

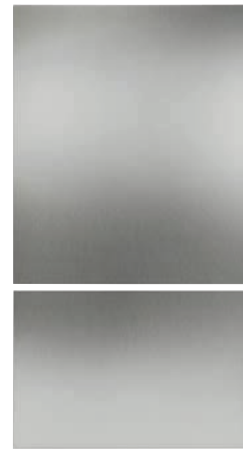

**RA 221 311**

Stainless steel door panel with handle.  
For RW 282, panel thickness 19 mm.



**RA 221 211**

Stainless steel door panel with handle.  
For RW 222, panel thickness 19 mm.



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Accessories and special accessories for Vario 400, Vario 200 and 200 series cooling appliances

### RA 425 110

Handle bar, stainless steel, long.  
With 3 mounts, length 1.131 mm,  
height 49 mm, drilling distance  
between each mount 554 mm.



### RA 425 710

Handle bar, stainless steel, short.  
For RB 472 with 2 mounts,  
length 658 mm, height 49 mm,  
drilling distance between the mounts  
637 mm.



### RA 425 910

Handle bar, stainless steel, short.  
For RVY 497, RB 492 and RW 222,  
with 2 mounts, length 810 mm,  
height 49 mm, drilling distance  
between the mounts 787 mm.



### RA 450 012

Activated charcoal water filter.  
For RVY, RB and RF.




### RA 460 000

Accessory for side-by-side  
installation. Not required if appliances  
are installed more than 160 mm apart  
from each other. Included in delivery  
for RF and RW.



### RA 460 013

Additional side heating element 230 V.  
Required if appliances are installed  
with a distance greater than 16 mm  
and less than 160 mm next to each  
other and for all built-in situations in a  
very humid environment. Not required  
if appliances are installed more than  
160 mm apart from each other.



### RA 460 020

Connecting element for vertically  
split appliance fronts (for a flush  
front).



### RA 460 030

Connecting element for vertically  
split fronts (for fridge-freezer  
combination).



### RA 464 111

Ventilation grille stainless steel.  
For 45.7 cm wide appliances.



### RA 464 113

Ventilation grille stainless steel.  
For 45.7 cm wide appliances with  
integrated water filter.



### RA 464 611

Ventilation grille stainless steel.  
For 61 cm wide appliances.



### RA 464 616

Ventilation grille stainless steel.  
For 61 cm wide appliances with  
integrated water filter.



### RA 464 711

Ventilation grille stainless steel.  
For 76.2 cm wide appliances.



### RA 464 714

Ventilation grille stainless steel.  
For 76.2 cm wide appliances with  
integrated water filter.



### RA 464 713

Ventilation grille stainless steel.  
For RB 472.



### RA 464 913

Ventilation grille stainless steel.  
For RB 492.



### RA 464 911

Ventilation grille stainless steel.  
For 91.4 cm wide appliances.




### RA 420 010

Door lock for RW 414 and RW 466.



### RA 097 600

Accessory for side-by-side installation  
of two under-counter wine climate  
cabinets.




### RA 260 000

Heavy duty hinge support.  
For RC/RF/RT 28\* maximum door  
weight 27 kg.  
For RB 28\* maximum door weight  
24 kg.  
RB 28\* requires 2 x RA 260 000.




**RA 491 161**

Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite. For 45.7 cm wide appliances.




**RA 491 661**

Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite. For 61 cm wide appliances.




**RA 423 140**

Side trims, long.



**RA 423 340**

Side trims, 2 pieces, for RB.



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Special accessories for Vario cooling Expressive series



Appliance type		Fridge-freezer combination
		RVY 497 190
<b>Door panels</b>		
Dark brushed stainless steel door panel with handles, panel thickness 19 mm.		RVA 421 922
Dark brushed stainless steel door panel without handles, panel thickness 19 mm.		RVA 428 922
<b>Handles</b>		
RA 425 110	Handle bar, stainless steel, long. With 3 mounts, length 1.131 mm, drilling distance between each mount 554 mm.	•
RA 425 910	Handle bar, stainless steel, short. For RVY 497 and RB 492, with 2 mounts, length 810 mm, drilling distance between the mounts 787 mm.	•
<b>Hinges</b>		
RVA 426 000	Dark toned hinges. Set of 4. For RVY.	•
<b>Miscellaneous</b>		
RA 430 100	Storage container with transparent lid, anthracite.	•
RVA 438 040	Solid oak wood bottle support.	•
RA 450 012	Activated charcoal water filter.	•
RVA 450 220	Activated charcoal air filter.	•
Spare part no. 17006999	Ethylene absorber - Starter kit.	•
Spare part no. 17007000	Ethylene absorber - Refill kit.	•

Accessories   Energy Label   Gaggenau Home Connect	Dishwashers   Washing machine	Cooling appliances	Ventilation appliances	Cooktops	Vario cooktops	Ovens 200 series	Ovens 400 series	Gaggenau Expressive series	EB 333
---	----------------------------------	--------------------	---------------------------	----------	----------------	------------------	------------------	-------------------------------	--------

## Special accessories for Vario cooling 400 series



Appliance type	Fridge-freezer combination	Fridge-freezer combination	Refrigerator	Refrigerator
	RB 492 305	RB 472 305	RC 492 305	RC 472 305
<b>Door panels / door panel frames</b>				
Stainless steel door panel with handles, panel thickness 19 mm.	RA 421 910	RA 421 712	RA 421 911	RA 421 710
Stainless steel door panel without handles, panel thickness 19 mm.	RA 428 910	RA 428 712	RA 428 911	RA 428 710
Stainless steel door panel frame with handle, left-hinged, panel thickness 19 mm.				
Stainless steel door panel frame with handle, right-hinged, panel thickness 19 mm.				
Stainless steel door panel frame without handle, panel thickness 19 mm.				
RA 420 010 Door lock for RW 414 and RW 464.				
<b>Ventilation grille</b>				
Stainless steel.	RA 464 913	RA 464 713	RA 464 911	RA 464 711
<b>Interior for wine climate cabinet</b>				
Fully extendable bottle trays in oak wood and solid aluminium in anthracite.				
Removable shelf with oak wood frame. Suitable for decanters and open bottles.				
Presenter in oak wood and aluminium in anthracite for single bottle display. 1 piece.				
Bottle support in oak wood for convenient storage of bottles on the division plate.				
RA 430 000 Screw whole cover set. 8 Pieces.				
<b>Handles</b>				
RA 425 110 Handle bar, stainless steel, long. With 3 mounts, length 1.131 mm, height 49 mm, drilling distance between each mount 554 mm.	•	•	•	•
RA 425 710 Handle bar, stainless steel, short. For RB 472 with 2 mounts, length 658 mm, height 49 mm, drilling distance between the mounts 637 mm.		•		
RA 425 910 Handle bar, stainless steel, short. For RYV 497, RB 492 and RW 222, with 2 mounts, length 810 mm, height 49 mm, drilling distance between the mounts 787 mm.	•			
<b>Miscellaneous</b>				
RA 430 100 Storage container with transparent lid, anthracite.	•	•	•	•
RA 448 220 Ice storage container, small. For installation with a door opening angle of 90°.				
RA 450 012 Activated charcoal water filter.	•	•		
ET 636 458 Activated charcoal air filter (spare part).	•	•	•	•





Refrigerator	Freezer	Freezer	Freezer	Freezer	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
RC 462 305	RF 471 306	RF 461 306	RF 411 306	RF 410 304	RW 466 365	RW 414 365	RW 466 305	RW 414 305
RA 421 610	RA 421 710	RA 421 610	RA 421 110	RA 421 110			RA 421 610	RA 421 110
RA 428 610	RA 428 710	RA 428 610	RA 428 110	RA 428 110			RA 428 610	RA 428 110
					RA 421 611	RA 421 111		
					RA 421 612	RA 421 112		
					RA 428 611	RA 428 111		
					•	•	•	•
RA 464 611	RA 464 714	RA 464 616	RA 464 113	RA 464 111	RA 464 611	RA 464 111	RA 464 611	RA 464 111
					RA 491 661	RA 491 161	RA 491 661	RA 491 161
					RA 492 660	RA 492 160	RA 492 660	RA 492 160
					RA 493 060	RA 493 060	RA 493 060	RA 493 060
					RA 498 640	RA 498 140	RA 498 640	RA 498 140
					•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Vario cooling Expressive series



<b>Appliance type</b>	<b>Fridge-freezer combination</b>	
Fully integrated	RVY 497 190	
<b>Dimensions</b>		
Appliance dimensions W x H x D	(cm)	89.4 x 212.3 x 60.8
Niche dimensions W x H x D	(cm)	90.0 x 213.4 x 61
Depth including wall clearance	(cm)	61
Weight when empty	(kg)	218.9
Shipping weight	(kg)	238
Maximum load weight	(kg)	583.6
Transport package dimensions W x H x D	(cm)	97.6 x 227 x 76
<b>Type and configuration</b>		
Cooling / freezing	•/•	
Fresh climate drawer / Chilled drawer	•/•	
Door hinge right / left / reversible	•/•/—	
Dark brushed stainless steel door panel	◦	
<b>Volume / consumption data</b>		
Total volume	(l)	576
— Volume of cooling	(l)	379
— Volume of freezing	(l)	197
Energy efficiency class		
Daily energy consumption <sup>1</sup>	(kWh/24h)	0.75
Annual energy consumption <sup>1</sup>	(kWh)	285
Noise level	(dB (A) re 1 pW)	39
Noise efficiency class	C	
Climate class <sup>2</sup>	SN - T	
<b>Handling</b>		
TFT touch display	•	
Opening assist for doors and freezer drawer	•	
Clear text display	(No. of languages)	42
<b>Features</b>		
Ice cubes / Ice and water dispenser with ice cubes / crushed ice / water	•/—/—/—	
Cooling compartments with temperature and humidity control	(no.)	2
Temperature / climate zones	(no.)	5
Temperature adjustable to the precise degree	•	
No-Frost technology	•	
Automatic defrosting: cooling / freezing	•/•	
Activated charcoal air filter	2	
Dark brushed stainless steel interior	•	
Holiday mode	•	
Malfunction, visual / audible warning signal	•/•	
Door open, visual / audible warning signal or door lock indication	—/•	
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>	•	
<b>Cooling</b>		
Fast cooling	•	
Dynamic cold air distribution	•	
Levels in the interior	(no.)	3
Containers / drawers in the interior	(no.)	3
Door racks	(no.)	6
Egg racks	(No. of eggs)	18
<b>Freezing</b>		
Fast freezing	•	
Freezing capacity	(kg/24h)	14
Storage time after a malfunction	(hrs.)	19
Interior compartments	(no.)	—
Baskets, containers, drawers in the interior	(no.)	3
Door racks	(no.)	—
Ice bucket, ice cube trays	(no.)	1
Activated charcoal water filter	◦	
<b>Connection</b>		
Total connected load	(kW)	0.200
Water connection inlet	•	

• Standard. — Not available. ◦ Special accessory. <sup>1</sup> Effective consumption depends on the use/location of appliance. <sup>2</sup> The appliance is fully functional within the room temperature limits defined in the following climate classes: SN-ST (+10 °C to +38 °C), SN-T (+10 °C to +43 °C). <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machineAccessories | Energy Label |  
Gaggenau Home Connect

## Vario cooling appliances 400 series



Appliance type		Fridge-freezer combination RB 492 305	Fridge-freezer combination RB 472 305	Refrigerator RC 492 305	Refrigerator RC 472 305
<b>Fully integrated / integrated</b>					
<b>Dimensions</b>					
Appliance dimensions W × H × D	(cm)	90.8 × 212.5 × 60.8	75.6 × 212.5 × 60.8	90.8 × 212.5 × 60.8	75.6 × 212.5 × 60.8
Niche dimensions W × H × D	(cm)	91.4 × 213.4 × 61	76.2 × 213.4 × 61	91.4 × 213.4 × 61	76.2 × 213.4 × 61
Depth including wall clearance	(cm)	61	61	61	61
Weight when empty	(kg)	226	203	205	182
Shipping weight	(kg)	244	219	223	198
Maximum load weight	(kg)	616	433	564	564
Transport package dimensions W × H × D	(cm)	100 × 226 × 75	85 × 226 × 75	100 × 230 × 75	85 × 226 × 75
<b>Type and configuration</b>					
Cooling / freezing / wine		•/•/—	•/•/—	•/—/—	•/—/—
Fresh cooling 0 °C / fresh cooling > 0 °C / fresh cooling		—/•/•	—/•/•	—/—/•	—/—/•
Fully integrated / integrated / under-counter / free-standing		•/—/—/—	•/—/—/—	•/—/—/—	•/—/—/—
Door hinge right / left / reversible		•/—/•	•/—/•	•/—/•	•/—/•
Glass door		—	—	—	—
Full panelling / door panelling		—/◦	—/◦	—/◦	—/◦
<b>Volume / consumption data</b>					
Total volume	(l)	555	452	579	467
— Total volume all cooling compartments	(l)	389	316	—	—
— Volume of cooling	(l)	—	—	494	398
— Volume of fresh cooling 0 °C / Fresh cooling > 0 °C	(l)	—	—	85	69
— Volume of freezing	(l)	166	136	—	—
Number of standard wine bottles (0.75 litres)	(no.)	—	—	—	—
Energy efficiency class					
Daily energy consumption <sup>1</sup>	(kWh/24h)	0.893	0.809	0.498	0.454
Annual energy consumption <sup>1</sup>	(kWh)	326	295	182	166
Noise level	(dB (A) re 1 pW)	42	42	40	40
Noise efficiency class		D	D	C	C
Climate class <sup>2</sup>		SN - T	SN - T	SN - T	SN - T
<b>Handling</b>					
TFT touch display		•	•	•	•
Opening assist for doors and freezer drawer		•	•	•	•
Clear text display	(No. of languages)	52	52	52	52
<b>Features</b>					
Ice cubes / Ice and water dispenser with ice cubes / crushed ice / water		•/—/—/—	•/—/—/—	—/—/—/—	—/—/—/—
Fresh cooling zones with temperature control	(no.)	•	•	•	•
Fresh cooling zones with humidity control	(no.)	•	•	•	•
Temperature / climate zones	(no.)	4	4	3	3
Temperature display internal / external		•/—	•/—	•/—	•/—
Temperature adjustable to the precise degree		•	•	•	•
No-Frost technology		•	•	•	•
Automatic defrosting: cooling / fresh cooling / freezing		•/•/•	•/•/•	•/•/—	•/•/—
Presentation light	(no.)	—	—	—	—
Lock		—	—	—	—
Humidity control		—	—	—	—
Activated charcoal air filter		•	•	•	•
Low-vibration operation		—	—	—	—
UV-protection		—	—	—	—
Stainless steel interior		•	•	•	•
Holiday mode		•	•	—	—
Malfunction, visual / audible warning signal		•/•	•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication		—/•	—/•	—/•	—/•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>		•	•	•	•
<b>Cooling / fresh cooling</b>					
Fast cooling		•	•	•	•
Dynamic cold air distribution		•	•	•	•
Levels in the interior	(No.)	3	3	4	4
Containers / drawers in the interior	(No.)	2	2	3	3
Door racks	(No.)	3	3	3	4
Egg racks	(No. of eggs)	18	18	18	18
<b>Wine</b>					
Max. levels in the interior		—	—	—	—
Bottle tray fully extendable / extendable		—	—	—	—
Shelf fully extendable / extendable / removable		—	—	—	—
Storage of Magnum bottles possible		—	—	—	—
Suitable for decanters, open bottles and humidors		—	—	—	—
<b>Freezing</b>					
Fast freezing		•	•	—	—
Freezing capacity	(kg/24h)	14	14	—	—
Storage time after a malfunction	(hrs.)	13	13	—	—
Interior compartments	(no.)	—	—	—	—
Baskets, containers, drawers in the interior	(no.)	2	2	—	—
Door racks	(no.)	—	—	—	—
Ice bucket, ice cube trays	(no.)	1	1	—	—
Activated charcoal filter		◦	◦	—	—
<b>Connection</b>					
Total connected load	(kW)	0.300	0.300	0.300	0.300
Water connection inlet		•	•	—	—

• Standard. — Not available. ◦ Special accessory. <sup>1</sup> Effective consumption depends on the use/location of appliance. <sup>2</sup> The appliance is fully functional within the room temperature limits defined in the following climate classes: SN-ST (+10 °C to +38 °C), SN-T (+10 °C to +43 °C). <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

Refrigerator	Freezer	Freezer	Freezer	Freezer	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
RC 462 305	RF 471 306	RF 461 306	RF 411 306	RF 410 304	RW 466 365	RW 414 365	RW 466 305	RW 414 305
60.3 × 212.5 × 60.8	75.6 × 212.5 × 60.8	60.3 × 212.5 × 60.8	45.1 × 212.5 × 60.8	45.1 × 212.5 × 60.8	60.3 × 212.5 × 60.8	45.1 × 212.5 × 60.8	60.3 × 212.5 × 60.8	45.1 × 212.5 × 60.8
61 × 213.4 × 61	76.2 × 213.4 × 61	61 × 213.4 × 61	45.7 × 213.4 × 61	45.7 × 213.4 × 61	61 × 213.4 × 61	45.7 × 213.4 × 61	61 × 213.4 × 61	45.7 × 213.4 × 61
61	61	61	61	61	61	61	61	61
163	182	158	130	135	165	140	159	139
178	199	173	143	148	179	152	173	152
555	483	401	300	300	571	377	571	377
70 × 226 × 74	85 × 226 × 75	70 × 226 × 75	55 × 226 × 75	55 × 226 × 75	70 × 226 × 75	55 × 226 × 75	70 × 226 × 75	55 × 226 × 75
•/•/—	—/•/—	—/•/—	—/•/—	—/•/—	—/•/•	—/•/•	—/•/•	—/•/•
•/•/•	—/•/—	—/•/—	—/•/—	—/•/—	—/•/—	—/•/—	—/•/—	—/•/—
•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•
•/•/•	—/•/•	—/•/•	—/•/•	—/•/•	•/•/•	•/•/•	•/•/•	•/•/•
—	—	—	—	—	•	•	•	•
—/◦	—/◦	—/◦	—/◦	—/◦	—/◦	—/◦	—/◦	—/◦
357	445	344	240	240	370	272	370	272
—	—	—	—	—	—	—	—	—
305	—	—	—	—	—	—	—	—
52	—	—	—	—	—	—	—	—
—	445	344	240	240	—	—	—	—
—	—	—	—	—	99	70	99	70
0.410	0.791	0.700	0.607	0.607	0.425	0.396	0.354	0.330
150	321	284	246	246	155	145	129	120
40	42	42	42	42	42	42	42	42
C	D	D	D	D	D	D	D	D
SN - T	SN - T	SN - T	SN - T	SN - T	SN - T	SN - T	SN - T	SN - T
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
52	52	52	52	52	52	52	52	52
—/•/•/•	•/•/•/•	•/•/•/•	•/•/•/•	—/•/•/•	—/•/•/•	—/•/•/•	—/•/•/•	—/•/•/•
•	—	—	—	—	—	—	—	—
•	—	—	—	—	—	—	—	—
3	1	1	1	1	3	2	3	2
•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•/•/•	—/•/•	—/•/•	—/•/•	—/•/•	•/•/•	•/•/•	•/•/•	•/•/•
—	—	—	—	—	5	5	5	5
—	—	—	—	—	◦	◦	◦	◦
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•
—/•	—/•	—/•	—/•	—/•	—/•	—/•	—/•	—/•
•	•	•	•	•	•	•	•	•
•	—	—	—	—	—	—	—	—
•	—	—	—	—	—	—	—	—
4	—	—	—	—	—	—	—	—
3	—	—	—	—	—	—	—	—
4	—	—	—	—	—	—	—	—
18	—	—	—	—	—	—	—	—
—	—	—	—	—	12	13	12	13
—	—	—	—	—	•	•	•	•
—	—	—	—	—	◦	◦	◦	◦
—	—	—	—	—	•	•	•	•
—	—	—	—	—	◦	◦	◦	◦
—	•	•	•	•	—	—	—	—
—	23	19	16	16	—	—	—	—
—	10	7	6	6	—	—	—	—
—	5	5	5	5	—	—	—	—
—	2	2	2	2	—	—	—	—
—	4	4	4	4	—	—	—	—
—	1	1	1	—	—	—	—	—
—	◦	◦	◦	—	—	—	—	—
0.300	0.300	0.300	0.300	0.300	0.300	0.300	0.300	0.300
—	•	•	•	—	—	—	—	—

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Wine climate cabinets



Appliance type		Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
Fully integrated / integrated		RW 282 263	RW 222 263	
Stainless steel glass door				RW 404 264
<b>Dimensions</b>				
Appliance dimensions W x H x D	(cm)	55.7 x 177 x 55.3	55.7 x 121.8 x 55.3	59.7 x 82-87 x 57
Niche dimensions W x H x D	(cm)	56 x 177.2 x 55	56 x 122 x 55	60 x 82-87 x 58
Depth including wall clearance	(cm)	55	55	58
Weight when empty	(kg)	89	64	52
Shipping weight	(kg)	101	74	56
Transport package dimensions W x H x D	(cm)	64 x 190 x 64	64 x 139 x 64	66 x 87 x 69
<b>Type and configuration</b>				
Cooling / freezing / wine		-/-*	-/-*	-/-*
Fresh cooling 0 °C / fresh cooling <math>\diamond</math> 0 °C / fresh cooling		-/-	-/-	-/-
Fully integrated / integrated / under-counter / free-standing		*/-/-	*/-/-	-/-/*-
Door hinge right / left / reversible		*/*	*/*	*/*
Full panelling / door panelling		-/-	-/-	-/-
<b>Volume / consumption data</b>				
Total volume	(l)	254	159	94
Number of standard wine bottles (0.75 litres)	(no.)	80	48	34
Energy efficiency class				
Daily energy consumption <sup>1</sup>	(kWh/24h)	0.444	0.414	0.378
Annual energy consumption <sup>1</sup>	(kWh)	162	151	138
Noise level	(dB (A) re 1 pW)	32	32	34
Noise efficiency class		B	B	B
Climate class <sup>2</sup>		SN-ST	SN-ST	SN - ST
<b>Features</b>				
Temperature / climate zones	(No.)	2	2	2
Temperature display internal / external		*/-	*/-	*/-
Temperature adjustable to the precise degree		.	.	.
Automatic defrosting: cooling / fresh cooling / freezing		*/-/-	*/-/-	*/-/-
Presentation light		.	.	.
Lock		-	-	.
Humidity control		.	.	.
Activated charcoal air filter		.	.	.
Low-vibration operation		.	.	.
UV-protection		.	.	.
Malfunction, visual / audible warning signal		*/-	*/-	*/-
Door open, visual / audible warning signal or door lock indication		*/*	*/*	*/*
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>		-	-	-
<b>Cooling / fresh cooling</b>				
Dynamic cold air distribution		.	.	.
<b>Wine</b>				
Max. levels in the interior		10	6	5
Bottle tray fully extendable / extendable		-/*	-/*	-/*
Shelf fully extendable / extendable		-/-	-/-	-/-
Storage of Magnum bottles possible		.	.	.
Suitable for decanters, open bottles and humidors		-	-	-
<b>Connection</b>				
Total connected load	(kW)	0.13	0.13	0.13
Water connection inlet		-	-	-

\* Standard. — Not available. <sup>1</sup> Effective consumption depends on the use/location of appliance. <sup>2</sup> The appliance is fully functional within the room temperature limits defined in the following climate classes: SN-ST (+10 °C to +38 °C), SN-T (+10 °C to +43 °C). <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

## Vario cooling appliances 200 series



Appliance type	Fridge-freezer combination	Fridge-freezer combination	Refrigerator	Freezer
Fully integrated / integrated	RB 289 300	RT 289 370	RC 289 370	RF 287 370
<b>Dimensions</b>				
Appliance dimensions W × H × D	(cm) 55.8 × 177.2 × 54.5	55.8 × 177.2 × 54.5	55.8 × 177.2 × 54.5	55.8 × 177.2 × 54.5
Niche dimensions W × H × D	(cm) 56 × 177.5 × 55	56 × 177.5 × 55	56 × 177.5 × 55	56 × 177.5 × 55
Depth including wall clearance	(cm) 55	55	55	55
Weight when empty	(kg) 76	71	72	64
Shipping weight	(kg) 81	76	77	70
Transport package dimensions W × H × D	(cm) 62 × 184 × 64	62 × 184 × 64	62 × 184 × 64	62 × 184 × 64
<b>Type and configuration</b>				
Cooling / freezing / wine	•/•/–	•/•/–	•/–/–	–/•/–
Fresh cooling 0 °C / fresh cooling ◊ 0 °C / fresh cooling	–/•/–	–/•/–	–/•/–	–/–/–
Fully integrated / integrated / under-counter / free-standing	•/–/–/–	•/–/–/–	•/–/–/–	•/–/–/–
Door hinge right / left / reversible	•/–/•	•/–/•	•/–/•	–/•/•
Full panelling / door panelling	–/–	–/–	–/–	–/–
<b>Volume / consumption data</b>				
Total volume	(l) 223	269	289	212
– Volume of cooling	(l) 101	171	206	–
– Volume of fresh cooling 0 °C / Fresh cooling ◊ 0 °C	(l) 55	83	83	–
– Volume of freezing	(l) 67	15	–	212
Energy efficiency class				
Daily energy consumption <sup>1</sup>	(kWh/24h) 0.550	0.504	0.328	0.580
Annual energy consumption <sup>1</sup>	(kWh) 201	184	120	235
Noise level	(dB (A) re 1 pW) 37	36	36	35
Noise efficiency class	C	C	C	B
Climate class <sup>2</sup>	SN - T	SN - T	SN - T	SN - T
<b>Features</b>				
Ice and water dispenser with ice cubes / crushed ice / water	–/–/–	–/–/–	–/–/–	–/–/–
Fresh cooling zones with humidity control	(No.) •	•	•	–
Temperature / climate zones	(No.) 4	4	3	1
Temperature display internal / external	•/–	•/–	•/–	•/–
Temperature adjustable to the precise degree	•	•	•	•
No-Frost technology	•	–	–	•
Automatic defrosting: cooling / fresh cooling / freezing	•/•/•	•/•/–	•/•/–	–/–/•
Activated charcoal air filter	–	–	–	–
Holiday mode	•	–	–	–
Malfunction, visual / audible warning signal	•/•	•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication	•/•	•/•	•/•	•/•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>	•	•	•	•
<b>Cooling / fresh cooling</b>				
Fast cooling	•	•	•	–
Dynamic cold air distribution	–	–	–	–
Levels in the interior	(No.) 3	6	7	–
Containers / drawers in the interior	(No.) 2	3	3	–
Door racks	(No.) 2	4	4	–
Bottle support, maple wood	2	2	2	–
Egg racks	(No. of eggs) 12	12	12	–
<b>Freezing</b>				
Fast freezing	•	–	–	•
Freezing capacity	(kg/24h) 7	2.8	–	14
Storage time after a malfunction	(hrs.) 8	9.5	–	9
Interior compartments	(No.) –	–	–	4
Baskets, containers, drawers in the interior	(No.) 3	–	–	3
Door racks	(No.) –	–	–	–
Ice cube trays	(No.) 1	1	–	1
Ice packs	(No.) 2	–	–	–
<b>Connection</b>				
Total connected load	(kW) 0.09	0.09	0.09	0.12
Water connection inlet	–	–	–	–

• Standard. – Not available. ◊ Special accessory. <sup>1</sup> Effective consumption depends on the use/location of appliance. <sup>2</sup> The appliance is fully functional within the room temperature limits defined in the following climate classes: SN-ST (+10 °C to +38 °C), SN-T (+10 °C to +43 °C). <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.

## Cooling 200 series



Appliance type		Freestanding fridge-freezer combination RY 295 350	Fridge-freezer combination RB 282 306	Fridge-freezer combination RT 282 306
Fully integrated / integrated			RB 282 306	RT 282 306
Stainless steel door, dark anthracite		RY 295 350		
<b>Dimensions</b>				
Appliance dimensions W x H x D	(cm)	90.5 x 183 x 70.6	55.8 x 177.2 x 54.5	55.8 x 177.2 x 54.5
Niche dimensions W x H x D	(cm)		56 x 177.5 x 55	56 x 177.5 x 55
Depth including wall clearance	(cm)	73.1	55	55
Weight when empty	(kg)	159	75	68
Shipping weight	(kg)	167	80	73
Transport package dimensions W x H x D	(cm)	99.8 x 197.5 x 80.4	62 x 184 x 64	62 x 184 x 64
<b>Type and configuration</b>				
Cooling / freezing / wine		•/•/—	•/•/—	•/•/—
Fresh cooling 0 °C / fresh cooling <math>\diamond</math> 0 °C / fresh cooling		•/—/—	—/•/—	—/•/—
Fully integrated / integrated / under-counter / free-standing		—/—/—/•	•/—/—/—	•/—/—/—
Door hinge right / left / reversible		•/•/—	•/—/•	•/—/•
Full panelling / door panelling		•/—	—/—	—/—
<b>Volume / consumption data</b>				
Total volume	(l)	573	223	269
— Total volume all cooling compartments	(l)	—	—	—
— Volume of cooling	(l)	335	101	171
— Volume of fresh cooling 0 °C / Fresh cooling <math>\diamond</math> 0 °C	(l)	67	55	83
— Volume of freezing	(l)	171	67	15
Energy efficiency class				
Daily energy consumption <sup>1</sup>	(kWh/24h)	0.760	0.550	0.504
Annual energy consumption <sup>1</sup>	(kWh)	333	201	184
Noise level	(dB (A) re 1 pW)	39	37	36
Noise efficiency class		C	C	C
Climate class <sup>2</sup>		SN - T	SN - T	SN - ST
<b>Features</b>				
Ice and water dispenser with ice cubes / crushed ice / water		•/•	—/—/—	—/—/—
Fresh cooling zones with temperature control		•	•	•
Fresh cooling zones with humidity control		•	•	•
Temperature / climate zones	(No.)	3	4	4
Temperature display internal / external		•/—	•/—	•/—
Temperature adjustable to the precise degree		•	•	•
No-Frost technology		•	•	—
Automatic defrosting: cooling / fresh cooling system / freezing		•/•/—	•/•/•	•/•/—
Brightness settings of lighting	(No.)	5	—	—
Defrost assistance freezing		•	•	—
Activated charcoal air filter		•	—	—
Holiday mode		•	•	—
Malfunction, visual / audible warning signal		•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication		•/•	•/•	•/•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>3</sup>		•	•	•
<b>Cooling / fresh cooling</b>				
Fast cooling		•	•	•
Dynamic cold air distribution		•	—	—
Levels in the interior	(No.)	7	3	6
Containers / drawers in the interior	(No.)	3	2	3
Door racks	(No.)	6	2	5
Wine and champagne rack, fold-away		—	•	•
Egg racks	(No. of eggs)	—	12	12
<b>Freezing</b>				
Fast freezing		•	•	—
Freezing capacity	(kg/24h)	15	7	2.8
Storage time after a malfunction	(h)	18.5	8	9.5
Interior compartments	(No.)	—	3	2
Baskets, containers, drawers in the interior	(No.)	3	3	—
Door racks	(No.)	—	—	—
Ice cube trays	(No.)	—	1	1
Ice packs	(No.)	—	2	—
<b>Connection</b>				
Total connected load	(kW)	0.18	0.09	0.09
Water connection inlet		•	—	—

• Standard. — Not available. ◊ Special accessory. <sup>2</sup> The appliance is fully functional within the room temperature limits defined in the following climate classes: SN-ST (+10 °C to +38 °C), SN-T (+10 °C to +43 °C). <sup>3</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.





Refrigerator	Freezer	Fridge-freezer combination	Refrigerator	Freezer
RC 282 306	RF 282 306	RT 202 180	RC 202 180	RF 202 180
55.8 × 177.2 × 54.5	55.8 × 177.2 × 54.5	59.8 × 82 × 54.8	59.8 × 82 × 54.8	59.8 × 82 × 54.8
56 × 177.5 × 55	56 × 177.5 × 55	60 × 82.2 × 55	60 × 82.2 × 55	60 × 82.2 × 55
55	55	55	55	55
68	66	32	32	32
74	70	35	35	35
62 × 184 × 64	62 × 184 × 64	67 × 89 × 62	67 × 89 × 62	67 × 89 × 62
•/—/—	—/•/—	•/•/—	•/—/—	—/•/—
—/•/—	—/—/—	—/•/—	—/•/—	—/—/—
•/—/—/—	•/—/—/—	—/—/•/—	—/—/•/—	—/—/•/—
•/—/•	—/•/•	•/—/•	•/—/•	•/—/•
—/—	—/—	—/—	—/—	—/—
289	212	110	134	85
—	—	—	—	—
206	—	93	134	—
83	—	14	14	—
—	212	17	—	85
0.328	0.580	0.326	0.254	0.467
120	235	119	93	189
36	35	35	35	35
C	B	B	B	B
SN - T	SN - T	SN - T	SN - T	SN - T
—/—/—	—/—/—	—/—/—	—/—/—	—/—/—
•	—	—	—	—
•	—	—	—	—
3	1	2	1	1
•/—	•/—	•/—	•/—	•/—
•	•	—	—	•
—	•	—	—	•
•/•/—	—/—/•	—/—/—	—/—/—	—/—/•
—	—	—	—	—
—	—	—	—	—
—	—	—	•	—
—/—	•/•	—/—	—/—	•/—
•/•	—/•	•/•	•/•	•/•
•	•	•	•	•
•	—	•	•	—
—	—	—	—	—
7	—	2	3	—
3	—	1	1	—
5	—	3	3	—
•	—	—	—	—
12	—	6	6	—
—	•	—	—	•
—	13.8	3	—	8
—	8	9	—	9
—	7	1	—	—
—	5	—	—	3
—	—	—	—	—
—	1	1	—	1
—	—	—	—	—
0.09	0.12	0.09	0.09	0.09
—	—	—	—	—

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops


Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

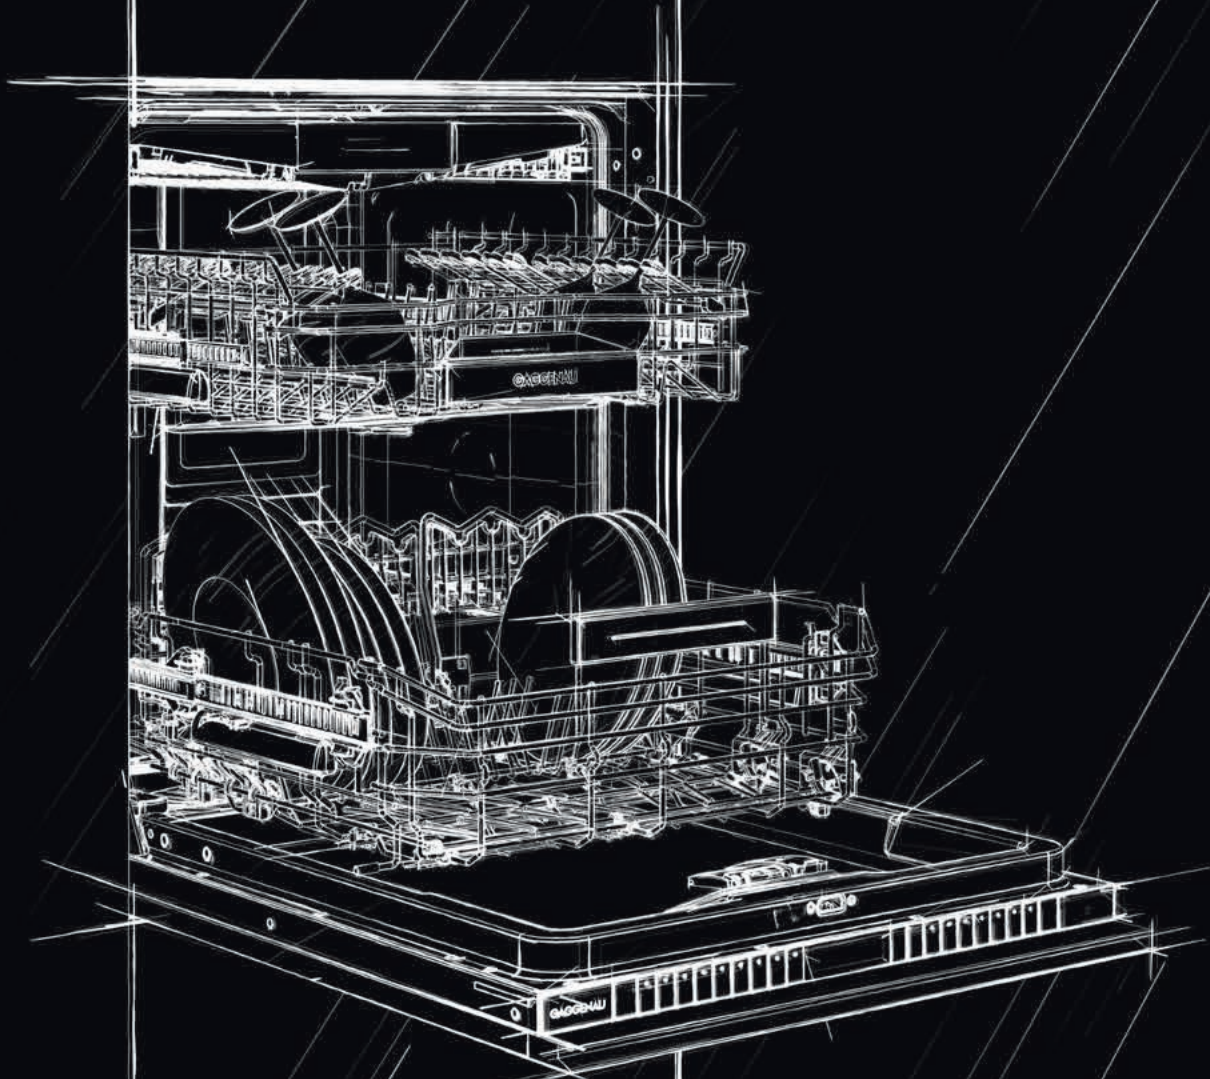

# DISHWASHERS | WASHING MACHINE | TUMBLE DRYER

Dishwashers 400 series	426
Dishwashers 200 series	430
Planning notes	438
Accessories   Special accessories	446
Technical specifications	448
Washing machine	450
Tumble dryer	451
Technical specifications	452



#### Dishwasher 400 series DF 481/DF 480

##### DF 481 101

Fully integrated.  
Height 86.5 cm.

##### DF 480 101

Fully integrated.  
Height 81.5 cm.



#### Included in the price

- 1 baking tray spray head.
- 2 GN container inserts.
- 1 holder for long-stemmed glasses.
- 1 stainless steel trim kit.

#### Installation accessories

##### GZ 010 011

Extension for water inlet and outlet  
(2 m long).

#### Special accessories

##### DA 041 160

Cutlery drawer with smooth running rails.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
13 place setting capacity with all 3 levels.

##### DA 042 030

Silvercare cartridge for all dishwashers.

##### DA 043 000

Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

##### DA 045 061

3rd basket.  
With smooth running rails.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensils.  
Movable knife shelf.

#### Highlights

- Optimal protection for sensitive glassware by low temperature drying with zeolite, elaborated basket design and intelligent water softening.
- 8 programmes with aqua sensor and 4 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive Plus for adjusting cleaning areas in the lower basket.
- Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.
- Perfectly illuminated interior.
- Push-to-open function for perfect integration into handleless furniture fronts.
- Remaining time projection onto the kitchen floor.
- Very quiet: 43 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
Touch key operation.

Flexible cycle time reduction, even during an active cycle.

Personalisation function for saving individual combinations of programmes.

Drying assistant for optional door opening at the end of the programme.

Information key with use indicators.

Time delay up to 24 hours.

Visual and acoustic end of programme indicator.

Remaining time projection.

#### Technical features

Perfectly illuminated interior.

Glass protection with zeolite.

Aqua sensor.

Load sensor.

Detergent recognition.

Regeneration electronics.

Heat exchanger.

Continuous flow heater.

Triple filter system.

Soft lock.

Aqua stop.

#### Selected digital services (Gaggenau Home Connect)

Programme Intelligent for adapting a cycle based on user feedback.

Programme assistant.

Temporary noise reduction.

Downloadable programmes.\*

Please read additional information on Gaggenau Home Connect on page 459.

#### Programmes

8 programmes:  
Auto 35 °C - 45 °C.  
Auto 45 °C - 65 °C.  
Auto 65 °C - 75 °C.  
Intensive 70 °C.  
Eco 50 °C.  
Night programme.  
Quick wash 45 °C (35 min.).  
Personalisation function  
(default setting: Pre-rinse).

4 options:  
Intensive Plus.  
Power.

Half Load.  
Hygiene.

Machine Care.

#### Interior

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

Upper basket:

Over extension.

Optional extra cleaning area by activating additional spray nozzles.

Rackmatic with 3 levels, adjustable in height up to 5 cm.

6 folding spines.

4 folding racks for optimal protection of glass.

Lower basket:

Motorised spray arm.

8 folding spines.

2 folding racks for optimal protection of glass.

Dividable glass support.

Cutlery basket.

Maximum dish sizes

(upper/lower basket)

for 86.5 cm high dishwashers:

29/28, 26.5/30.5 or 24/34 cm

respectively.

Maximum dish sizes

(upper/lower basket)

for 81.5 cm high dishwashers:

27/25, 24.5/27.5 or 22/31 cm

respectively.

12 place setting capacity.

Maximum glass loading capacity

23 wine glasses.

#### Consumption data

Energy efficiency class B at a range of energy efficiency classes from A to G.  
From 9.5 l water.

From 0.626 kWh.

Noise level 43 dB (re 1 pW).

#### Planning notes

Height-adjustable feet.

Appliance plinth recess 100 mm (see drawing).

To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).

The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.

Rear feet adjustable at front.

Door weight up to 10/8.5 kg.

Door panel dimension dependent on plinth height of kitchen furniture.

Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes on page 438-445.

#### Connection

Total connected load 2000-2400 W.


Connecting cable pluggable.

Water connection with 3/4" screw joint.


Connection to hot or cold water possible.

\* Availability depending on country.


86.5 cm high dishwasher

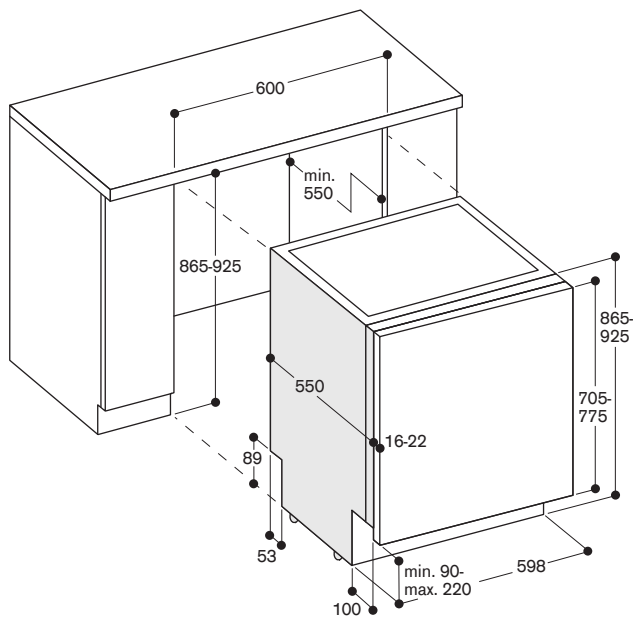

81.5 cm high dishwasher

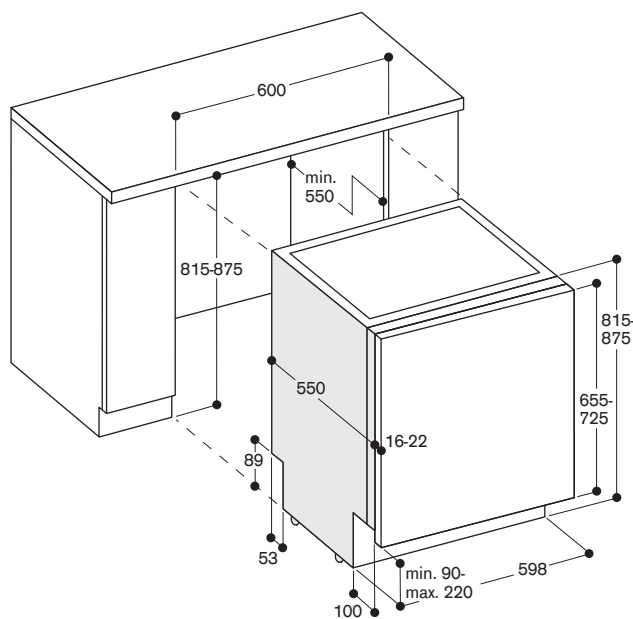

Connection dimensions for a 60 cm wide dishwasher

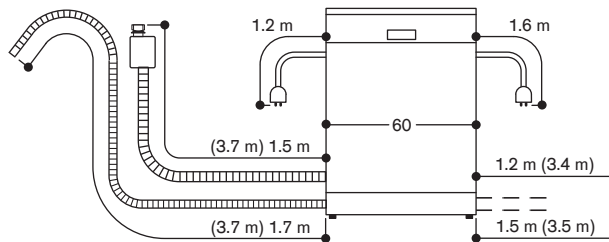

( ) values with extension kit

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



#### Dishwasher 400 series DF 481/DF 480

##### DF 481 101F

Fully integrated.  
Height 86.5 cm.  
With flexible hinge.

##### DF 480 101F

Fully integrated.  
Height 81.5 cm.  
With flexible hinge.



#### Included in the price

- 1 baking tray spray head.
- 2 GN container inserts.
- 1 holder for long-stemmed glasses.
- 1 stainless steel trim kit.

#### Installation accessories

##### GZ 010 011

Extension for water inlet and outlet  
(2 m long).

#### Special accessories

##### DA 041 160

Cutlery drawer with smooth running rails.

3rd loading level above the upper basket.

For large pieces of cutlery, cooking utensils and espresso cups.  
13 place setting capacity with all 3 levels.

##### DA 042 030

Silvercare cartridge for all dishwashers.

##### DA 043 000

Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

##### DA 045 061

3rd basket.

With smooth running rails.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensils.  
Movable knife shelf.

#### Highlights

- Optimal protection for sensitive glassware by low temperature drying with zeolite, elaborated basket design and intelligent water softening.
- 8 programmes with aqua sensor and 4 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive Plus for adjusting cleaning areas in the lower basket.
- Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.
- Perfectly illuminated Interior.
- Push-to-open function for perfect integration into handleless furniture fronts.
- Flexible hinge for reduced plinth height as of 50 mm or tall unit installation.
- Lateral Info-Light.
- Very quiet: 43 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.

Touch key operation.

Flexible cycle time reduction, even during an active cycle.

Personalisation function for saving individual combinations of programmes.

Drying assistant for optional door opening at the end of the programme.

Information key with use indicators.

Time delay up to 24 hours.

Visual and acoustic end of programme indicator.

Lateral Info-Light.

#### Technical features

Perfectly illuminated interior.

Glass protection with zeolite.

Aqua sensor.

Load sensor.

Detergent recognition.

Regeneration electronics.

Heat exchanger.

Continuous flow heater.

Triple filter system.

Soft lock.

Aqua stop.

#### Selected digital services

##### (Gaggenau Home Connect)

Programme Intelligent for adapting a cycle based on user feedback.

Programme assistant.

Temporary noise reduction.

Downloadable programmes.\*

Please read additional information on Gaggenau Home Connect on page 459.

#### Programmes

8 programmes:

Auto 35°C - 45°C.

Auto 45°C - 65°C.

Auto 65°C - 75°C.

Intensive 70°C.

Eco 50°C.

Night programme.

Quick wash 45°C (35 min.).

Personalisation function

(default setting: Pre-rinse).

#### 4 options:

Intensive Plus.

Power.

Half Load.

Hygiene.

Machine Care.

#### Interior

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

Upper basket:  
Over extension.

Optional extra cleaning area by activating additional spray nozzles.  
Rackmatic with 3 levels, adjustable in height up to 5 cm.  
6 folding spines.  
4 folding racks for optimal protection of glass.

Lower basket:  
Motorised spray arm.  
8 folding spines.

2 folding racks for optimal protection of glass.  
Dividable glass support.  
Cutlery basket.

Maximum dish sizes  
(upper/lower basket)  
for 86.5 cm high dishwashers:  
29/28, 26.5/30.5 or 24/34 cm  
respectively.

Maximum dish sizes  
(upper/lower basket)  
for 81.5 cm high dishwashers:  
27/25, 24.5/27.5 or 22/31 cm  
respectively.

12 place setting capacity.  
Maximum glass loading capacity  
23 wine glasses.

#### Consumption data

Energy efficiency class B at a range of energy efficiency classes from A to G.  
From 9.5l water.  
From 0.626 kWh.  
Noise level 43 dB (re 1 pW).

#### Planning notes

Height-adjustable feet.

Appliance plinth recess 100 mm  
(see drawing).

Rear feet adjustable at front.

Door weight up to 11 kg.

Door panel dimension dependent on plinth height of kitchen furniture.

Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes, also concerning flexible hinge, on page 438-445.

#### Connection


Total connected load 2000-2400 W.  
Connecting cable pluggable.

Water connection with 3/4" screw joint.


Connection to hot or cold water possible.

\* Availability depending on country.


86.5 cm high dishwasher with flexible hinge

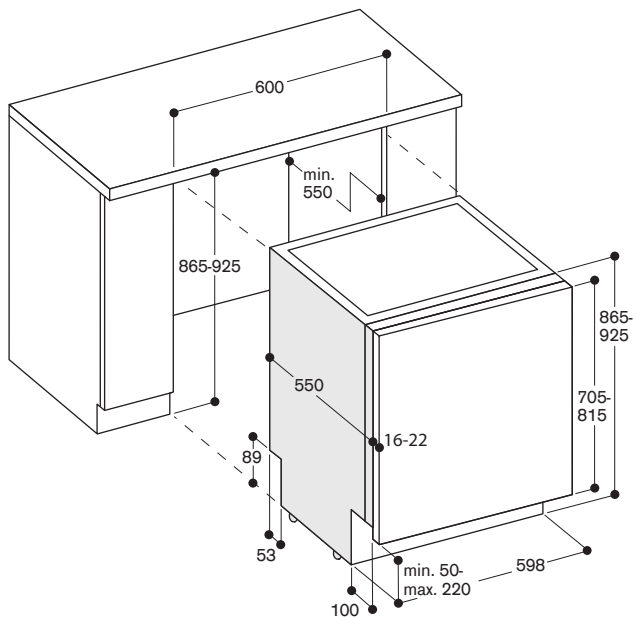

81.5 cm high dishwasher with flexible hinge

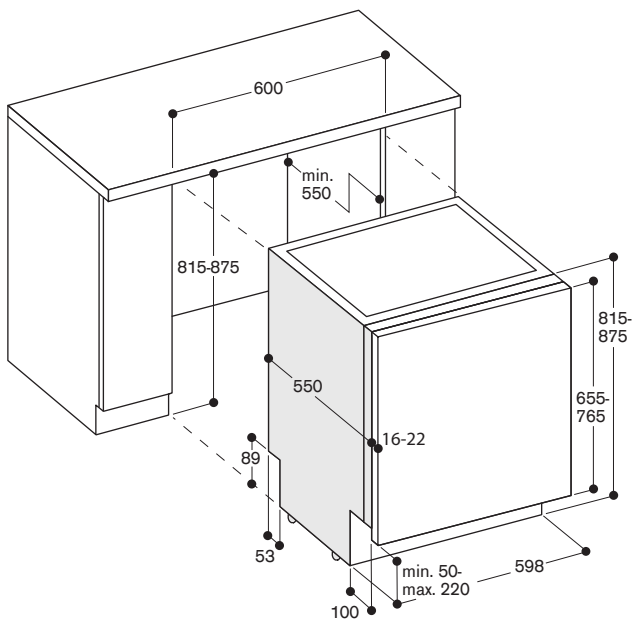

Connection dimensions for a 60 cm wide dishwasher

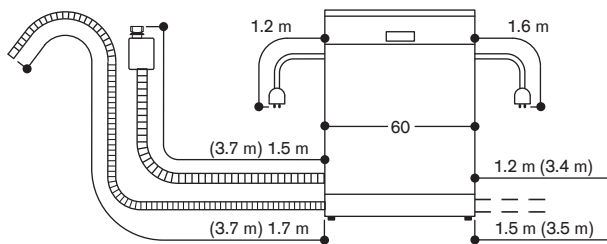

( ) values with extension kit

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Dishwasher 200 series DF 271/DF 270

#### DF 271 101

Fully integrated.  
Height 86.5 cm.

#### DF 270 101

Fully integrated.  
Height 81.5 cm.



#### Included in the price

- 1 baking tray spray head.
- 1 stainless steel trim kit.

#### Installation accessories

##### GZ 010 011

Extension for water inlet and outlet  
(2 m long).

#### Special accessories

##### DA 041 160

Cutlery drawer with smooth running rails.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
13 place setting capacity with all 3 levels.

##### DA 042 030

Silvercare cartridge for all dishwashers.

##### DA 043 000

Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

##### DA 045 061

3rd basket.  
With smooth running rails.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensils.  
Movable knife shelf.

#### Highlights

- Optimal protection for sensitive glassware by low temperature drying with zeolite, elaborated basket design and intelligent water softening.
- 6 programmes with aqua sensor and 3 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive for particularly thorough cleaning in the lower basket.
- Flexible basket system with smooth running rails on all levels.
- Bright interior lighting.
- Push-to-open function for perfect integration into handleless furniture fronts.
- Remaining time projection onto the kitchen floor.
- Very quiet: 43 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
Touch key operation.  
Flexible cycle time reduction, even during an active cycle.  
Personalisation function for saving individual combinations of programmes.  
Drying assistant for optional door opening at the end of the programme.  
Information key with use indicators.  
Time delay up to 24 hours.  
Visual and acoustic end of programme indicator.  
Remaining time projection.

#### Technical features

Bright interior lighting.  
Glass protection with zeolite.  
Aqua sensor.  
Load sensor.  
Detergent recognition.  
Regeneration electronics.  
Heat exchanger.  
Continuous flow heater.  
Triple filter system.  
Soft lock.  
Aqua stop.

#### Selected digital services (Gagganau Home Connect)

Downloadable programmes.\*  
Programme assistant.  
Temporary noise reduction.

Please read additional information on Gagganau Home Connect on page 459.

#### Programmes

6 programmes:  
Auto 35°C–45°C.  
Auto 45°C–65°C.  
Auto 65°C–75°C.  
Eco 50°C.  
Quick wash 45°C (35 min.).  
Personalisation function  
(default setting: Pre-rinse).

3 options:  
Intensive.  
Power.  
Half Load.

Machine Care.

#### Interior

Flexible basket system with smooth running rails on all levels.

Upper basket:  
Over extension.  
Optional extra cleaning area by activating additional spray nozzles.  
Rackmatic with 3 levels, adjustable in height up to 5 cm.  
6 folding spines.  
4 folding racks for optimal protection of glass.

Lower basket:  
8 folding spines.  
2 folding racks for optimal protection of glass.  
Dividable glass support.  
Cutlery basket.

Maximum dish sizes  
(upper/lower basket)  
for 86.5 cm high dishwashers:  
29/28, 26.5/30.5 or 24/34 cm  
respectively.

Maximum dish sizes  
(upper/lower basket)  
for 81.5 cm high dishwashers:  
27/25, 24.5/27.5 or 22/31 cm  
respectively.

12 place setting capacity.  
Maximum glass loading capacity  
23 wine glasses.

#### Consumption data

Energy efficiency class B at a range of energy efficiency classes from A to G.  
From 9.5 l water.  
From 0.725 kWh.  
Noise level 43 dB (re 1 pW).

#### Planning notes

Height-adjustable feet.  
Appliance plinth recess 100 mm (see drawing).  
To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).  
The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.  
Rear feet adjustable at front.  
Door weight up to 10/8.5 kg.  
Door panel dimension dependent on plinth height of kitchen furniture.  
Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes on page 438–445.


#### Connection

Total connected load 2000–2400 W.  
Connecting cable pluggable.  
Water connection with 3/4" screw joint.  
Connection to hot or cold water possible.


\* Availability depending on country.




86.5 cm high dishwasher

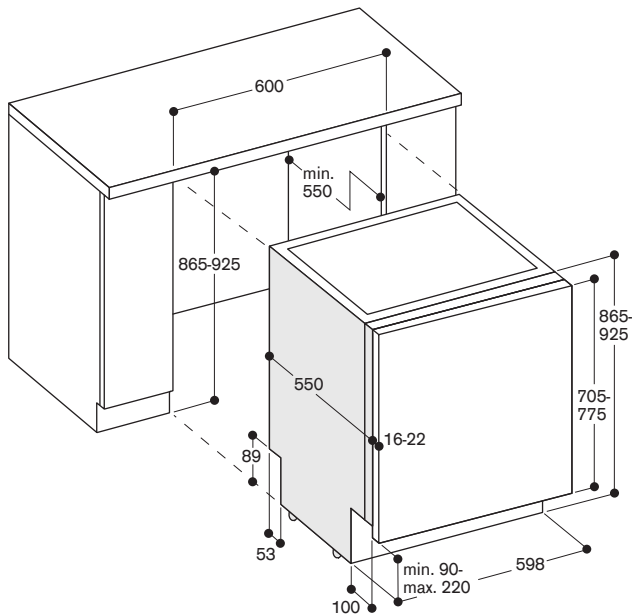

81.5 cm high dishwasher

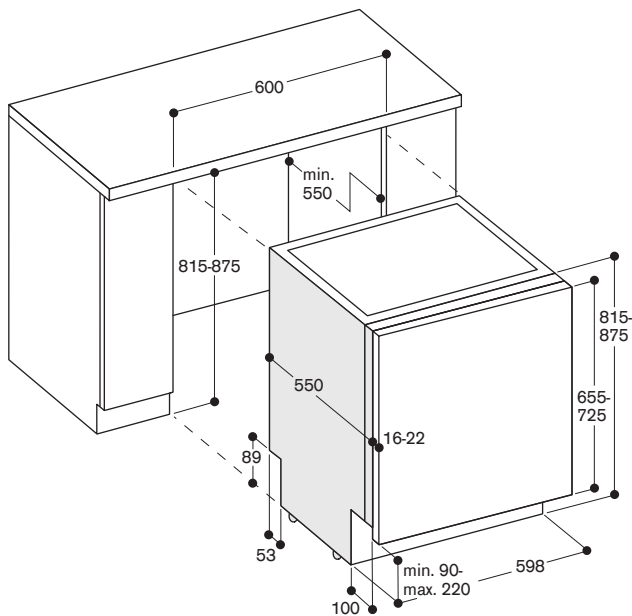

Connection dimensions for a 60 cm wide dishwasher

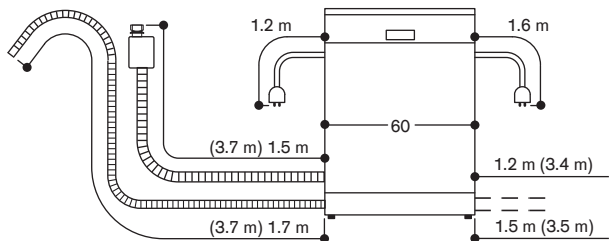

( ) values with extension kit

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Dishwasher 200 series DF 271/DF 270

#### DF 271 101F

Fully integrated.  
Height 86.5 cm.  
With flexible hinge.

#### DF 270 101F

Fully integrated.  
Height 81.5 cm.  
With flexible hinge.



#### Included in the price

- 1 baking tray spray head.
- 1 stainless steel trim kit.

#### Installation accessories

**GZ 010 011**  
Extension for water inlet and outlet  
(2 m long).

#### Special accessories

##### DA 041 160

Cutlery drawer with smooth running rails.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
13 place setting capacity with all 3 levels.

##### DA 042 030

Silvercare cartridge for all dishwashers.

##### DA 043 000

Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

##### DA 045 061

3rd basket.  
With smooth running rails.  
For 86.5 cm high dishwashers  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensils.  
Movable knife shelf.

#### Highlights

- Optimal protection for sensitive glassware by low temperature drying with zeolite, elaborated basket design and intelligent water softening.
- 6 programmes with aqua sensor and 3 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive for particularly thorough cleaning in the lower basket.
- Flexible basket system with smooth running rails on all levels.
- Bright interior lighting.
- Push-to-open function for perfect integration into handleless furniture fronts.
- Flexible hinge for reduced plinth height as of 50 mm or tall unit installation.
- Lateral Info-Light.
- Very quiet: 43 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
Touch key operation.  
Flexible cycle time reduction, even during an active cycle.  
Personalisation function for saving individual combinations of programmes.  
Drying assistant for optional door opening at the end of the programme.  
Information key with use indicators.  
Time delay up to 24 hours.  
Visual and acoustic end of programme indicator.  
Lateral Info-Light.

#### Technical features

Bright interior lighting.  
Glass protection with zeolite.  
Aqua sensor.  
Load sensor.  
Detergent recognition.  
Regeneration electronics.  
Heat exchanger.  
Continuous flow heater.  
Triple filter system.  
Soft lock.  
Aqua stop.

#### Selected digital services (Gaggenau Home Connect)

Downloadable programmes.\*  
Programme assistant.  
Temporary noise reduction.

Please read additional information on Gaggenau Home Connect on page 459.

#### Programmes

6 programmes:  
Auto 35 °C–45 °C.  
Auto 45 °C–65 °C.  
Auto 65 °C–75 °C.  
Eco 50 °C.  
Quick wash 45 °C (35 min.).  
Personalisation function  
(default setting: Pre-rinse).

3 options:  
Intensive.  
Power.  
Half Load.

Machine Care.

#### Interior

Flexible basket system with smooth running rails on all levels.

Upper basket:  
Over extension.  
Optional extra cleaning area by activating additional spray nozzles.  
Rackmatic with 3 levels, adjustable in height up to 5 cm.  
6 folding spines.  
4 folding racks for optimal protection of glass.

Lower basket:  
8 folding spines.  
2 folding racks for optimal protection of glass.  
Dividable glass support.  
Cutlery basket.

Maximum dish sizes  
(upper/lower basket)  
for 86.5 cm high dishwashers:  
29/28, 26.5/30.5 or 24/34 cm  
respectively.

Maximum dish sizes  
(upper/lower basket)  
for 81.5 cm high dishwashers:  
27/25, 24.5/27.5 or 22/31 cm  
respectively.

12 place setting capacity.  
Maximum glass loading capacity  
23 wine glasses.

#### Consumption data

Energy efficiency class B at a range of energy efficiency classes from A to G.  
From 9.5 l water.  
From 0.725 kWh.  
Noise level 43 dB (re 1 pW).

#### Planning notes

Height-adjustable feet.  
Appliance plinth recess 100 mm (see drawing).  
Rear feet adjustable at front.  
Door weight up to 11 kg.  
Door panel dimension dependent on plinth height of kitchen furniture.  
Installation and usage also with furniture handle possible. The push-to-open function remains active.


Please read additional planning notes, also concerning flexible hinge, on page 438–445.

#### Connection


Total connected load 2000–2400 W.  
Connecting cable pluggable.  
Water connection with 3/4" screw joint.  
Connection to hot or cold water possible.

\* Availability depending on country.


86.5 cm high dishwasher with flexible hinge

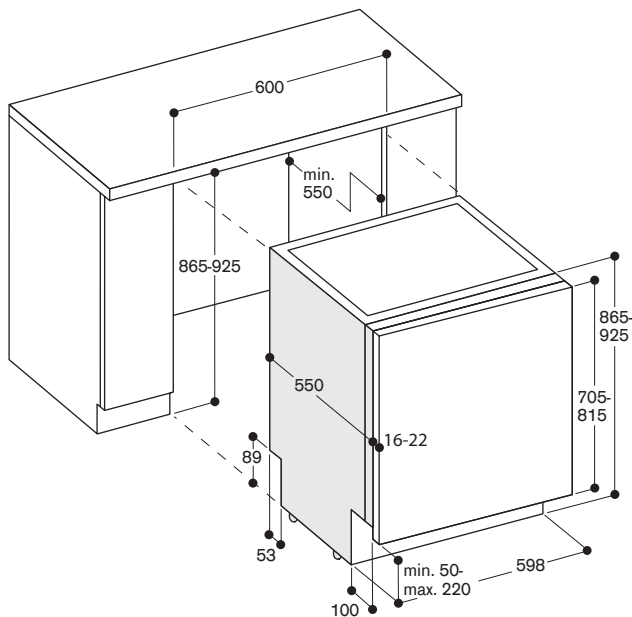

81.5 cm high dishwasher with flexible hinge

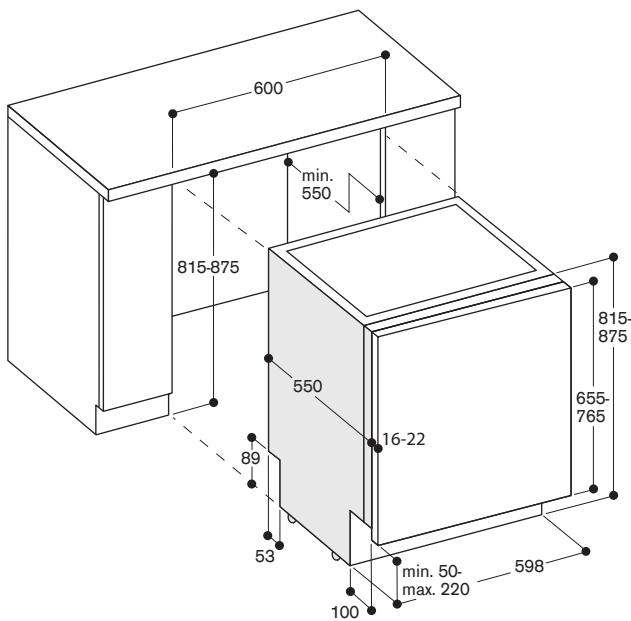

Connection dimensions for a 60 cm wide dishwasher

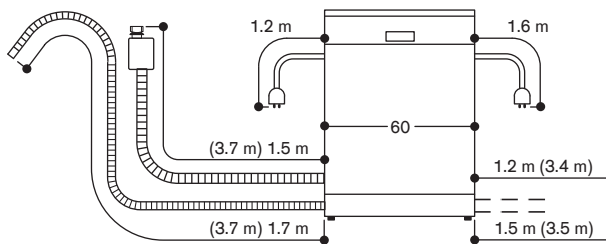

( ) values with extension kit

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect



### Dishwasher 200 series DF 261/DF 260

**DF 261 101**  
Fully integrated.  
Height 86.5 cm.

**DF 260 101**  
Fully integrated.  
Height 81.5 cm.



#### Included in the price

- 1 baking tray spray head.
- 1 stainless steel trim kit.

#### Installation accessories

**GH 045 010**  
Handle bar with 2 mounts, stainless steel, length 45 cm, height 49 mm, drilling distance 427 mm.

**GZ 010 011**  
Extension for water inlet and outlet (2 m long).

#### Special accessories

**DA 041 061**  
Cutlery drawer.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
14 place setting capacity with all 3 levels.

**DA 042 030**  
Silvercare cartridge for all dishwashers.

**DA 043 000**  
Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

**DA 045 060**  
3rd basket.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensiles.  
Movable knife shelf.

#### Highlights

- Optimal protection for sensitive glassware by low temperature drying with zeolite, elaborated basket design and intelligent water softening.
- 6 programmes with aqua sensor and 3 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive for particularly thorough cleaning in the lower basket.
- Flexible basket system.
- Bright interior lighting.
- Remaining time projection onto the kitchen floor.
- Very quiet: 43 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
Touch key operation.  
Flexible cycle time reduction, even during an active cycle.  
Personalisation function for saving individual combinations of programmes.  
Drying assistant for optional door opening at the end of the programme.  
Information key with use indications.  
Time delay up to 24 hours.  
Visual and acoustic end of programme indicator.  
Remaining time projection.

#### Technical features

Bright interior lighting.  
Glass protection with zeolite.  
Aqua sensor.  
Load sensor.  
Detergent recognition.  
Regeneration electronics.  
Heat exchanger.  
Continuous flow heater.  
Triple filter system.  
Soft lock.  
Aqua stop.

**Selected digital services (Gaggenau Home Connect)**  
Downloadable programmes.\*  
Programme assistant.  
Temporary noise reduction.

Please read additional information on Gaggenau Home Connect on page 459.

#### Programmes

6 programmes:  
Auto 35°C–45°C.  
Auto 45°C–65°C.  
Auto 65°C–75°C.  
Eco 50°C.  
Quick wash 45°C (35 min.).  
Personalisation function (default setting: Pre-rinse).

3 options:  
Intensive.  
Power.  
Half Load.

Machine Care.

#### Interior

Flexible basket system.

Upper basket:  
Over extension.  
Optional extra cleaning area by activating additional spray nozzles.  
Rackmatic with 3 levels, adjustable in height up to 5 cm.  
6 folding spines.  
4 folding racks for optimal protection of glass.

Lower basket:  
8 folding spines.  
2 folding racks for optimal protection of glass.  
Dividable glass support.  
Cutlery basket.

Maximum dish sizes (upper/lower basket) for 86.5 cm high dishwashers: 29/28, 26.5/30.5 or 24/34 cm respectively.

Maximum dish sizes (upper/lower basket) for 81.5 cm high dishwashers: 27/25, 24.5/27.5 or 22/31 cm respectively.

13 place setting capacity.  
Maximum glass loading capacity 23 wine glasses.

#### Consumption data

Energy efficiency class B at a range of energy efficiency classes from A to G.  
From 9.5l water.  
From 0.635 kWh.  
Noise level 43 dB (re 1 pW).

#### Planning notes


Height-adjustable feet.  
Appliance plinth recess 100 mm (see drawing).  
To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).  
The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.  
Rear feet adjustable at front.  
Door weight up to 10/8.5 kg.  
Door panel dimension dependent on plinth height of kitchen furniture.

Please read additional planning notes on page 438–445.


#### Connection

Total connected load 2000–2400 W.  
Connecting cable pluggable.  
Water connection with 3/4" screw joint.  
Connection to hot or cold water possible.


86.5 cm high dishwasher

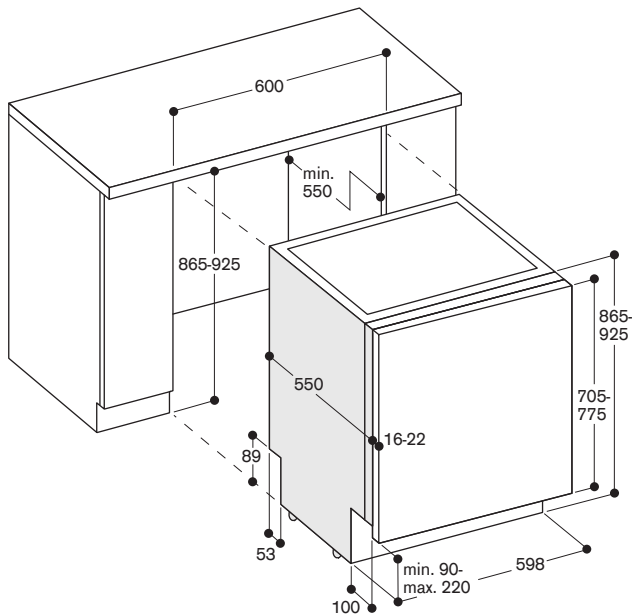

81.5 cm high dishwasher

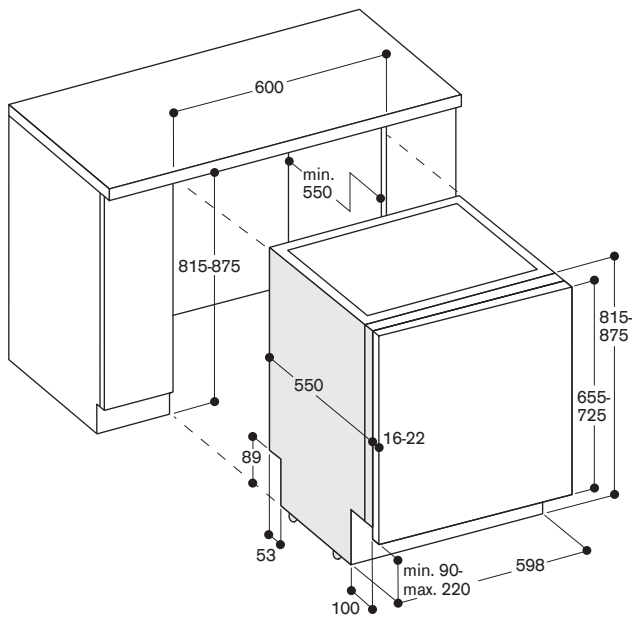

Connection dimensions for a 60 cm wide dishwasher

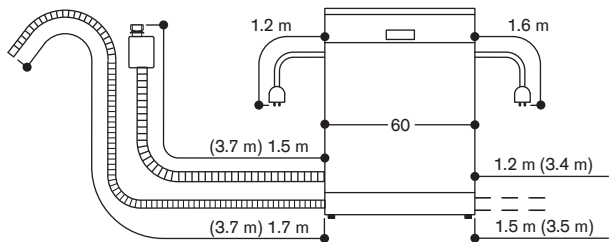

( ) values with extension kit



### Dishwasher 200 series DF 210

**DF 210 100**  
Fully integrated.  
Height 81.5 cm.



#### Included in the price

1 baking tray spray head.

#### Installation accessories

**DA 020 011**  
Stainless steel trim kit for 81.5 cm high dishwashers.

**GH 045 010**  
Handle bar with 2 mounts, stainless steel, length 45 cm, height 49 mm, drilling distance 427 mm.

**GZ 010 011**  
Extension for water inlet and outlet (2 m long).

#### Special accessories

**DA 041 061**  
Cutlery drawer.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
14 place setting capacity with all 3 levels.

**DA 042 030**  
Silvercare cartridge for all dishwashers.

**DA 043 000**  
Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

#### Highlights

- 6 programmes with aqua sensor and 3 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive for particularly thorough cleaning in the lower basket.
- Flexible basket system.
- Bright interior lighting.
- Very quiet: 44 dB.

#### Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
Touch key operation.  
Flexible cycle time reduction, even during an active cycle.  
Personalisation function for saving individual combinations of programmes.  
Information key with use indications.  
Time delay up to 24 hours.  
Visual and acoustic end of programme indicator.  
Info-Light.

#### Technical features

Bright interior lighting.  
Glass protection.  
Aqua sensor.  
Load sensor.  
Detergent recognition.  
Regeneration electronics.  
Heat exchanger.  
Continuous flow heater.  
Triple filter system.  
Soft lock.  
Aqua stop.

#### Selected digital services (Gaggeneau Home Connect)

Downloadable programmes.\*  
Programme assistant.  
Temporary noise reduction.

Please read additional information on Gaggeneau Home Connect on page 459.

#### Programmes

6 programmes:  
Auto 35°C–45°C.  
Auto 45°C–65°C.  
Auto 65°C–75°C.  
Eco 50°C.  
Quick wash 45°C (29 min.).  
Personalisation function (default setting: Pre-rinse).

3 options:  
Intensive.  
Power.  
Extra Dry.

#### Interior

Flexible basket system.

Upper basket:  
Over extension.  
Rackmatic with 3 levels, adjustable in height up to 5 cm.  
6 folding spines.  
4 folding racks for optimal protection of glass.

Lower basket:  
8 folding spines.  
2 folding racks for optimal protection of glass.  
Dividable glass support.  
Cutlery basket.

Maximum dish sizes (upper/lower basket) for 81.5 cm high dishwashers: 27/25, 24.5/27.5 or 22/31 cm respectively.

13 place setting capacity.  
Maximum glass loading capacity 23 wine glasses.

#### Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.  
From 9.5 l water.  
From 0.836 kWh.  
Noise level 44 dB (re 1 pW).

#### Planning notes

Height-adjustable feet.  
Appliance plinth recess 100 mm (see drawing).  
Rear feet adjustable at front.  
Door weight up to 8.5 kg.  
Door panel dimension dependent on plinth height of kitchen furniture.


Please read additional planning notes on page 438–445.

#### Connection


Total connected load 2000–2400 W.  
Connecting cable pluggable.  
Water connection with 3/4" screw joint.  
Connection to hot or cold water possible.

\* Availability depending on country.

81.5 cm high dishwasher

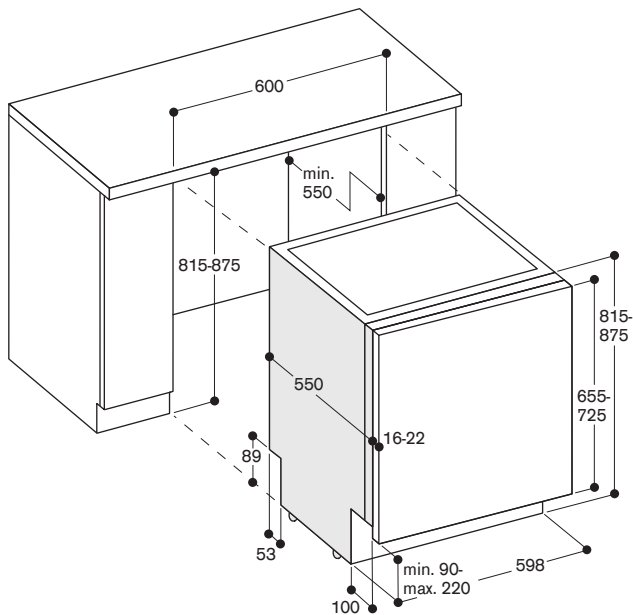

Connection dimensions for a 60 cm wide dishwasher

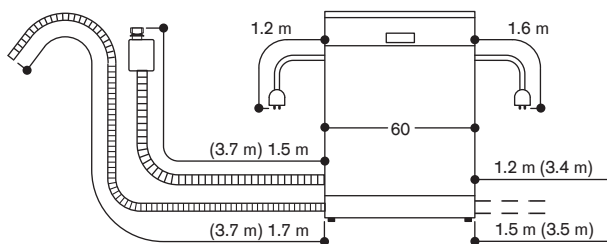

( ) values with extension kit

EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
Washing machine

Accessories | Energy Label |  
Gaggenau Home Connect

## Additional planning notes for standard dishwashers (without flexible hinge)

**For niche heights from 815 to 855 mm,** in most cases, the 81.5 cm high dishwasher must be planned, regardless of the plinth height.


**For niche heights from 885 to 925 mm,** in most cases, the 86.5 cm high dishwasher must be planned, regardless of the plinth height.

**If the niche height amounts to 865 or 875 mm, please note:** Whether the 81.5 cm high dishwasher or the 86.5 cm high dishwasher can be used here depends on the plinth height.

For dishwasher with remaining time projection, the maximum plinth height must be reduced by 30 mm to provide an optimal display.

Plinth height in mm ↓	Front height 655 to 765 mm											
	Front height 705 to 815 mm											
	Niche height in mm →											
	815	825	835	845	855	865	875	885	895	905	915	925
<90	1 (S)	1 (S)	1 (S)	1 (S)	1 (S)	2 (S)	2 (S)	2 (S)	2 (S)	2 (S)	2 (S)	2 (S)
90	1	1 (S/D)	1 (S)	1 (S)	1 (S)	2	2 (S)	2 (S)	2 (S)	2 (S)	2 (S)	2 (S)
100	1	1	1 (S/D)	1 (S)	1 (S)	1 (S) 2	2	2 (S/D)	2 (S)	2 (S)	2 (S)	2 (S)
110	1	1	1	1 (S/D)	1 (S)	1 (S) 2	1 (S) 2	2	2 (S/D)	2 (S)	2 (S)	2 (S)
120	1	1	1	1	1 (S/D)	1 (S) 2	1 (S) 2	2	2	2 (S/D)	2 (S)	2 (S)
130	1	1	1	1	1	1 (S/D) 2	1 (S) 2	2	2	2	2 (S/D)	2 (S)
140	1	1	1	1	1	1 2	1 (S/D) 2	2	2	2	2	2 (S/D)
150	1	1	1	1	1	1 2	1 2	2	2	2	2	2
160	1	1	1	1	1	1 2	1 2	2	2	2	2	2
170		1	1	1	1	1	1 2	2	2	2	2	2
180			1	1	1	1	1	2	2	2	2	2
190				1	1	1	1		2	2	2	2
200					1	1	1			2	2	2
210							1	1			2	2
220								1				2

- 1 = 81.5 cm high dishwasher DF 480/DF 270/DF 260/DF 210, (S) = special solution
- 2 = 86.5 cm high dishwasher DF 481/DF 271/DF 261, (S) = special solution
- (S) = special solution with folding hinge (order as spare part, no. 648174) / divided kitchen furniture door
- (D) = special solution with 10 mm gap from the worktop → Spacer batten / child lock not possible

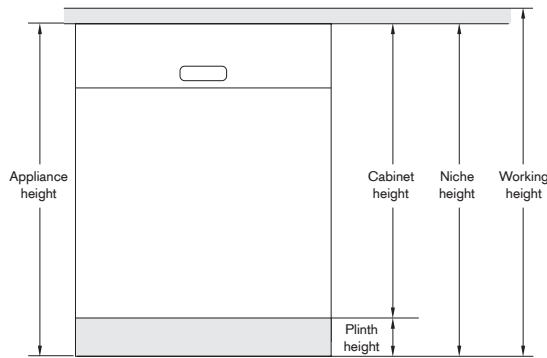




## Additional planning notes - tall unit installation of standard dishwashers (without flexible hinge)

### Tall unit installation of dishwashers without slanted drawer panel

The table contains the gap size required between the kitchen furniture door panel and drawer panel with reference to niche height, plinth height and panel thickness when using a standard kitchen furniture door panel for dishwashers installed below worktops.

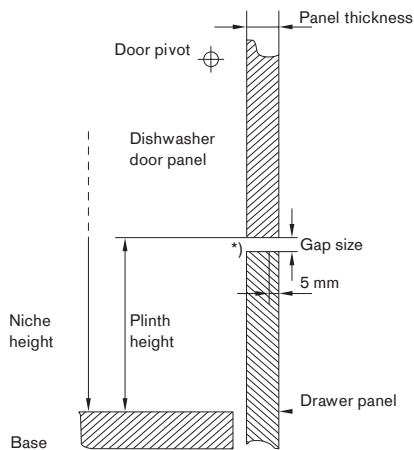


\* The pivot area of the door should be at least 4 mm.

Niche height (mm)	Panel thickness (mm)	Plinth height (mm)								
		90	100	110	120	130	140	150	160	170
815	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
825	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
835	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
845	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
855	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
865	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
875	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
885	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
895	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
905	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
915	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
925	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	

### Tall unit installation of dishwashers with slanted drawer panel

The table contains the gap size required between the kitchen furniture door panel and drawer panel with reference to niche height, plinth height and panel thickness when using a standard kitchen furniture door panel for dishwashers installed below worktops.

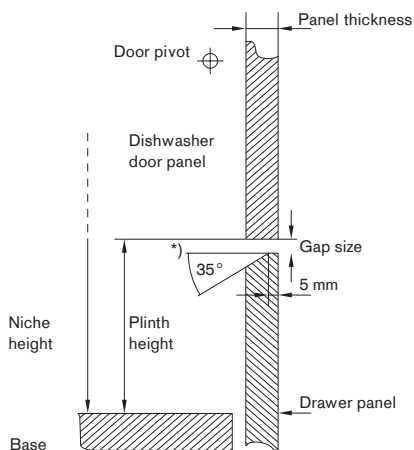

\* The pivot area of the door should be at least 4 mm.

Niche height (mm)	Panel thickness (mm)	Plinth height (mm)								
		90	100	110	120	130	140	150	160	170
815	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
825	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
835	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
845	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
855	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
865	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
875	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
885	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
895	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
905	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
915	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
925	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect

## Additional planning notes for dishwashers with flexible hinge

For niche heights from 815 to 860 mm, in most cases, the 81.5 cm high dishwasher must be planned, regardless of the plinth height.

For niche heights from 880 to 925 mm, in most cases, the 86.5 cm high dishwasher must be planned, regardless of the plinth height.

If the niche height amounts between 865 and 875 mm, please note: Whether the 81.5 cm high dishwasher or the 86.5 cm high dishwasher can be used here depends on the plinth height.

If the installation of a dishwasher with **flexible hinge** is necessary or not depends on several factors.

The door panels cannot be used with dishwashers with flexible hinge.

		Front height 655 to 765 mm									
		Niche height in mm →									
		815	820	825	830	835	840	845	850	855	860
Plinth height in mm ↓	50	①									
	55	①	①								
	60	①	①	①							
	65	①	①	①	①						
	70	①	①	①	①	①					
	75	①	①	①	①	①	①				
	80	①	①	①	①	①	①	①			
	85	①	①	①	①	①	①	①	①		
	90	①*	①	①	①	①	①	①	①	①	①
	95	①*	①*	①	①	①	①	①	①	①	①
	100	①*	①*	①*	①	①	①	①	①	①	①
	105	①*	①*	①*	①*	①	①	①	①	①	①
	110	①*	①*	①*	①*	①*	①	①	①	①	①
	115	①*	①*	①*	①*	①*	①*	①	①	①	①
	120	①*	①*	①*	①*	①*	①*	①*	①	①	①
	125	①*	①*	①*	①*	①*	①*	①*	①*	①	①
	130	①*	①*	①*	①*	①*	①*	①*	①*	①*	①
	135	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
	140	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
	145	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
	150	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
	155	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
160	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	
165		①*	①*	①*	①*	①*	①*	①*	①*	①*	
170			①*	①*	①*	①*	①*	①*	①*	①*	
175				①*	①*	①*	①*	①*	①*	①*	
180					①*	①*	①*	①*	①*	①*	
185						①*	①*	①*	①*	①*	
190							①*	①*	①*	①*	
195								①*	①*	①*	
200									①*	①*	
205										①*	
210											
215											
220											

① = 81.5 cm high dishwasher with flexible hinge DF 480 101F / DF 270 101F

② = 86.5 cm high dishwasher with flexible hinge DF 481 101F / DF 271 101F

\* Also possible with dishwashers without flexible hinge.

Front height 705 to 815 mm

865	870	875	880	885	890	895	900	905	910	915	920	925
6												
6	6											
6	6	6										
6	6	6	6									
6	6	6	6	6								
6	6	6	6	6	6							
6	6	6	6	6	6	6						
6*	6	6	6	6	6	6	6					
6*	6*	6	6	6	6	6	6	6	6			
1/6*	6*	6*	6	6	6	6	6	6	6	6		
1/6*	1/6*	6*	6*	6	6	6	6	6	6	6	6	
1/6*	1/6*	1/6*	6*	6*	6	6	6	6	6	6	6	6
1/6*	1/6*	1/6*	6*	6*	6*	6	6	6	6	6	6	6
1/6*	1/6*	1/6*	6*	6*	6*	6*	6	6	6	6	6	6
1/6*	1/6*	1/6*	6*	6*	6*	6*	6*	6	6	6	6	6
1/6*	1/6*	1/6*	6*	6*	6*	6*	6*	6*	6	6	6	6
1*/6*	1/6*	1/6*	6*	6*	6*	6*	6*	6*	6*	6	6	6
1*/6*	1*/6*	1/6*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6
1*/6*	1*/6*	1*/6*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6*
1*/6*	1*/6*	1*/6*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6*
1*	1*/6*	1*/6*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6*
1*	1*	1*/6*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6*
1*	1*	1*	6*	6*	6*	6*	6*	6*	6*	6*	6*	6*
1*	1*	1*		6*	6*	6*	6*	6*	6*	6*	6*	6*
1*	1*	1*			6*	6*	6*	6*	6*	6*	6*	6*
1*	1*	1*				6*	6*	6*	6*	6*	6*	6*
1*	1*	1*					6*	6*	6*	6*	6*	6*
1*	1*	1*						6*	6*	6*	6*	6*
1*	1*	1*							6*	6*	6*	6*
1*	1*	1*								6*	6*	6*
1*	1*	1*									6*	6*
	1*	1*										6*
		1*										6*
			1*									6*

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect



95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170
3	3.5	3.5	3.5	3.5	3.5	4	4	4	6						
4	4	4	4	4.5	4.5	4.5	5	5	8						
4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11						
3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6					
3.5	4	4	4	4	4.5	4.5	4.5	5	5	8					
4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11					
3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6				
3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8				
4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11				
3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6			
3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8			
4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11			
3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4	4	6		
3.5	3.5	3.5	3.5	4	4	4	4.5	4.5	4.5	5	5	8			
4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11		
3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6	
3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8	
4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11	
3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	6
3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	8
4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11
3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4
3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5
3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5
3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4
3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5
3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5
3	3.5	3.5	3.5	3.5	3.5	4	4	4	6						
4	4	4	4	4.5	4.5	4.5	5	5	8						
4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11						
3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6					
3.5	4	4	4	4	4.5	4.5	4.5	5	5	8					
4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11					
3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6				
3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8				
4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11				
3	3	3	3	3	3	3.5	3.5	3.5	4	4	4	6			
3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8			
4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11			
3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4	4	6		
3.5	3.5	3.5	3.5	3.5	4	4	4	4.5	4.5	4.5	5	5	8		
4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11
3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	6
3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8
4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11
3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4
3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5
3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6
3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	4
3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5
3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5
	3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5
	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5
	3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5
		3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5
		3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5
		3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	5	5	5.5
			3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5
			3	3	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4
			3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	5	5

EB 333

Gaggenau Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation appliances

Cooling appliances

Dishwashers | Washing machine

Accessories | Energy Label | Gaggenau Home Connect





## Accessories and special accessories for dishwashers

### Flexible basket system

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

For more flexibility and easier handling when loading and unloading the dishwasher.

### Upper basket

6 folding spines.

4 folding racks for optimal protection of glass.

With over extension, optional extra cleaning area, smooth running rails and cushioned closing as well as rackmatic with 3 levels, adjustable in height up to 5 cm. Handle for easier removal of the upper basket.



### Lower basket

8 folding spines.


2 folding racks for optimal protection of glass.

Dividable glass support.

Cutlery basket.

With smooth running rails and cushioned closing.

Handle for easier removal of the lower basket.

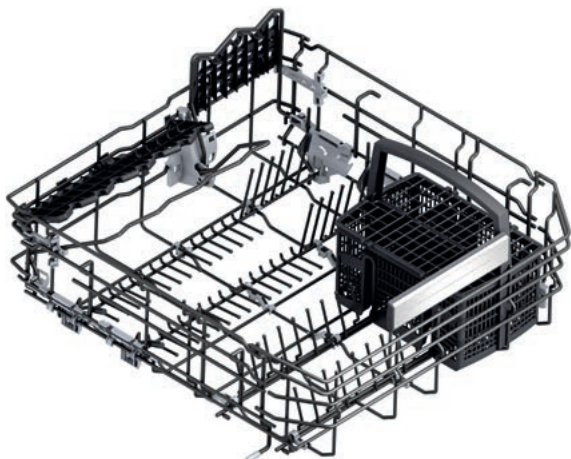

Configuration of flexible basket system depending on model.

### DA 020 011

Stainless steel trim kit for all 81.5 cm high dishwashers.

Set of 2, for left and right.

To cover the gap between appliance and adjacent furniture and for better fixation of the appliance in the niche. The white frame is replaced by a stainless steel trim kit.

W x D in cm: 2.3 x 2.3.

Height 62.2 cm.

### DA 020 111

Stainless steel trim kit for 86.5 cm high dishwashers.

Set of 2, for left and right.

To cover the gap between appliance and adjacent furniture and for better fixation of the appliance in the niche. The white frame is replaced by a stainless steel trim kit.

W x D in cm: 2.3 x 2.3.

Height 67.2 cm.



### Part no. 648174

(order as spare part)

Hinge for all fully integrated dishwashers.


Installation solution for all dishwashers with a niche height of up to 92 cm and split furniture panel.

The hinge is fastened to the plinth of the appliance and the lower part of the split furniture panel is mounted onto it.

Height upper part of the split furniture panel:

64.5-68 cm for 81.5 cm high dishwashers.

69.5-73 cm for 86.5 cm high dishwashers.





**DA 041 160**


Cutlery drawer with smooth running rails.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
13 place setting capacity with all 3 levels.

**DA 041 061**

Cutlery drawer.  
3rd loading level above the upper basket.  
For large pieces of cutlery, cooking utensils and espresso cups.  
14 place setting capacity with all 3 levels.

**DA 045 060**

3rd basket.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensiles.  
Movable knife shelf.

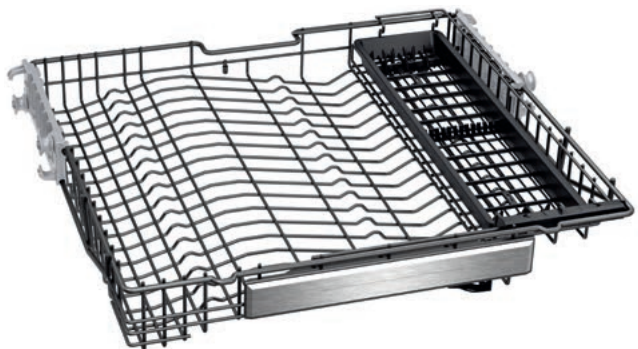**DA 045 061**

3rd basket.  
With smooth running rails.  
For 86.5 cm high dishwashers.  
3rd loading level above the upper basket.  
For small bowls, cups and cooking utensiles.  
Movable knife shelf.

**DA 042 030**

Silvercare cartridge for all dishwashers.  
Made of aluminium to protect silverware from corrosion.  
Easy use of cartridge in the cutlery basket.  
W x H x D in cm: 5.5 x 20.2 x 4.1.

**DA 043 000**

Holder for long-stemmed glasses.  
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.  
For positioning in the lower basket.

**GH 045 010**

Handle bar with 2 mounts, stainless steel, length 45 cm, height 49 mm, drilling distance 427 mm

**GZ 010 011**

Extension for water inlet and outlet (2 m long).



EB 333

Gaggenau  
Expressive series

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Ventilation  
appliances

Cooling appliances

Dishwashers |  
washing machineAccessories | Energy Label |  
Gaggenau Home Connect

## Dishwasher



Appliance type	Dishwasher	Dishwasher	Dishwasher
Model	Fully integrated DF 480 101	Fully integrated DF 481 101F	Fully integrated DF 270 101
Appliance height 81.5 cm	DF 480 101		DF 270 101
Appliance height 86.5 cm	DF 481 101		DF 271 101
Appliance height 81.5 cm with flexible hinge		DF 480 101F	
Appliance height 86.5 cm with flexible hinge		DF 481 101F	
<b>Width/capacity</b>			
Width	(cm) 60	60	60
Capacity in place settings	12/13 <sup>3</sup>	12/13 <sup>3</sup>	12/13 <sup>3</sup>
Dish size up to	(cm) 31/34 <sup>2</sup>	31/34 <sup>2</sup>	31/34 <sup>2</sup>
<b>Consumption data/noise level<sup>5</sup></b>			
Energy efficiency class			
Drying efficiency class	A	A	A
Test programme	Eco 50°C	Eco 50°C	Eco 50°C
Programme duration <sup>5</sup>	(h:min) 4:55	4:55	4:55
Water <sup>7</sup>	(l) 9.5	9.5	9.5
Energy <sup>8</sup>	(kWh) 63	63	63
Noise level	(dB (A) re 1 pW) 43	43	43
Energy consumption standby/networked standby	(W) 0.5/2.0	0.5/2.0	0.5/2.0
<b>Programmes</b>			
Number of programmes + options	8 + 4	8 + 4	6 + 3
Programmes	Auto 35°C - 45°C Auto 45°C - 65°C Auto 65°C - 75°C Intensive 70 °C Eco 50°C Night programme Quick wash 45°C	Auto 35°C - 45°C Auto 45°C - 65°C Auto 65°C - 75°C Intensive 70 °C Eco 50°C Night programme Quick wash 45°C	Auto 35°C - 45°C Auto 45°C - 65°C Auto 65°C - 75°C Eco 50°C Quick wash 45°C
Options	Personalisation function (Pre-rinse) Intensive Plus Power Half Load Hygiene	Personalisation function (Pre-rinse) Intensive Plus Power Half Load Hygiene	Personalisation function (Pre-rinse) Intensive Power Half Load
<b>Machine Care</b>			
•			
<b>Features</b>			
Glass protection with zeolite / Glass protection	•/—	•/—	•/—
Aqua sensor / Load sensor	•/•	•/•	•/•
Automatic detergent function	•	•	•
Detergent recognition	•	•	•
Regeneration electronics	•	•	•
Heat exchanger	•	•	•
Low temperature drying with Zeolite	•	•	•
Drying assistant	•	•	•
Continuous flow heater	•	•	•
Electronic refill indicator for salt/rinsing agent	•/•	•/•	•/•
Inflow water indicator	•	•	•
Time remaining indicator	•	•	•
Remaining time projection	•	—	•
Lateral Info-Light / Info-Light	—/—	•/—	—/—
Flexible cycle time reduction	•	•	•
Bright interior lighting through illuminated backwall / through LED spots	•/—	•/—	—/•
Time delay	24 h	24 h	24 h
Digital services (Gaggenau Home Connect) wireless via WiFi <sup>10</sup>	•	•	•
Soft lock	•	•	•
Triple filter system	•	•	•
Cutlery drawer	DA 041 160 <sup>9</sup>	DA 041 160 <sup>9</sup>	DA 041 160 <sup>9</sup>
3rd basket	DA 045 061 <sup>2/9</sup>	DA 045 061 <sup>2/9</sup>	DA 045 061 <sup>2/9</sup>
Smooth running rails / Cushioned closing	•/•	•/•	•/—
Folding spines in upper/lower basket	6/8	6/8	6/8
Folding racks in upper/lower basket	4/2	4/2	4/2
Rackmatic with 3 levels	•	•	•
Aqua stop	•	•	•
Baking tray spray head / Gastronorm insert holder / Holder for long-stemmed glasses	•/•/•	•/•/•	•/—/—
<b>Connection</b>			
Connection to hot/cold water possible	•/•	•/•	•/•
Total connected load	(kW) 2.4	2.4	2.4

• Standard. — Not available. <sup>1</sup> Appliance height 81.5 cm. <sup>2</sup> Appliance height 86.5 cm. <sup>3</sup> With special accessory DA 041 160. <sup>4</sup> With special accessory DA 041 061. <sup>5</sup> Values according to EU regulation 2019/2017. <sup>6</sup> Duration of Eco programme. <sup>7</sup> Water consumption in litres/operating cycle (using Eco programme). <sup>8</sup> Energy consumption in kWh/100 operating cycles (using Eco programme). <sup>9</sup> Special accessory. <sup>10</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.





### Washing machine WM 260

#### WM 260 165<sup>1</sup>

Free-standing, slide-under or stackable.  
Width 60 cm, height 84.5 cm.



#### WM 260 166<sup>2</sup>

Free-standing, slide-under or stackable.  
Width 60 cm, height 84.5 cm.



<sup>1</sup> Available until Q2 / 2025.

<sup>2</sup> Available from Q2 / 2025.

### Special accessories

#### WMZ2381

Extension for cold water inlet (2 m).  
Diameter inside 10mm / outside 15 mm.  
Water inlet extension.  
Aqua-Stop extension.

### Highlights

- Intelligent dosage system iDos for liquid detergent and softener for a perfect washing result.
- 10 kg drum with interior lighting.
- Top-up function.
- Dynamic Wash System: innovative washing technology for increased cleaning performance.
- Combines perfectly with dryer WT 260165.

### Handling

Automatic programmes: Perfect washing results at the touch of a button.  
Illuminated rotary knob with integrated On-Off switch.  
Large touch display with clear text and symbols.  
Loading indicator with dosage recommendation.  
Programme sequence and remaining time display.  
Time delay up to 24 hours.  
Multiple signal tones.

### Technical features

Aqua sensor.  
Aqua stop.  
Flow-through sensor.  
Anti-stain automatic.  
Continuous automatic load adjustment.  
Foam detection system.  
Spin speed selection from 400 to 1600 rpm.  
Top-up function.  
Dynamic Wash System technology for increased cleaning performance.  
Automatic stabilisation.  
Anti-crease system.  
Child lock.

### Selected digital services

**(Gaggenau Home Connect)**  
Smart Energy Management.  
Smart Dry (Washing machine automatically selects correct dryer program).  
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect on page 459.

### Programmes

Eco 40-60.  
Cottons.  
Cottons Color.  
Easy Care.  
Quick/Mix.  
Delicates/Silk.  
Steam Assist.  
Automatic.  
Super 15/30.  
Hygiene.  
Wool.  
Spin/Drain.  
Rinse.  
App Programmes: Automatic Soft, Shirts/Blouses, Dark Wash, Duvet, Sports, Drum Clean with reminder.  
Options: Remote-Start, Mini Load, Favourite, Speed Perfect, Steam, Water Plus, Prewash, Stains.

### Features

iDos for fully automatic dosing of liquid detergent and softener.  
Volume capacity from 1 to 10 kg.  
Drum interior lighting.  
Powder detergent drawer with automatic cleaning mode after every wash cycle.  
Stainless steel drum with wave structure.  
Innovative BLDC motor technology for more performance, higher durability as well as less energy consumption and noise.

### Consumption data



Energy efficiency class A at a range of energy efficiency classes from A to G.  
Water consumption 48l.  
Energy consumption 51 kWh per 100 cycles.

### Planning notes

Left-hinged.  
Large porthole with 188 ° opening angle.  
Height-adjustable feet.  
Height for slide-under installation: 85 cm.  
Stackable under dryer WT 260165 and WT 260 166 in combination with special accessory. With pull-out shelf WZ27500.

### Connection

Total connected load 2.3 kW.  
Connection cable 160 cm with plug.  
Water connection with 3/4" screw joint.

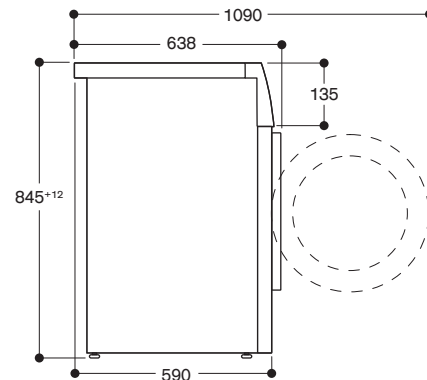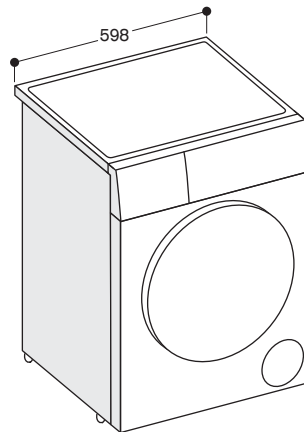




### Tumble dryer with heat pump WT 260

#### WT 260 165<sup>1</sup>

Free-standing, slide-under or stackable.  
Width 60 cm, height 84.2 cm.



#### WT260166<sup>2</sup>

Free-standing, slide-under or stackable.  
Width 60 cm, height 84.2 cm.



<sup>1</sup> Available until Q2 / 2025.

<sup>2</sup> Available from end of Q2 / 2025.

#### Special accessories

##### WMZ20600

Basket for drying delicate wool fabrics, sports shoes & plush toys.  
For use in combination with a time-controlled warm drying program or with a special basket program.  
Dimensions: 360 x 310 x 310 mm.

##### WA027500

Stacking kit for safe alignment of tumble dryers on top of washing machines.  
Allows you to stack tumble dryer on top of full-sized washing machine (depth >55cm).  
Includes useful pull-out shelf for loading and unloading.  
Dimensions: 42 x 595 x 574 mm.

#### Highlights

- Heat pump technology.
- Twin rotary compressor for reduced energy consumption.
- Self-cleaning condenser for automatic fluff removal.
- Very silent drying with only 58 dB.
- Smart Dry automatically selects the right dryer program based on the last washing program.

#### Handling

Illuminated rotary knob with integrated On-Off switch.  
Large touch display with clear text and symbols.  
Programme sequence and remaining time display.  
Time delay up to 24 hours.  
Multiple signal tones.

#### Technical features

Moisture and time controlled programmes.  
Heat pump technology.  
Self-cleaning heat exchanger.  
Refresh function without previous washing cycle.  
Anti-crease cycle at programme end.  
Top-up function.  
Child lock.

#### Selected digital services

(Gaggenuu Home Connect)  
Smart Energy Management.  
Smart Dry (Washing machine automatically selects correct dryer program).  
Remote control and monitoring.

Please read additional information on Gaggenuu Home Connect on page 459.

#### Programmes

Cottons.  
Cottons Eco.  
Easy Care.  
Mix.  
Super 40'.  
Outdoor.  
Steam Assist.  
Shirts/Blouses.  
Wool in Basket.  
Hygiene.  
Towels.  
Duvet.  
Timed program warm.  
App Programmes: Smart Dry, Sports, Dessous, Synthetics, Down, Timed program cold.  
Options: Smart Dry, Refresher Options, Half Load, Remote Start, Anti Crease, Easy Iron, Drying Target, Spin Speed, Gentle Dry, Favourite.

#### Features

Stainless steel drum with honeycomb structure.  
Dry wool without shrinking or matting thanks to the included basket for woollens.  
Volume capacity from 1 to 9 kg.  
Drum interior lighting.

#### Consumption data


Energy efficiency class  
A+++ (WT 260 165) /  
B (WT 260 166) at a range of energy efficiency classes from A+++ to D.

#### Planning notes


Combines perfectly with washing machine WM 260 165 and WM 260 166.  
Right-hinged, reversible.  
Large porthole with 180 ° opening angle.  
Height-adjustable feet.  
Height for slide-under installation: 84.2 cm.  
Stackable above washing machine WM 260 165 and WM 260 166 in combination with special accessory.  
With pull-out shelf WA027500.

#### Connection

Total connected load 0.6 kW.  
Connection cable 145 cm with plug.

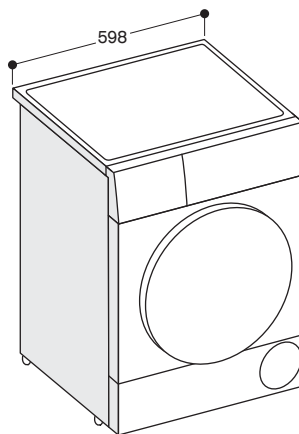


Side view of WT 260 above WM 260 with connection kit accessory

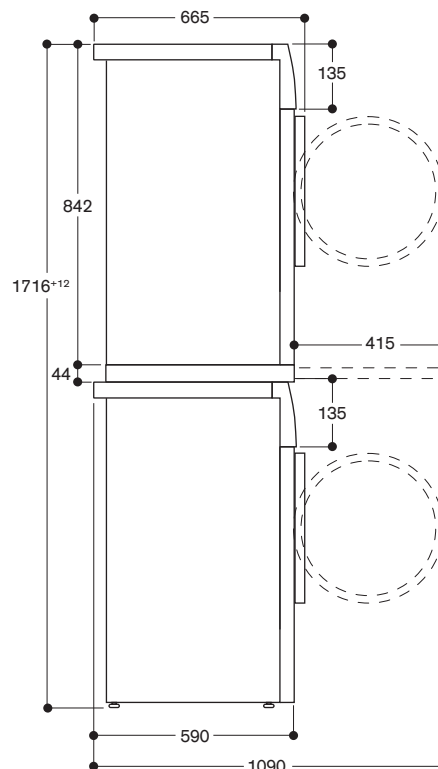

## Washing machine



<b>Appliance type</b>	<b>Washing machine</b>
	WM 260 165 / WM 260 166
Housing colour	Character White
Panel colour	Black
<b>Dimensions / capacity</b>	
Width	(cm) 60
Appliance dimensions W x H x D	(mm) 598 x 845 x 638
Appliance height for under-counter	(mm) 850
Door hinge porthole / Door opening angle	Left / 188 °
Capacity	(kg) 10
<b>Consumption data / noise level</b>	
Energy efficiency class <sup>1</sup>	
Spinning efficiency class	A
Total annual energy consumption (100 cycles) <sup>2</sup>	(kWh) 51
Water consumption test programme <sup>3</sup>	(l) 48
Weighted energy consumption off-mode / left-on mode	(W) 0.1/0.5
Test programme	Eco 40-60
Spin speed test programme <sup>4</sup>	(rpm) 1600
Cycle time test programme full load <sup>5</sup>	(min) 03:55
Noise level washing / spinning test programme	(dB) 48/72
<b>Programmes</b>	
Washing programmes	Eco 40-60 Cottons Cottons Color Easy Care Quick/Mix Delicates/Silk Steam Assist Automatic Super 15/30 Hygiene Wool Spin/Drain Rinse
Additional programmes	Automatic Soft, Shirts/Blouses, Dark Wash, Duvet, Sports, Drum clean with reminder
Options	iDos 1 / iDos 2 Favourite Speed Perfect Remote Start Mini Load Stains Steam, Water Plus, Silent Wash, Prewash
Cleaning temperatures	(°C) Cold/30/40/60/90
<b>Features</b>	
Electronic control	•
Large LED display with clear text and symbols	•
Loading indicator	•
Intelligent dosing system	•
Programme sequence indicator	•
Remaining time display	•
Time delay	(h) 24
Top up function	•
End of programme indicator	Display, audible
Aqua sensor / Flow-through sensor	• / •
Continuous automatic load adjustment / Automatic stabilisation	• / •
Aquastop with guarantee	•
Anti-crease system	•
Child lock	•
Number of tanks for iDos system	2
Self-cleaning detergent drawer	•
Large drum with wave structure	•
Interior lighting	•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>6</sup>	•
<b>Connection</b>	
Total connected load	(kW) 2.3
Length of connection cable	(cm) 160
Length of water inlet	(cm) 150
Length of water outlet	(cm) 150
Maximum drainage height	(cm) 100

• Standard. <sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme). <sup>3</sup> Water consumption in litres/operating cycle (using Eco 40-60 programme). <sup>4</sup> The specified value is rounded off. <sup>5</sup> Duration of Eco 40-60 programme. <sup>6</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. Values according to EU regulation 2019

## Tumble dryer with heat pump



<b>Appliance type</b>	<b>Tumble dryer with heat pump</b>
Housing colour	Character White
Panel colour	Black
<b>Dimension / capacity</b>	
Width	(cm) 60
Appliance dimensions W x H x D	(mm) 598 x 842 x 651
Appliance height for under-counter	(mm) 850
Door hinge porthole	Right, reversible
Door opening angle	(°) 180
Capacity	(kg) 9
<b>Consumption data / noise level</b>	
Energy efficiency class	
Total annual energy consumption (160 cycles) <sup>1</sup>	(kWh) 193
Test programme	Cottons cupboard dry
Noise level	(dB) 58
<b>Programmes</b>	
Drying programmes	Cottons Cottons Eco Easy Care Mix Super 40 Outdoor Steam Assist Shirts / Blouses Wool in Basket Hygiene Towels Duvet Timed programme warm
Additional programmes	Sports Dessous Synthetics Down Timed programme cold
Options	Favourite Smart Dry Refresher Options Half Load Remote Start Anti Crease Drying Target, Spin Speed, Gentle Dry
<b>Features</b>	
Electronic control	•
Large LED display with clear text and symbols	•
Programme sequence indicator	•
Remaining time display	•
Time delay	(h) 24
End of programme indicator	Display, audible
Top up function	•
Heat pump technology	•
Twin Rotary Compressor	•
Refresh function	•
Self-cleaning condenser	•
Anti-crease cycle at the end of the programme	•
Child lock	•
Stainless steel drum with wave structure	•
Glass porthole	•
Interior lighting	•
Digital services (Gaggenau Home Connect) wireless via WiFi. <sup>2</sup>	•
<b>Connection</b>	
Total connected load	(kW) 0.6
Length of connection cable	(cm) 145
Maximum drainage height	(cm) 100

• Standard. <sup>1</sup> Effective consumption depending on type of use of appliance. <sup>2</sup> The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country.






# THE ACCESSORIES | ENERGY LABEL | GAGGENAU HOME CONNECT

Gastronorm system	456
Furniture handles	457
Energy Label	458
Gaggenau Home Connect	459

## The Gaggenau Gastronorm system

The Gastronorm system provides the basis for cookware in the professional kitchen. It enables a smooth continuum from the preparation and cooking stages right through to serving at the table and storage. The Gastronorm inserts from Gaggenau have been adapted to match our cooling appliances, our induction cooktops, our Combi-steam and steam ovens, our ovens as well as our dishwashers.

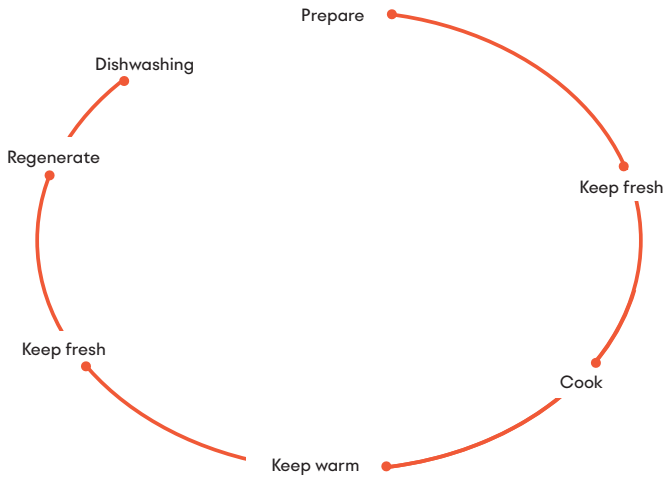

**Prepare.**

To prepare in combination with kitchen sinks in the Gastronorm format.

**Keep fresh.**

To keep fresh in Gaggenau cooling appliances.

**Cook.**

To cook on induction cooktops V1, C1 and CX, in our Combi-steam and steam ovens BS/BSP or our ovens BO/BOP in combination with the pull-out system BA 018/BA 016.

**Keep warm.**

To keep warm in the Gaggenau warming drawers WS/WSP.

**Regenerate/warm up.**

To regenerate in our Combi-steam and steam ovens BS/BSP as well as warming up on our induction cook-tops V1, C1 and CX or in our ovens BO/BOP in combination with the pull-out systems BA 018/BA 016.

**Dishwashing.**

Optimal cleaning and drying of the GN inserts thanks to the GN insert holder.

## Accessories in the Gaggenau Gastronorm system

For usage in the various Gaggenau appliances the following accessories in the Gaggenau Gastronorm system are available.

**Gastronorm insert**

**GN 114/124/144/154**

These high-walled, sturdy inserts made from hygienic stainless steel are ideal for cooking with steam and equally practical for storage in the refrigerator or serving at the table. They are dishwasher-safe. For cooking several meals simultaneously, the cooking inserts for Combisteam and steam ovens in the GN 2/3 format can be combined as required with smaller inserts that are available as special accessories in the GN 1/3 format.

**GN 114 130**

Gastronorm insert, stainless steel, GN 1/3, unperforated, 40 mm deep, 1.5l.



**GN 114 230**

Gastronorm insert, stainless steel, GN 2/3, unperforated, 40 mm deep, 3l.



**GN 124 130**

Gastronorm insert, stainless steel, GN 1/3, perforated, 40 mm deep, 1.5l.



**GN 124 230**

Gastronorm insert, stainless steel, GN 2/3, perforated, 40 mm deep, 3l.



**Gastronorm roaster**

**GN 340**

Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick. For roasting in oven with roasting function. Lower and upper part can also be used as separate ovenproof dishes, height 100 and 65 mm. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (both to be ordered separately).

**GN 340 230**

Gastronorm roaster, cast aluminium, GN 2/3, height 165 mm.



**Teppan Yaki plate**

**GN 232**

**GN 232 110**

Teppan Yaki plate made of multi ply material, GN 1/1. For full surface induction cooktop CX 492/482.



**GN 232 230**

Teppan Yaki plate made of multi ply material, GN 2/3. For full surface induction cooktop CX 492/482.



## Furniture handles

For the individual design of your furniture fronts, Gaggenau is offering handle bars matching the Vario cooling appliances and also the 200 series ovens. Depending on the length, handle bars come with two or three mounts.

### Handle bar with 2 mounts

#### GH 020 010

Handle bar, stainless steel,  
Length 20 cm, height 49 mm,  
drilling distance 177 mm.

#### GH 030 010

Handle bar, stainless steel,  
Length 30 cm, height 49 mm,  
drilling distance 277 mm.

#### GH 031 010

Handle bar, stainless steel,  
match to BOP, Length 30.5 cm,  
height 49 mm, drilling distance  
282 mm.

#### GH 045 010

Handle bar, stainless steel,  
Length 45 cm, height 49 mm,  
drilling distance 427 mm.

#### GH 050 010

Handle bar, stainless steel,  
Length 50 cm, height 49 mm,  
drilling distance 477 mm.

#### GH 060 010

Handle bar, stainless steel,  
Length 60 cm, height 49 mm,  
drilling distance 577 mm.

#### GH 070 010


Handle bar, stainless steel,  
Length 70 cm, height 49 mm,  
drilling distance 677 mm.

#### GH 080 010

Handle bar, stainless steel,  
Length 80 cm, height 49 mm,  
drilling distance 777 mm.

#### GH 090 010

Handle bar, stainless steel,  
Length 90 cm, height 49 mm,  
drilling distance 877 mm.




### Handle bar with 3 mounts

#### GH 110 010

Handle bar, stainless steel,  
Length 110 cm, height 49 mm,  
Drilling distance 538.5 mm each.

#### GH 140 010

Handle bar, stainless steel,  
Length 140 cm, height 49 mm,  
Drilling distance 688.5 mm each.




# ENERGY LABELS

By using energy-saving home appliances, you save valuable resources as well as money. That’s why you should consider low energy and water consumption values when you purchase a home appliance.

Technological developments have resulted in many more products being able to attain an A+ or better rating. User behaviour has also changed, which is why new rescaled labels have been created that take this into account for washing machines, washer-dryers, dishwashers, cooling appliances and wine coolers. The Energy Label for ovens, cooktops, ventilation appliances and dryers will remain the same.


For more information on energy labels, visit: [www.gaggenau.com](http://www.gaggenau.com)

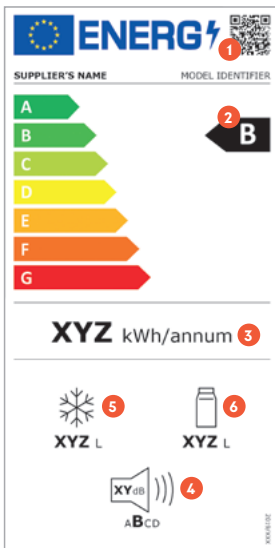

New rescaled energy label for washing machines, washer-dryers, dishwashers, cooling appliances and wine coolers.

### Example Key for a fridge-freezer combination

- 1 QR code
- 2 Energy efficiency class
- 3 Energy consumption in kWh/year (measured under new standard conditions)
- 4 Noise emissions expressed in dB(A) re 1 PW and noise emission class
- 5 Total volume of all freezer compartments
- 6 Total volume of all refrigerator compartments

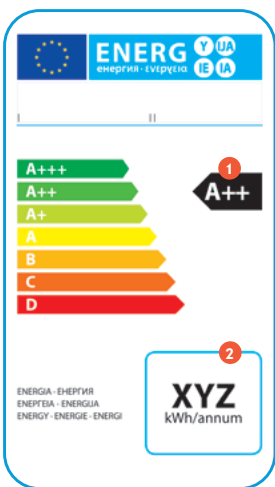

Energy label for ovens, cooktops, ventilation appliances and dryers.

### Key

- 1 Energy efficiency class
- 2 Energy consumption in kWh/year (measured under standard conditions)

# THE EXTRAORDINARY IS CONNECTED

Make use of digital services via Gaggenau Home Connect\*



Discover how Gaggenau Home Connect can be used to enhance the chef's life and the appliances' use.

## The difference is Gaggenau

This is the beginning of the future of cooking. Aided by a digital device, the private chef can, for instance, preheat the oven, turn on ventilation, start the dishwasher, download digital user manuals and have a technician run a diagnostic check, all remotely.

Integrating into different home management systems ensures the kitchen remains the heart of the digital home. The private chef can ask e.g. Amazon Alexa to prepare a cup of coffee and turn on the ventilation while checking remaining time of the oven.

### — Connect:

Remotely control\*\* and monitor. Enable remote diagnosis by an online technician.

### — Access:

Download user manuals and utilise our partnering network.

### — Integration:

Compatible with different home management systems.

This is just the start. Explore the possibilities at <https://www.gaggenau.com/global/appliances/home-connect>


- 1 **Fridge-Freezer:** Control your energy consumption: change your appliances to Eco mode or Holiday mode via the App.
- 2 **Wine climate cabinet:** Using the App bring the chosen wine to serving temperature as you make your way home.
- 3 **Washing machine:** Communicating via Gaggenau Home Connect, the dryer chooses the programme best suited to the clothes the Washing machine has just cleaned.
- 4 **Oven:** Entertain in the garden and have your mobile phone alert you when the hors d'oeuvres are done.
- 5 **Fully automatic espresso machine:** Prepare your appliance for your morning coffee by turning it on with your mobile device.
- 6 **Combi-steam oven:** Send the sous-vide recipe settings (temperature, time and humidity) to your oven.
- 7 **Cooktop:** Rather than adjust the ventilation separately, link it through Gaggenau Home Connect and control it from the cooktop.
- 8 **Dishwasher:** Ask the app what setting would work best on your delicate glasses and heavily soiled pots and pans.

Download app here:



\* Home network integration for digital services (Gaggenau Home Connect) wireless via WiFi. The use of the Gaggenau Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: <https://www.gaggenau.com/global/appliances/home-connect>  
Gaggenau Home Connect is a service of Home Connect GmbH.

\*\* Not applicable for cooktops. Cooktops are not intended for unattended use - cooking process must be supervised.

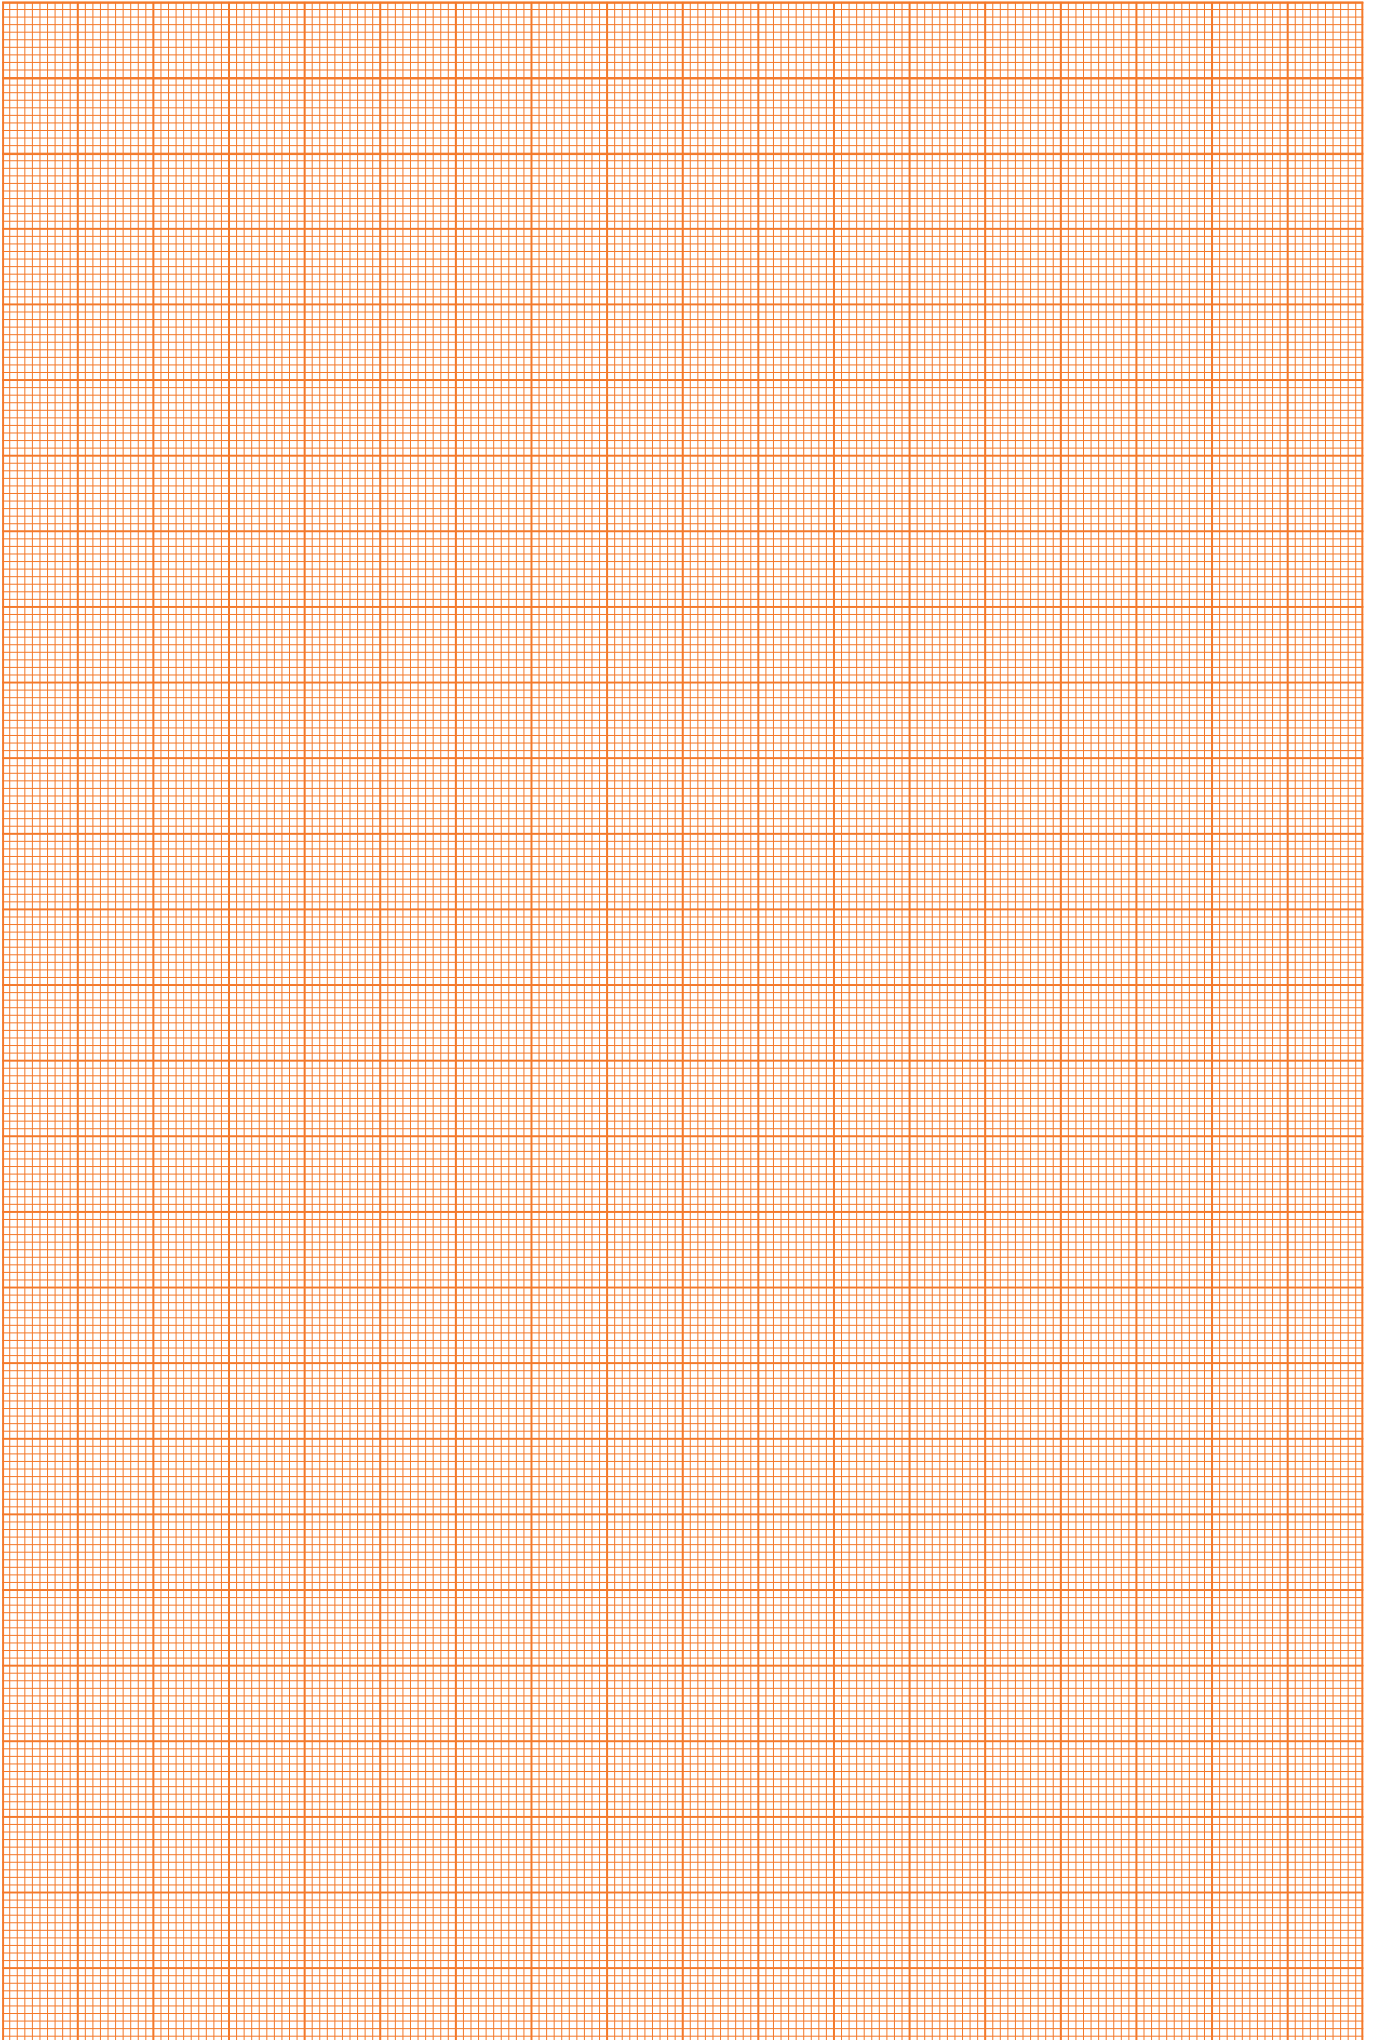

© Copyright by  
BSH Hausgeräte GmbH  
P.O. Box 830101  
81701 Munich  
Edition 2025 I.

The data and facts expressed herein are current as of November 2024. Gaggenau reserves the right to implement technical modifications that serve the purpose of progress.  
The appliances are for household use only.  
Certain appliances in this brochure are not available in all countries. Please contact your Gaggenau supplier for details.

The difference is Gaggenau