



**Color Variants**

BMP225100

**Included accessories**

1 x glass pan.  
1 x grid.

Flush installation  
Handleless door / automatic door opening  
Single operation and combination of microwave and grill  
Sequential operation of up to 5 modes incl. programming of combined operation and rest time  
TFT touch display  
Electronic temperature control  
Interior volume 21 litres

**Programmes**

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.  
Full surface grill with 3 levels of intensity, maximum output 1300 W.  
Full surface grill with microwave output levels 360, 180 and 90 W combinable.  
10 automatic programmes with weight indication: 3 defrosting programmes  
4 cooking programmes 3 combination programmes  
Option to save individual recipes.

**Handling**

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

**Features**

Innowave.  
Actual temperature display.  
25 W interior light.  
Hygienic stainless steel interior with glass ceramic base.

**Safety**

Thermally insulated door with double glazing.  
Triple door lock.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

**Planning notes**

Door hinge not reversible.  
Minimum installation height 85 cm (top edge of niche bottom).  
Height-adjustable feet.  
Installation of BMP above BOP with intermediate shelf.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When planning a corner solution, pay attention to the 90° door opening angle.

**Connection**

Total connected load 2.0 KW.

**Characteristics**

Type of micro-wave oven  
MW+Grill function

Type of control  
Electronic

Dimensions  
382x590x321

Cavity dimensions  
220 x 350 x 270

Length electrical supply cord  
170

Net weight  
18.9

Gross weight  
21.6

Maximum micro-wave power  
900

Number of Power Levels  
5

Turntable  
No

Turntable diameter (in)  
Cavity material

Stainless steel

Door opening  
Button

Clock  
Yes

Max. extraction rate  
Maximum output recirculating air

Ventilation Power Levels

Type of Filter

Illumin type - kind of lamps  
Included accessories

1 x glass pan, 1 x grid

Height of the appliance  
382

Width of the appliance  
590

Depth of the product  
321

Maximum micro-wave power  
900

Connection Rating  
1990

Fuse protection  
10

Voltage  
220-240

Frequency  
60; 50

Plug type  
Gardy plug w/ earthing

Connecting cable type

Universal Product Code  
825225914167

Alternative colors available  
BMP225110, BMP225130

Length of electrical supply cord (in)

Required cutout/niche size for installation (in)

x  
Appliance Dimensions (h x w x d) (in)

Dimensions of the packed product  
18.50 x 18.11 x 26.37


Net weight  
42.000

Gross weight  
48.000

**Consumption and connection features**


2025-12-17  
Page 1

Installation in an upper cabinet

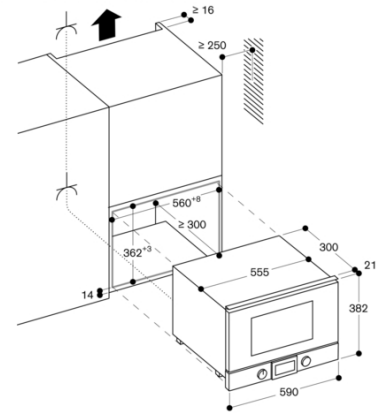

Socket  
measurements in mm

Installation in a tall cupboard

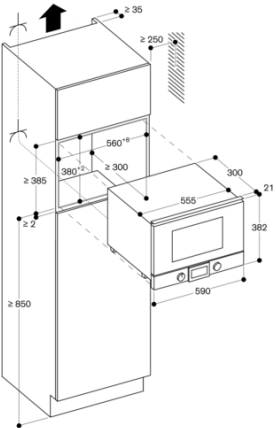

Socket  
measurements in mm

Side view of BMP 224/225 over BOP

