



Color Variants

BMP225110

BMP225100

Included accessories

1 x glass pan.

1 x grid.

Product Variants

BMP224110

Flush installation  
Handleless door / automatic door opening  
Single operation and combination of microwave and grill  
Sequential operation of up to 5 modes incl. programming of combined operation and rest time  
TFT touch display  
Electronic temperature control  
Interior volume 21 litres

Programmes

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.  
Full surface grill with 3 levels of intensity, maximum output 1300 W.  
Full surface grill with microwave output levels 360, 180 and 90 W combinable.  
10 automatic programmes with weight indication:  
3 defrosting programmes 4 cooking programmes 3 combination programmes  
Option to save individual recipes.

Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

Features

Innowave.  
Actual temperature display.  
25 W interior light.  
Hygienic stainless steel interior with glass ceramic base.

Safety

Thermally insulated door with double glazing.  
Triple door lock.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

Planning notes

Door hinge not reversible.  
Minimum installation height 85 cm (top edge of niche bottom).  
Height-adjustable feet.  
Installation of BMP above BOP with intermediate shelf.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When planning a corner solution, pay attention to the 90° door opening angle.

Connection

Total connected load 2.0 KW.

Characteristics

Type of micro-wave oven

MW+Grill function

Type of control

Electronic

Dimensions

382x590x321

Cavity dimensions

220 x 350 x 270

Length electrical supply cord

170

Net weight

18.9

Gross weight

21.6

Maximum micro-wave power

900

Number of Power Levels

5

Turntable

No

Turntable diameter (in)

Cavity material

Stainless steel

Door opening

Button

Clock

Yes

Max. extraction rate

Maximum output recirculating air

Ventilation Power Levels

Type of Filter

Illumin type - kind of lamps

Included accessories

1 x glass pan, 1 x grid

Height of the appliance

382

Width of the appliance

590

Depth of the product

321

Maximum micro-wave power

900

Connection Rating

1990

Fuse protection

10

Voltage

220-240

Frequency

50; 60

Plug type

Gardy plug w/ earthing

Connecting cable type

Universal Product Code

825225914174

Alternative colors available

BMP225100, BMP225130

Length of electrical supply cord (in)

Required cutout/niche size for installation (in)

x

Appliance Dimensions (h x w x d) (in)

Dimensions of the packed product

18.50 x 18.11 x 26.37

Net weight

42.000

Gross weight


48.000

Consumption and connection features

2025-12-12


Page 1

Installation in an upper cabinet

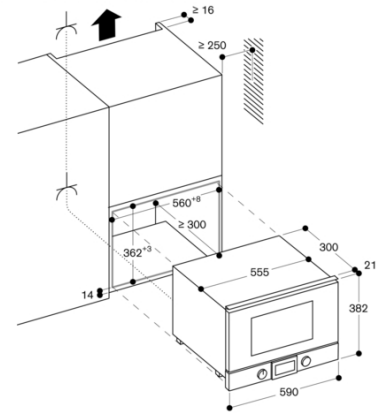

Socket  
measurements in mm

Installation in a tall cupboard

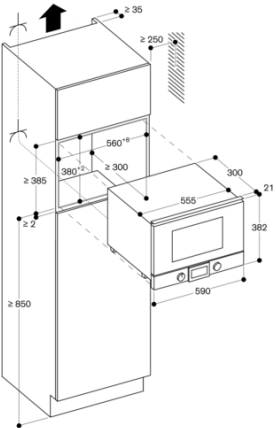

Socket  
measurements in mm

Side view of BMP 224/225 over BOP

