



**BO420102**

1 x enamel baking tray, suit. pyrolytic clean  
1 x glass pan  
1 x grill shelf

**BA016105:**

1 telescopic shelf rail, for 60cm oven

**BA026115:**

Baking tray, for 60cm oven

**BA036105:**

wire rack, for 60cm oven

**BA046117:**

Glass tray, for 60cm oven

**BA056115:**

Heating elem. 230 V, for 60cm oven

**BA056133:**

Baking stone for 60 cm oven

**BA226105:**

Grill tray, for 60cm oven

**BS020002:**

Set of 2 pizza paddles

**GN340230:**

Gastronorm roaster GN 2/3

**built-in oven 400 series**

60 x 60 cm, door hinge: right, Gaggenau

**Anthracite**

**BO420102**

- Handleless door / automatic door opening
  - Pyrolytic cleaning programme heats up to 485 °C
  - 9 heating methods, with baking stone function
  - Handleless door / automatic door opening
- Pyrolytic system  
9 heating methods, with baking stone function  
TFT touch display  
Panel-free appliance with surface control module  
Electronic temperature control from 50 °C to 300 °C  
Net volume 76 litres

#### Heating methods

Hot air.

Eco hot air. Top + bottom heat. Top heat.  
Bottom heat. Hot air + bottom heat. Full surface  
grill + circulated air. Full surface grill. Baking  
stone function.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Option to save individual recipes.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

#### Features

Baking stone socket.  
Actual temperature display.  
Rapid heating.  
60 W halogen light on the top.  
Enamelled side shelf supports with 4 tray levels,  
pyrolysis-safe.  
The use of the Home Connect functionality  
depends on the Home Connect services, which  
are not available in every country. For further  
information please check: [home-connect.com](http://home-connect.com).

#### Safety

Thermally insulated door with quadruple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Pyrolytic system.  
Gaggenau enamel.  
Heated catalyser to clean the oven air.

#### Planning notes


Door hinge not reversible.  
The façade of the appliance extends 47 mm  
from the furniture cavity.  
If the handle (optional accessory) is retrofitted,  
the outer edge of the door handle extends 94  
mm from the furniture cavity.  
Consider the overhang, incl. the door handle  
where applicable, when planning to open  
drawers next to the appliance.  
When planning a corner solution, pay attention  
to the 90° door opening angle.

To achieve the 550 mm installation depth, the  
connection cable needs to follow the slanted  
edge on the lower right hand corner of the  
housing.

The mains socket needs to be planned outside  
the built-in niche.

#### Connection

Energy efficiency class A at a range of energy  
efficiency classes from A+++ to D.  
Total connected load 3.7 KW.  
Plan a connection cable.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 1.4 W.  
Time auto-standby/network 20 min.

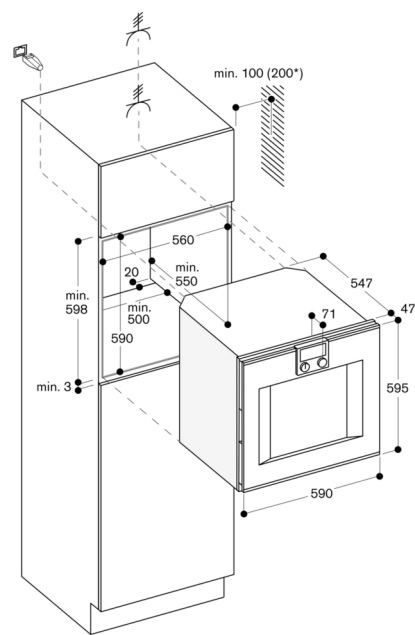

\* 200 mm in conjunction with BA 016