



Color Variants

CMP250101  
Full glass door in Gaggenau Anthracite  
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CMP250101  
Fully automatic espresso machine 200 series  
Full glass door in Gaggenau Anthracite  
Width 60 cm  
Controls at the top

Handless door / cushioned door closing system  
Continuous flow heater means no waiting time and constant brewing temperature  
Aroma brewing technology for a full aroma  
Single portion cleaning  
TFT touch display  
Panel-free appliance with surface control module  
One-touch operation  
Personalisation function  
7 light settings  
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

- Ristretto / 2 x Ristretto.
- Espresso / 2 x Espresso.
- Espresso Macchiato / 2 x Espresso Macchiato.
- Coffee / 2 x Coffee.
- Americano / 2 x Americano.
- Caffe Latte / 2 x Caffe Latte.
- Latte Macchiato / 2 x Latte Macchiato.
- Cappuccino / 2 x Cappuccino.
- Flat White / 2 x Flat White.
- Milk froth / 2 x Milk froth.
- Warm milk / 2 x Warm milk.
- Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Personalisation function, option to save 8 individualised beverages.  
4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
8 coffee strength levels from very mild to extra strong.  
Coffee: 3 grades.  
Hot water: 10 grades.  
4 coffee-milk ratio levels.  
Adjustable grinding level.  
Height-adjustable coffee dispenser 7 cm to 15 cm.  
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.  
Separate drawer for second ground coffee type.  
Water pump with 19 bar pressure.  
Double grinding and brewing cycles for extra intensity for single beverage order.  
For double beverage order, two grinding and brewing cycles.  
Beverage dispenser with integrated milk system.  
Insulated stainless steel milk container for up to 0.5 litres.  
Integrated lightning with LEDs.  
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
Automatic adjustment of ground coffee quantity.  
Removable 2.4 litre water tank.  
Electronic water filter exchange indicator.

Characteristics
Built-in / Free-standing
Built-in
Frothing nozzle
No
Display
No
Water protection system
no
Portion sizes
All cups
Dimensions
455 x 590 x 426
Dimensions of the packed product (HxWxD)
540 x 478 x 670
Required niche size for installation (HxWxD)
449 x 558 x 356
Hot water spout
No
Adjustable programs
Standby function
Yes
Pump pressure
19
Simultaneous preparation of 2 cups
Yes
Included accessories
1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories
Electrical connection rating
1600
Fuse protection
10
Voltage
220-240
Frequency
50/60
Plug type
Gardy plug w/ earthing
Product group
Built-in coffee machine
Brand
Gaggenau
Product name/family
Product name / Commercial code
CMP250101
Universal Product Code
Main colour of product
Anthracite
Typology
Fully automatic
Australia Standards, CE, Eurasian, G-Mark, Morocco, Ukraine, VDE
Length electrical supply cord
170.0
Length of electrical supply cord (in)
Recommended height for installation (in)
Recommended height for installation
449
Appliance Dimensions (h x w x d) (in)
Dimensions
455 x 590 x 426
Dimensions of the packed product
Dimensions of the pallet (in)
Dimensions of the packed product (HxWxD)
540 x 478 x 670
45
Net weight
20.494
51
Gross weight
22.9
Capacity water container
2.4

Consumption and connection features

2021-11-20  
Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning


Fully automatic rinse programme when machine is turned on/off.  
Automatic steam cleaning of the milk system after every beverage.  
Automatic cleaning and descaling programme.  
Emptying programme to prepare the appliance for holiday or transportation.  
Empty-grinding function to remove coffee residues from the system when switching bean types.  
Removable brewing unit.  
Dishwasher-safe coffee residue container and drip tray.  
Dishwasher-safe beverage dispenser.

Planning notes


Ideal installation height 95 cm to 145 cm (top edge of niche bottom).  
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When installing in a corner a side clearance is required.  
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.  
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.  
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).  
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.  
Special accessories (order as spare parts):  
Part No. 17000705 Water filter  
Part No. 00311819 Descaling tablets  
Part No. 00311769 Cleaning tablets  
Part No. 00636455 Door hinge restrictor (92° opening angle)  
Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 KW.

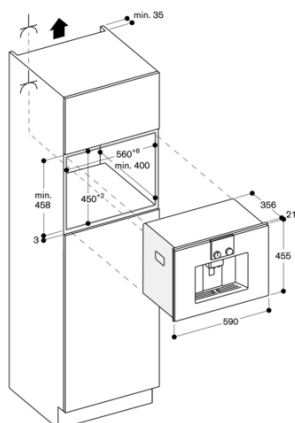

#### Left corner installation

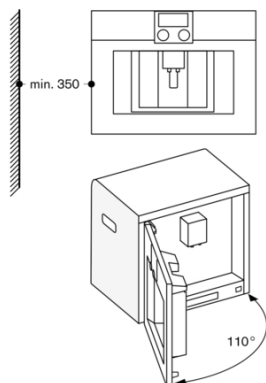

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.