



CMP250112

Built-In Fully Automatic Coffee Machine 200 series

60 x 45 cm, Metallic

CMP250112

Handless door / cushioned door closing system
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato. Coffee / 2 x Coffee.
Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White. Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
Rotary knob and TFT touch display operation.
Clear text display.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
Coffee: 3 grades.
Hot water: 10 grades.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for single beverage order.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.
Electronic fill level control for drip tray and container for coffee residue.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.


Planning notes

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
Special accessories (order as spare parts):
Part No. 17000705 Water filter Part No. 00311819 Descaling tablets Part No. 00311769 Cleaning tablets Part No. 00636455 Door hinge restrictor (92° opening angle) Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 KW.
Connection cable 1.7 m with plug.
Power consumption standby/display off 0.5 W.
Power consumption standby/network 2.0 W.
Time auto-standby/network 30 min.
Please check the user manual for how to switch off the WiFi module.

Left corner installation

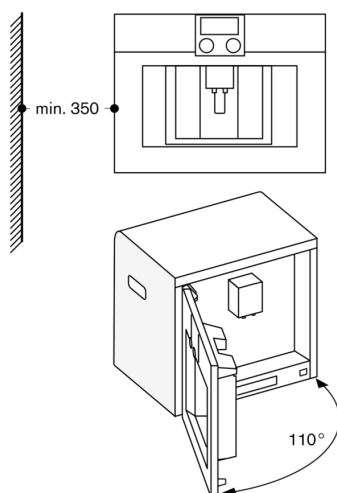

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.

