



CV282111

AD410040:

Flexibel connecting piece DN 150 flat

AD857010:

Flat duct DN150 100cm

AD857015:

Flat duct DN150 50cm

AD857030:

Flat duct bend 90° vertical DN150

AD857031:

Flat duct bend 90° horizontal DN150

AD857033:

Short flat duct bend 90° vertical DN150

AD857034:

Extra short flat duct bend 90° vertical

AD857040:

Flat duct connection piece DN150

AD857041:

Flat duct adapter round DN150

AD857042:

Flat duct adapter cyl. 90 degree, DN150

AD857050:

Plinth diffuser for CV282/482/492

CA050300:

Flex pan set, 3 pcs.

CA051300:

Teppan Yaki (large)

CA051301:

Teppan Yaki

CA052300:

Griddle Plate

CA055300:

Flex pan large

CA082010:

Kit unducted recirculation

CA082061:

Kit ducted recirculation, 60 cm worktop

CA082071:

Kit ducted recirculation, 70 cm worktop

CA084010:

Acoustic filter

CA230100:

Magnetic knob, black

CA282112:

Recirculation replenishment filter CV

AD857050:

Plinth diffuser for CV282/482/492

CA082011:

Kit unducted recirculation

CA082061:

Kit ducted recirculation, 60 cm worktop

GAGGENAU

## Induction hob with integrated ventilation system 200 series

80 cm

CV282111

Sturdy stainless steel frame

Flex function for combining the rectangular cooking areas

Free positioning of cookware inside combined cooking areas

Highly efficient ventilation system integrated in the cooktop

Fully automatic ventilation system functions

Energy-saving, low-noise fan

Air extraction or air recirculation system

Twist-Pad control with removable magnetic knob

Easy control of all functions with bicoloured display

### Cooking zones

2 flex induction cooking areas 23x19 cm (2200 W, with booster 3700 W), linked together 23x38 cm (3300 W, with booster 3700 W).

### Performance of ventilation system

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3. Sound pressure level according to EN 60704-2-13. Odour reduction for air recirculation in accordance with EN 61591.

Air recirculation:

497 / 627m³/h.

67 / 72dB (A) re 1 pW.

55 / 61 dB (A) re 20 µPa.

### Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control in 17 power levels.

Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

### Features

Flex function for rectangular cooking areas.

Automatic pot detection when the cooktop is switched on.

Professional cooking function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Automatic sensor-controlled performance adjustment of the ventilation system.

Automatic activation of the ventilation system when a cooking zone is used.

Interval ventilation, 6 min.

Sensor-controlled run-on function.

Removable, dishwasher-safe grease filter unit.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised interior for efficient air circulation.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Memory function.

Options menu.

Power management.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

### Consumption data

Energy consumption 56.9 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class -.

Grease filter efficiency class B.

Sound level min. 61 dB / max. 70 dB normal mode.

### Safety

Main switch.

Operation indicator.

Pot detection.

Residual heat indicator: digital 2-step

Child lock.

Safety shut-off.

Detachable, dishwasher-safe two-stage overflow protection.

### Planning notes

Immersion depth 223 mm.

In air extraction a one-way flap with a maximum opening pressure of 65 Pa should be installed.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance must be fixed from underneath.

Appliance weight: approx. 29.

The appliance must be freely accessible from below.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

### Connection

Total connected load 7.4 KW.

Connecting cable 1.5 m without plug.

Power consumption standby/display off 0.5 W.


Power consumption standby/network 2.0 W.

Please check the user manual for how to switch off the WiFi module.

CV282111  
Not ducted recirculation, 70 cm worktop

CA084010:  
Acoustic filter


Side view with kit ducted air recirculation 600 mm worktop depth;  
surface-mounted

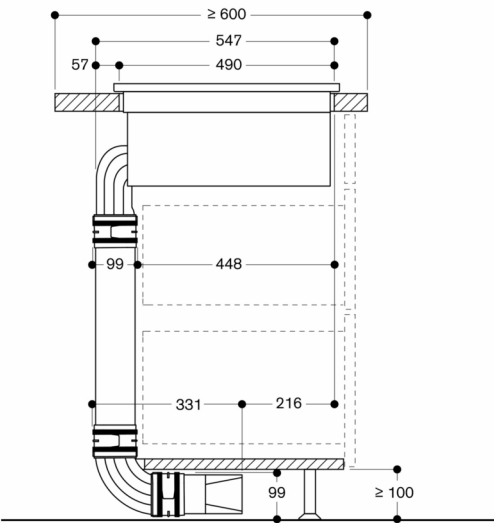

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Measurements in mm


Side view with kit ducted air recirculation 700 mm worktop depth;  
surface-mounted

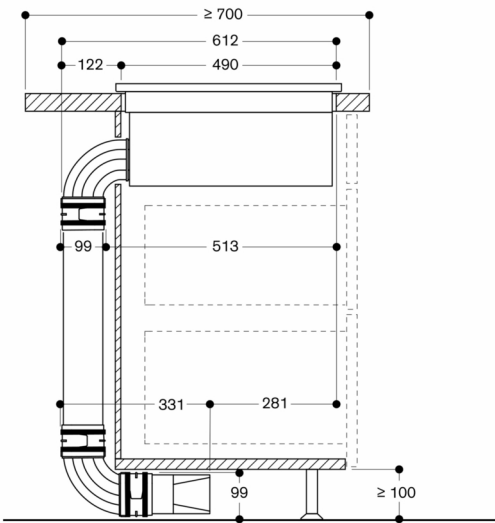

Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )


Measurements in mm

Front view of CV 282 with ducted recirculation

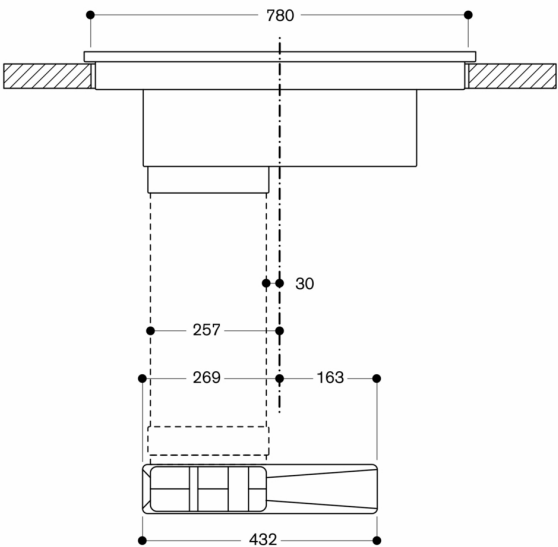


Measurements in mm

Front view

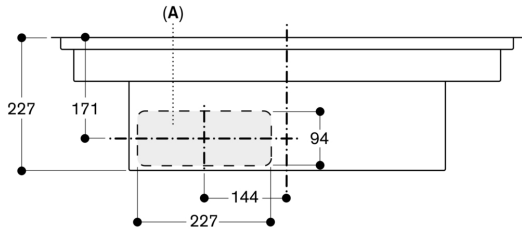


A: Connected directly at the rear  
measurements in mm

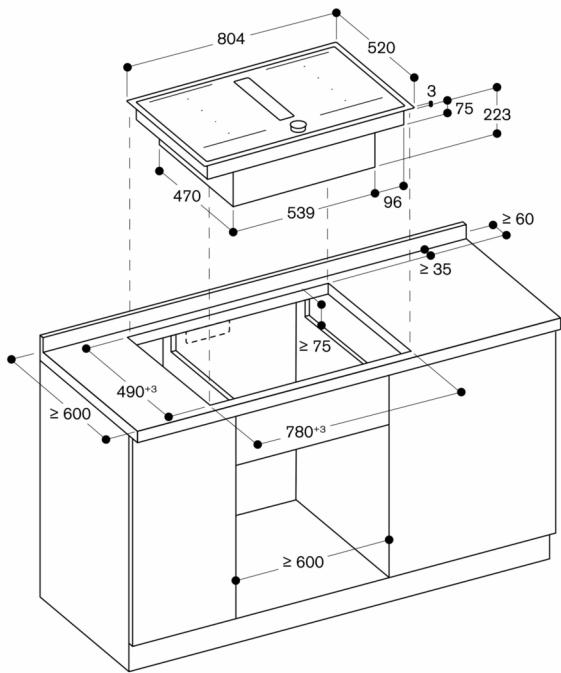

Measurements in mm


Side view with unducted recirculation; surface-mounted

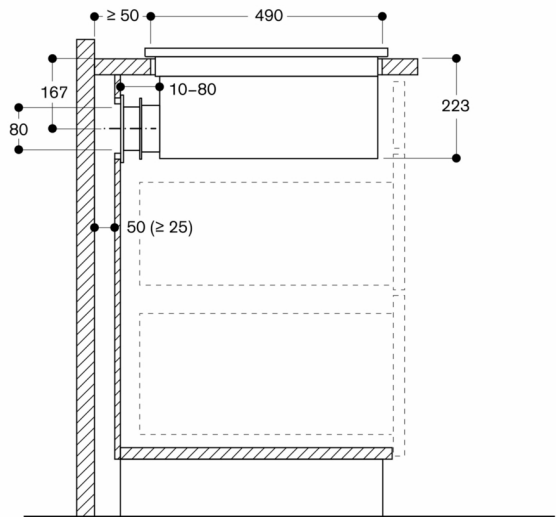


Not recommended for non-thermally insulated outer wall or floor ( $U \geq 0.5 \text{ W/m}^2\text{K}$ )

Measurements in mm


Front view - furniture cut-out for unducted recirculation; surface-mounted

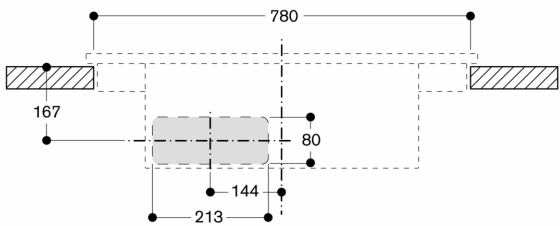


Measurements in mm

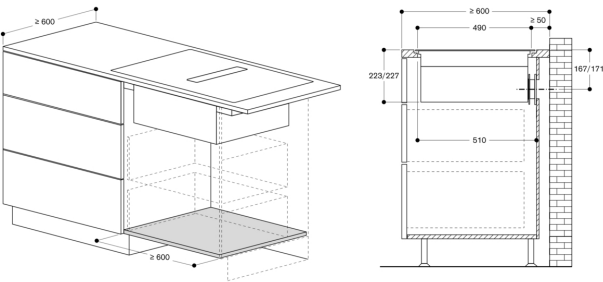


measurements in mm

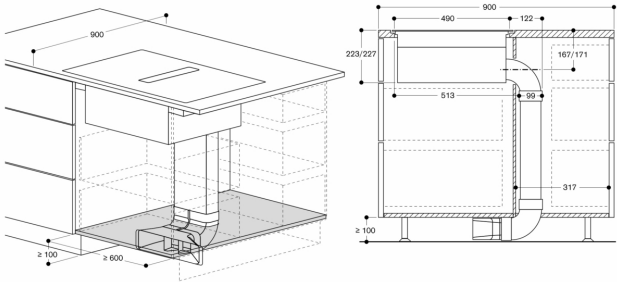


measurements in mm

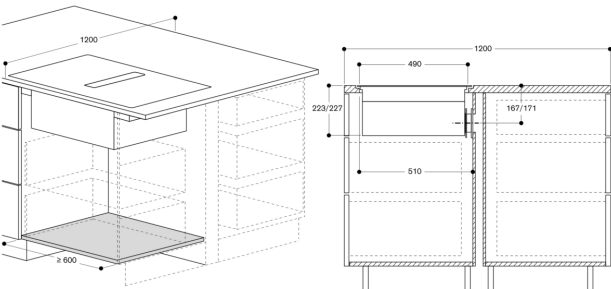


measurements in mm

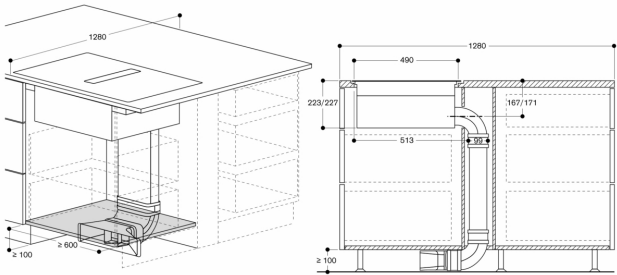


measurements in mm

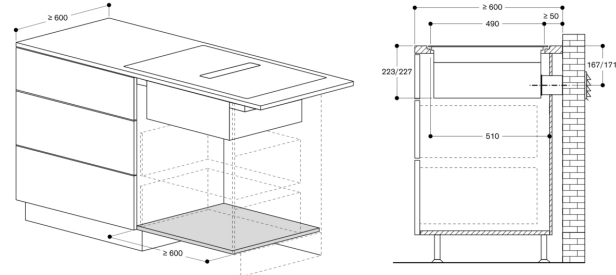


measurements in mm

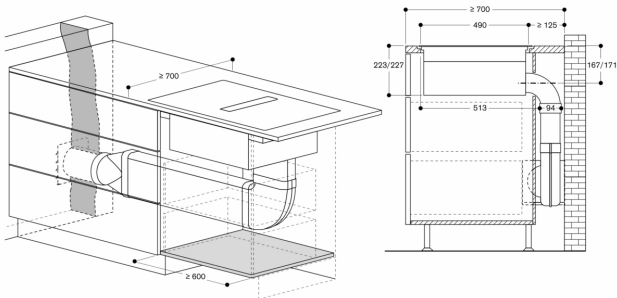


measurements in mm

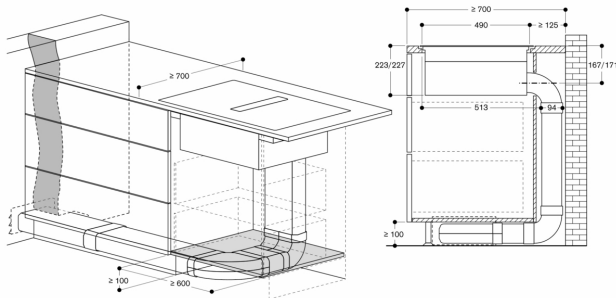

measurements in mm

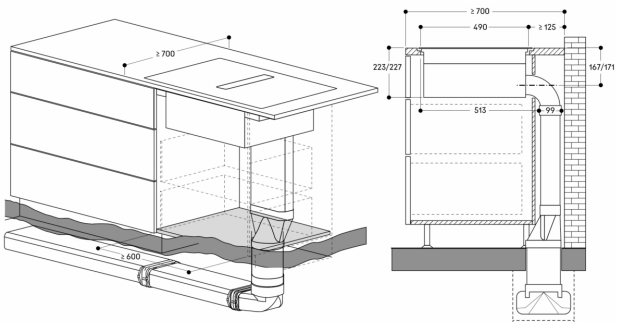

Measurements in mm

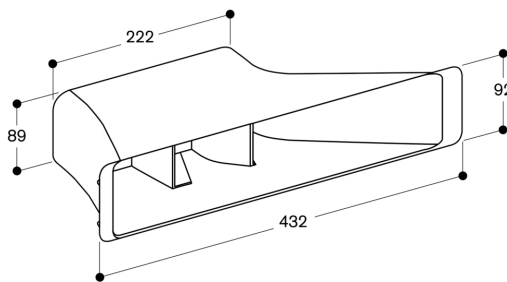

measurements in mm