



CX480100

GN232110:
Teppan Yaki GN 1/1

GN232230:
Teppan Yaki GN 2/3

Full surface induction cooktop 400 series 80 cm CX480100

- One single big cooking surface
- Dynamic cooking function
- One single big cooking surface

Free positioning of cookware

All sizes and formats of cookware can be used
TFT touch display for an intuitive control of all functions

Max. power output for big cookware of up to 4.6 KW

Frameless for flush mounting

Cooking zones

One unique cooking surface of 2800 cm².

Up to 4 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Booster function.

Individual pot detection.

Cooking timer for each cooking position.

Timer.

Information key with use indicators.

Power management.

Safety

Main switch.

Residual heat indicator.

Child lock.

Display cleaning protection.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

Appliance must be fixed from underneath.

Cooktop clamping range: 30 - 50 mm.

Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.


Appliance weight: approx. 27.

Connection


Total connected load 7.2 KW.

Connecting cable 1.50 m without plug.


Worktop strength




Solid worktop

Thin worktop
with reinforced substructure

Cross-section

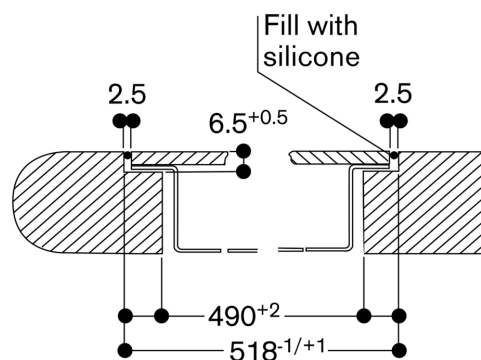

Longitudinal section

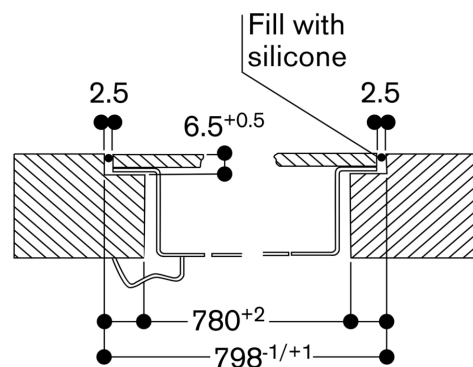

View from above

