



RC462304

RA430100:  
Storage container with lid, anthracite

RA421610:  
SS door 61cm / 24

RA423140:  
Side trims, long

RA425110:  
Vario SS handle 1131 mm

RA428610:  
SS door w/o handle 61cm / 24"

RA460000:  
Installation kit SxS

RA460013:  
Heating side kit 230V

RA460020:  
Frontpanel connection long

RA464611:  
Ventilation grille 61cm / 24" w/o filter

## Vario built-in fridge with freezer section 400 series 212.5 x 60.3 cm, soft close flat hinge RC462304

Stainless steel interior with solid anthracite aluminium elements  
Warm white and glare-free LED light spots  
Opening assist for door with two options:  
1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle  
The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level  
Flat stainless steel inner door, full-length  
Almost invisible rail system for shelves and door racks for flexible positioning  
Solid anthracite aluminium door racks  
1 fresh cooling drawer 0 °C with temperature control from -1 °C to +3 °C and one fresh cooling drawer with manually adjustable humidity  
TFT touch display  
Net volume 356 litres

**Handling**  
TFT touch display operation.  
Clear text display.

**Technical Features**  
Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Activated charcoal air filter.  
Rest mode certified by Star-K.  
When rest mode is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.  
Home network integration for digital services (Home Connect) wireless via WiFi.  
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

**Cooling**  
No-Frost technology with fast cooling.  
Temperature adjustable from +2 °C to +8 °C.  
4 safety glass shelves, white glass, 3 of which are individually adjustable in height.  
1 shallow, fully extendable drawer with transparent front.  
Flat door rail system with fully flexible positioning of door racks.  
4 height-adjustable door racks, 1 of which is extra deep.  
Net volume 321 litres.

**Fresh cooling 0 °C**  
1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.  
Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.  
Ideal for meat, fish and poultry.  
Net volume 35 litres.

**Fresh cooling**  
1 fully extendable fresh cooling drawer with


transparent front, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

**Consumption data**  
Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.  
Energy consumption 131 kWh/year.  
Noise level 40 dB (re 1 pW).


**Planning notes**  
Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 41 kg.

**Connection**  
Total connected load: 0.300 KW.  
Connecting cable 3.0 m, detachable.

Door opening angle

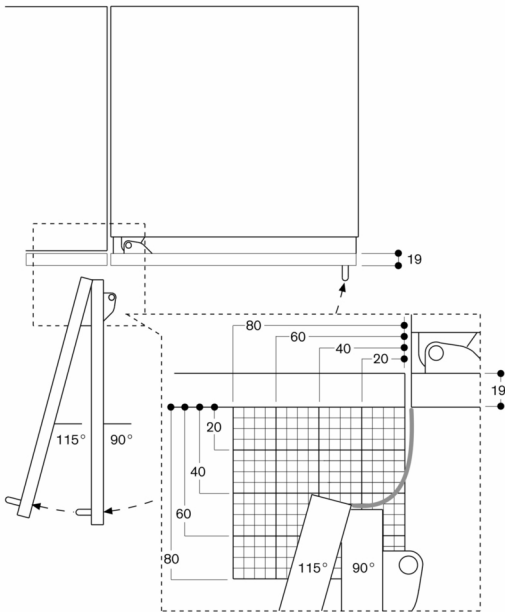


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

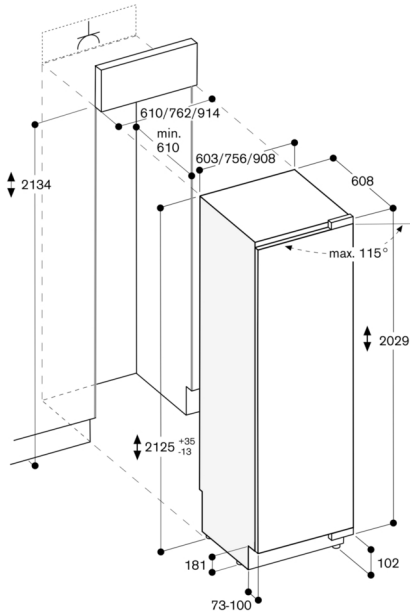

The maximum door panel dimensions are based on a clearance of 3 mm.


Wall clearance RB 472/RC/RF/RW

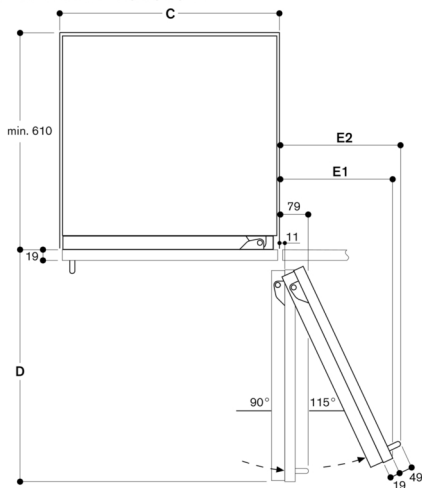

Recess width			
C	D	E1	E2
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Base detail

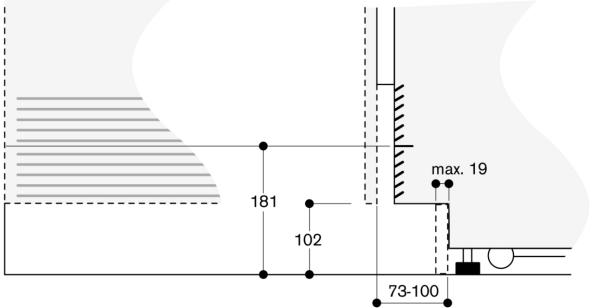

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

