



RC492304

RA430100:
Storage container with lid, anthracite

RA421911:
SS door with handle 91,4cm / 36"

RA423140:
Side trims, long

RA425110:
Vario SS handle 1131 mm

RA428911:
SS door w/o handle 91,4cm / 36"

RA460000:
Installation kit SxS

RA460013:
Heating side kit 230V

RA460020:
Frontpanel connection long

RA464911:
Ventilation grille 91.4cm/36" w/o filter

Vario built-in fridge with freezer section 400 series
212.5 x 90.8 cm, soft close flat hinge
RC492304

Stainless steel interior with solid anthracite aluminium elements
Warm white and glare-free LED light spots
Opening assist for door with two options:
1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle
The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level
Flat stainless steel inner door, full-length
Almost invisible rail system for shelves and door racks for flexible positioning
Solid anthracite aluminium door racks
1 fresh cooling drawer 0 °C with temperature control from -1 °C to +3 °C and one fresh cooling drawer with manually adjustable humidity
TFT touch display
Net volume 567 litres

Handling
TFT touch display operation.
Clear text display.

Technical Features
Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.
Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Cooling
No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
1 shallow, fully extendable drawer with transparent front.
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.
Flat door rail system with fully flexible positioning of door racks.
3 height adjustable door racks, 1 of which is extra deep.
Net volume 509 litres.

Fresh cooling 0 °C
1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.
Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.
Ideal for meat, fish and poultry.
Net volume 58 litres.

Fresh cooling
1 fully extendable fresh cooling drawer with


transparent front, illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

Consumption data
Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 151 kWh/year.
Noise level 40 dB (re 1 pW).


Planning notes
Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 43 kg.

Connection
Total connected load: 0.300 KW.
Connecting cable 3.0 m, detachable.

Door opening angle

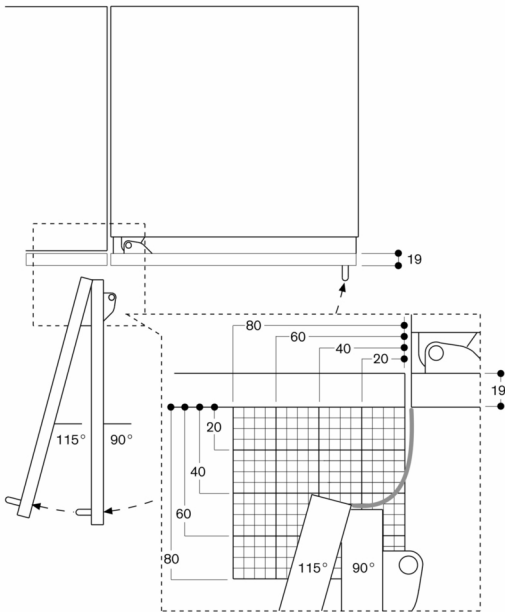


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

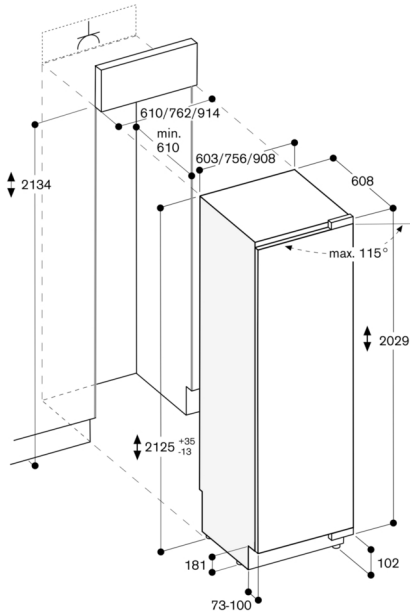

The maximum door panel dimensions are based on a clearance of 3 mm.


Wall clearance RB 472/RC/RF/RW

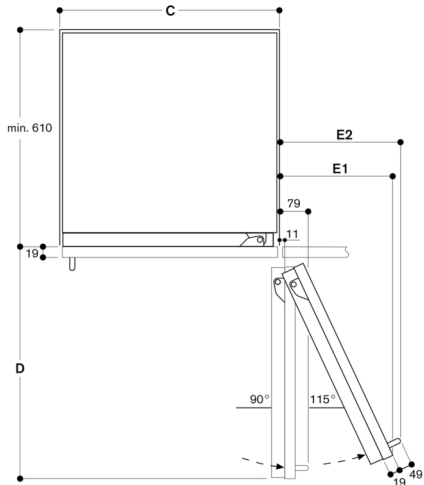

Recess width			
C	D	E1	E2
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Base detail

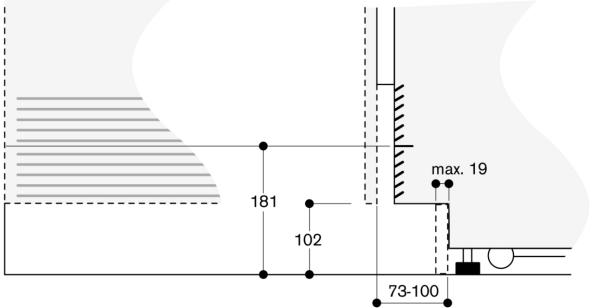

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

