



RF461301

RA421610:

SS door 61cm / 24"

RA425110:

Vario SS handle 1131 mm

RA460011:

Heating side kit 230V

RA460020:

Frontpanel connection long

RA460040:

Finger protection extra long

RA461616:

Toe kick 61cm/24"

## Vario built-in freezer 400 series

212.5 x 60.3 cm, flat hinge

RF461301

Stainless steel interior  
Generous lighting concept  
Integrated ice maker with fixed inlet water connection  
Solid aluminium door racks  
Net volume 321 litres  
Energy efficiency class A+

### Handling

Electronic temperature control with digital display.

### Technical Features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Open-door and malfunction alarm.

### Freezing

No-frost technology with fast freezing.  
4-star freezer compartment.  
Freezing capacity 18 kg/24 h.  
Storage time after a malfunction 13 h.  
4 solid metal shelves, 3 of which are manually adjustable.  
2 fully extendable drawers with transparent front, 1 of which large, 1 regular.  
Bright interior lighting with light pillars.  
4 height-adjustable door racks, 1 of which is extra deep.  
1 door rack with transparent front flap.

### Ice maker

Integrated, with fixed inlet water connection.  
Can be switched off.  
Ice cube production: approx. 1.4 kg/24 h.  
Removable ice storage container with approx. 4 kg capacity.

### Consumption data


Energy consumption 357 kWh/year.  
Noise level 41 dB (re 1 pW).

### Planning notes

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 40 kg.  
Shut-off valve for water connection must be planned next to the appliance and always be accessible.  
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.


### Connection

Total connected load: 0.421 KW.  
Connecting cable 3.0 m, detachable.  
Water inlet.  
Supply hose 3.0 m with 3/4 " connection.  
Water pressure 2 to 8 bar.

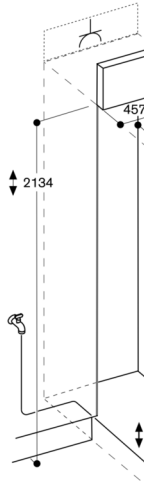


The maximum door panel

Door opening angle

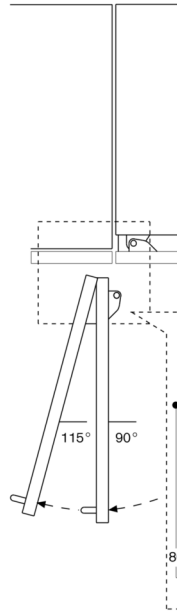

The hinge travel and resultir units and handles can be fo for the thickness of the fron front panel thickness of 19


Wall clearance RB 472

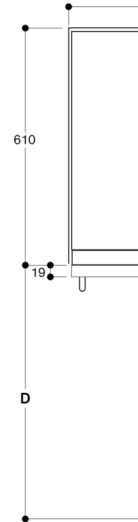

| Recess width |     |
|--------------|-----|
| C            | D   |
| 457 mm       | 525 |
| 610 mm       | 677 |
| 762 mm       | 830 |

In the drawing, a unit fi unit handle of 49 mm v

Base detail



Based on the standard he plinth is 102 mm. Maximur