



AC200180

AA200510:  
Remote control

AA210110:  
Active charcoal filter f. recirc. module

AA211812:  
Recirculation module w.active charcoal

## Canopy extractor 200 series 70 cm, Stainless steel and glass, Stainless steel AC200180

- Air extraction or air recirculation system
- Can be integrated invisibly in upper cabinet
- Can be integrated invisibly in upper cabinet

Energy-saving, low-noise fan  
Rim extraction with flat and easy-to-clean glass underside

Dimmable, neutral white LED light for ideal illumination of the whole cooktop

Air extraction or air recirculation system

### Output

Performance and noise level, output level  
3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3. Sound pressure level according to EN 60704-2-13. Odour reduction for air recirculation in accordance with EN 61591.

Air extraction:

575 / 775m<sup>3</sup>/h.

65 / 72dB (A) re 1 pW.

51 / 58 dB (A) re 20 µPa.

Air recirculation:

570 / 740m<sup>3</sup>/h.

73 / 78dB (A) re 1 pW.

59 / 64 dB (A) re 20 µPa.

Odour reduction air recirculation 93 %.

### Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is available as a special accessory.

Interval ventilation, 6 min.

Run-on function, 6 min.

Grease filter saturation indicator.

Metal grease filter, dishwasher-safe.

Glass filter cover.

Neutral white LED light (4000 K), dimmable.

Lamp output 2 x 1 W.

Illuminance 244 lx.

Fan technology with highly efficient, brushless DC motor (BLDC).

### Consumption data

Energy consumption 46.6 kWh/year.

Sound level min. 42 dB / max. 65 dB normal mode.

### Planning notes

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the filter drawer.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

Can be integrated invisibly in upper cabinet.

Vario cooktops with intensive production of vapours like VR/VP should be placed in the middle beneath the hood (in this case air recirculation is not recommended).

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).


Clearance above electric appliances min. 50 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


### Connection

Total connected load 272 W.

Connecting cable 1.0 m with plug.

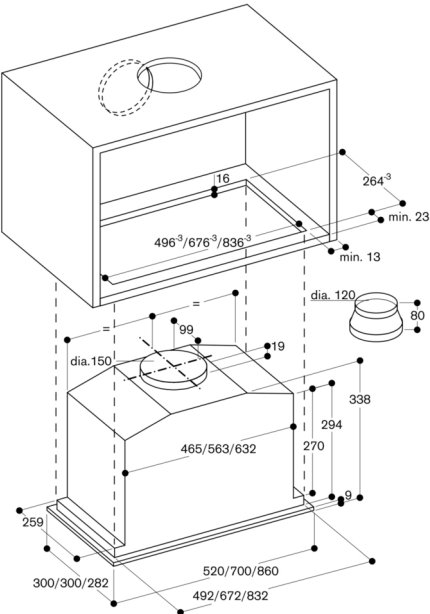

View of upper cabinet from above with AC 200 and AA 211 812

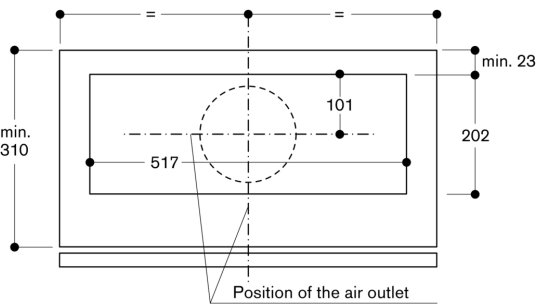

Cross-section of upper cabinet with AC 200 and AA 211 812

