

AR410110

AA410110:
Active charcoal filter for AR410110

AA410112:
Activated charcoal filter regenerative

AA010410:
ventilation grid 90 cm

Remote fan unit 400 series

AR410110

- Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series.
- Efficient BLDC technology
- Particularly quiet due to patented noise insulation
- Compact, space-saving installation in the cabinet for Vario downdraft ventilation
- Air output according to EN 61591 Extr rate recircul int. max: 675 m³/h
- Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series.

Efficient BLDC technology

Particularly quiet due to patented noise insulation

Compact, space-saving installation in the cabinet for Vario downdraft ventilation

Output

Air output according to EN 61591 Extr rate recircul int. max: 675 m³/h

Sound power level depends on the built-in situation.

Power levels depend on the motorless appliances, see table on page XX.

Features

3 electronically controlled power levels and 1 intensive mode.

Fan technology with highly efficient, brushless DC motor (BLDC).

Including sound insulation to minimise the noise level.

Steel housing, zinc-plated.

Pipe connection piece on intake side: 1 x DN 150 flat duct.

Retaining bracket for installation at the furniture base enclosed.

2 activated charcoal filters enclosed ex factory.

Planning notes

Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series

Connection to the respective appliances via network cable.

Installation in a cupboard possible with a cut-out in the furniture base or behind the cupboard positioned on the floor.

Filter replacement interval: 1 year depending on cooking frequency.


To replace the filter the remote fan unit must be accessible.

The charcoal filter exchange is possible from both sides.

Connection

Total connected load 180 W.

Connecting cable 1.8 m, pluggable.

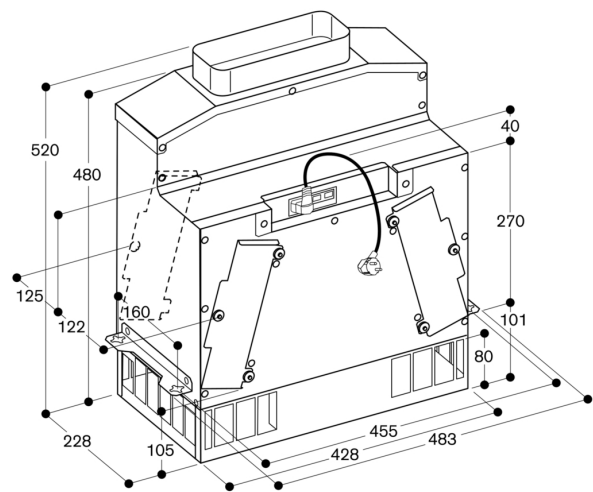

Filter exchange

