



Color Variants

BM455110

Included accessories

1 x combination grid.
1 x glass tub.

Handleless door / automatic door opening
Single operation and combination of microwave, grill and oven
Sequential operation of up to 5 modes incl. programing of combined operation and rest time
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control
Interior volume 36 litres

Programs

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.
Oven operation with 4 heating methods: Hot air 40 °C and from 100 °C to 250 °C,
Full surface grill + hot air from 100 °C to 250 °C,
Full surface grill + circulated air from 100 °C to 250 °C,
Full surface grill with 3 levels of intensity, maximum output 2000 W.
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.
15 automatic programs with weight indication, customisable:
4 defrosting programs
4 cooking programs
7 combination programs

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

Safety

Thermally insulated door with triple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.
Interior back wall with catalytic coating.

Planning notes

Door hinge not reversible.
Plan the niche without back wall.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
Consider the overhang when planning to open drawers next to the appliance.
The mains socket needs to be planned outside of the built-in niche.

Connection

Total connected load 3.1 KW.
Connection cable 1.5 m without plug.

Characteristics

Type of micro-wave oven

MW-Combi

Color / Material Front

Built-in / Free-standing

Built-in

Door opening

Button

Cleaning

catalytic partial

Control Panel Material

without panel

Door colour

Stainless steel behind glass

Dimensions (HxWxD)

455x590x582

Dimensions of the packed product (HxWxD)

560x710x690

Required niche size for installation (HxWxD)

450-450 x 560-560 x 550

Cavity dimensions

236 x 445 x 348

Cavity capacity

36

Maximum micro-wave power

1000

Number of interior lights

1

Net weight

38.7

Gross weight

44.2

EAN code

4242006218379

Connection Rating

3100

Fuse protection

16

Voltage

220-240

Frequency

60; 50


Length electrical supply cord

150

Consumption and connection features

2025-12-18

Page 1

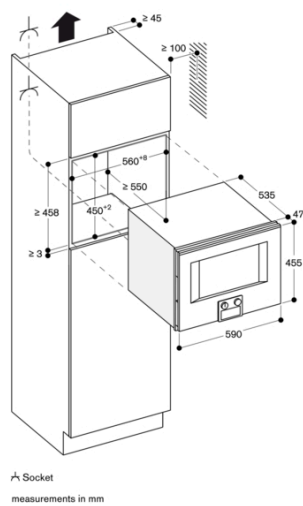

Side view of BM 454/455 above BO

