



BO481112

BA058133:

Baking stone for 76cm/90cm oven

BS020002:

Set of 2 pizza paddles

GN340230:

Gastronorm roaster GN 2/3

BA018105:

1 telescopic shelf rail, 76cm/90cm oven

BA028115:

Baking tray, for 76cm/90cm oven

BA038105:

Wire shelf, for 76cm/90cm oven

BA058115:

Heating elem. 230 V, for 76cm/90cm oven

oven 400 series

76 x 67 cm, door hinge: left, Stainless steel behind glass

BO481112

- Handleless door / automatic door opening
- Pyrolytic cleaning programme heats up to 485 °C
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Automatic programmes
 - Handleless door / automatic door opening
- Pyrolytic system
- 17 heating methods, with core temperature probe, rotisserie spit and baking stone function
- Automatic programs
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C to 300 °C
- Net volume 110 litres

Heating methods

Hot air.
Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proving. Defrosting. Keeping warm.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programs.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programs.
Rotisserie spit.
Baking stone socket.
Actual temperature display.
Rapid heating.
60 W halogen light on the top.
2 x 10 W halogen light on the side.
Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.
Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

Safety

Thermally insulated door with quadruple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.


Planning notes

Door hinge not reversible.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.
The mains socket needs to be planned outside the built-in niche.
The LAN port can be found at the back on the upper right side.


Connection

Total connected load 5.5 KW.
Plan a connection cable.
Plan a LAN cable.
Please check the user manual for how to switch off the WiFi module.


When installed next to each other

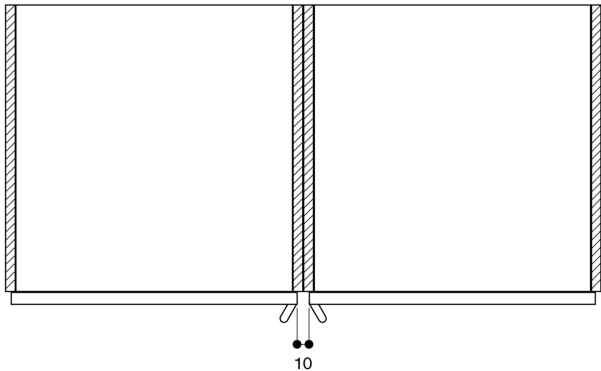


Cross section of the top/bottom door edge gaps

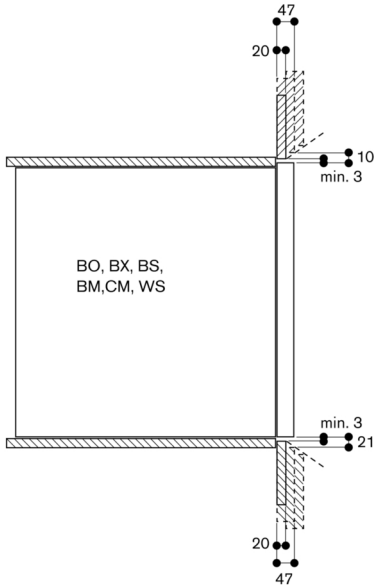

Air inlet cross section at the door edges

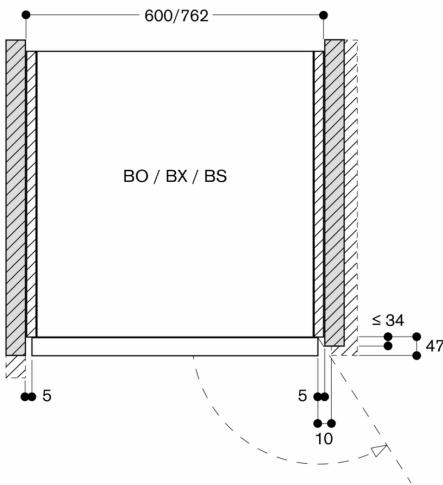

Measurements in mm

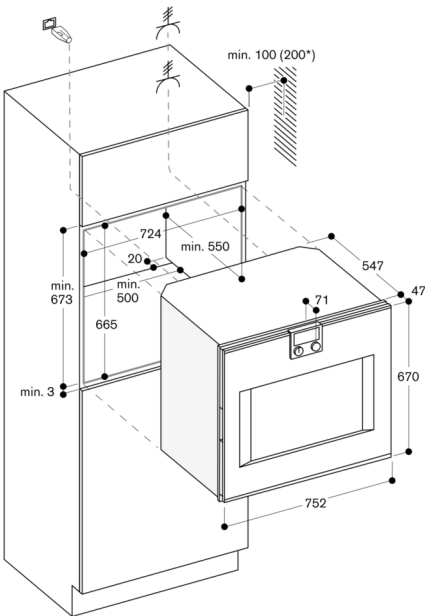

* 200 mm in conjunction with BA 018