



#### Color Variants

**BSP250100**  
**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**

#### Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.  
1 x STS tray-GN2/3-unpunched-40 mm deep.  
1 x grid.  
1 x pluggable meat probe.

#### Optional accessories

**GN340230**  
**Gastronorm roaster in cast aluminium.**

**BSP250100**  
**Combi-steam oven 200 series**  
**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**  
**Controls at the top**



Flush installation  
Water tank  
Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%  
TFT touch display  
Panel-free appliance with surface control module  
Steaming without pressure  
Electronic temperature control from 30 °C to 230 °C  
Core temperature probe, removable  
Net volume 42 litres

#### Heating methods

Hot air + 100 % humidity.  
Hot air + 80 % humidity.  
Hot air + 60 % humidity.  
Hot air + 30 % humidity.  
Hot air + 0 % humidity.  
Dough proofing.  
Defrosting.  
Regenerating.  
Low temperature cooking.

#### Handling

Rotary knob and TFT touch display operation.  
Option to save individual recipes (incl. core temperature probe).  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

#### Features

Removable 1.3 litre water tank.  
Water level warning.  
Core temperature probe with automatic shut-off.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.  
Electronic boiling point detection.  
48 W halogen light on the side.  
Hygienic stainless steel cooking interior.  
4 tray levels.

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
Drying program.  
Descaling programme.  
Grease filter, dishwasher-safe.

#### Planning notes


Door hinge not reversible.  
No other electrical appliances should be installed above the BSP.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the 110° door opening angle. Min. 300mm distance to the adjacent wall is required.

Characteristics
Color / Material Front
Anthracite
Built-in / Free-standing
Built-in
Door opening
Lateral
Required niche size for installation (HxWxD)
Dimensions (HxWxD)
Dimensions of the packed product (HxWxD) (mm)
575 x 660 x 690
Control Panel Material
Door Material
Glass
Net weight (kg)
35.858
Approval certificates
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
150
EAN code
4242006217303
Electrical connection rating (W)
Fuse protection (A)
8
Voltage (V)
220-240
Frequency (Hz)
50; 60
Plug type
fixed connection, no plug
Approval certificates
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Number of cavities (2010/30/EC)
1
Usable volume of cavity
42
Energy efficiency rating
A+
Energy consumption per cycle conventional (2010/30/EC)
Energy consumption gas oven per cycle conventional (2010/30/EC)
Energy consumption per cycle forced air convection (2010/30/EC)
0.57
Energy consumption gas oven per cycle forced air convection (2010/30/EC)
Energy efficiency index (2010/30/EC)
78.1

**Consumption and connection features**  
**2021-08-13**  
**Page 1**

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.  
The mains socket needs to be planned outside of the built-in niche.

**Connection**  
Total connected load 1.9 KW.  
Connection cable 1.5 m without plug.

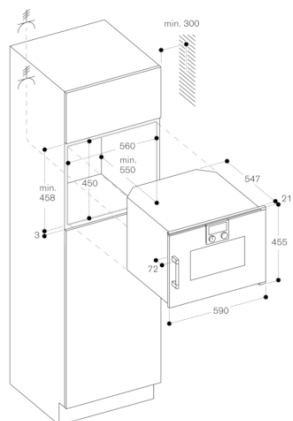

Side view of BSP, BMP over BOP

