



CJ292110
Flex induction cooktop 200 series
Stainless steel frame
Width 90 cm

Sturdy stainless steel frame
Twist-Pad control with removable magnetic knob
Flex function for combining the rectangular cooking areas
Free positioning of cookware inside combined cooking areas
Professional cooking function for splitting the cooktop into 3 predefined heat areas
Cooking sensor function for temperature control in pots
Frying sensor function for temperature control in pans
Large cooking zone for pots up to ø 32 cm
Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Immersion depth 55 mm.
Appliance must be fixed from underneath.
Cooktop clamping range: 20 - 40 mm.
Appliance weight: approx. 22 kg.

Connection

Total connected load 11.1 kW.
Connecting cable 1.5 m without plug.

Characteristics

Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
5
Type of control setting devices
Required niche size for installation (HxWxD)
55 x 880-880 x 490-490
Width of the product (mm)
908
Dimensions of the product (mm)
55 x 908 x 520
Dimensions of the packed product (HxWxD) (mm)
126 x 1073 x 603
Net weight (kg)
22.165
Gross weight (kg)
24.0
Residual heat indicator
Separate
Location of control panel
Hob front
Type of external control possibility
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
EAN code
4242006248987

Consumption and connection features

Electrical connection rating (W)
11100
Gas connection rating (W)
Current (A)
Voltage (V)
220-240
Frequency (Hz)
60; 50


2020-02-19
Page 1

Color Variants

CJ292110
Stainless steel frame
Width 90 cm

Optional accessories

CA051300
Teppan Yaki made of multi ply material
CA052300
Griddle plate in cast aluminium
CA060300
Cooking sensor for temperature regulation within pots
CA230100
Black magnetic knob for induction cooktop 200 series
GP900003
Stainless steel frying sensor pan
GP900004
Stainless steel frying sensor pan

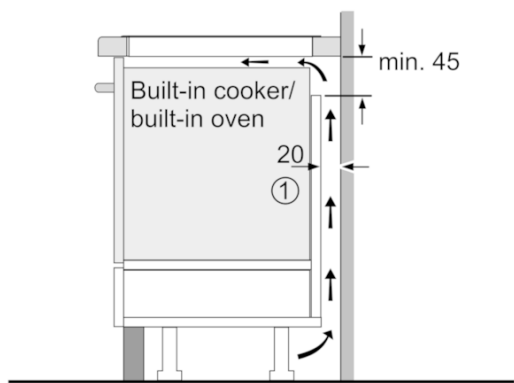

①
Ventilation gap must
be present

All measurements in mm