



CM450111
Fully automatic espresso machine 400 series
Stainless steel behind glass-backed full glass door
Width 60 cm
Controls at the top

Handleless door / automatic door opening
 Continuous flow heater means no waiting time and constant brewing temperature
 Aroma brewing technology for a full aroma
 Single portion cleaning
 TFT touch display
 Panel-free appliance with surface control module
 One-touch operation
 Personalisation function
 7 light settings
 Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage
 Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffè Latte / 2 x Caffè Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Handling
 Automatic door opening.
 Rotary knob and TFT touch display operation.
 Personalisation function, option to save 8 individualised beverages.
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 3 coffee temperature levels.
 10 hot water temperature levels.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 7 cm to 15 cm.
 Easy access to water tank, milk and coffee bean container behind the door.

Features
 Maintenance-free grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 19 bar pressure.
 Double grinding and brewing cycles for extra intensity for single beverage order.
 For double beverage order, two grinding and brewing cycles.
 Beverage dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 0.5 litres.
 Integrated lighting with LEDs.
 Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.
 Removable 2.4 litre water tank.
 Electronic water filter exchange indicator.
 Electronic fill level control for drip tray and container for coffee residue.

Characteristics
Built-in / Free-standing
 Built-in
Frothing nozzle
 No
Display
 No
Water protection system
 No
Portion sizes
 All cups
Dimensions (HxWxD)
 455 x 590 x 444
Dimensions of the packed product (HxWxD)
 545 x 475 x 670
Required niche size for installation (HxWxD)
 449 x 558 x 347
EAN code
 4242006263652
Electrical connection rating
 1600
Fuse protection
 10
Voltage
 220-240
Frequency
 50/60
Plug type
 Gardy plug w/ earthing

Consumption and connection features
2021-11-09
Page 1

Safety

Child lock.

Cleaning

Fully automatic rinse program when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling program.
 Emptying program to prepare the appliance for holiday or transportation.
 Empty grinding function to remove coffee residues from the system when switching bean types.
 Removable brewing unit.
 Dishwasher-safe coffee residue container and drip tray.
 Dishwasher-safe beverage dispenser.

Planning notes

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
 The door panel surface of the appliance extends 47 mm from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
 Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
 Special accessories (order as spare parts):
 Part No. 17000705 Water filter
 Part No. 00311819 Descaling tablets
 Part No. 00311769 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 KW.


Color Variants

CM450111
Stainless steel behind glass-backed full glass door
Width 60 cm


Included accessories

1 x assembly screws.
 1 x scoop.
 1 x test strip.
 1 x milk container (insulated).
 1 x connection hose for milk frother.
 1 x milk pipe.

CM450111
Fully automatic espresso machine 400
series
Stainless steel behind glass-backed full
glass door
Width 60 cm
Controls at the top

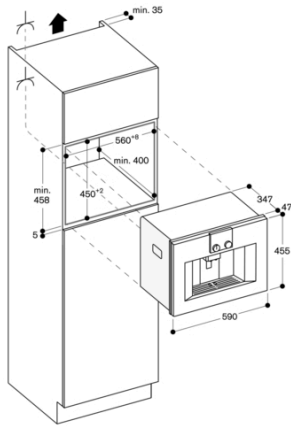

Left corner installation

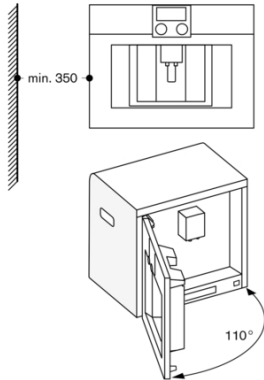

If using the 92° door hinge restrictor (spare part no. 00636455),
the minimum distance from the wall is only 100 mm.