



VI461110
Vario induction cooktop 400 series
Stainless steel frame
Width 60 cm

Three cooking zones with booster for cookware with a diameter of 15 to 28 cm
 Solid stainless steel control knob
 Precision crafting of 3 mm stainless steel
 For surface mounting with a visible edge or for flush mounting
 Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

1 induction cooking zone ø 18 cm (1800 W, with booster 2500 W), automatically switches to ø 28 cm (2800 W, with booster 4400 W).
 1 induction cooking zone ø 21 cm (2200 W, with booster 3300 W).
 1 induction cooking zone ø 15 cm (1400 W, with booster 1800 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
 Electronic control in 12 output levels.

Features

Cooking zone marking.
 Booster function for each cooking zone.
 Super booster function for ø 28 cm cooking zone.
 Pot detection.
 Timer.

Safety

Individual residual heat indicators.
 Safety shut-off.

Planning notes

If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.
 If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.
 If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
 In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.
 The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
 The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Characteristics

Product name/family
 Cooking zone ceramic
Construction type
 Built-in
Energy input
 Electric
Total number of positions that can be used at the same time
 3
Type of control setting devices
Required niche size for installation (HxWxD)
 54 x 560-560 x 490-490
Width of the product (mm)
 590
Dimensions of the product (mm)
 54 x 590 x 520
Dimensions of the packed product (HxWxD) (mm)
 113 x 1091 x 709
Net weight (kg)
 14.484
Gross weight (kg)
 16.0
Residual heat indicator
 Separate
Location of control panel
 External control
Type of external control possibility
Basic surface material
 Ceramic
Color of surface
 Black, Stainless steel
Color of frame
 Stainless steel
Approval certificates
 AENOR, CE
Length electrical supply cord (cm)
 150
EAN code
 4242006212179

Consumption and connection features

Electrical connection rating (W)
 7200
Gas connection rating (W)
Current (A)
Voltage (V)
 220-240
Frequency (Hz)
 60; 50
2019-10-27
 Page 1

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
 Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
 Immersion depth 54 mm.
 Built-in control panel to be integrated in the bottom cabinet at drawer level.
 Panel thickness 16 - 26 mm.
 The drawing "Installation of the control knob" must be observed if the panel is more than 26 mm thick (there must be a recess at the rear).
 Appliance can be snapped into the worktop from above.
 Appliance weight: approx. 14 kg.

Connection


Total connected load 7.2 kW.
 Connecting cable 1.5 m without plug.

Color Variants

VI461110
Stainless steel frame
Width 60 cm


Installation Accessories

VA420000
 Connection strip for combination with other Vario appliances of the 400 series for flush mounting
VA420001
 Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip
VA420010
 Connection strip for combination with other Vario appliances of the 400 series for surface mounting
VA420011
 Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip
VA450600
 Stainless steel filler strip 60 cm

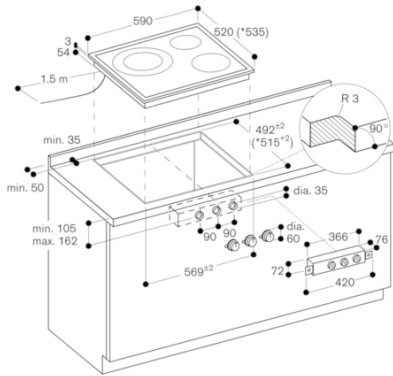


* with filler strip.
 See separate planning notes.

Cross-section

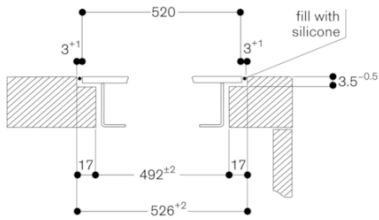


When installing with appliance cover or filler strip, pay attention to the deeper cut-out and the front and rear groove width.

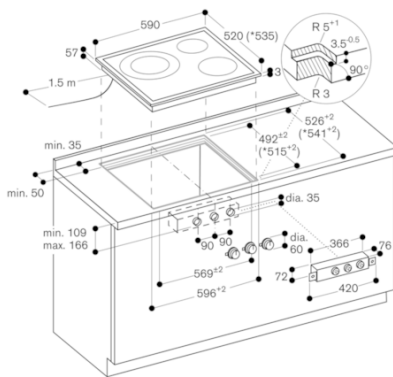


* with filler strip.
 See separate planning notes.

View from above

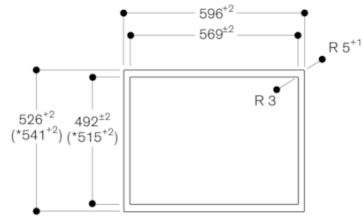


* with filler strip

Longitudinal section

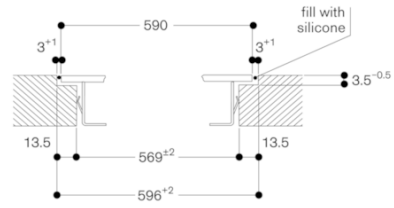

Installation of the control knob; surface mounting

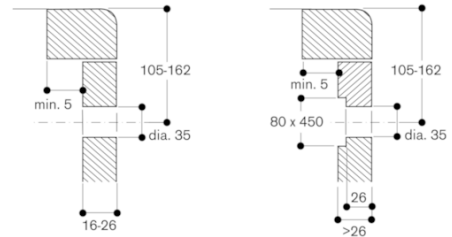

Installation of the control knob; flush mounting

