



VK230114
Vario steamer 200 series
Stainless steel control panel
Width 28 cm

Can be combined with the cooktops of the Vario 200 series to a harmonic unity
Generous control panel for comfortable and secure operation
Steaming in cooktop size
Exact water temperature control from 45 °C to 95 °C
Cooking on two levels, without flavour transfer

Cooking zones
Water capacity 1 to 6 litres.

Handling
Function display.
Electronic water temperature control from 45 °C to 95 °C, in 5 °C steps.
Steam cooking level with electronic steam control for pressureless cooking.

Features
Automatic boiling point detection.
Motor-driven water drain valve 1/2".
Electronic short-term timer up to 90 min.
Special heating system.

Safety
Remaining time display.
Child lock.
Operation indicator.
Automatic shut off.

Planning notes
Appliance dimensions: (W x D) 288 mm x 523 mm
Installation dimensions: (H x W x D) 280 mm x 268 mm x 490 mm
Access to drain in bottom cabinet is required.
Appliance is intended for fixed water outlet connection, but can be fitted without fixed connection by using the special accessory AG 060.
Seal the worktop cutout.
Appliance can be snapped into the worktop from above.
A minimum clearance of at least 200 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
In case of suspended cabinets a ventilation hood must be installed above the steamer.
If a cover is fitted, the glass lid must be removed when closing it.
VK 230 and VF 230 must not be installed directly next to each other.
In combination with the downdraft ventilation VL 040/041, this must be planned on the right of VK.
Appliance weight: approx. 11 kg.

Connection
Total connected load 2.3 kW.
Connecting cable 1.7 m without plug.

Characteristics
Product name/family
Vario/Domino steam cooker
Built-in / Free-standing
Built-in
Energy input
Electric
Type of control
Electronic
Type of control setting and signalling devices
Sword knobs
Required niche size for installation (HxWxD)
280 x 268 x 490
Width of the product (mm)
288
Dimensions of the product (mm)
280 x 288 x 523
Dimensions of the packed product (HxWxD) (mm)
385 x 420 x 610
Net weight (kg)
11.137
Gross weight (kg)
12.7
Power on indicator
Yes
Location of control panel
Type of regulation
Stepless energy regulated
Basic surface material
Stainless steel
Color of surface
Stainless steel
Color of frame
Approval certificates
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
170
EAN code
4242006190927

Consumption and connection features
Electrical connection rating (W)
2300
Current (A)
16; 10
Voltage (V)
230-240
Frequency (Hz)
60; 50
2019-10-29
Page 1



Color Variants
VK230114
Stainless steel control panel
Width 28 cm
VK230134
Aluminium control panel
Width 28 cm

Included accessories
2 x cooking insert.
1 x glass cover.
1 x hand grip.
1 x residuary filter.
1 x water drain valve.


Optional accessories
FK023000
Pasta basket
VD201014
Brushed stainless steel appliance cover

Installation Accessories
AG060000
Drain installation set enables drainage of cooking liquid into a suitable receptacle
VV200014
Stainless steel connection strip for combination with further Vario cooktops


Product Variants
VK230134
Vario steamer 200 series
Aluminium control panel
Width 28 cm

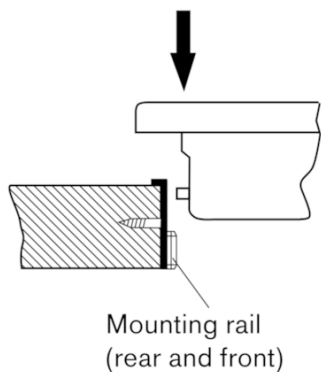

Drainage connection present
 in the bottom cupboard:
 Fixed connection without free
 fall section as per DIN 1986,
 Part 1.
 A non-return valve
 must be installed.
 Recommendation: AG 050 000
 Drain installation set.



Drainage connection present
 in the bottom cupboard:
 Fixed connection with free fall
 section as per DIN 1986 Part 1.
 A non-return valve must be installed.
 Recommendation:
 Install a non-return valve.
 Recommendation: AG 050 000
 Drain installation set.



Drainage into a water-collecting
 receptacle (e.g. saucepan).
 Only possible with AG 060 000
 Drain installation set.

