



RC462705
Vario refrigerator 400 series
With fresh cooling 0 °C
Fully integrated
Niche width 61 cm, Niche height 213.4 cm



Stainless steel interior with solid anthracite aluminium elements
 Warm white and glare-free LED light spots
 Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
 The drawers in the RC and RF models are positioned at the same height.
 With side-by-side installation, the glass shelves and door racks can be aligned on the same level
 Flat stainless steel inner door, full-length
 Almost invisible rail system for shelves and door racks for flexible positioning
 Solid anthracite aluminium door racks
 1 fresh cooling drawer 32 °F with temperature control from 32° F to 37 °F and one fresh cooling drawer with manually adjustable humidity
 TFT touch display
 Net volume 367 litres
 Energy star qualified

Handling
 TFT touch display operation.
 Clear text display.

Technical Features
 Dynamic cold air distribution.
 Automatic defrosting with defrost water evaporation.
 Cushioned door closing system.
 Activated charcoal air filter.
 Rest mode certified by Star-K.
 When rest mode is active, the appliance can only be opened using a handle.
 Open-door and malfunction alarm.
 Home network integration for digital services (Home Connect) wireless via WiFi.
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Cooling
 Temperature adjustable from +2 °C to +8 °C.
 1 shallow, fully extendable drawer with transparent front.
 4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.
 Flat door rail system with fully flexible positioning of door racks.
 4 height-adjustable door racks, 1 of which is extra deep.
 Net volume 314 litres.

Fresh cooling 0 °C
 1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.
 Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.
 Ideal for meat, fish and poultry.
 Net volume 53 litres.

Fresh cooling
 1 fully extendable fresh cooling drawer with transparent front, illuminated.
 Humidity can be adjusted manually.
 Ideal for fruit and vegetables.

Product Features
UPC code
 825225961062
Color / Material housing
Variant color
 Not applicable
Panel ready
 Not possible
Silence level (dBA)
 40
Watts (W)
 350
Current (A)
 10
Volts (V)
 110-120
Frequency (Hz)
 60
Energy consumption (kWh/yr)
 253.9
Energy Star® qualified
 Yes
Approval certificates
 CSA
Power cord length (in)
 118,1"
Required cutout size (HxWxD) (in)
 84" x 24" x 24 3/4"
Appliance Width (in)
 23 3/4 "
Height (in)
 83 3/4 "
Depth (in)
 24"
Capacity in 0.75l (bordeaux bottles)
Total unit gross capacity (cu. ft.) - AHAM
 13.0
Product packaging dimensions (HxWxD) (in)
 89.37 x 29.52 x 27.16
Refrigerator Gross capacity (cu. ft.)
 13.0
Freezer Gross capacity (cu ft)
Net weight (lbs)
 317.000
Gross weight (lbs)
 351.000
SKU
 RC462705

Consumption and connection features
2021-06-20
 Page 1

Consumption data

Energy consumption 254 kWh/year.
 Noise level 40 dB (re 1 pW).

Planning notes

Flat hinge.
 Door hinge right, reversible.
 Door opening angle of 115°, fixable at 90°.
 Max. door panel weight 90 lbs (41 kg).

Connection

Total connected load 0.350 KW.
 Total Amps: 10 A.
 Connecting cable 118" (3.0 m), detachable.

Color Variants

RC462705
With fresh cooling 0 °C
Fully integrated

Included accessories

1 x egg box with lid.


Optional accessories

RA430100

Installation Accessories

RA421615
 Stainless steel door panel with handle
 RA423140
 RA425110
 Handle bar, stainless steel, long
 RA428615
 RA460000
 Installation kit for side-by-side installation (for connecting any two columns)
 RA460012
 RA460020
 Connecting element for vertically split appliance fronts (for a flush front)
 RA464611
 Ventilation grille stainless steel

RC462705
Vario refrigerator 400 series
With fresh cooling 0 °C
Fully integrated
Niche width 61 cm, Niche height 213.4 cm
cm
2021-06-20
Page 2

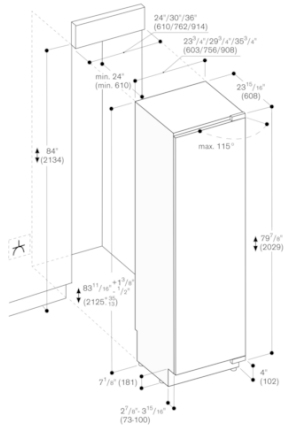

The maximum door front dimensions are based on a clearance of 20mm.