



RF411705

RA448220:

Ice container, small, 90° door fixation

RA450022:

Water filter Vario 400

RA425110:

Vario SS handle 1131 mm

RA428115:

Stainless steel door w/o handle 18"_US

RA460012:

Heating side kit 110V

RA460020:

Frontpanel connection long

RA464113:

Vent grille 45.7cm / 18" with filter

RA421115:

Stainless steel door, handle, 18"_US

RA423140:

Side trims, long

Vario built-in freezer 400 series

18", Softclose® Flat Hinge

RF411705

RF411705

Vario freezer 400 series

Fully integrated, panel ready

Niche width 45.7 cm, Niche height 213.4 cm

Stainless steel interior with solid anthracite aluminium elements

Warm white and glare-free LED light spots

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle

The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level

Material and aesthetics of interior as for RC model

- Glass shelves - Solid anthracite aluminium door racks

Flat stainless steel inner door, full-length

Almost invisible rail system for shelves and door racks for flexible positioning

Integrated ice maker with fixed inlet water connection

TFT touch display

Net volume 242 litres

Operation

TFT touch display operation.

Clear text display in 44 languages.

Technical Features

Dynamic cold air distribution with Multi-Flow Air System.

Automatic defrosting with defrost water evaporation.

Cushioned door closing system.

Sabbath mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction warning system.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Freezer compartment

No-frost technology with fast freezing at -30 °C.

Temperature adjustable from -24 °C to -14 °C.

4-star freezer compartment.

Freezing capacity 6.3 kg/24 h.

4 safety glass shelves, white glass, 3 of which are individually height adjustable.

2 fully extendable drawers with transparent front.

Flat door rail system with fully flexible positioning of door racks.

4 height-adjustable door racks.

Ice dispenser

Integrated automatic ice maker in the freezer compartment, with fixed water connection.

Particle filter for water inlet, integrated in ventilation grille area.

Saturation indicator shown in TFT touch display.

Ice maker can be switched off independently.

Ice cube production approx. 1.4 kg/24 h.

Removable ice storage container with approx. 2.5 kg capacity.

Consumption data

Energy consumption 404 kWh/year.

Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge left, reversible.

Door opening angle of 115°, fixable at 90°.

For installation with a door opening angle of 90° the ice storage container must be exchanged for the small ice storage container (RA 448220).

This must be done prior to fixing the door.

Max. door panel weight 55 lbs (25 kg).

Shut-off valve for water connection must be planned next to the appliance and always be accessible.

If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Rating

Total rating 1.079 kWh/24h.

Total Amps: 10 A.



Connecting cable 118" (3.0 m), detachable.

Cold water connection required.

Electrical location 6" above ground in lower left corner of unit.

Supply hose 1.2 m with 1/4" male compression fitting (standard icemaker connector).

Water pressure 2 to 8 bar.

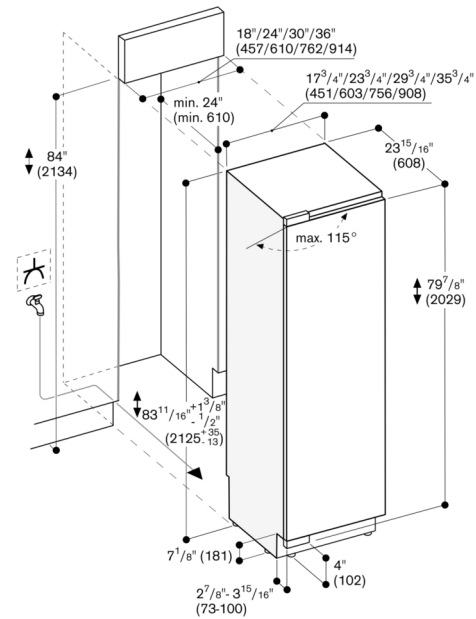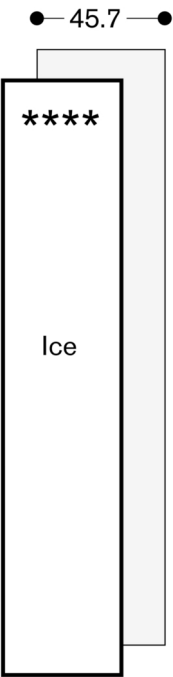

The maximum door front dimensions are based on a clearance of 3/8th in.