



VG295114CA

WP400001:
Wok pan

Gas Cooktop 200 series
36", Liquid gas 27.5 mbar
VG295114CA

- Precise and reproducible flame size
 - Solid smooth-surface cast iron pan supports
- Automatic fast ignition, electronic flame monitoring

Cooking zones

Operation

Integrated control panel with cooking zone and output level markings.
One-handed operation.

Features

Three-part cast iron pan support with flat, continuous pot surface.
Brass burner rings.

Safety


Electronic flame monitoring with automatic re-ignition.
Automatic quick ignition.

Planning notes

Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
The rear panel must consist of a non-flammable material. Wall trims must be resistant to heat.
Installation in a 90 cm wide lower cabinet is required.
An oven can be installed under the cooktop.
Appliance must be fixed from underneath.
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Cooktop clamping range: 30 - 50 mm.
An air extraction hood must be switched on during operation of the gas cooktop.
Distance between ventilation hood and gas cooktop at least 760 mm.
Appliance weight: approx. 29 kg.

Rating

Connecting cable 1.4 m with plug.

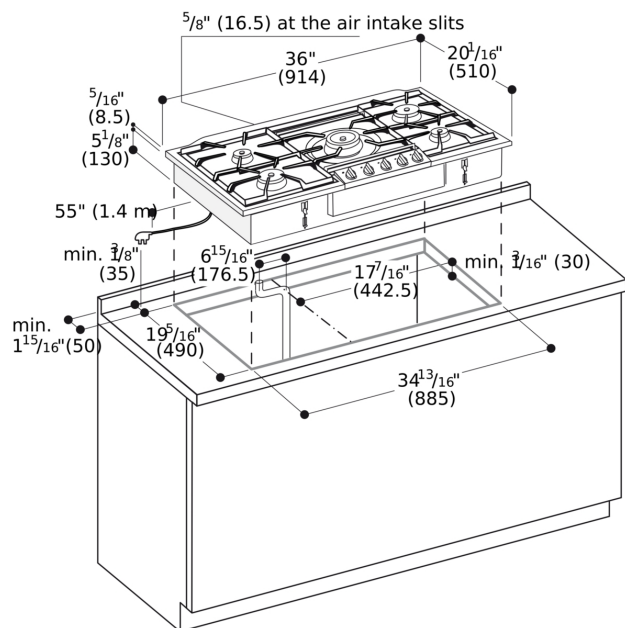

Gas connection

