



VG295214CA

WP400001:  
Wok pan

Gas Cooktop 200 series  
36", Natural gas 15 mbar  
VG295214CA

- Precise and reproducible flame size
  - Solid smooth-surface cast iron pan supports
- Automatic fast ignition, electronic flame monitoring

#### Cooking zones

##### Operation

Integrated control panel with cooking zone and output level markings.  
One-handed operation.  
Gas valve with fine control.

##### Features

Three-part cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

##### Safety


Electronic flame monitoring with automatic re-ignition.  
Automatic quick ignition.

##### Planning notes

Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance is not operable without power supply).  
Panel thickness 16 - 26 mm.  
Air intake from above.  
No intermediate shelf required.  
The rear panel must consist of a non-flammable material. Wall trims must be resistant to heat.  
Installation in a 90 cm wide lower cabinet is required.  
An oven can be installed under the cooktop.  
Appliance must be fixed from underneath.  
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Cooktop clamping range: 30 - 50 mm.  
Minimum distance between gas cooktop(s) with more than 37,533 BTU(11kW) and ventilation hood must be 30" (76cm).  
Appliance weight: approx. 29 kg.

##### Rating

Connecting cable 1.4 m with plug.

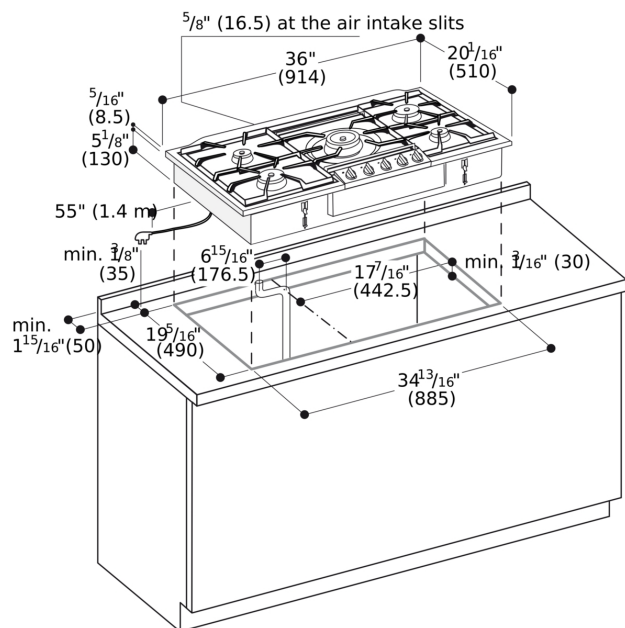

## Gas connection

