



AC482181

Ceiling ventilation 400 series

AC482181

- Control module of ceiling ventilation with light
- Individual integration of light elements into the configuration of the ceiling ventilation
- Power levels depend on the remote fan unit.
- 7-key infrared remote control, backup keys for operation also on the control module.
- Three electronically controlled power levels and an intensive mode.
- Control module of ceiling ventilation with light
- Individual integration of light elements into the configuration of the ceiling ventilation

Output

Power levels depend on the remote fan unit.

Features

7-key infrared remote control, backup keys for operation also on the control module.

Three electronically controlled power levels and an intensive mode.

Interval ventilation, 6 min.

Run-on function, 6 min

Grease filter saturation indicator.

Planning notes

Connection to the respective appliances via network cable.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs a suitable safety switch.


Fixing at the filter module.

Connection

Total connected load 15 W.

Connecting cable 1.75 m, pluggable.


Minimum installation height including flat duct DN 150

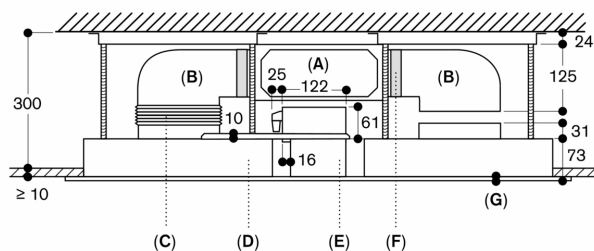

A: AD 854 048
 B: AD 857 042
 C: AD 751 010
 D: AC 402 181
 E: AC 472 181 / AC 482 181
 F: AD 857 040
 G: 0.8 mm

Measurements in mm


AC 402 Further possible ceiling fixture

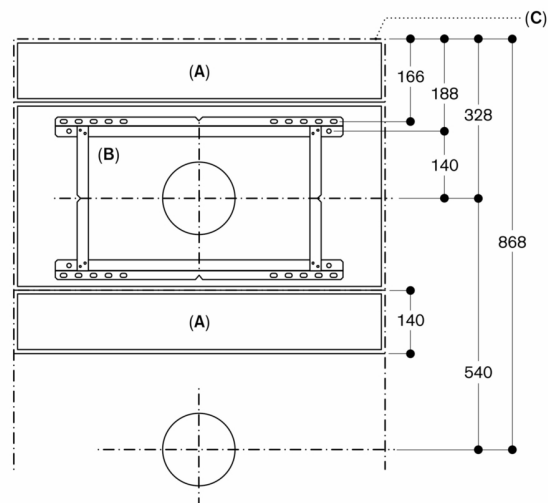

A: AC 482 / 472
 B: AC 402
 C: Ceiling cut-out


Measurements in mm

AC 402 Ceiling fixture and position of connecting piece DN 150

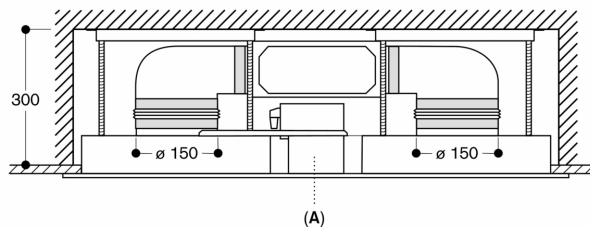

A: AC 472 181 / AC 482 181


Measurements in mm

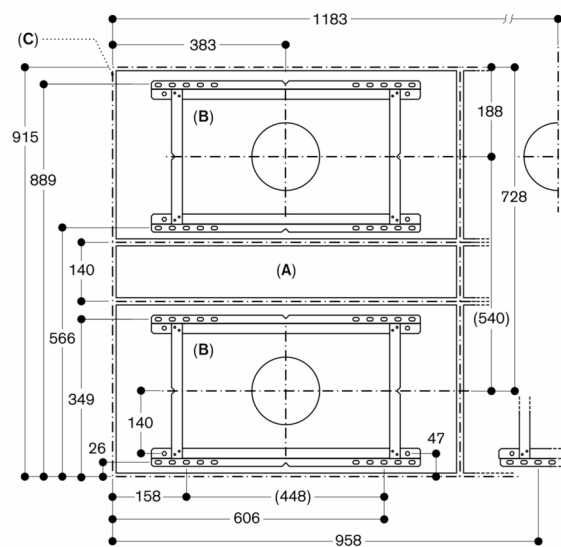






A: AC 482 / 472
 B: AC 402
 C: Ceiling cut-out

Measurements in mm

Necessary installation space  F2-CL

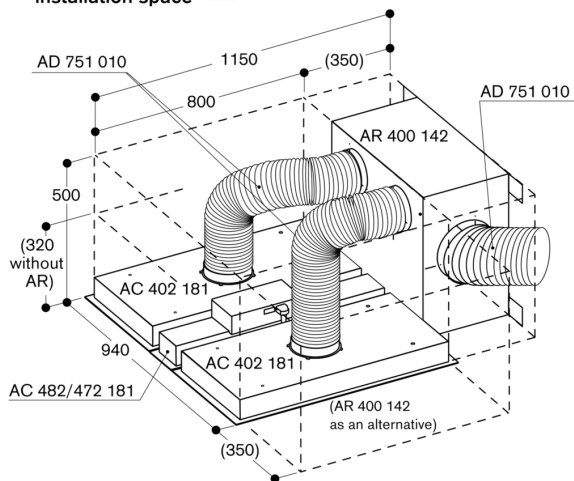

Necessary installation space  FL2-CL-L1

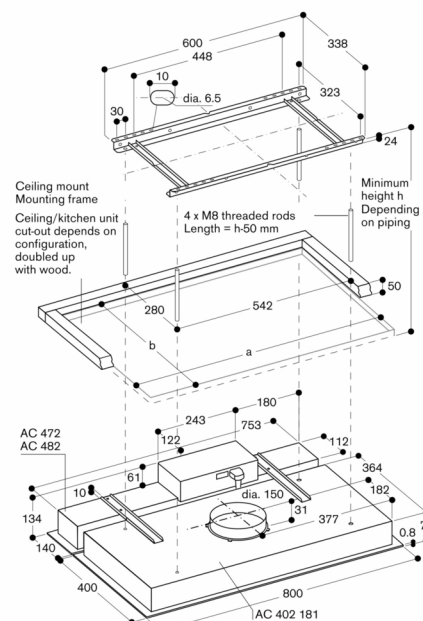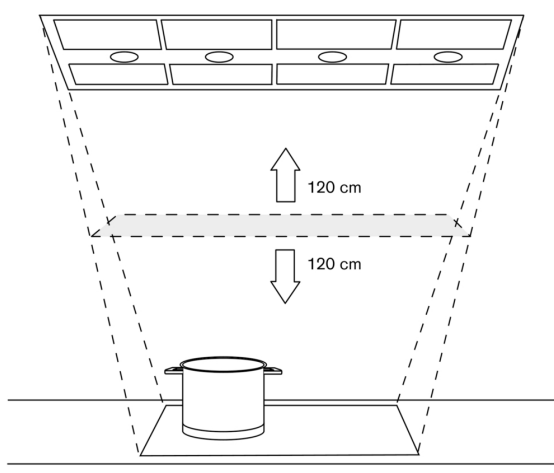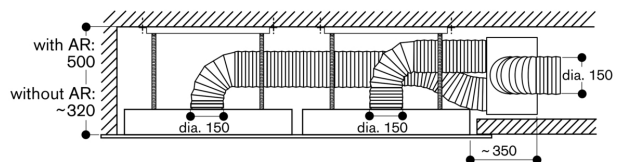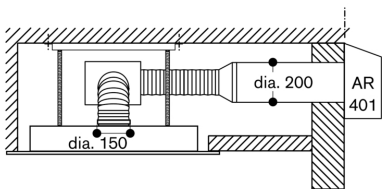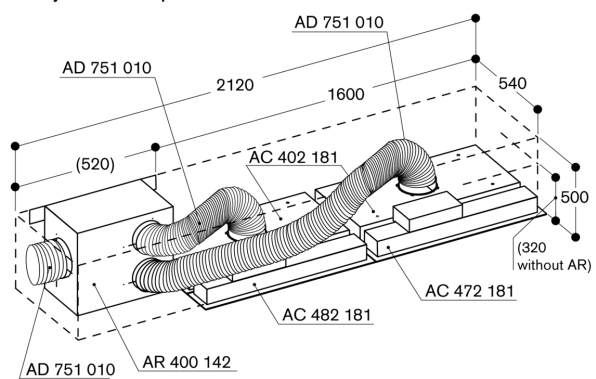

For multiple configurations:
Ceiling deflection around cut-out: max. + 3 mm.
Support is required in the middle to prevent deflection upwards when fastening the modules.
The required threaded rods, nuts and ceiling bolts are supplied as standard.

Necessary installation space F3-CL-L1

