

AD750054

Air duct part

ø 150 mm

AD750054

- Optimal temperature insulation
- Hermetically sealed by an optimized built-in heat retention system.
- Flat stainless steel cover with minimal effect to the aesthetics of the building exterior facade.
- Weatherproof stainless steel louvers.
- 3-times insulating Backflow system.
- Optimal temperature insulation

Hermetically sealed by an optimized built-in heat retention system.

Flat stainless steel cover with minimal effect to the aesthetics of the building exterior facade.

Features

Weatherproof stainless steel louvers.

3-times insulating Backflow system.

Magnetic opening and closing.

Defined opening pressure (65 Pa) prevents rattling.

Full opening even at low flow rates.


Telescopic wall duct 350 - 500 mm for round pipe connection piece DN 150.

Planning notes

Conform to blower-door test.

For connection of round pipe DN 150 or flat pipe DN 150.

Wall breakthrough ø 155 mm.

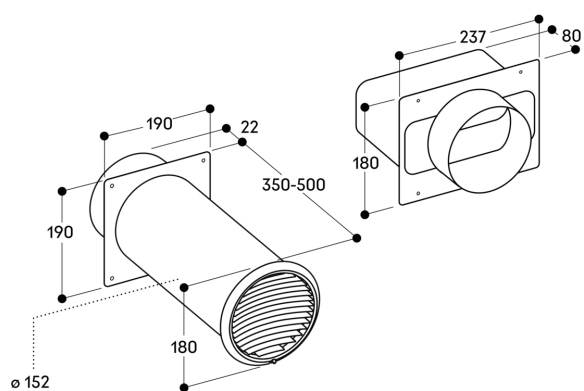

Measurements in mm