



AF200160
Flat kitchen hood 200 series
Stainless steel handle bar
Width 60 cm
Air extraction/recirculation



Unobtrusive flat kitchen hood design thanks to integrated glass panel in the steam screen
 Especially quiet operation thanks to integrated sound insulation
 Steam screen extends by touching the handle bar
 Steam screen and visible corpus made of brushed stainless steel
 Integration of a spice rack is possible
 Energy-saving, low-noise fan
 Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
 Dimmable, neutral white LED light for ideal illumination of the whole cooktop
 The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet
 Air extraction or recirculation system
 Recirculation module with activated charcoal filter: Silent and highly efficient air recirculation solution with odour reduction comparable to air extraction and long replacement intervals

Output
 Performance and noise level, output level 3/Intensive:
 Air output according to DIN EN 61591.
 Sound power level according to EN 60704-3.
 Sound pressure level according to EN 60704-13.
 Odour reduction air recirculation 94%.

Features
 Controls at front.
 Three electronically controlled power levels and an intensive mode.
 Automatic function with sensor-controlled run-on function.
 Grease filter saturation indicator.
 Stainless steel grease filter, dishwasher-safe.
 Neutral white LED light (3500 K), continuously dimmable.
 Illuminance: 648 lx
 Light can be switched on separately.
 Fan technology with highly efficient, brushless DC motor.
 Integrated sound insulation for quiet operation.
 The fan is activated when the steam screen is extended.
 Patented technology for extension of the steam screen.
 Extendable steam screen 198 mm.
 Airflow-optimised interior for efficient air circulation and ease of cleaning.
 Patented easy mounting system for simple installation.
 The package includes an one-way flap.

Product rating
 Energy consumption 37.7 kWh/year.
 Ventilation efficiency class B.
 Illumination efficiency class A.
 Grease filter efficiency class B.
 Sound level min. 39 dB / max. 55 dB normal mode.

Planning notes
 The door of the upper cabinet must be fully open in order to change the activated charcoal filter.
 To be installed in an upper cabinet without base.

Characteristics
Product name/family
Color chimney
Typology
 Pull-out
Approval certificates
 CE, Eurasian, Ukraine, VDE
Length of electrical supply cord
 175
Required niche size for installation (HxWxD)
 388mm x 524.0mm x 290mm
Height of the chimney
Height of product, without chimney
Minimum distance above an electric hob
 430
Minimum distance above a gas hob
 650
Net weight
 13.316
Type of control
 Electronic
Number of speed settings
Maximum output air extraction
 379
Boost position output recirculating
 579
Maximum output recirculating air
 344
Boost position air extraction
 698
Number of lights (Stck)
 2
Noise level
 55
Diameter of air outlet
 120 / 150
Grease filter material
 Washable stainless steel
EAN code
 4242006256401
Connection rating
 146
Fuse protection
 10
Voltage
 220-240
Frequency
 50; 60
Plug type
 CH plug w/ earthing, Gardy plug w/ earthing, GB plug
Installation type
 Built-in

Consumption and connection features
 created on 2021-09-28
 Page 1

The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.
 Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).
 Clearance above electric appliances min. 43 cm.
 When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs a suitable safety switch.

Connection
 Total connected load 146 W.
 Connecting cable 1.8 m, pluggable.

Color Variants

AF200160
 Stainless steel handle bar
 Width 60 cm


Optional accessories

AA211812
 Patented air recirculation module including 1 activated charcoal filter with high efficient odour reduction due to increased surface


Installation Accessories

AA210460
 Lowering frame for 60 cm flat kitchen hood

AF200160
 Flat kitchen hood 200 series
 Stainless steel handle bar
 Width 60 cm
 Air extraction/recirculation
 created on 2021-09-28
 Page 2

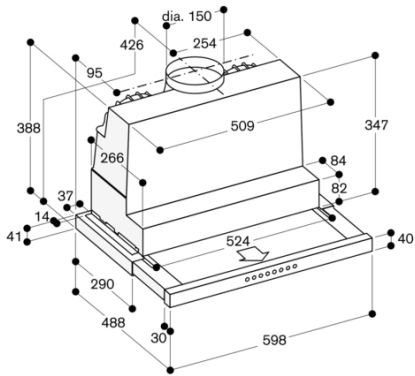


View of upper cabinet from above with AA 211 812

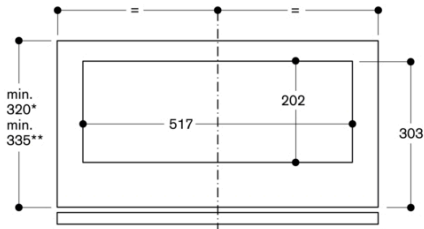


* Appliance only
 ** Appliance with AA 210 490/460 lowering frame


Cross-section of upper cabinet with AA 211 812 and lowering frame AA 210 490/460

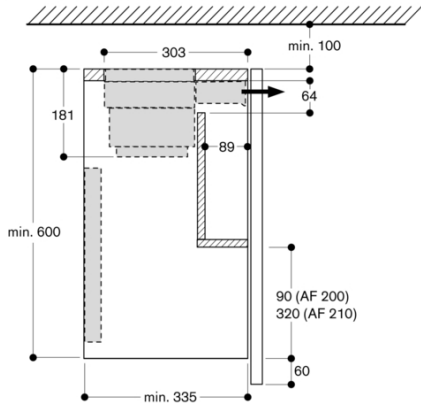


Cross-section of upper cabinet with AA 211 812

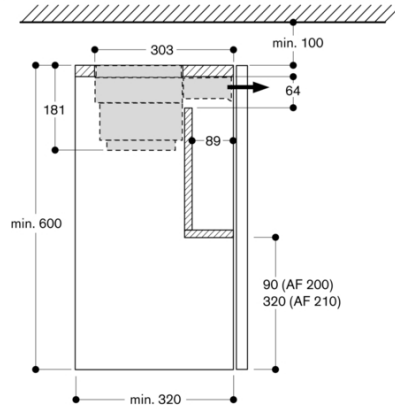

Upper cabinet for AF 200 160

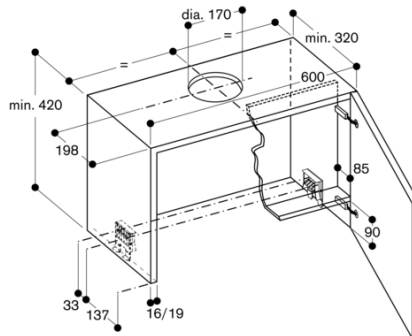

Upper cabinet for AF 200 160 with AA 210 460 lowering frame

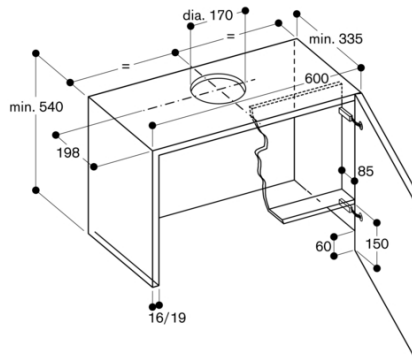

AF200160
Flat kitchen hood 200 series
Stainless steel handle bar
Width 60 cm
Air extraction/recirculation

created on 2021-09-28
Page 3

