



AW442190

A

#### Optional accessories

AA400510:

Window contact switch with cable

AA442110:

Active charcoal filter for AA 442 810

AA442810:

Recirculation module w.active charcoal

AD442392:

Ceiling Collar Stainless Steel Wall

#### Installation Accessories

AD442012:

Chimney exhaust air stainless steel

AD442022:

Chimney exhaust air stainless steel

AD442112:

Chimney recirculation stainless steel

AD442122:

Chimney recirculation stainless steel

#### Wall-mounted hood 400 series

90 cm, Stainless steel

AW442190

#### – Perfect Integration with Vario Cooktops 400 series

– Professional technology hood combined with classic Gaggenau design

Highly efficient extraction of cooking vapours due to large vapour collection area

Motorless, can be combined with Gaggenau BLDC remote fan units

Angled baffle filter with high grease absorption  
Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Air extraction or recirculation system

Recirculation module with activated charcoal filter: Silent and highly efficient air recirculation solution with odour reduction comparable to air extraction and long replacement intervals

#### Output

Power levels depend on the remote fan unit.

#### Features

Three electronically controlled power levels and an intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Baffle filter, dishwasher-safe.

Easy mounting system for simple installation and alignment.

#### Planning notes

Connection to the respective appliances via network cable.

Clearance above gas appliances min. 70 cm.

Clearance above electric appliances min. 60 cm.


Air recirculation module with 2 activated charcoal filters is installed in the inner chimney. Special air recirculation chimneys are available for this.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection


Total connected load 30 W.

Connecting cable 1.8 m, pluggable.

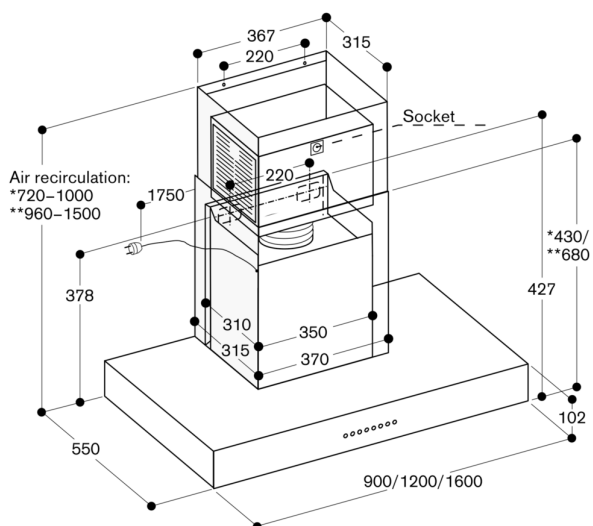

\* With air recirculation chimney AD 442 112, suitable for ceiling heights from 2.35 m to 2.60 m.

\*\* With air recirculation chimney AD 442 122, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

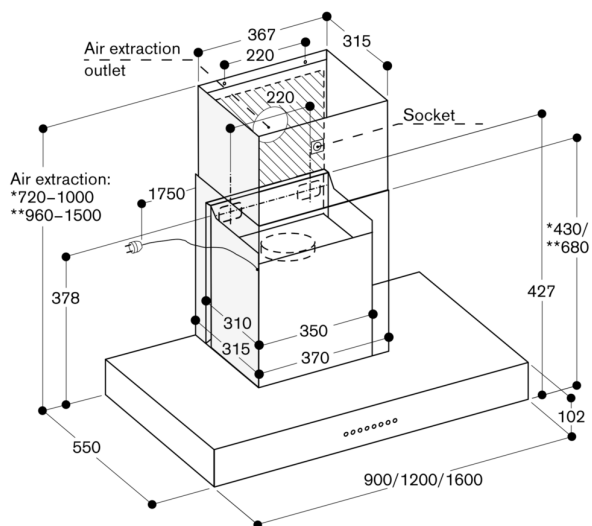

\* With air extraction chimney 442 012, suitable for ceiling heights from 2.35 m to 2.60 m.

\*\* With air extraction chimney AD 442 022, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.