



**BO470111**  
**Oven 400 series**  
**Stainless steel-backed full glass door**  
**Width 60 cm**  
**controls at the top**

Handleless door / automatic door opening  
 Pyrolytic system  
 17 heating methods, with core temperature probe, rotisserie spit and baking stone function  
 TFT touch display  
 Panel-free appliance with surface control module  
 Electronic temperature control from 30 °C to 300 °C  
 76 litres net volume

#### Heating methods

Hot air. Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proofing. Defrosting. Keeping warm.

#### Handling

Automatic door opening.  
 Rotary knob and TFT touch display operation.  
 Option to save individual recipes (incl. core temperature probe).  
 Information key with use indications.  
 Side-opening door opens up to 180° angle.

#### Features

Core temperature probe with automatic shut-off.  
 Rotisserie spit.  
 Baking stone socket.  
 Actual temperature display.  
 Rapid heating.  
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.  
 60 W halogen light on the top.  
 2 x 10 W halogen light on the side.  
 Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

#### Safety

Thermally insulated door with quadruple glazing.  
 Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

#### Cleaning

Pyrolytic system.  
 Gaggenau enamel.  
 Heated air cleaning catalyser.

#### Planning notes

Door hinge not reversible.  
 The door panel surface of the appliance extends 47 mm from the furniture cavity.  
 If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.  
 Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the 90° door opening angle.  
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.  
 The mains socket needs to be planned outside of the built-in niche.

#### Characteristics

**Color / Material Front**  
 Stainless steel  
**Construction type**  
 Built-in  
**Integrated Cleaning system**  
**Required niche size for installation (HxWxD)**  
 590-590 x 560-560 x 550  
**Dimensions**  
 595 x 590 x 547  
**Dimensions of the packed product (HxWxD) (mm)**  
 780 x 760 x 680  
**Control Panel Material**  
**Door Material**  
 Stainless steel behind glass  
**Net weight (kg)**  
 62.109  
**Usable volume of cavity (l)**  
 76  
**Cooking method**  
 Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, Roaster function, Top heat, warming  
**First cavity material**  
**Temperature control**  
 electronic  
**Number of interior lights**  
 3  
**Approval certificates**  
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE  
**Length of electrical supply cord (cm)**  
**EAN code**  
 4242006240196

#### Consumption and connection features

**Number of cavities (2010/30/EC)**  
 1  
**Energy efficiency rating**  
 A  
**Energy consumption per cycle conventional (2010/30/EC)**  
 1.25  
**Energy consumption gas oven per cycle conventional (2010/30/EC)**  
**Energy consumption per cycle forced air convection (2010/30/EC)**  
 0.83  
**Energy consumption gas oven per cycle forced air convection (2010/30/EC)**  
**Energy efficiency index (2010/30/EC)**  
 95.4  
**Connection rating (W)**  
 3700  
**Current (A)**  
 16  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 50  
**Plug type**  
 fixed connection, no plug

created on 2020-09-29

Page 1

## Connection

Total connected load 3.7 KW.  
 Plan a connection cable.


#### Color Variants

**BO470111**  
**Stainless steel-backed full glass door**  
**Width 60 cm**


#### Optional accessories

**BA026115**  
**Baking tray, enamelled**  
**BA046115**  
**Glass tray**  
**BA056133**  
**Baking stone**  
**BS020002**  
**Pizza paddle, set of 2**  
**GN340230**  
**Gastronorm roaster in cast aluminium**

BO470111  
 Oven 400 series  
 Stainless steel-backed full glass door  
 Width 60 cm  
 controls at the top  
 created on 2020-09-29  
 Page 2

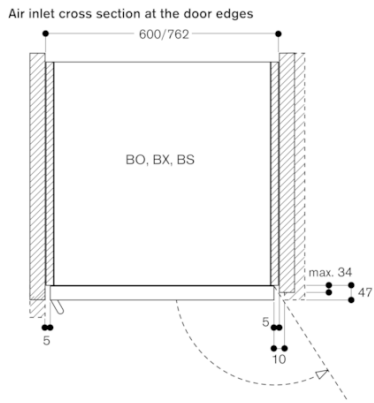

When installed next to each other

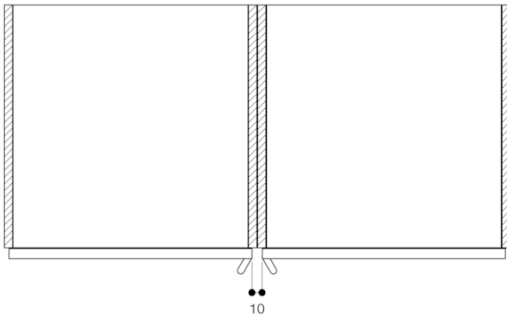

Cross section of the top/bottom door edge gaps

