



BS454110
Combi-steam oven 400 series
Stainless steel-backed full glass door
Width 60 cm
Controls at the bottom



Handleless door / automatic door opening
 Water tank
 Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
 TFT touch display
 Panel-free appliance with surface control module
 Steaming without pressure
 Electronic temperature control from 30 °C to 230 °C
 Core temperature probe, removable

Heating methods
 Hot air + 100 % humidity.
 Hot air + 80 % humidity.
 Hot air + 60 % humidity.
 Hot air + 30 % humidity.
 Hot air + 0 % humidity.
 Dough proofing.
 Defrosting.
 Regenerating.
 Low temperature cooking.

Handling
 Automatic door opening.
 Rotary knob and TFT touch display operation.
 Option to save individual recipes (incl. core temperature probe).
 Information key with use indications.
 Side-opening door opens up to 180° angle.

Features
 Removable 1.3 litre water tank.
 Water level warning.
 Core temperature probe with automatic shut-off.
 Actual temperature display.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 Electronic boiling point detection.
 60 W halogen light on the side.
 Hygienic stainless steel cooking interior.
 3 tray levels.

Safety
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning
 Cleaning aid.
 Drying programme.
 Descaling programme.
 Grease filter, dishwasher-safe.

Planning notes
 Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 47 mm from the furniture cavity.
 If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.
 Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 90° door opening angle.
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

Characteristics
Color / Material Front
 Built-in
Construction type
 Built-in
Door opening
 Lateral
Required niche size for installation (HxWxD)
Dimensions
Dimensions of the packed product (HxWxD)
 575 x 660 x 690
Control Panel Material
Door Material
 Stainless steel behind glass
Net weight
 35.936
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Length of electrical supply cord
EAN code
 4242006217167
Electrical connection rating
Fuse protection
 8
Voltage
 220-240
Frequency
 50; 60
Plug type
 fixed connection, no plug
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Number of cavities (2010/30/EC)
 1
Usable volume (of cavity) - NEW (2010/30/EC)
 42
Energy efficiency rating
 A+
Energy consumption per cycle conventional (2010/30/EC)
Energy consumption gas oven per cycle conventional (2010/30/EC)
Energy consumption per cycle forced air convection (2010/30/EC)
 0.57
Energy consumption gas oven per cycle forced air convection (2010/30/EC)
Energy efficiency index (2010/30/EC)
 78.1

Consumption and connection features
 created on 2021-12-09
 Page 1

The mains socket needs to be planned outside of the built-in niche.

Connection
 Total connected load 1.9 KW.
 Plan a connection cable.

Color Variants

BS454110
Stainless steel-backed full glass door
Width 60 cm


Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.
 1 x STS tray-GN2/3-unpunched-40 mm deep.
 1 x grid.
 1 x pluggable meat probe.

Optional accessories

GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3
GN124130
Gastronorm insert, stainless steel, GN 1/3
GN124230
Gastronorm insert, stainless steel, GN 2/3
GN340230
Gastronorm roaster in cast aluminium

BS454110
Combi-steam oven 400 series
Stainless steel-backed full glass door
Width 60 cm
Controls at the bottom
created on 2021-12-09
Page 2

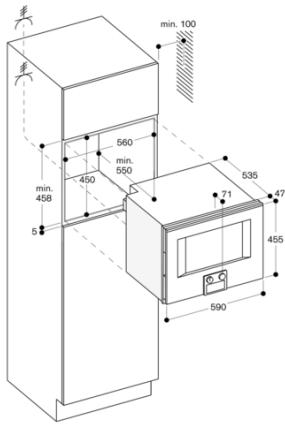

Side view of BS 454/455, BM 454/455 above BO

