



BSP221130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Controls at the top

Characteristics
Color / Material Front
Construction type
 Built-in
Door opening
 Lateral
Required niche size for installation (HxWxD)
Dimensions
 455 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
 575 x 660 x 690
Control Panel Material
Door Material
 Glass
Net weight (kg)
 34.658
Approval certificates
 CE, VDE
Length of electrical supply cord (cm)
 150
EAN code
 4242006217464
Connection rating (W)
 1900
Current (A)
 8
Voltage (V)
 220-240
Frequency (Hz)
 50; 60
Plug type
 fixed connection, no plug
Approval certificates
 CE, VDE

Consumption and connection features
 created on 2021-01-27
 Page 1

Color Variants
BSP221130
Full glass door in Gaggenau Silver
Width 60 cm
BSP221100
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP221110
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories
 1 x STS tray-GN2/3-punched-40 mm deep.
 1 x STS tray-GN2/3-unpunched-40 mm deep.
 1 x grid.

Optional accessories
GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3
GN124130
Gastronorm insert, stainless steel, GN 1/3
GN124230
Gastronorm insert, stainless steel, GN 2/3
GN340230
Gastronorm roaster in cast aluminium

Product Variants
BSP220130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Controls at the top

Flush installation
 Water tank
 Steaming without pressure with 100% humidity from 30 °C to 100 °C
 TFT touch display
 Panel-free appliance with surface control module
 Electronic temperature control from 30 °C to 100 °C

Heating methods
 100 % humidity.
 Slow steaming.
 Dough proofing.
 Defrosting.
 Regenerating.
 Low temperature steaming.

Handling
 Rotary knob and TFT touch display operation.
 Information key with use indications.
 Side-opening door opens up to 110° angle.

Features
 Removable 1.3 litre water tank.
 Water level warning.
 Actual temperature display.
 Electronic boiling point detection.
 60 W halogen light on the side.
 Hygienic stainless steel cooking interior.
 3 tray levels.


Safety
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning
 Cleaning aid.
 Descaling programme.

Planning notes
 Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
 The mains socket needs to be planned outside of the built-in niche.

Connection
 Total connected load 1.9 KW.
 Connection cable 1.5 m without plug.

BSP221130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Controls at the top
created on 2021-01-27
Page 2

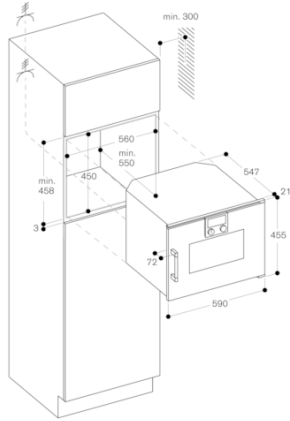

Side view of BSP, BMP over BOP

