



**BSP221131**

#### Included accessories

1 x grid  
punched  
1 x STS tray  
unpunched  
40 mm deep

#### Optional accessories

**BA220370:**  
Container st. steel perf for BSP22\*

**GN114130:**  
GN insert unperf, st. steel, GN1/3, 40mm

**GN114230:**  
GN insert unperf, st. steel, GN2/3, 40mm

**GN124130:**  
GN insert perf, st. steel, GN1/3, 40mm

**GN124230:**  
GN insert perf, st. steel, GN2/3, 40mm

**BA046117:**  
Glass tray, for 60cm oven

**BA220360:**  
Container st. steel unperf for BSP22\*

#### installation accessories

**Steam oven 200 series**  
**60 x 45 cm, door hinge: left, Gaggenau Silver**  
**BSP221131**

- Flush installation
- Water tank for fresh and waste water
- Flush installation

Water tank  
Large cavity  
LED light source  
External steam generation  
Steaming without pressure with 100% humidity  
from 30 °C to 100 °C  
Sous-vide cooking with accurate temperature  
regulation  
TFT touch display  
Panel-free appliance with surface control  
module  
Electronic temperature control from 30 °C to  
100 °C  
59 litres net volume

#### Heating methods

100 % humidity.  
Sous-vide cooking. Dough proofing. Defrosting.  
Regenerating. Low temperature steaming.

#### Handling

Rotary knob and TFT touch display operation.  
Clear text display.  
Personalisation of automatic programmes.  
Information key with use indications.  
Side-opening door opens up to 110° angle.

#### Features

Removable 1.7 litre water tank.  
Water level warning.  
Actual temperature display.  
Timer functions: cooking time, cooking time end,  
timer, stopwatch, long-term timer (certified by  
Star-K).  
Automatic boiling point detection.  
LED light on the side.  
Hygienic stainless steel cooking interior.  
3 tray levels.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.  
Recipes.  
Home network integration for digital services  
(Home Connect) either via cable connection  
LAN (recommended) or wireless via WiFi.  
The availability of the Home Connect  
functionality depends on the availability of the  
Home Connect Services in your country. Home  
Connect Services are not available in every  
country – for further information please check:  
[www.home-connect.com](http://www.home-connect.com)

#### Safety

Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
Descaling programme for the steam generator.

#### Planning notes

Door hinge not reversible.

No other electrical appliances should be  
installed above the BS.

The door panel surface of the appliance extends  
21 mm from the furniture cavity.

The outer edge of the door handle extends 72  
mm from the furniture cavity.

Necessary lateral gap between appliance door  
and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle,  
when planning to open drawers next to the  
appliance.

When planning a corner solution, pay attention  
to the side-opening door and the minimum  
required distance to the wall.


The main socket needs to be planned outside of  
the niche.

The LAN port can be found at the back on the  
lower left side.

Special accessories (order as spare part):  
Part No. 17002490 Descaling tablets.

#### Connection

Total connected load 2.8 KW.  
Connecting cable 1.8 m with plug.  
Plan a LAN cable.  
Power consumption standby/display on 0.8 W.  
Power consumption standby/display off 0.5 W.  
Power consumption standby/network 1.8 W.  
Time auto-standby/display on 20 min.  
Time auto-standby/display off 20 min.#  
Time auto-standby/network 20 min.  
Please check the user manual for how to switch  
off the WiFi module.

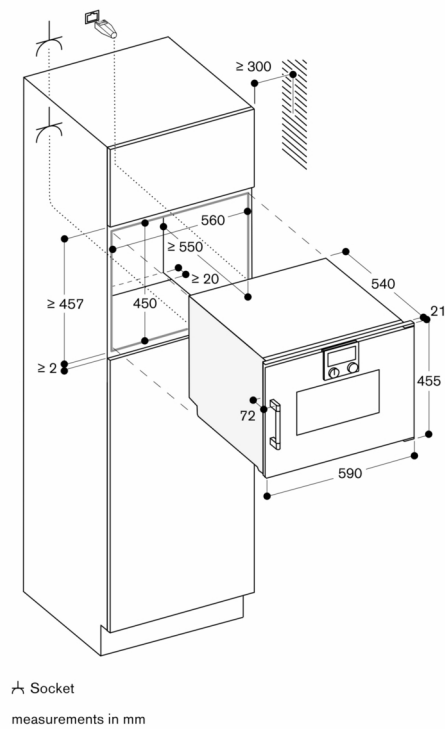

Side view of BSP 220/250 above BOP

