



**BX481112**



2 x enamel baking tray, suit. pyrolytic clean

1 x rotary spit

2 x grill shelf

2 x grill tub with grid

1 x pluggable meat probe

**BS020002:**

Set of 2 pizza paddles

**GN340230:**

Gastronorm roaster GN 2/3

**BA038105:**

Wire shelf, for 76cm/90cm oven

**BA058115:**

Heating elem. 230 V, for 76cm/90cm oven

**BA058133:**

Baking stone for 76cm/90cm oven

**BA018105:**

1 telescopic shelf rail, 76cm/90cm oven

**BA028115:**

Baking tray, for 76cm/90cm oven

## Double oven 400 series

### BX481112

- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
  - Pyrolytic cleaning programme heats up to 485 °C
  - Pyrolytic system
- 17 heating methods, with core temperature probe, rotisserie spit and baking stone function
- Core temperature probe with estimation of cooking time
- TFT touch display
- Electronic temperature control from 30 °C to 300 °C

### Heating methods

Hot air.

Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proofing. Defrosting. Keeping warm.

### Handling

Rotary knob and TFT touch display operation.

Clear text display.

Information key with use indications.

Side-opening door opens up to 180° angle.

### Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Rotisserie spit (lower oven).

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).

60 W halogen light on the top.

2x10 W halogen light on the side.

Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.

### Safety

Thermally insulated door with quadruple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

### Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated air cleaning catalyser.

### Planning notes

Door hinge not reversible.

The façade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.


The main socket needs to be planned outside of the niche.

### Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 9.2 KW.

Plan a connection cable.

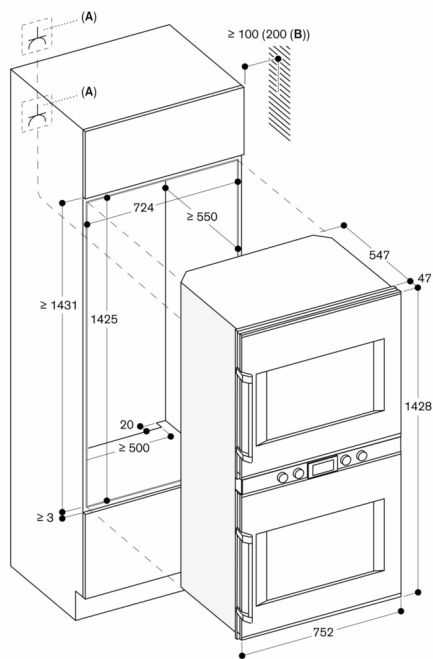

A: Electrical connection  
 B: 200 mm in conjunction with BA 018  
 Measurements in mm