



Color Variants

CM450111
Stainless steel behind glass-backed full glass door
Width 60 cm

CM450101
Full glass door in Gaggenau Anthracite
Width 60 cm

Included accessories

1 x assembly screws.
1 x scoop.
1 x test strip.
1 x milk container (insulated).
1 x connection hose for milk frother.
1 x milk pipe.

CM450111
Fully automatic espresso machine 400 series

Stainless steel behind glass-backed full glass door

Width 60 cm

controls at the top

Handleless door / automatic door opening
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
Seven light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto. Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato. Coffee / 2 x Coffee. Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White. Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Personalisation function, up to 8 beverages can be personalised and memorised.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
Coffee: 3 levels.
Hot water: 10 grades.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for one beverage.
Double grinding and brewing cycles for two beverages.
Dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.
Electronic fill level control for drip tray and container for coffee dregs.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.

Characteristics

Construction type

Built-in

Frothing nozzle

No

Display

No

Water protection system

No

Portion sizes

All cups

Dimensions

455 x 590 x 444

Dimensions of the packed product (HxWxD)

545 x 475 x 670

Required niche size for installation (HxWxD)

449 x 558 x 347

EAN code

4242006263652

Electrical connection rating

1600

Fuse protection

10

Voltage

220-240

Frequency

50/60

Plug type

Gardy plug w/ earthing

Consumption and connection features

created on 2021-11-09

Page 1

Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Coffee dregs container and drip tray dishwasher-safe.
Milk frother dishwasher-safe.


Planning notes

The façade of the appliance extends 47 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high WS in 59 cm standardised niche.
Special accessories (order as spare parts): Part No. 17000705 Water filter Part No. 00311819 Descaling tablets Part No. 00311769 Cleaning tablets Part No. 00636455 Door hinge restrictor (92° opening angle) Part No. 11015223 Bean container with lid


Connection

Total connected load Total connected load 1.6 KW.

CM450111
Fully automatic espresso machine 400
series
Stainless steel behind glass-backed full
glass door
Width 60 cm
controls at the top
created on 2021-11-09
Page 2

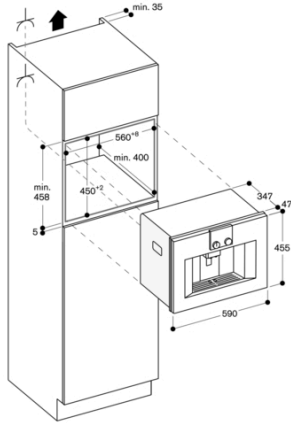

Left corner installation

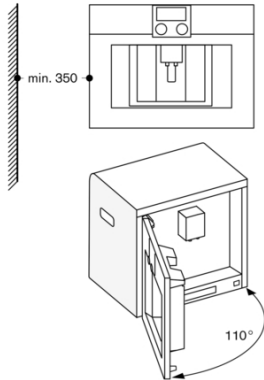

If using the 92° door hinge restrictor (spare part no. 00636455),
the minimum distance from the wall is only 100 mm.