



#### Color Variants

**CMP250101**

**Full glass door in Gaggenau Anthracite**

**Width 60 cm**

#### Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

#### CMP250101

**Fully automatic espresso machine 200 series**

**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**

**controls at the top**

Handless door / cushioned door closing system  
Continuous flow heater means no waiting time and constant brewing temperature  
Aroma brewing technology for a full aroma  
Single portion cleaning  
TFT touch display  
Panel-free appliance with surface control module  
One-touch operation  
Personalisation function  
Seven light settings  
Electronic fill level control for milk, water and coffee to ensure a perfect result

#### Type of beverage

Ristretto / 2 x Ristretto. Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato. Coffee / 2 x Coffee. Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White. Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

#### Handling

Door with cushioned door closing system.  
Rotary knob and TFT touch display operation.  
Personalisation function, up to 8 beverages can be personalised and memorised.  
4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
8 coffee strength levels from very mild to extra strong.  
Coffee: 3 levels.  
Hot water: 10 grades.  
4 coffee-milk ratio levels.  
Adjustable grinding level.  
Height-adjustable coffee dispenser 7 cm to 15 cm.  
Easy access to water tank, milk and coffee bean container behind the door.

#### Features

Maintenance-free grinding unit with ceramic discs.  
Separate drawer for second ground coffee type.  
Water pump with 19 bar pressure.  
Double grinding and brewing cycles for extra intensity for one beverage.  
Double grinding and brewing cycles for two beverages.  
Dispenser with integrated milk system.  
Insulated stainless steel milk container for up to 0.5 litres.  
Integrated lightning with LEDs.  
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
Automatic adjustment of ground coffee quantity.  
Removable 2.4 litre water tank.  
Electronic water filter exchange indicator.  
Electronic fill level control for drip tray and container for coffee dregs.

#### Safety

Child lock.

#### Cleaning

#### Characteristics

##### Construction type

Built-in

##### Frothing nozzle

No

##### Display

No

##### Water protection system

No

##### Portion sizes

All cups

##### Dimensions

455 x 590 x 426

##### Dimensions of the packed product (HxWxD)

540 x 478 x 670

##### Required niche size for installation (HxWxD)

449 x 558 x 356

##### EAN code

4242006263836

##### Electrical connection rating

1600

##### Fuse protection

10

##### Voltage

220-240

##### Frequency

50/60

##### Plug type

Gardy plug w/ earthing

#### Consumption and connection features

created on 2021-11-19

Page 1

Fully automatic rinse programme when machine is turned on/off.

Automatic steam cleaning of the milk system after every beverage.

Automatic cleaning and descaling programme.

Emptying programme to prepare the appliance for holiday or transportation.

Empty-grinding function to remove coffee residues from the system when switching bean types.

Removable brewing unit.

Coffee dregs container and drip tray dishwasher-safe.

Milk frother dishwasher-safe.

#### Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

When installing in a corner a side clearance is required.

Door opening angle appr. 110°

(delivery status) - mounting distance to the wall has to be at least 350 mm.

Door opening angle appr. 155° -

mounting distance to the wall has to be at least 650 mm.

Door opening angle appr. 92° -

mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).

Installation directly above 14 cm high

WS in 59 cm standardised niche.

Special accessories (order as spare parts): Part No. 17000705 Water filter

Part No. 00311819 Descaling tablets

Part No. 00311769 Cleaning tablets

Part No. 00636455 Door hinge restrictor


(92° opening angle) Part No. 11015223

Bean container with lid


#### Connection

Total connected load Total connected load 1.6 KW.

# GAGGENAU

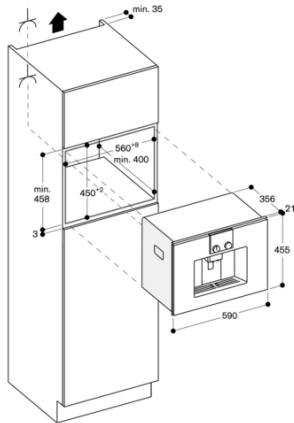

Left corner installation

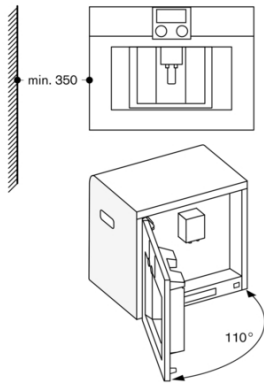

If using the 92° door hinge restrictor (spare part no. 00636455),  
the minimum distance from the wall is only 100 mm.