



Color Variants

CMP270101
Full glass door in Gaggenau Anthracite
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CMP270101
Fully automatic espresso machine 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
controls at the top

Handless door / cushioned door closing system
Fixed inlet and outlet water connection
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
Seven light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

- Ristretto / 2 x Ristretto.
- Espresso / 2 x Espresso.
- Espresso Macchiato / 2 x Espresso Macchiato.
- Coffee / 2 x Coffee.
- Americano / 2 x Americano.
- Caffe Latte / 2 x Caffe Latte.
- Latte Macchiato / 2 x Latte Macchiato.
- Cappuccino / 2 x Cappuccino.
- Flat White / 2 x Flat White.
- Milk froth / 2 x Milk froth.
- Warm milk / 2 x Warm milk.
- Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
Rotary knob and TFT touch display operation.
Personalisation function, up to 8 beverages can be personalised and memorised.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
Coffee: 3 grades.
Hot water: 10 grades.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for one beverage.
Double grinding and brewing cycles for two beverages.
Dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.
Fresh water-function to refill the water tank with fresh water.

Characteristics
Construction type
Built-in
Frothing nozzle
No
Display
No
Water protection system
No
Portion sizes
All cups
Dimensions
455 x 590 x 519
Dimensions of the packed product (HxWxD)
540 x 478 x 670
Required niche size for installation (HxWxD)
449 x 558 x 356
EAN code
4242006263898
Electrical connection rating
1600
Fuse protection
10
Voltage
220-240
Frequency
50/60
Plug type
Gardy plug w/ earthing

Consumption and connection features

created on 2021-09-21
Page 1

Electronic fill level control for drip tray and container for coffee dregs.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Coffee dregs container and drip tray dishwasher-safe.
Milk frother dishwasher-safe.


Planning notes

Left-hinged
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high WS in 59 cm standardised niche.
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 150 mm lower than the appliance outlet (see drawing "drainage connection").
If the appliance is placed too far from the main siphon, the drain system has to be adjusted on-site (building installation).
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.
Special accessories (order as spare parts):
Part No. 17000705 Water filter
Part No. 00311819 Descaling tablets
Part No. 00311769 Cleaning tablets
Part No. 00636455 Door hinge restrictor (92° opening angle)
Part No. 11015223 Bean container with lid


Connection

Total connected load Total connected load 1.6 KW.
Only cold water connection.
Inlet hose 165 cm with 3/4 " (26.4 mm) connection, extendable.
Outlet hose (ø 18 mm) 170 cm (HT-Hose).


Drainage connection

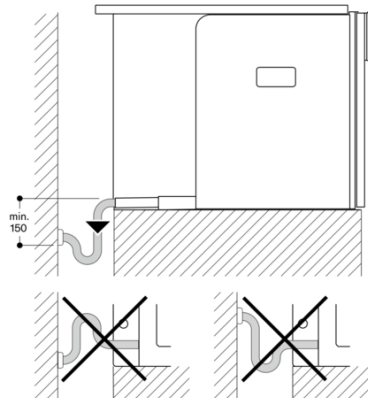

View from rear

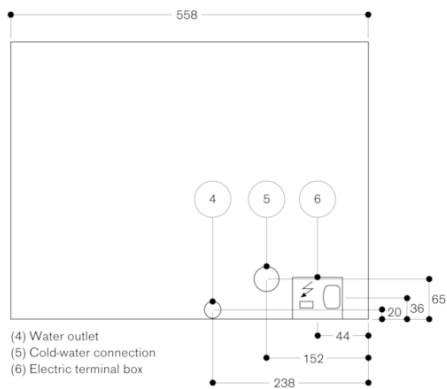

Left corner installation

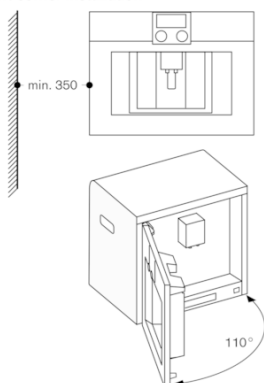

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.

