



Color Variants

DF260164F
fully integrated
with flexible hinge

Included accessories

1 x baking tray spray head.

Optional accessories

DA041160
DA042030
Silvercare cartridge for all dishwashers
DA043000
Holder for long-stemmed glasses

Installation Accessories

GH045010
Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm
GZ010011
Aqua stop extension (2 m long)

DF260164F

Dishwasher 200 series

fully integrated

with flexible hinge

Height 81.5 cm

Optional door opening at the end of the programme to support the hygienic drying process

6 programmes with aqua sensor and 4 options, such as Power and Intensive: Clean and dry dishes in 59 minutes
Intensive cleaning in the lower basket while protecting glassware in the upper basket

Flexible basket system with smooth running rails on all levels
Bright interior light
Very quiet: 42 dB
Energy efficiency class A++
Aqua stop with guarantee

Handling

Touch key operation.
Time delay up to 24 hours.
Info-Light.

Features

Bright interior light.
Glass protection.
Aqua sensor.
Load sensor.
Automatic detergent function.
Regeneration electronics.
Heat exchanger - Hygienic and efficient drying
Continuous flow heater.
Triple filter system, self-cleaning.
Soft lock.
Aqua stop.

Programmes

6 programmes:
Auto 65 °C - 75 °C.
Auto 45 °C - 65 °C.
Auto 35 °C - 45 °C
Standard Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.
4 options:
Intensive.
Power.
Half Load.
Holiday.

Features

Flexible basket system with smooth running rails on all levels.
Upper basket:
Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.
Lower basket:
8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.
Maximum dish sizes (upper/lower basket)
27/25, 24.5/27.5 or 22/31 cm respectively.
12 place setting capacity.
Maximum glass loading capacity 23 wine glasses.

Product rating

From 9.5 l water.
From 0.9 kWh.
Noise level 42 dB (re 1 pW).

Planning notes

Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 8.5 kg.

Characteristics

Water consumption (l)

9.5

Construction type

Built-in

Height of removable worktop (mm)

0

Dimensions of the product (HxWxD)

815 x 598 x 550

Required niche size for installation (HxWxD)

815-875 x 600 x 550

Depth with open door 90 degree (mm)

1150

Adjustable feet

Yes - all from front

Maximum adjustability feet (mm)

60

Adjustable plinth

both horizontal and vertical

Net weight (kg)

43.777

Gross weight (kg)

46.0

Connection rating (W)

Current (A)

10

Voltage (V)

220-240

Frequency (Hz)

50; 60

Length of electrical supply cord (cm)

175

Plug type

Gardy plug w/ earthing

Length inlet hose (cm)

165

Length outlet hose (cm)

190

EAN code

4242006271565

Number of place settings

12

Energy efficiency rating

Energy consumption annual (kWh/ annum) - NEW (2010/30/EC)

258.00

Energy consumption (kWh)

0.90

Power consumption in left-on mode (W) - NEW (2010/30/EC)

0.50

Power consumption in off-mode (W) - NEW (2010/30/EC)

0.50

Water consumption annual (l/annum) - NEW (2010/30/EC)

2660

Drying performance

A

Reference programme

Eco

Total cycle time of reference programme (min)

195

Noise level (dB(A) re 1 pW)

42

Installation type

Full-integrated

Consumption and connection features

created on 2021-07-08

Page 1


Door panel dimension dependent on plinth height of kitchen furniture.
For installation into a tall unit, ventilation openings are required (min. 200 cm²).

Connection

Connecting cable plugable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

GAGGENAU

Connection dimensions for a 60 cm wide dishwasher

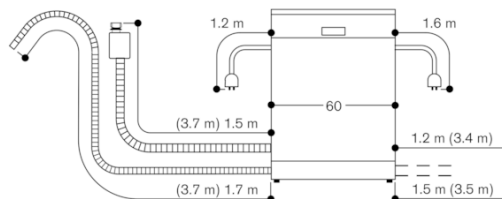

() values with extension kit

81.5 cm high dishwasher with flexible hinge

