



DF261164F
Dishwasher 200 series
fully integrated
with flexible hinge
Height 86.5 cm

Optional door opening at the end of the programme to support the hygienic drying process
 6 programmes with aqua sensor and 4 options, such as Power and Intensive: Clean and dry dishes in 59 minutes Intensive cleaning in the lower basket while protecting glassware in the upper basket
 Flexible basket system with smooth running rails on all levels
 Bright interior light
 Very quiet: 42 dB
 Energy efficiency class A++
 Aqua stop with guarantee

Handling
 Touch key operation.
 Time delay up to 24 hours.
 Info-Light.

Features
 Bright interior light.
 Glass protection.
 Aqua sensor.
 Load sensor.
 Automatic detergent function.
 Regeneration electronics.
 Heat exchanger - Hygienic and efficient drying
 Continuous flow heater.
 Triple filter system, self-cleaning.
 Soft lock.
 Aqua stop.

Programmes
 6 programmes:
 Auto 65 °C - 75 °C.
 Auto 45 °C - 65 °C.
 Auto 35 °C - 45 °C
 Standard Eco 50 °C.
 Quick wash 45 °C (29 min.).
 Pre-rinse.
 4 options:
 Intensive.
 Power.
 Half Load.
 Holiday.

Features
 Flexible basket system with smooth running rails on all levels.
 Upper basket:
 Over extension.
 Rackmatic with 3 levels, adjustable in height up to 5 cm.
 6 folding spines.
 4 folding racks.
 2 glass support bars.
 Lower basket:
 8 folding spines.
 2 folding racks.
 Dividable glass support.
 Cutlery basket.
 Maximum dish sizes (upper/lower basket)
 29/28, 26.5/30.5 or 24/34 cm respectively.
 12 place setting capacity.
 Maximum glass loading capacity 23 wine glasses.

Product rating
 From 9.5 l water.
 From 0.9 kWh.
 Noise level 42 dB (re 1 pW).

Planning notes
 Height-adjustable feet.
 Appliance plinth recess 100 mm (see drawing).
 Rear feet adjustable at front.
 Door weight up to 10 kg.

Characteristics
Water consumption (l)
 9.5
Construction type
 Built-in
Height of removable worktop (mm)
 0
Dimensions of the product (HxWxD)
 865 x 598 x 550
Required niche size for installation (HxWxD)
 865-925 x 600 x 550
Depth with open door 90 degree (mm)
 1200
Adjustable feet
 Yes - all from front
Maximum adjustability feet (mm)
 60
Adjustable plinth
 both horizontal and vertical
Net weight (kg)
 45.688
Gross weight (kg)
 48.0
Connection rating (W)
Current (A)
 10
Voltage (V)
 220-240
Frequency (Hz)
 50; 60
Length of electrical supply cord (cm)
 175
Plug type
 GARDY plug w/ earthing
Length inlet hose (cm)
 165
Length outlet hose (cm)
 190
EAN code
 4242006271572
Number of place settings
 12
Energy efficiency rating
Energy consumption annual (kWh/ annum) - NEW (2010/30/EC)
 258.00
Energy consumption (kWh)
 0.90
Power consumption in left-on mode (W) - NEW (2010/30/EC)
 0.50
Power consumption in off-mode (W) - NEW (2010/30/EC)
 0.50
Water consumption annual (l/annum) - NEW (2010/30/EC)
 2660
Drying performance
 A
Reference programme
 Eco
Total cycle time of reference programme (min)
 195
Noise level (dB(A) re 1 pW)
 42
Installation type
 Full-integrated

Consumption and connection features
 created on 2021-07-08
 Page 1

Door panel dimension dependent on plinth height of kitchen furniture. For installation into a tall unit, ventilation openings are required (min. 200 cm²).

Connection
 Connecting cable plugable.
 Water connection with 3/4" screw joint.
 Connection to hot or cold water possible.


Color Variants
DF261164F
fully integrated
with flexible hinge

Included accessories
 1 x baking tray spray head.

Optional accessories
DA041160
DA042030
Silvercare cartridge for all dishwashers
DA043000
Holder for long-stemmed glasses

Installation Accessories
GH045010
Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm
GZ010011
Aqua stop extension (2 m long)

Connection dimensions for a 60 cm wide dishwasher

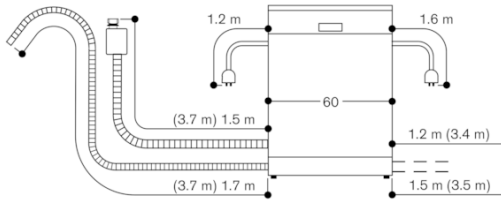

() values with extension kit

86.5 cm high dishwasher with flexible hinge

