



DV061100

Optional accessories

installation accessories

Vacuumping drawer 400 series

60 x 14 cm

DV061100

- 3 vacuuming levels for vacuuming in the chamber, max. 99%
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%
- 99% vacuuming inside the chamber
- Hygienic stainless steel interior with glass bottom
- Integrable in 14 cm high niche

Hygienic stainless steel vacuuming chamber, applicable height up to 95 mm

3 vacuuming levels for vacuuming in the chamber, max. 99%

3 vacuuming levels for vacuuming outside the chamber, max. 90%

Automatic connection recognition for vacuuming outside the chamber

Cushioned closing system

Application

Vacuumping for sous-vide cooking.

Vacuumping for fast marinating and flavouring.

Vacuumping for fast marinating and flavouring.

Vacuumping of vacuuming containers outside the chamber.

Vacuumping of liquids in bottles outside the chamber.

Handling

Touch key operation.

Features

Net volume 7 litres.

Capacity load max. 10 kg.

Maximum size of vacuuming bags W 240 mm x L 350 mm.

3 heat-sealing levels for different strengths of bag material.

Sealing bar, non-stick coating, removable.

Safety glass cover, opens automatically after vacuuming.

Raised vacuuming platform, 44 mm, deployable.

Utility space in vacuuming chamber, W 210 mm x L 275 mm.

Membrane for avoiding reflow of liquids during vacuuming outside the chamber.

Drying programme for vacuuming pump.

Warning function.

Planning notes

Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.

Front weight up to 3 kg.

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.

Built-in under worktop or in single niche.

The socket can be planned behind the appliance.

Special accessories (order as spare parts):


Part No. 00578813 vacuuming bags, small Part

No. 00578814 vacuuming bags, big.

Connection

Total connected load 0.32 KW.

Connection cable 1.5 m, pluggable.

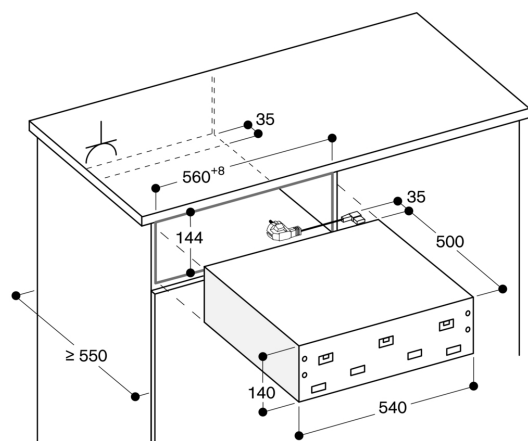

Socket

measurements in mm