



EB333111
Oven 300 series
stainless steel
Width 90 cm



One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel
Cushioned door opening and closing system
Diagonally positioned light sources for optimal interior lighting
Pyrolytic system
17 heating methods, with core temperature probe, rotisserie spit and baking stone function
Automatic programmes
Core temperature probe with estimation of cooking time
Hot air fan rotates in both directions for ideal heat distribution
TFT touch display
Panel-free appliance with control module behind glass
Electronic temperature control from 30 °C to 300 °C
83 litres net volume

Heating methods

Hot air.
Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proofing. Defrosting. Keeping warm.

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programmes.
Information key with use indications.
Front-hinged door with 90° door opening angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programmes.
Rotisserie spit.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer (certified by Star-K).
60 W halogen light on the top.
2 x 10 W halogen light on the side.
Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.
Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Safety

Thermally insulated door with quintuple glazing.
Child lock.
Safety shut-off.

Characteristics

Color / Material Front
Stainless steel

Construction type
Built-in

Integrated Cleaning system
Pyrolytic

Required niche size for installation (HxWxD)
475-475 x 860-860 x 560

Dimensions
480 x 890 x 550

Dimensions of the packed product (HxWxD)
660 x 730 x 1000

Control Panel Material
Stainless steel

Door Material
Stainless steel behind glass

Net weight
79.0

Usable volume of cavity
83

Cooking method
Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, Roaster function, Top heat, warming

First cavity material

Oven control
electronic

Number of interior lights
3

Approval certificates
Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE

Length of electrical supply cord
EAN code
4242006284848

Number of cavities (2010/30/EC)
1

Energy efficiency rating
A

Energy consumption per cycle conventional (2010/30/EC)
1.32

Energy consumption gas oven per cycle conventional (2010/30/EC)

Energy consumption per cycle forced air convection (2010/30/EC)
0.86

Energy consumption gas oven per cycle forced air convection (2010/30/EC)

Energy efficiency index (2010/30/EC)
95.6

Connection rating
5380

Fuse protection
25

Voltage
220-240

Frequency
50

Plug type
fixed connection, no plug

Consumption and connection features

created on 2022-06-10
Page 1

Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated air cleaning catalyser.

Planning notes

The door panel surface of the appliance extends 40 mm from the furniture cavity.

The outer edge of the door handle extends 90 mm from the furniture cavity.

For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

The main socket needs to be planned outside of the niche.

The LAN port can be found at the back on the upper left side.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 5.4 KW.

Plan a connection cable.

Plan a LAN cable.

Power consumption standby/display on 0.7 W.

Power consumption standby/display off 0.5 W.

Power consumption standby/network 1.5 W.


Time auto-standby/display on 20 min.

Time auto-standby/display off 20 min.#

Time auto-standby/network 20 min.

Please check the user manual for how to switch off the WiFi module.

EB333111
Oven 300 series
stainless steel
Width 90 cm
created on 2022-06-10
Page 2

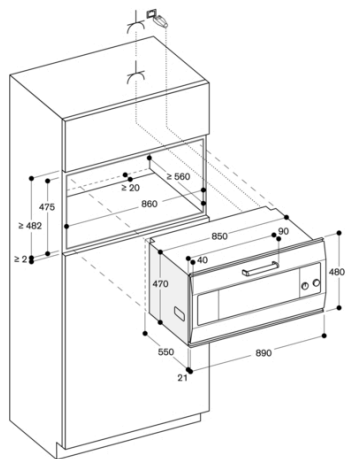

Socket
measurements in mm