



GW483120

warming drawer Gaggenau Expressive series  
76 x 21 cm, Stainless steel behind smoked glass  
**GW483120**

- Handleless opening with a light push for convenience and style
- Hygienic stainless steel and glass interior for effortless cleaning and elegant design
- Six power levels and four heating modes ensure consistent temperature control for various culinary needs
- Seamlessly integrated with multiple Gaggenau appliances, offering flexibility and a harmonious aesthetics

#### Highlights

Handleless drawer

Bright interior lighting.

Push-to-open function.

Hygienic stainless steel interior with glass bottom

Direct temperature selection in the range 30 °C to 80 °C.

Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Preheating of small beverage containers.

Warming ovenware.

Keeping meals warm.

Low-temperature cooking.

Direct temperature control.

Personalisation function via Home Connect.

16 additional programmes via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 47 litres.

Volume capacity: Dinner service for 10 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.

Capacity load max. 25 kg.

Usable interior dimensions

W 701 mm x H 166 mm x D 405 mm.

Heating system for even heat distribution and stable cavity temperature.

Status indicator, visible on the frame.

Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.

Remote control and monitoring.

#### Planning notes

Plan the niche without back wall.

Protrusion from appliance front to furniture cabinet 42 mm.

Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.


Drawers installed above a dishwasher need a specific niche.

The socket can be planned behind the appliance.

#### Connection

Total connected load 0.82 KW.

Connection cable 1.75 m, pluggable.

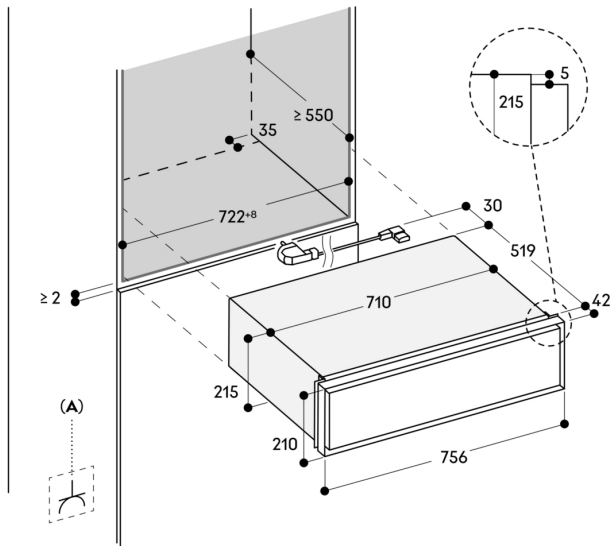

A: Accessible electrical connection  
Measurements in mm