



RC282306



Included accessories

3 x egg tray
1 x wine and champagne rack

Optional accessories

RA260000:
Heavy duty hinge support (RB 2x)

RA430100:
Storage container with lid, anthracite

installation accessories

refrigerator 200 series
177.2 x 55.8 cm, soft close flat hinge
RC282306

3 climate zones incl. 3 fresh cooling drawers close to 0 °C
Height adjustable safety glass shelves
Door racks with aluminium profiles
Combines with freezer RF 282 (side-by-side integration)
Cushioned door closing system allowing a soft and controlled door closure
Total volume 289 litres

Handling

Electronic temperature control with digital display.
Touch keys.

Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.
Integrated WiFi module for digital services (Home Connect).
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Cooling

Fast cooling.
Temperature adjustable from +3 °C to +8 °C.
6 safety glass shelves, height adjustable, of which 1 is extendable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
4 door racks with aluminium profile.
Bright interior lighting with integrated glare-free LED side light element.
Volume 206 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.
2 fully extendable fresh cooling drawers close to 0 °C, illuminated.
Ideal for meat, fish and poultry.
Net volume 83 litres.

Product rating

Energy efficiency class D at a range of energy efficiency classes from A to G.
Energy consumption 120 kWh/year.
Noise level 36 dB (A) re 1 pW.


Planning notes

Flat hinge.
Door hinge right, reversible.



Door opening angle of 115°, fixable at 90°.
Max. door panel weight 27 kg.
For a side-by-side installation every appliance must be planned in its own niche.

Connection


Connecting cable 2.3 m with plug.

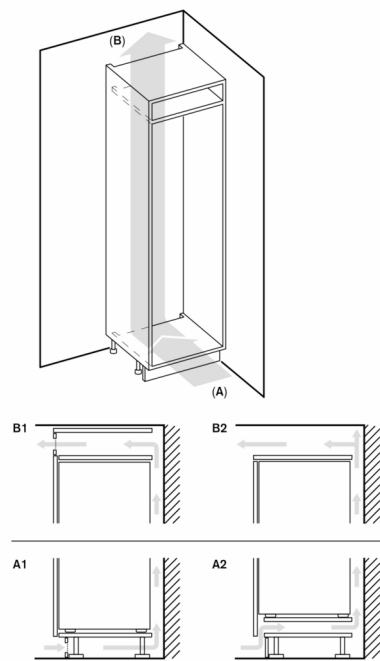

A: Air inlet ≥ 200 cm²; ventilation options A1 or A2
B: Air outlet ≥ 200 cm²; ventilation options B1 or B2

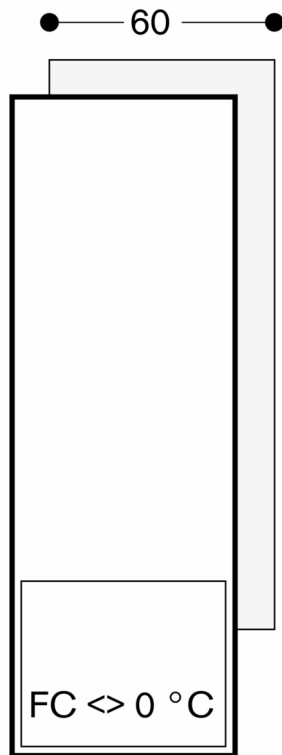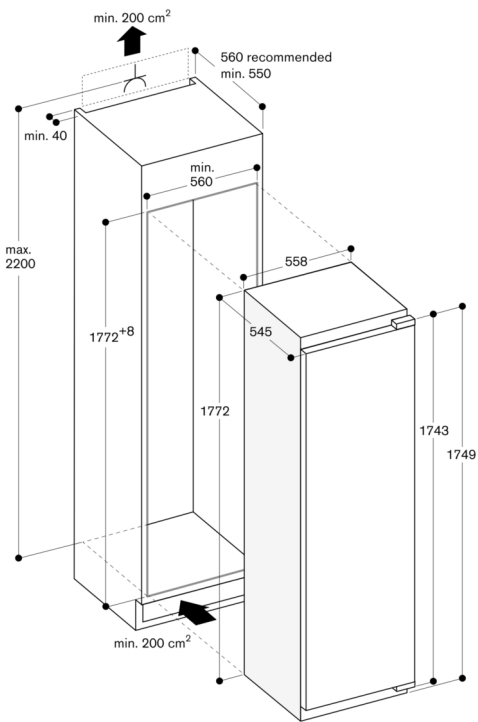

Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

F = Furniture panel thickness
R = Radius
X = Gap dimension

The gap dimensions recommended in the table must be adhered in order to ensure that the appliance door does not collide with anything when it is opened, and to avoid causing damage to furniture panels.

measurements in mm