



RC289300
Vario refrigerator 200 series
with fresh cooling close to 0 °C
fully integrated
Niche width 56 cm, Niche height 177.5 cm



Interior with precision-fitted, solid aluminium elements in Gaggenau Light Bronze
 Extendable shelves and drawers
 Intelligent lighting concept
 Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles
 Combines with freezer RF 287 (Side-by-Side-Integration)
 Cushioned door closing system allowing a soft and controlled door closure
 Smooth running fully extendable telescopic pull out racks and a cushioned closing system allow a soft and controlled closure of the drawers
 Solid maple bottle supports with magnetic connector
 Total volume 289 litres

Handling
 Electronic temperature control with digital display.
 Touch keys.

Features
 Automatic defrosting with defrost water evaporation.
 Cushioned door closing system from 20° door opening angle, integrated in door hinge.
 Open-door and malfunction alarm.
 Integrated WiFi module for digital services (Home Connect).
 The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Cooling
 Fast cooling.
 Temperature adjustable from +3 °C to +8 °C.
 1 frosted white glass shelf.
 2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.
 A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.
 The bottle supports are also suitable for storing champagne bottles and magnums.
 1 large aluminium door rack for bottles.
 4 aluminium door racks.
 Warm white interior lighting (3500 K) with integrated glare-free side lights.
 Volume 206 litres.

Fresh cooling close to 0 °C
 Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.
 Humidity can be adjusted manually.
 Ideal for fruit and vegetables.
 Ideal for meat, fish and poultry.
 Net volume 83 litres.

Product rating
 Energy efficiency class D at a range of energy efficiency classes from A to G.
 Energy consumption 120 kWh/year.
 Noise level 36 dB (A) re 1 pW.

Planning notes
 Flat hinge.
 Door hinge right, reversible.

Characteristics
Energy Efficiency Class
 D
Average annual energy consumption in kilowatt hour per year (kWh/a)
 120
Sum of volume of frozen compartments
 0
Sum of volume of chill compartments
 289
Airborne acoustical noise emissions
 36
Airborne acoustical noise emission class
 C
Construction type
 Built-in
Door panel options
 Not possible
Height
 1772
Width of the appliance
 558
Depth of the product
 545
Required niche size for installation (HxWxD)
 1775.0 x 560 x 550
Net weight
 71.8
Connection rating
 90
Fuse protection
 10
Door hinge
 Right reversible
Voltage
 220-240
Frequency
 50
Approval certificates
 CE
Length of electrical supply cord
 230
Storage Period in Event of Power Failure (h)
 1
Number of compressors
 1
Number of independent cooling systems
 1
Interior ventilator
 No
Reversible Door Hinge
 Yes
Number of Adjustable Shelves in fridge compartment (Stck)
 6
Shelves for Bottles
 Yes
Capacity of Water Tank
EAN code
 4242006290757
Brand
 Gaggenau
Product name / Commercial code
 RC289300
Product category
 Refrigerator
Frost free system
 No
Installation type
 Full-integrated

Consumption and connection features

created on 2022-06-17
 Page 1

Door opening angle of 115°, fixable at 90°.
 Max. door panel weight 22 kg.
 For a side-by-side installation every appliance must be planned in its own niche.




Connection
 Total connected load 0.090 KW.
 Connecting cable 2.3 m with plug.

Color Variants
RC289300
with fresh cooling close to 0 °C
fully integrated

Included accessories
 2 x egg tray.
 2 x wooden bottle holder magnetic.

Optional accessories
RA238030
Solid maple bottle support with magnetic connector, oiled
RA430100

RC289300
 Vario refrigerator 200 series
 with fresh cooling close to 0 °C
 fully integrated
 Niche width 56 cm, Niche height 177.5 cm
 cm
 created on 2022-06-17
 Page 2

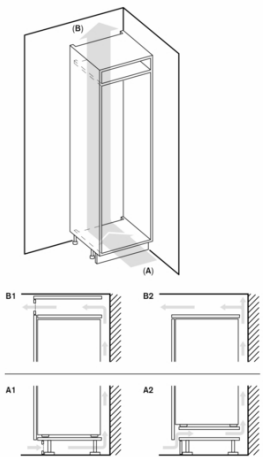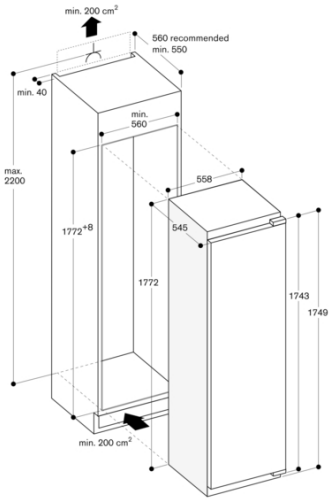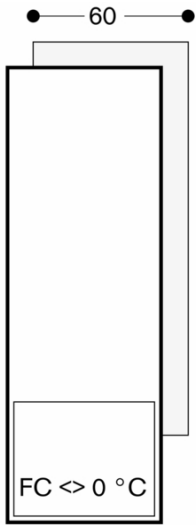

A: Air inlet \geq 200 cm²; ventilation options A1 or A2
 B: Air outlet \geq 200 cm²; ventilation options B1 or B2