



#### Color Variants

**RC462301**  
with fresh cooling close to 0 °C  
fully integrated

#### Required installation accessories

**RA460000**  
Accessory for side-by-side installation  
**RA460011**  
Additional side heating element

#### Installation Accessories

**RA421610**  
**RA425110**  
Handle bar, stainless steel, long  
**RA460020**  
Connecting element for vertically split  
appliance fronts (for a flush front)  
**RA460040**  
Finger protection for extra long  
furniture fronts

**RC462301**  
**Vario refrigerator 400 series**  
with fresh cooling close to 0 °C  
fully integrated  
Niche width 61 cm, Niche height 213.4  
cm

Stainless steel interior  
Generous lighting concept  
Solid aluminium door racks  
Net volume 369 litres  
Fresh cooling drawer, temperature  
control from 0 °C to 3 °C  
One motorised glass shelf,  
adjustable when fully loaded  
Energy efficiency class A++

#### Handling

Electronic temperature control with  
digital display.

#### Features

Dynamic cold air distribution with Multi-  
Air-Flow.  
Automatic defrosting with defrost water  
evaporation.  
Antimicrobial activated charcoal air  
filter.  
Energy-saving vacation mode.  
Open-door and malfunction alarm.

#### Cooling

Net volume 318 litres.  
No-frost technology with fast cooling.  
Temperature adjustable from +2 °C to  
+8 °C.  
4 safety glass shelves, 1 of which is  
motorised, 2 manually adjustable.  
2 fully extendable drawers with  
transparent front, 1 of which deep and  
1 shallow.  
Bright interior lighting with light pillars.  
3 height adjustable door racks, 1 of  
which is extra deep.  
1 door rack with transparent front flap.

#### Fresh cooling close to 0 °C

Net volume 51 litres.  
Separate automatic temperature  
control, with settings for fish, meat or  
vegetables.  
1 large, fully extendable drawer with  
transparent front and integrated  
lighting.

#### Product rating

Energy consumption 133 kwh/year.  
Noise level 40 dB (re 1 pW).

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at  
90°.  
Max. door panel weight 35 kg.

#### Connection

Total connected load 0.266 kW.  
Connecting cable 3.0 m, pluggable.


#### Characteristics

**Construction type**  
Built-in  
**Door panel options**  
Not possible  
**Height (mm)**  
2125  
**Width of the product (mm)**  
603  
**Depth of the product**  
608  
**Required niche size for installation  
(HxWxD)**  
2134.0 x 610 x 610  
**Net weight (kg)**  
157.205  
**Connection rating (W)**  
266  
**Current (A)**  
10  
**Door hinge**  
Right reversible  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
50  
**Approval certificates**  
CE, VDE  
**Length of electrical supply cord (cm)**  
300  
**Energy efficiency class**  
**Energy consumption (kWh)**  
**Total annual energy consumption (kWh)**  
**Refrigerator Net capacity (l)**  
**Freezer Net capacity (l)**  
**Freezing capacity (kg)**  
**Storage Period in Event of Power  
Failure (h)**  
**Number of compressors**  
1  
**Number of independent cooling  
systems**  
1  
**Interior ventilator**  
Yes  
**Reversible Door Hinge**  
Yes  
**Number of Adjustable Shelves in fridge  
compartment (Stick)**  
3  
**Shelves for Bottles**  
No  
**Capacity of Water Tank [l]**  
**EAN code**  
4242006217518



#### Consumption and connection features

**Brand**  
Gaggenau  
**Product name / Commercial code**  
RC462301  
**Energy efficiency class (2010/30/EC)**  
A++  
**Energy consumption annual (kWh/  
annum) - NEW (2010/30/EC)**  
133.00  
**Refrigerator Net capacity (l) - NEW  
(2010/30/EC)**  
369  
**Freezer Net capacity (l) - NEW  
(2010/30/EC)**  
0  
**Frost free system**  
Fridge and freezer  
**Temperature rise time (h)**  
**Freezing capacity (kg/24h) - NEW  
(2010/30/EC)**  
0  
**Climate class**  
SN-T  
**Noise level (dB(A) re 1 pW)**  
40  
**Installation type**  
N/A  
**created on** 2019-05-17  
**Page** 1


RC462301  
Vario refrigerator 400 series  
with fresh cooling close to 0° C  
fully integrated  
Niche width 61 cm, Niche height 213.4 cm  
created on 2019-05-17  
Page 2

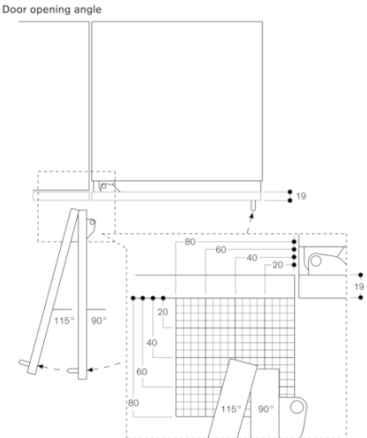

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

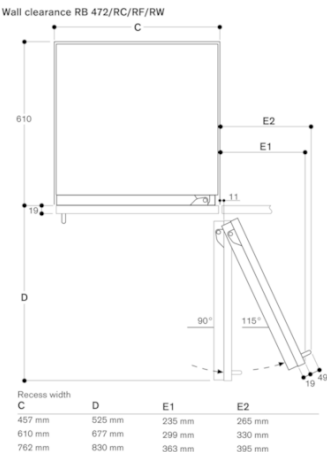

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

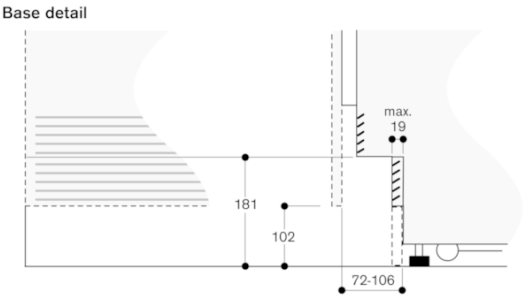

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.