



RC492304



1 x egg box with lid

RA430100:  
Storage container with lid, anthracite

RA421911:  
SS door with handle 91,4cm / 36"

RA423140:  
Side trims, long

RA425110:  
Vario SS handle 1131 mm

RA428911:  
SS door w/o handle 91,4cm / 36"

RA460000:  
Installation kit SxS

RA460013:  
Heating side kit 230V

RA460020:  
Frontpanel connection long

RA464911:  
Ventilation grille 91.4cm/36" w/o filter

Vario refrigerator 400 series  
212.5 x 90.8 cm, soft close flat hinge  
RC492304

- Home Connect
- Stainless steel interior with solid anthracite aluminium elements

Warm white and glare-free LED light spots  
Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front  
2. Pull-to-open function to facilitate opening the door using a handle

The drawers in the fridge and freezer models are positioned at the same height.

With side-by-side installation, the glass shelves and door racks can be aligned on the same level

Flat stainless steel inner door, full-length  
Smooth design rail system providing flexible positioning for shelves and door racks

Solid anthracite aluminium door racks  
1 fresh cooling drawer 0 °C with temperature control from -1 °C to +3 °C and one fresh cooling drawer with manually adjustable humidity

TFT touch display  
Net volume 567 litres

#### Handling

TFT touch display operation.  
Clear text display.

#### Features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Activated charcoal air filter.  
Rest mode certified by Star-K.  
When rest mode is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.  
Integrated WiFi module for digital services (Home Connect).  
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

#### Cooling

No-frost technology with fast cooling.  
Temperature adjustable from +2 °C to +8 °C.  
1 shallow, fully extendable drawer with transparent front.  
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.  
Smooth design door rail system with fully flexible positioning of door racks.  
3 height adjustable door racks, 1 of which is extra deep.  
Net volume 509 litres.

#### Fresh cooling 0 °C

1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.  
Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.  
Ideal for meat, fish and poultry.

Net volume 58 litres.

#### Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

#### Product rating

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.  
Energy consumption 151 kWh/year.  
Noise level 40 dB (re 1 pW).


#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 43 kg.


#### Connection

Total connected load 0.300 KW.  
Connecting cable 3.0 m, pluggable.

Door opening angle

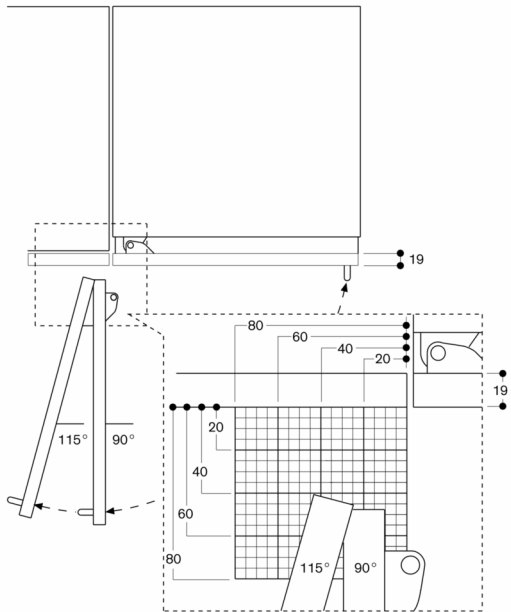


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

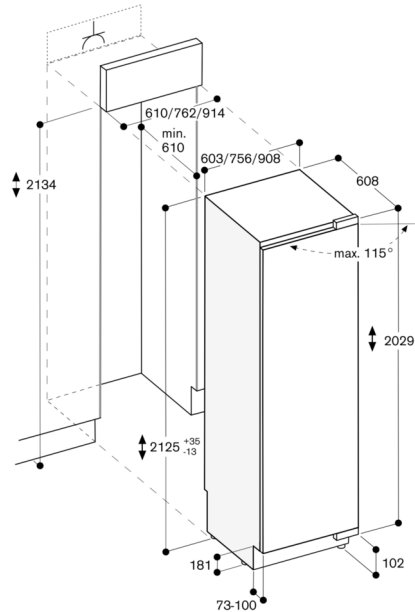

The maximum door panel dimensions are based on a clearance of 3 mm.


Wall clearance RB 472/RC/RF/RW

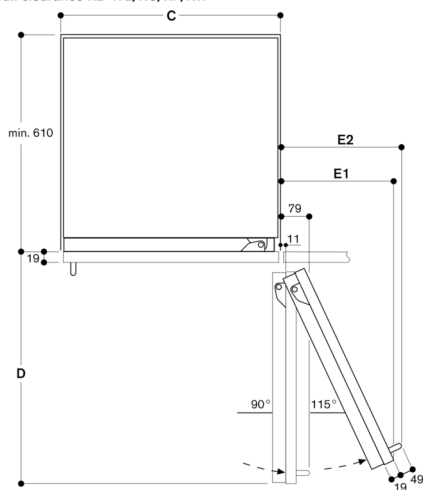

Recess width	C	D	E1	E2
457 mm	525 mm	235 mm	265 mm	
610 mm	677 mm	299 mm	330 mm	
762 mm	830 mm	364 mm	395 mm	
914 mm	980 mm	428 mm	460 mm	

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Base detail

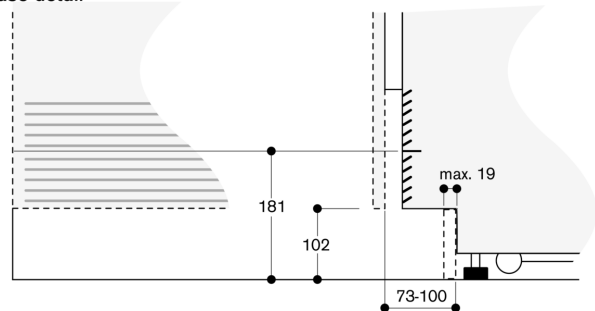

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

