



RF463306



1 x connection set

RA450012:

Water filter Vario 400

RA422610:

SS door 61cm / 24" for RF463

RA423140:

Side trims, long

RA425110:

Vario SS handle 1131 mm

RA428810:

SS door w/o handle 61cm / 24" for RF463

RA460013:

Heating side kit 230V

RA460020:

Frontpanel connection long

RA464617:

Vent grille 61cm / 24", right, for RF463

Vario freezer 400 series

212.5 x 60.3 cm, soft close flat hinge

RF463306

- Stainless steel interior with solid anthracite aluminium elements
- Opening assist for door with two options
- Immerse your kitchen in a mesmerizing glow with Gaggenau's Glare-Free LED Light Spots and showcase your dishes like never before.

- Integrated ice maker

- Stainless steel interior with solid anthracite aluminium elements

Warm white and glare-free LED light spots

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle

The drawers in the fridge and freezer models are positioned at the same height.

With side-by-side installation, the glass shelves and door racks can be aligned on the same level

Material and aesthetics of interior as for RC model

- Glass shelves

Flat stainless steel inner door, full-length

Almost invisible rail system for shelves for flexible positioning

Illuminated dispenser for ice cubes, crushed ice and chilled water

Integrated ice maker with fixed inlet water connection

Proximity sensor for ice and water dispenser

TFT touch display

Total volume 304 litres

Handling

TFT touch display operation.

Clear text display.

Touch key operation for ice and water dispenser.

Features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Cushioned door closing system.

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction alarm.

Selected digital services (Home Connect)

Remote control and monitoring.

Remote diagnostics.

Integrated WiFi module for digital services (Home Connect).

The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Freezing

No-frost technology with fast freezing at -30 °C.

Temperature adjustable from -14 °C to -24 °C.

4-star freezer compartment.

Freezing capacity 18 kg /24 h.

Storage time after a malfunction 8 h.

1 integrated shelf with satin-finished glass.

2 fully extendable drawers with transparent front.

Brilliant LED light spots with warm white, glare-free light (3500 K).

Ice and water dispenser

Warm white LED lighting.

Proximity sensor for automatic activation of light and touch keys for ice and water dispenser.

Integrated, with fixed inlet water connection.

Particle filter for water inlet, integrated in ventilation grille area.

Saturation indicator shown in TFT touch display.

Can be switched off.

Ice cube production approx. 1.4 kg/24 h.

Ice cubes and crushed ice.

Removable ice storage container with approx.

3.2 kg capacity.

Ice water supply approx. 1.5 litres.

Product rating

Energy efficiency class F at a range of energy efficiency classes from A to G.

Energy consumption 337 kWh/year.

Noise level 42 dB (A) re 1 pW.

Planning notes

Flat hinge.

Door opening angle of 115°, fixable at 90°.

For an installation with a door opening angle of 90°, the drawers have a restricted access.

Max. door panel weight 67 kg.

Shut-off valve for water connection must be planned next to the appliance and always be accessible.

If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Connection


Total connected load 0.300 KW.

Connecting cable 3.0 m, pluggable.



Water inlet.

Supply hose 2.0 m with 3/4 " connection.

Water pressure 2 to 8 bar.

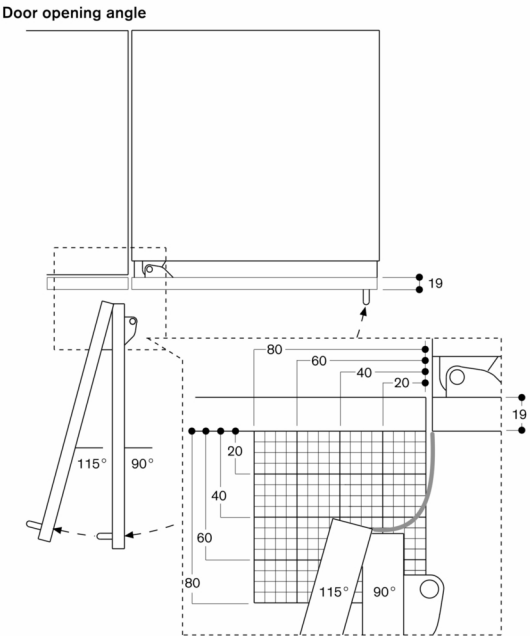


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

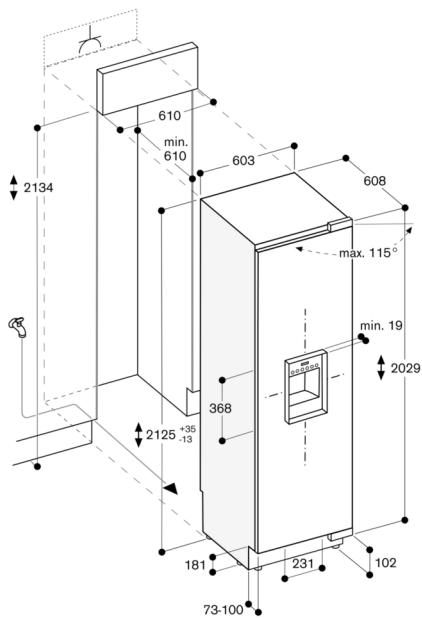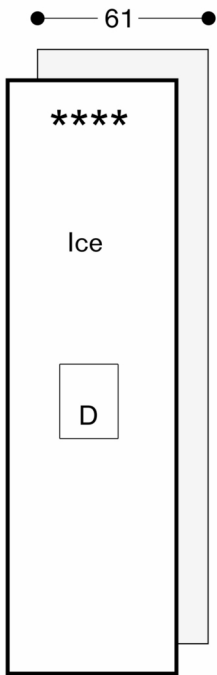

The maximum door panel dimensions are based on a clearance of 3 mm.


Wall clearance RB 472/RC/RF/RW

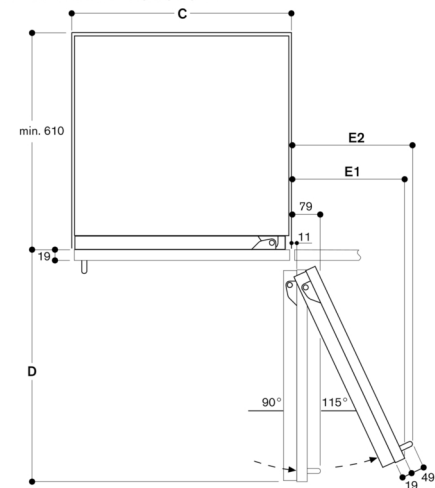

Recess width	D	E1	E2
C			
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Base detail

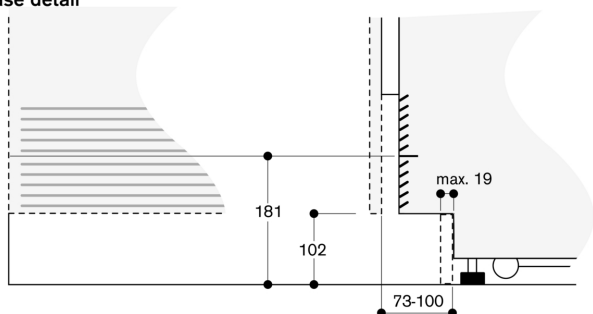

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.