



RT282204



2 x egg tray  
1 x wine and champagne rack  
1 x ice cube tray

RA260000:  
Heavy duty hinge support (RB 2x)

RA430100:  
Storage container with lid, anthracite

Fridge-freezer combination 200 series  
177.5 x 56 cm, soft close flat hinge  
**RT282204**

- Immerse your kitchen in a mesmerizing glow with Gaggenau's Glare-Free LED Light Spots and showcase your dishes like never before.
  - Three climate zones incl. one fresh cooling drawer with manually adjustable humidity
- Height adjustable safety glass shelves  
Door racks with aluminium profiles  
Cushioned door closing system allowing a soft and controlled door closure  
Total volume 286 litres

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Features

Dynamic cold air distribution.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Cooling

Temperature adjustable from +2 °C to +8 °C.  
4 safety glass shelves, of which 1 is fully extendable and 4 height adjustable.  
1 integrated shelf.  
Wine and champagne rack for 4 bottles, can be completely folded away.  
1 large door rack with aluminium profile for bottles with flexible bottle holder.  
5 door racks with aluminium profile.  
1 vegetable drawer.  
Bright interior lighting with integrated glare-free LED side light element.  
Total volume all refrigerator compartments 252 litres.

#### Fresh cooling

1 full width fresh cooling drawer.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

#### Freezing

Fast freezing.  
Storage temperature -18°C and lower.  
4-star freezer compartment.  
Freezing capacity 4 kg /24 h.  
Storage time after a malfunction 16 h.  
Volume 34 litres.

#### Product rating


Energy efficiency class F at a range of energy efficiency classes from A to G.  
Energy consumption 222 kWh/year.  
Noise level 36 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight 27 kg.

#### Connection

Total connected load 0.09 KW.  
Connecting cable 2.3 m with plug.

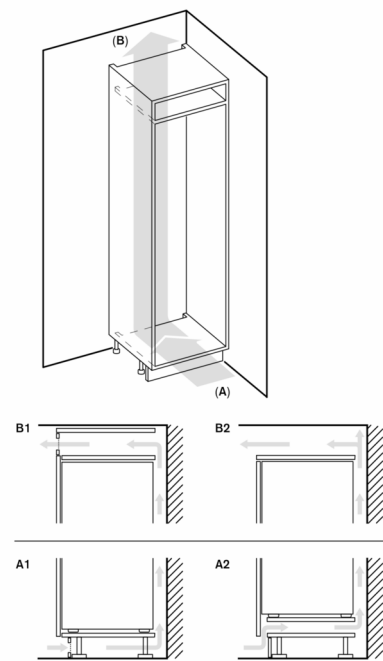

A: Air inlet  $\geq 200 \text{ cm}^2$ ; ventilation options A1 or A2  
B: Air outlet  $\geq 200 \text{ cm}^2$ ; ventilation options B1 or B2

