



RW414364

**Vario wine climate cabinet 400 series
fully integrated, with glass door**

**Niche width 45.7 cm, Niche height 213.4
cm**



Two independantly controllable climate zones

Consistant temperatures with exact control from +5 °C to +20 °C

Humidity control

Stainless steel interior

Fully extendable bottle trays in oak wood and solid aluminium in anthracite

Bottle trays with hidden telescopic rails

Warm white and glare-free LED light spots

5 preset lighting scenarios, selectable via TFT display

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front

2. Pull-to-open function to facilitate opening the door using a handle

Low-vibration operation

TFT touch display

Capacity 70 bottles

Handling

TFT touch display operation.

Clear text display.

Features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Activated charcoal air filter.

UV-protection.

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction alarm.

Integrated WiFi module for digital services

(Home Connect).

The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Characteristics

Energy Efficiency Class

G

Average annual energy consumption in kilowatt hour per year (kWh/a)

145

Capacity of 75 cl bottles

70

Airborne acoustical noise emissions

42

Airborne acoustical noise emission class

D

Construction type

Built-in

Door panel options

Not possible

Height

2125

Width of the appliance

451

Depth of the product

608

Required niche size for installation (HxWxD)

2134.0 x 457.0 x 610

Net weight

138.000

Connection rating

300

Fuse protection

10

Interior ventilator

Yes

Voltage

220-240

Frequency

50-60

Approval certificates

VDE

Length of electrical supply cord

300

Plug type

Gardy plug w/ earthing

Number of compressors

1

Number of independent cooling systems

1

Reversible Door Hinge

Yes

Interior light switch

No

EAN code

4242006262228

Brand

Gaggenau

Product name / Commercial code

RW414364

Product category

Consumption and connection features

created on 2021-11-23

Page 1

The main socket needs to be planned outside of the niche.

Connection

Total connected load 0.300 KW.

Connecting cable 3.0 m, pluggable.

Color Variants

RW414364

fully integrated, with glass door

Niche width 45.7 cm, Niche height 213.4

cm

Optional accessories

RA430000

RA491161

RA492160

Removable shelf with oak wood frame

RA493060

RA498140

Bottle support in oak wood for convenient storage of bottles on the division plate.

Installation Accessories

RA420010

Door lock

RA421111

RA421112

RA423140

RA425110

Handle bar, stainless steel, long

RA428111

RA460013

RA464111

Ventilation grille stainless steel

GAGGENAU

RW414364

Vario wine climate cabinet 400 series


fully integrated, with glass door

Niche width 45.7 cm, Niche height 213.4 cm

created on 2021-11-23


Page 2

Base detail

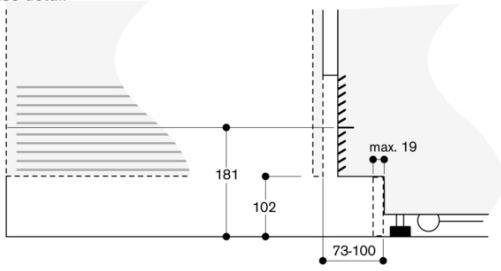


Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

Wall clearance RB 472/RC/RF/RW




Recess width C	D	E1	E2
457 mm	525 mm	235 mm	295 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm


In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.



Bottle storage

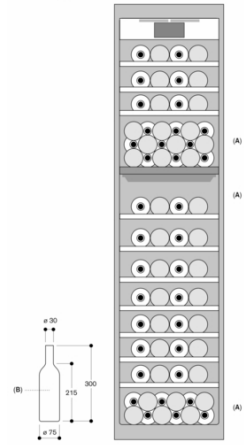


A: Suitable area for storage of magnum bottles in standard tray configuration
 B: 0.75 liter
 Measurements in mm

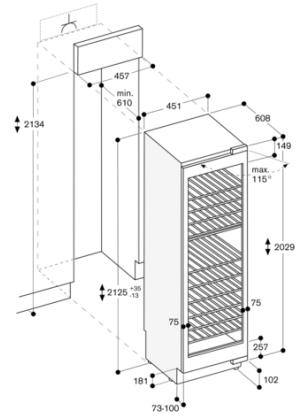

The maximum door panel dimensions are based on a clearance of 3 mm.

Door opening angle

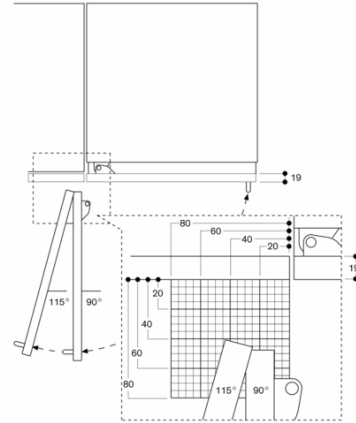

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.