

Color Variants VG231114F Stainless steel control panel Width 28 cm

Optional accessories VD201014 Brushed stainless steel appliance cover WP400001 Wok pan made of multiple-layer material

Installation Accessories VV200014 Stainless steel connection strip for combination with further Vario cooktops

VG231114F Vario gas wok 200 series Stainless steel control panel Width 28 cm Liquid gas 28 - 37 mbar Wok burner with 5.8 KW

Can be combined with the cooktops of the Vario 200 series to a harmonic unity.

Generous control panel for comfortable and secure operation. Three-ring burner of solid, heat-resistant brass as used in professional kitchen. Total output up to 5.8 KW

Cooking zones

1 three-ring wok burner (270 W - 5,800 W), suitable for pots up to max. ø 32 cm.

Handling

One-handed operation. Gas valve with fine control. To close the cover, the pan support can be easily reversed.

Features

Cast pan support. Brass burner rings.

Safety Thermoelectric safety pilot.

Planning notes

Maximum drawer depth 42 cm. Appliance can be snapped into the worktop from above. A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. An air extraction hood is necessary when installing several Vario gas cooktops with an overall output of more than 11 kW.

Connection

Total connected load gas 5.8 kW. Total connected load electric 1.0 W. Connecting cable 1.4 m with plug. Characteristics

Product name/family Vario/Domino gas hob w control Built-in / Free-standing CONSTR_TYPE.Built-in Energy input Gas Total number of positions that can be used at the same time

Required niche size for installation (HxWxD) 88 x 268 x 490

Width of the product (mm) 288

Dimensions of the product (mm) 88 x 288 x 523 Dimensions of the packed product (HxWxD) (mm) 230 x 410 x 600 Net weight (kg) 9.400 Gross weight (kg) 10.8 Residual heat indicator without Location of control panel Hob front Basic surface material brushed stainless steel Color of surface Stainless steel Color of frame Stainless steel

Approval certificates CE, Eurasian, G-Mark, VDE

Length of electrical supply cord (cm) 140

EAN code 4242006190590


Consumption and connection features Electrical connection rating (W)

Gas connection rating (W) 5800 Current (A) 10

Voltage (V) 220-240 Frequency (Hz) 60; 50

created on 2019-11-08 Page 1



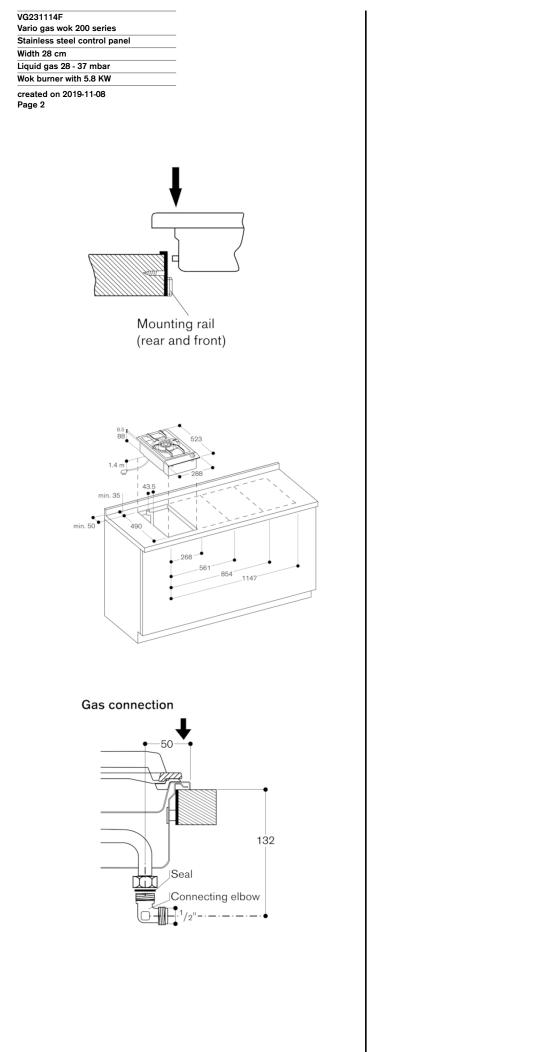

GAGGENAU