



Color Variants

VG232220
Black control panel
Width 28 cm

Optional accessories

VD200020
Black appliance cover

Installation Accessories

VV200010
Stainless steel connection strip for combination with further Vario cooktops
VV200020
Black connection strip for combination with other Vario appliances of the 200 series

VG232220

Vario gas cooktop 200 series

Black control panel

Width 28 cm

Natural gas 20 mbar

Can be combined with the cooktops of the Vario 200 series to a harmonic unity.

Control panel for comfortable and secure operation
Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
Solid smooth-surface cast pan supports for easy and safe positioning of cookware.

Cooking zones

1 high output burner (560 W - 3000 W), suitable for pots up to max. ø 22 cm.
1 standard burner (380 W - 1900 W), suitable for pots up to max. ø 20 cm.

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Cast pan support with continuous pot surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes

Appliance can be snapped into the worktop from above.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 12 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 12 kW and ventilation hood 70 cm.
Appliance weight: approx. 9.

Connection

Total connected load gas 4.9 KW.
Total connected load electric 10.0 W.
Connecting cable 1.5 m with plug.

Characteristics

Product name/family

Vario/Domino gas hob w control

Product name/family

Vario/Domino gas hob w control

Construction type

Built-in

Construction type

Built-in

Energy input

Gas

Energy input

Gas

Total number of positions that can be used at the same time

2

Total number of positions that can be used at the same time

2

Required niche size for installation

(HxWxD)

106 x 268 x 492

Required niche size for installation

(HxWxD)

106 x 268 x 492

Width of the appliance

288

Width of the appliance

288

Dimensions

132 x 288 x 512

Dimensions

132 x 288 x 512

Dimensions of the packed product

(HxWxD)

260 x 400 x 600

Dimensions of the packed product

(HxWxD)

260 x 400 x 600

Net weight

8.6

Net weight

8.6

Gross weight

9.8

Gross weight

9.8

Residual heat indicator

Separate

Residual heat indicator

Separate

Location of control panel

Hob front

Location of control panel

Hob front

Basic surface material

brushed stainless steel

Basic surface material

brushed stainless steel

Color of surface

Stainless steel

Color of surface

Stainless steel

Color of frame

Stainless steel

Color of frame

Stainless steel

Approval certificates

CE, VDE

Approval certificates

CE, VDE

Length of electrical supply cord

150

Length of electrical supply cord

150

EAN code

4242006280048

EAN code

4242006280048

Electrical connection rating

10

Electrical connection rating

10

Gas connection rating

4900

Gas connection rating

4900

Fuse protection

10



Fuse protection

10

Voltage

220-240

GAGGENAU

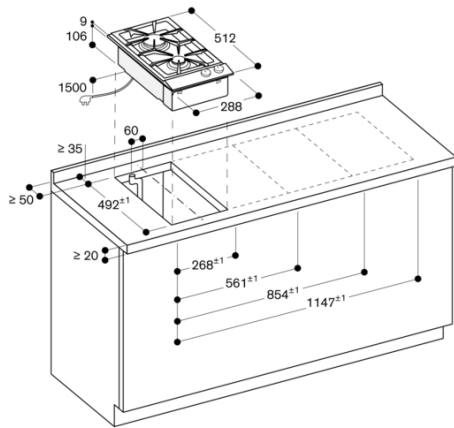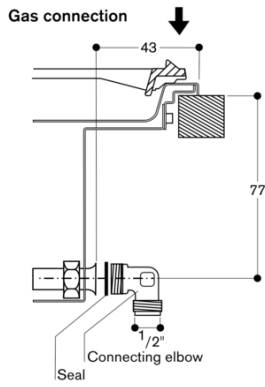

Minimum distance from the appliance cut-out to the side wall 150 mm.
measurements in mm